

TECHNICAL EXHIBIT
APPLICATION FOR LICENSE
TELEVISION STATION WLYH-DT
LANCASTER, PENNSYLVANIA

May 23, 2002

TECHNICAL EXHIBIT
APPLICATION FOR LICENSE
TELEVISION STATION WLYH-DT
LANCASTER, PENNSYLVANIA

Table of Contents

Technical Statement

Appendix

Transmitting Antenna Manufacturer's Azimuthal Plane
and Vertical Plane Pattern Data

TECHNICAL EXHIBIT
APPLICATION FOR LICENSE
TELEVISION STATION WLYH-DT
LANCASTER, PENNSYLVANIA

Technical Statement

This Technical Exhibit was prepared on behalf of WLYH-DT, Lancaster, Pennsylvania, in support of an application for license to cover its construction permit (See FCC File No. BPCDT-19991027ACS). This Technical Statement provides additional documentation concerning the replacement antenna employed by WLYH-DT in lieu of the authorized antenna pursuant to Section 73.1690(c)(3) of the FCC Rules.

The WLYH-DT facility operates at the same location, antenna height above ground and effective radiated power as indicated in the WLYH-DT CP, but with a different transmitting antenna pattern. The installed transmitting antenna is a Dielectric model TFU-24DSB-W. The antenna is oriented with a maximum at 270° True. The installed transmitting antenna pattern is identical to the authorized transmitting antenna pattern, and it meets the requirements of Section 73.1690(c)(3) of the FCC Rules. The manufacturer's supplied data sheets are included in the Appendix to this report.

With respect to the potential for human exposure to radio frequency (RF) radiation, calculations prepared in accordance with FCC Bulletin OET-65 (Edition 97-01) indicate that the proposal will not result in human exposure to RF radiation at ground level in excess of FCC standards. Power density calculations were conducted at

2-m above ground* based on the following conservative assumptions, with the following results:

Call Sign	Channel	Peak Visual ERP or Average ERP (kW)	Aural ERP (kW)	Relative Field Factor [†]	FCC Limit [‡] (mW/cm ²)	Percentage of Limit
WLYH-DT	23	325	--	0.15	0.349	0.9%

As indicated above, the exposure to RF radiation at 2-m above ground level will not exceed 0.9% of the FCC limit for general population / uncontrolled exposure. Therefore, the proposal complies with the FCC limits for human exposure to RF radiation and it is categorically excluded from environmental processing. The applicant, in coordination with other users of the transmission facility, shall reduce power or cease operation as necessary to protect persons having access to the tower or antenna from radio frequency radiation in excess of the FCC guidelines.

Louis Robert du Treil, Jr.

May 23, 2002

* The radiation center height above ground is 280 m.

† This relative field level is not exceeded for elevation angles greater than 7° below horizontal.

‡ for general population/uncontrolled environments

TECHNICAL EXHIBIT
APPLICATION FOR LICENSE
TELEVISION STATION WLYH-DT
LANCASTER, PENNSYLVANIA

Transmitting Antenna Manufacturer's
Azimuthal Plane and Vertical Plane Pattern Data

(three pages follow)



Exhibit No.

Date
Call Letters
Location
Customer
Antenna Type

21 Jun 2001

Channel


AZIMUTH PATTERN

RMS Gain at Main Lobe
Calculated / Measured

1.56 (1.93 dB)
Calculated

Frequency
Drawing #

MHz
CH23_W

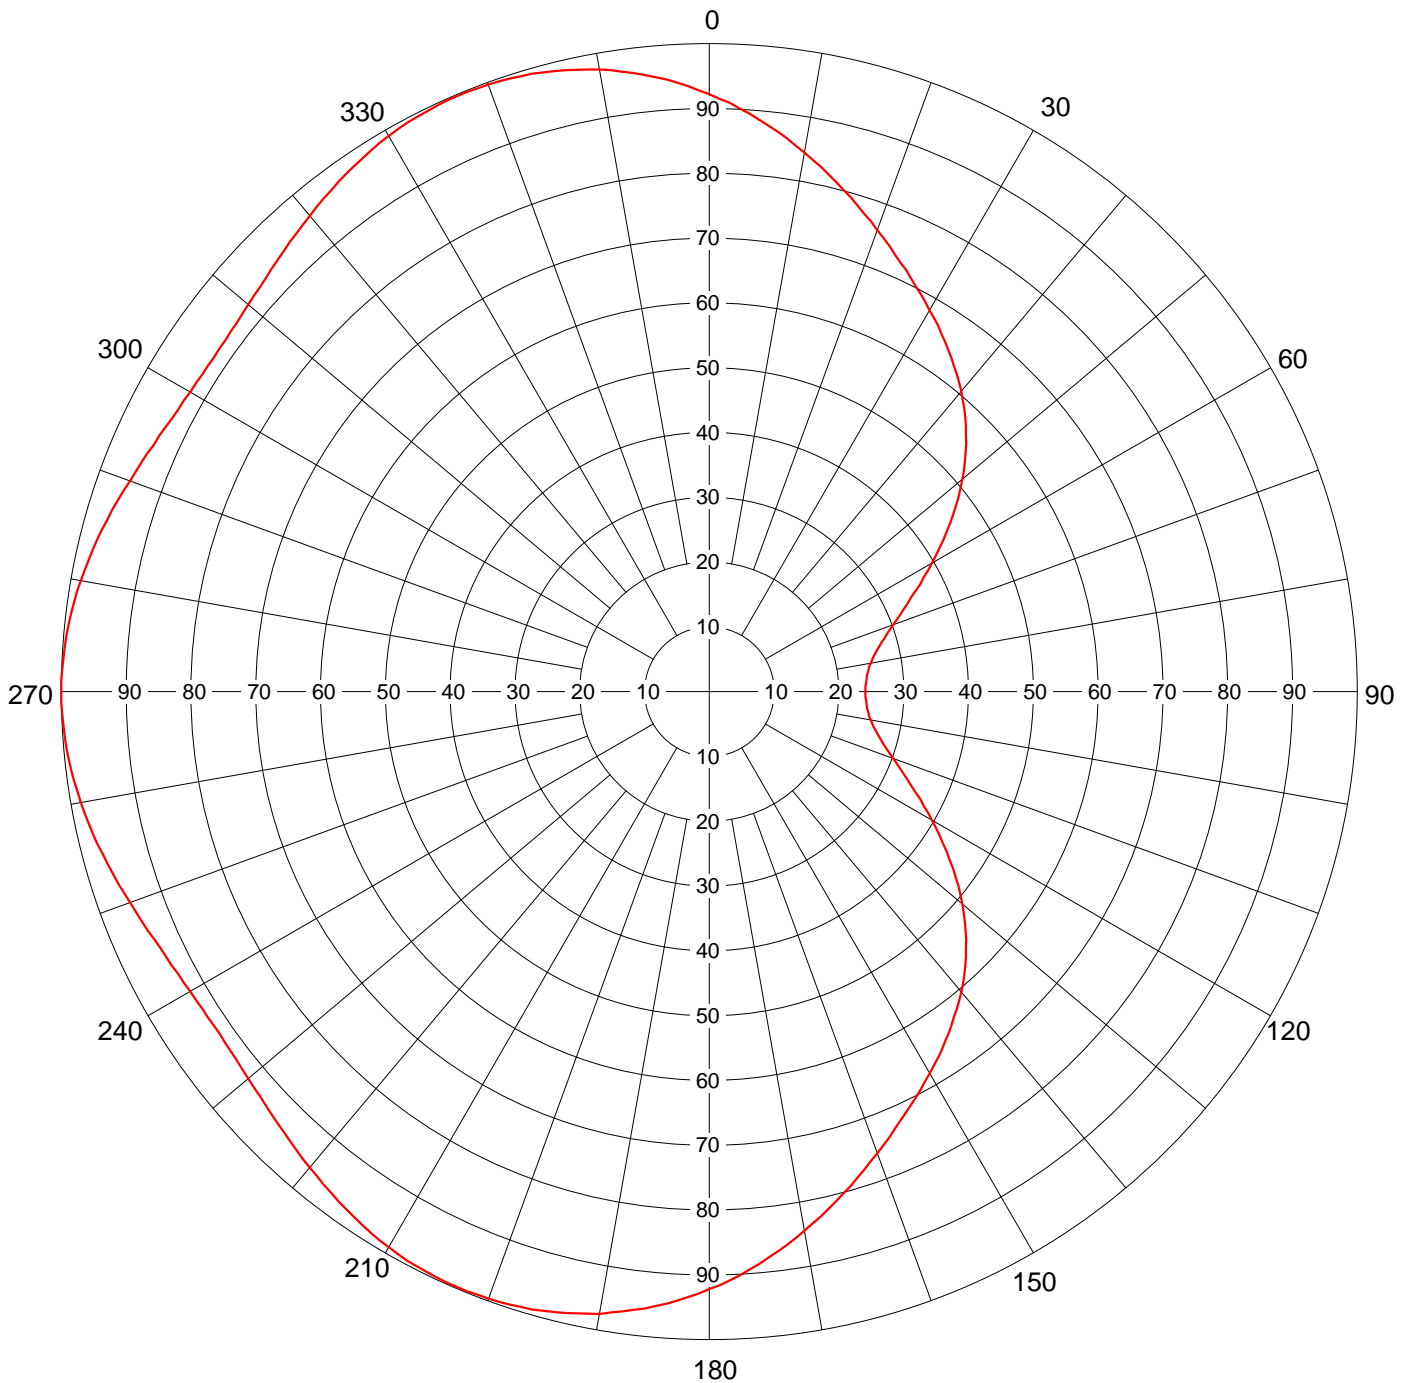

Remarks:

Date **21 Jun 2001**

Call Letters

Channel

Location

Customer

Antenna Type

TABULATION OF AZIMUTH PATTERNAzimuth Pattern Drawing # **CH23_W**

Angle	Field	Angle	Field	Angle	Field	Angle	Field	Angle	Field	Angle	Field	Angle	Field	Angle	Field
0	0.922	45	0.560	90	0.241	135	0.560	180	0.922	225	0.942	270	1.000	315	0.942
1	0.915	46	0.551	91	0.241	136	0.570	181	0.929	226	0.939	271	1.000	316	0.945
2	0.909	47	0.541	92	0.241	137	0.579	182	0.935	227	0.936	272	0.999	317	0.949
3	0.901	48	0.531	93	0.242	138	0.588	183	0.941	228	0.933	273	0.998	318	0.952
4	0.894	49	0.521	94	0.243	139	0.597	184	0.947	229	0.931	274	0.997	319	0.955
5	0.886	50	0.510	95	0.244	140	0.605	185	0.952	230	0.929	275	0.996	320	0.959
6	0.878	51	0.499	96	0.245	141	0.613	186	0.957	231	0.927	276	0.994	321	0.963
7	0.870	52	0.488	97	0.247	142	0.621	187	0.961	232	0.925	277	0.992	322	0.966
8	0.862	53	0.477	98	0.248	143	0.628	188	0.966	233	0.924	278	0.990	323	0.969
9	0.853	54	0.465	99	0.250	144	0.636	189	0.970	234	0.923	279	0.988	324	0.973
10	0.845	55	0.454	100	0.253	145	0.644	190	0.975	235	0.922	280	0.985	325	0.976
11	0.836	56	0.442	101	0.256	146	0.651	191	0.978	236	0.922	281	0.982	326	0.979
12	0.828	57	0.431	102	0.259	147	0.659	192	0.981	237	0.923	282	0.979	327	0.982
13	0.819	58	0.419	103	0.263	148	0.666	193	0.984	238	0.923	283	0.976	328	0.985
14	0.810	59	0.408	104	0.267	149	0.673	194	0.987	239	0.924	284	0.973	329	0.988
15	0.801	60	0.397	105	0.272	150	0.680	195	0.989	240	0.925	285	0.970	330	0.990
16	0.793	61	0.386	106	0.277	151	0.687	196	0.992	241	0.927	286	0.966	331	0.992
17	0.784	62	0.375	107	0.282	152	0.695	197	0.993	242	0.928	287	0.963	332	0.994
18	0.775	63	0.365	108	0.288	153	0.703	198	0.995	243	0.931	288	0.959	333	0.995
19	0.767	64	0.354	109	0.295	154	0.710	199	0.996	244	0.933	289	0.955	334	0.996
20	0.758	65	0.344	110	0.302	155	0.717	200	0.997	245	0.935	290	0.951	335	0.997
21	0.750	66	0.335	111	0.310	156	0.725	201	0.997	246	0.938	291	0.948	336	0.998
22	0.742	67	0.326	112	0.318	157	0.733	202	0.998	247	0.942	292	0.945	337	0.998
23	0.733	68	0.318	113	0.326	158	0.742	203	0.998	248	0.945	293	0.942	338	0.998
24	0.725	69	0.310	114	0.335	159	0.750	204	0.998	249	0.948	294	0.938	339	0.997
25	0.718	70	0.302	115	0.344	160	0.758	205	0.997	250	0.951	295	0.936	340	0.997
26	0.710	71	0.295	116	0.354	161	0.766	206	0.996	251	0.955	296	0.933	341	0.996
27	0.702	72	0.288	117	0.365	162	0.775	207	0.995	252	0.959	297	0.930	342	0.995
28	0.695	73	0.283	118	0.375	163	0.784	208	0.994	253	0.962	298	0.928	343	0.993
29	0.688	74	0.277	119	0.386	164	0.793	209	0.992	254	0.966	299	0.927	344	0.992
30	0.680	75	0.272	120	0.397	165	0.801	210	0.990	255	0.969	300	0.925	345	0.989
31	0.673	76	0.267	121	0.408	166	0.810	211	0.988	256	0.973	301	0.924	346	0.987
32	0.666	77	0.263	122	0.419	167	0.819	212	0.985	257	0.976	302	0.923	347	0.984
33	0.658	78	0.259	123	0.430	168	0.828	213	0.982	258	0.979	303	0.923	348	0.981
34	0.651	79	0.256	124	0.442	169	0.836	214	0.979	259	0.982	304	0.922	349	0.978
35	0.643	80	0.253	125	0.453	170	0.845	215	0.976	260	0.985	305	0.923	350	0.975
36	0.636	81	0.250	126	0.465	171	0.854	216	0.973	261	0.987	306	0.923	351	0.971
37	0.628	82	0.248	127	0.476	172	0.862	217	0.969	262	0.990	307	0.924	352	0.966
38	0.621	83	0.247	128	0.488	173	0.870	218	0.966	263	0.992	308	0.925	353	0.962
39	0.613	84	0.245	129	0.499	174	0.878	219	0.962	264	0.994	309	0.927	354	0.957
40	0.605	85	0.244	130	0.510	175	0.886	220	0.959	265	0.996	310	0.929	355	0.952
41	0.596	86	0.243	131	0.520	176	0.894	221	0.956	266	0.997	311	0.931	356	0.947
42	0.588	87	0.242	132	0.531	177	0.902	222	0.952	267	0.998	312	0.933	357	0.941
43	0.579	88	0.241	133	0.541	178	0.909	223	0.949	268	0.999	313	0.936	358	0.935
44	0.570	89	0.241	134	0.551	179	0.916	224	0.945	269	1.000	314	0.939	359	0.928

Remarks:



Date
Call Letters
Location
Customer
Antenna Type

21 Jun 2001

Channel


ELEVATION PATTERN

RMS Gain at Main Lobe
RMS Gain at Horizontal
Calculated / Measured

24.0 (13.80 dB)
16.4 (12.15 dB)
Calculated

Beam Tilt
Frequency
Drawing #

0.75 Degrees
MHz
24D240075-90

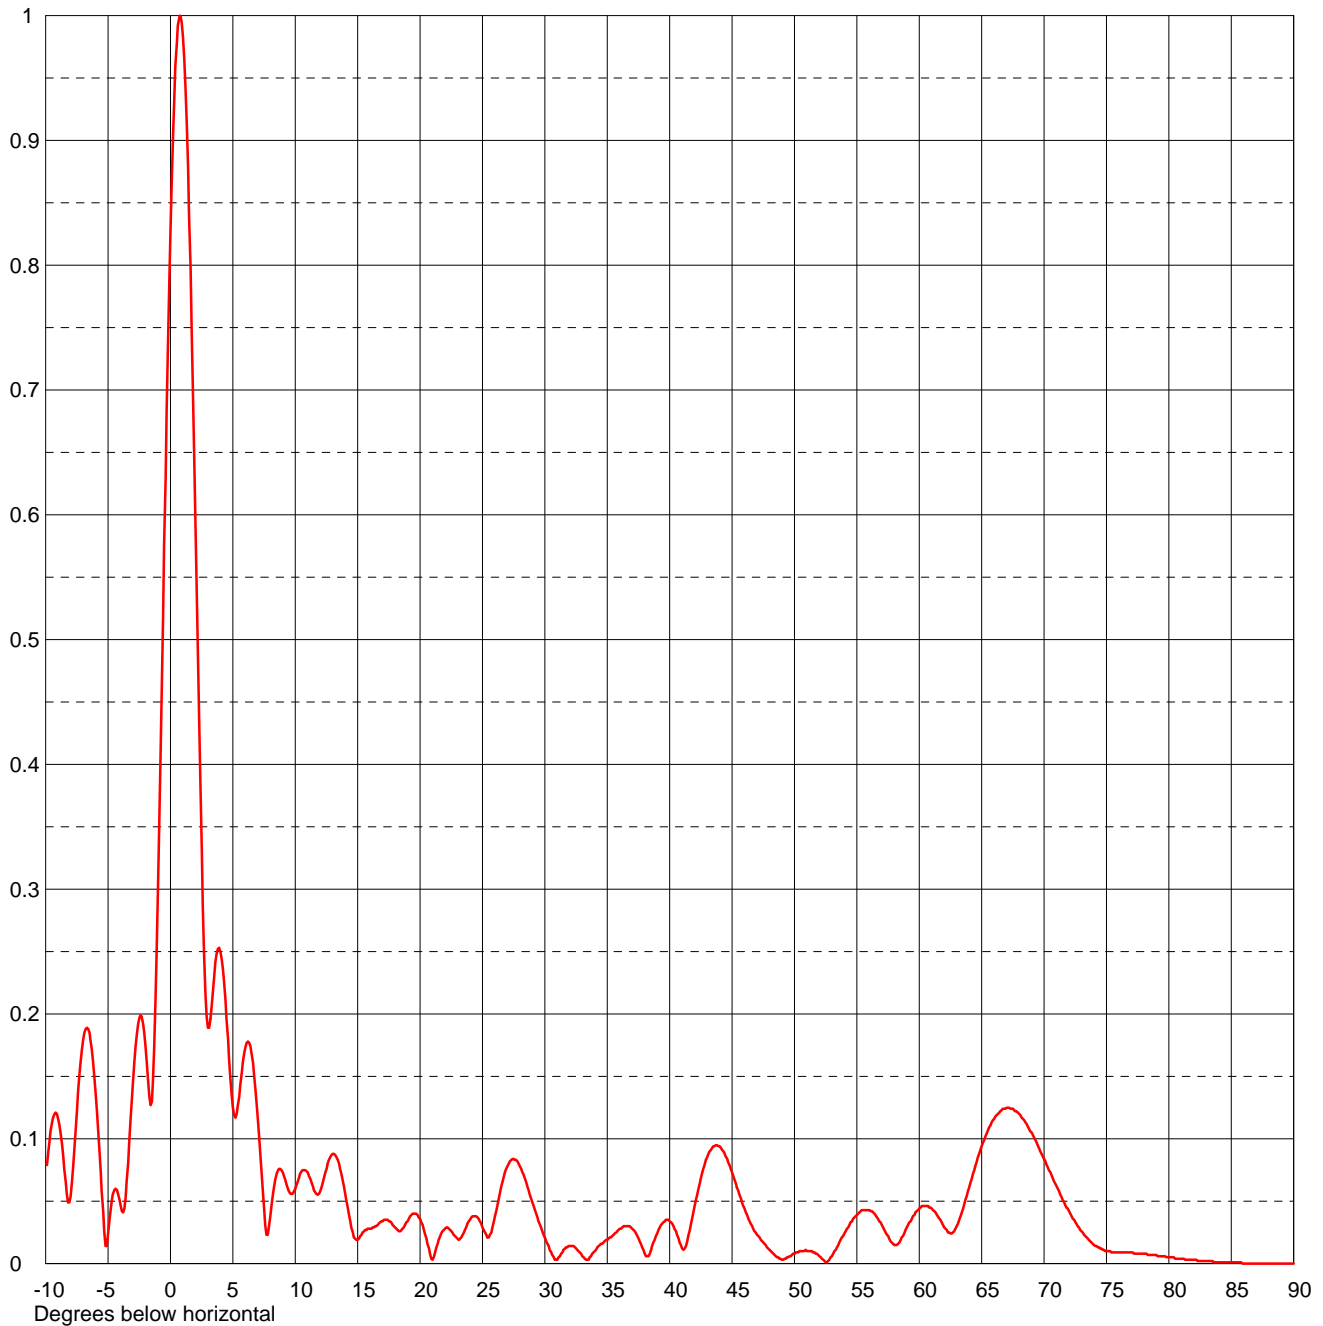

Remarks: