

TECHNICAL EXHIBIT
CONCERNING HUMAN EXPOSURE TO RF ELECTROMAGNETIC ENERGY
PREPARED FOR
STATION KGTV-DT
SAN DIEGO, CALIFORNIA
CH 10 20.7 KW (MAX-DA) 227 M

Technical Statement

The proposed facilities were evaluated in terms of potential radio frequency (RF) energy exposure at ground level to workers and the general public. The radiation center for the proposed DTV antenna is located 68 meters above ground level. The maximum DTV ERP is 20.7 kW (horizontal polarization). A “worst-case” vertical plane relative field value of 0.05 (for angles below 60 degrees downward) is assumed for the antenna's downward radiation (see Figure 2 attached). The calculated power density at a point 2 meters above ground level is 0.0004 mW/cm^2 . This is 0.2% of the FCC's recommended limit of 0.2 mW/cm^2 for channel 10 for an “uncontrolled” environment. Therefore, based on the responsibility threshold of 5%, the proposal will comply with the RF emission rules.

Access to the transmitting site will be restricted and appropriately marked with RFR warning signs. Furthermore, as this is a multi-user site, an agreement will be in effect with the other stations in the event that workers or other authorized personnel enter the restricted area or climb the tower to ensure that appropriate measures will be taken to assure worker safety with respect to radio frequency radiation exposure. Such measures include reducing the average exposure by spreading out the work over a longer period of time, wearing “accepted” RFR protective clothing and/or RFR exposure.

Finally, it is noted that this technical exhibit only addresses the potential for radio frequency electromagnetic field exposure. All other aspects of the

environmental processing analysis will be or already has been provided to the FCC by the tower owner as part of the tower registration process.

A handwritten signature in black ink, appearing to read 'T. Howell', with a stylized flourish at the end.

Thomas J. Howell

du Treil, Lundin & Rackley, Inc.

201 Fletcher Avenue

Sarasota, Florida 34237-6019

(941) 329-6000

JEFF@DLR.COM


December 18, 2008

Date **14 Feb 2008**
 Call Letters
 Location
 Customer
 Antenna Type **TW-12B10**

Channel **10**

ELEVATION PATTERN

RMS Gain at Main Lobe	12.0 (10.79 dB)	Beam Tilt	0.75 Degrees
RMS Gain at Horizontal	11.1 (10.45 dB)	Frequency	195.00 MHz
Calculated / Measured	Calculated	Drawing #	25W120075-90

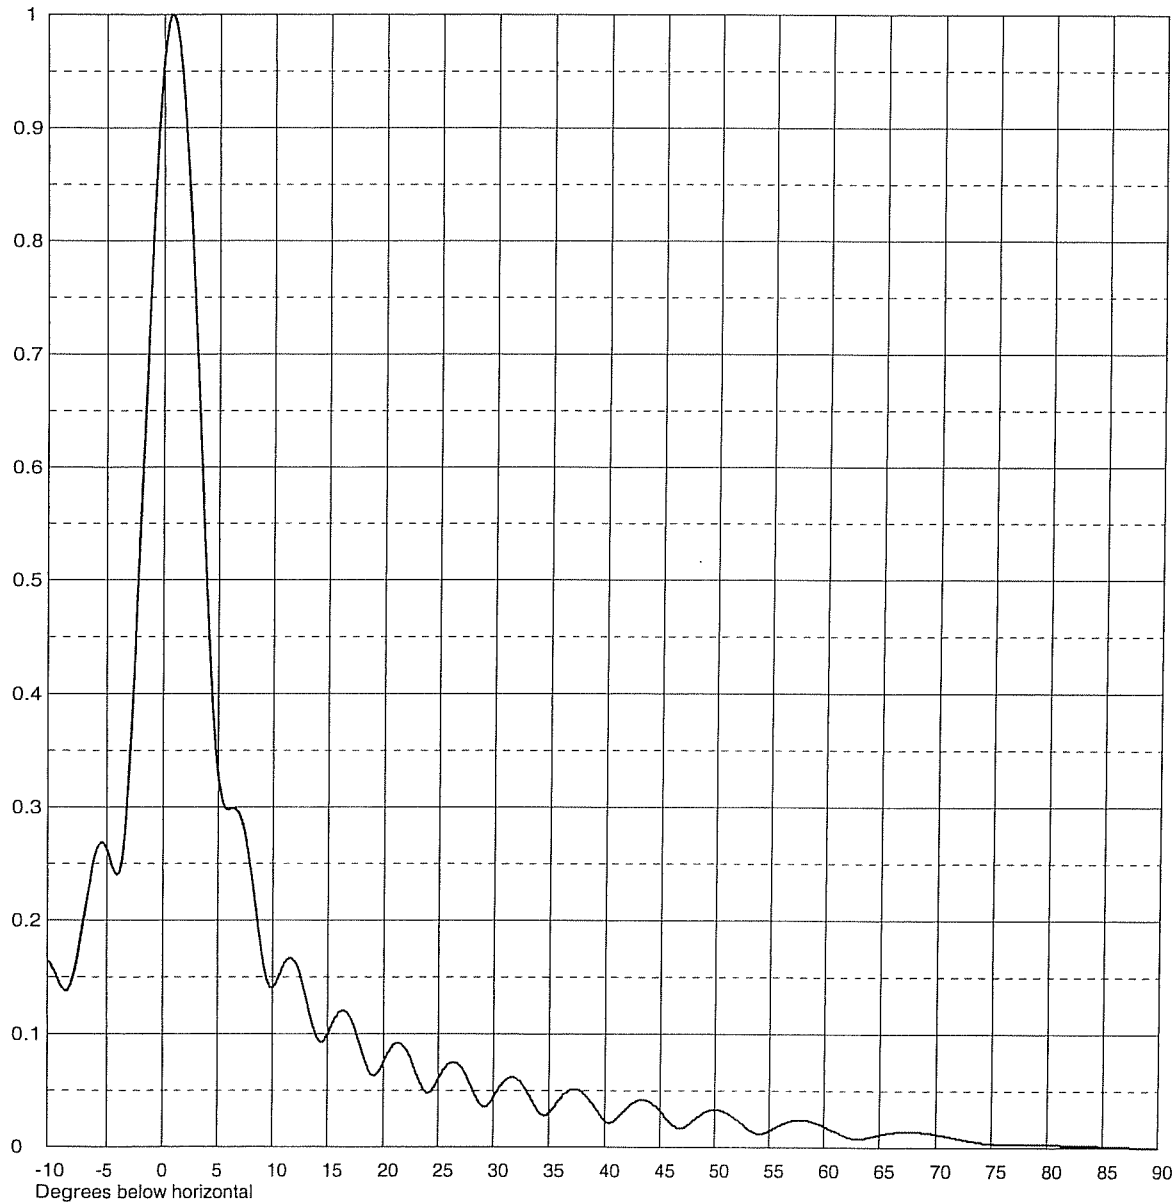

Remarks: