

EXHIBIT #14
COMMUNITY COVERAGE

Vermont Public Radio
Minor Change to Licensed Station
WRVT
BLED-19881215KA
Rutland, VT

August 2007

CH 204C2

0.09 kW H & 4.8 kW V DA

WRVT operates on Channel 204, a reserved channel. According to Section 73.515, a minimum field strength of 1 mv/m (60 dBu) must be provided over at least 50% of its community of license or reach 50% of the population within the community. The map on page #2 shows the 60 dBu contour of the proposed WRVT change. Rutland, the city of license, is shown to be within this contour.

Page #3 is a distance to 60 dBu contour table of the proposed WRVT facility.


Proposed Community Coverage - Rutland Class C2

WRVT4.8

Rutland, VT C2
 Latitude: 43-39-31 N
 Longitude: 073-06-25 W
 ERP: 4.80 kW
 Channel: 204
 Frequency: 88.7 MHz
 AMSL Height: 663.0 m
 HAAT: 412.16 m
 Horiz. Pattern: Directional
 Vert. Pattern: No

8/8/2007

V Doug Vernier
 721 West 1st Street, Suite A
 Cedar Falls, Iowa 50613
 (319) 266-8402
 Telecommunications Consultants

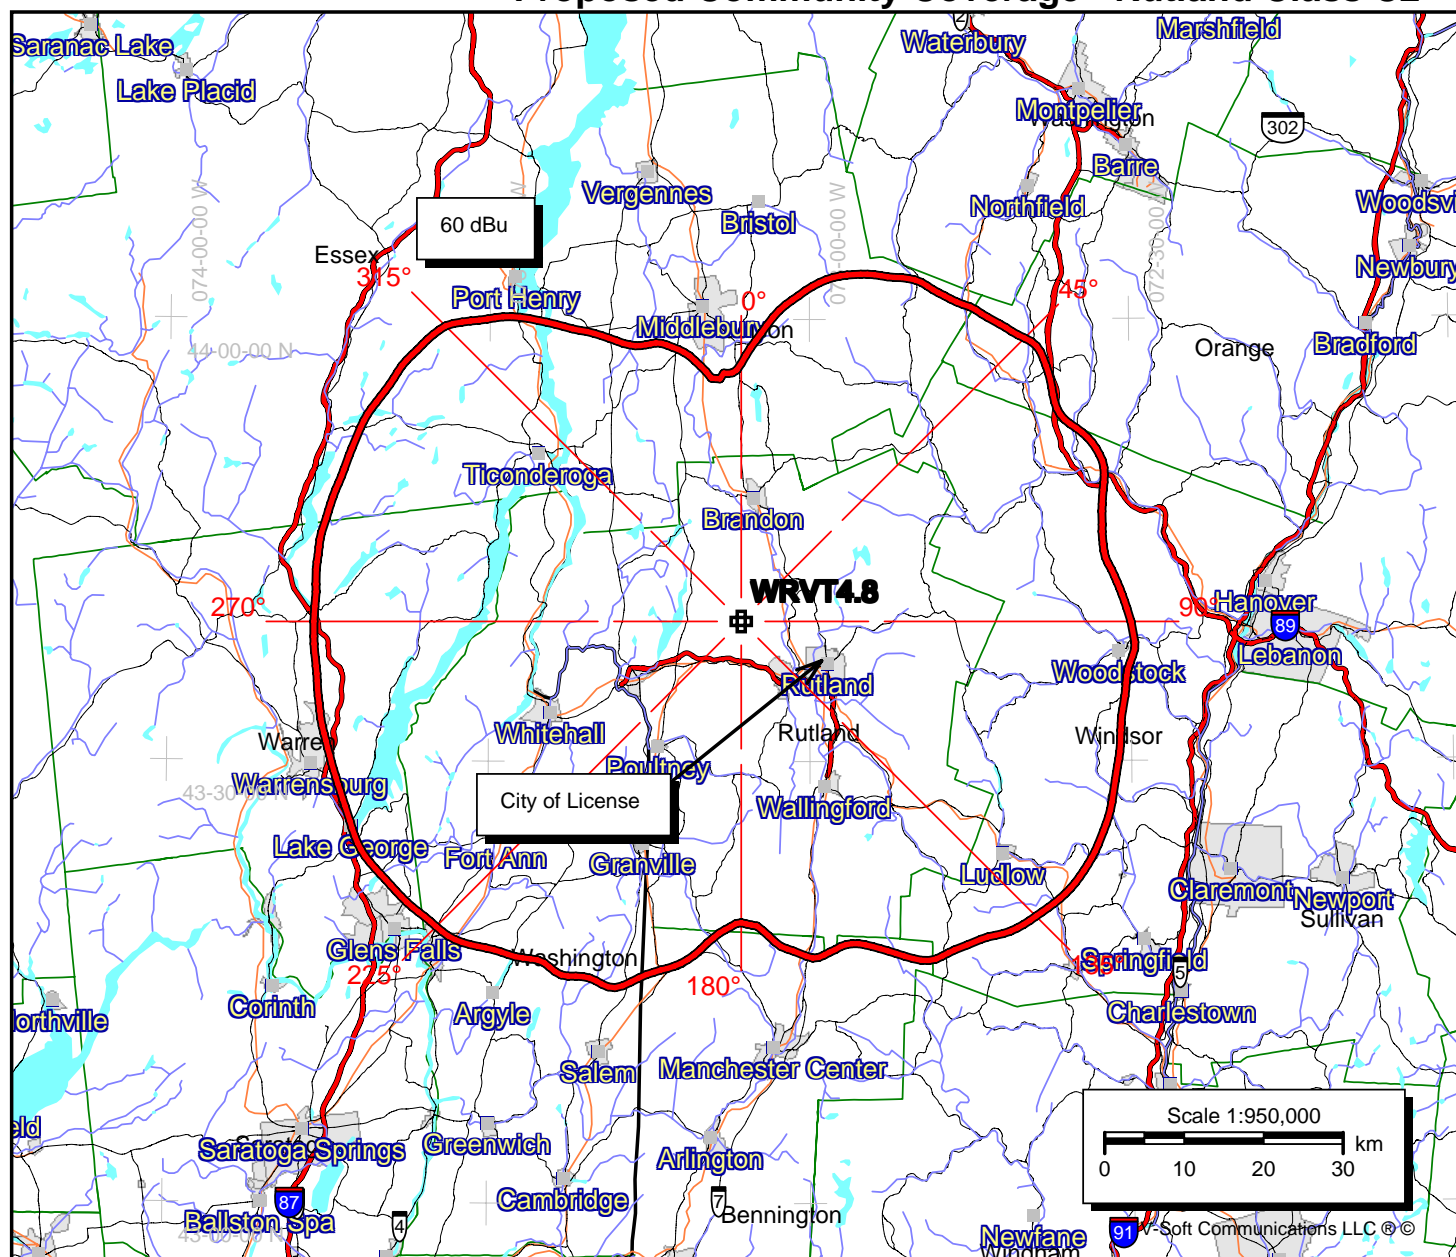

N. Lat. = 433931.0 W. Lng. = 730625.0

HAAT and Distance to Contour - FCC Method - NGDC 30 SEC
WRVT (4.8 kW) Distance to 60 dBu Contour

Azi.	AV EL	HAAT	ERP kW	dBk	Field	60-F5
000	325.1	337.9	0.7990	-0.97	0.408	31.50
010	201.4	461.5	1.2665	1.03	0.514	40.57
020	185.6	477.3	2.0072	3.03	0.647	45.34
030	233.9	429.1	3.1813	5.03	0.814	47.05
040	262.9	400.0	4.8000	6.81	1.000	49.34
050	250.5	412.4	4.8000	6.81	1.000	50.01
060	276.2	386.8	4.8000	6.81	1.000	48.62
070	280.2	382.8	4.8000	6.81	1.000	48.40
080	314.3	348.7	4.8000	6.81	1.000	46.47
090	269.4	393.6	4.8000	6.81	1.000	48.99
100	267.6	395.3	4.8000	6.81	1.000	49.08
110	241.4	421.5	4.8000	6.81	1.000	50.50
120	203.2	459.8	4.8000	6.81	1.000	52.59
130	192.4	470.6	4.8000	6.81	1.000	53.20
140	228.3	434.7	4.8000	6.81	1.000	51.21
150	269.3	393.6	4.8000	6.81	1.000	48.99
160	371.1	291.9	4.8000	6.81	1.000	43.10
170	382.8	280.1	4.8000	6.81	1.000	42.38
180	452.0	210.9	4.8000	6.81	1.000	37.86
190	361.6	301.3	4.8000	6.81	1.000	43.66
200	271.5	391.4	4.8000	6.81	1.000	48.87
210	259.3	403.7	4.8000	6.81	1.000	49.53
220	195.7	467.3	4.8000	6.81	1.000	53.01
230	163.4	499.5	4.8000	6.81	1.000	54.88
240	150.3	512.6	4.8000	6.81	1.000	55.66
250	169.7	493.2	4.8000	6.81	1.000	54.51
260	178.8	484.2	4.8000	6.81	1.000	53.98
270	183.8	479.2	4.8000	6.81	1.000	53.69
280	180.7	482.3	4.8000	6.81	1.000	53.87
290	188.0	475.0	4.8000	6.81	1.000	53.45
300	185.1	477.8	4.8000	6.81	1.000	53.61
310	193.7	469.3	4.8000	6.81	1.000	53.13
320	220.5	442.5	3.7164	5.70	0.880	49.22
330	280.5	382.5	2.3449	3.70	0.699	42.12
340	319.7	343.3	1.4795	1.70	0.555	36.56
350	320.7	342.2	0.9335	-0.30	0.441	32.93

Additional Radials: (Not Considered in Average):

039	265.9	397.0	4.8000	6.81	1.000	49.17
314	200.7	462.2	4.8000	6.81	1.000	52.73

Ave El= 250.85 M HAAT= 412.10 M AMSL= 662.95