

EXHIBIT 12A

47 CFR 74.1235 Compliance, Contour Radials
Height Above Average Terrain

N. Lat. = 344939.0 W. Lng. = 1181013.0
HAAT and Distance to Contour,
FCC, FM 2-10 Mi, 51 pts Method - NGDC 30 SEC

K212DL, The Association For Community, BLFT20060502ABP

Azi.	AV EL	HAAT	ERP kW	dBk	Field	60-F5
000	789.7	-51.7	0.2500	-6.02	1.000	7.09
030	769.8	-31.8	0.2500	-6.02	1.000	7.09
060	737.6	0.4	0.2500	-6.02	1.000	7.09
090	697.0	41.0	0.2500	-6.02	1.000	8.28
120	701.1	36.9	0.2500	-6.02	1.000	7.81
150	707.1	30.9	0.2500	-6.02	1.000	7.19
180	716.4	21.6	0.2500	-6.02	1.000	7.09
210	732.0	6.0	0.2500	-6.02	1.000	7.09
240	736.7	1.3	0.2500	-6.02	1.000	7.09
270	742.1	-4.1	0.2500	-6.02	1.000	7.09
300	774.5	-36.5	0.2500	-6.02	1.000	7.09
330	809.0	-71.0	0.2500	-6.02	1.000	7.09

Ave El= 742.75 M HAAT= -4.75 M AMSL= 738 M

In accordance with 47 C.F.R. 74.1235 (b) (1)
Maximum ERP at 90 degrees = 120 watts.
Maximum ERP at 120 degrees = 170 watts.

Graph is Relative Field

Azi	Field	dBk	kW
000	1.000	-06.021	0.250
010	1.000	-06.021	0.250
020	1.000	-06.021	0.250
030	1.000	-06.021	0.250
040	1.000	-06.021	0.250
050	1.000	-06.021	0.250
060	0.908	-06.859	0.206
070	0.802	-07.937	0.161
080	0.693	-09.208	0.120
090	0.693	-09.208	0.120
100	0.693	-09.208	0.120
110	0.757	-08.439	0.143
120	0.800	-07.959	0.160
130	0.825	-07.696	0.170
140	0.917	-06.778	0.210
150	1.000	-06.021	0.250
160	1.000	-06.021	0.250
170	1.000	-06.021	0.250
180	1.000	-06.021	0.250
190	1.000	-06.021	0.250
200	1.000	-06.021	0.250
210	1.000	-06.021	0.250
220	1.000	-06.021	0.250
230	1.000	-06.021	0.250
240	1.000	-06.021	0.250
250	1.000	-06.021	0.250
260	1.000	-06.021	0.250
270	1.000	-06.021	0.250
280	1.000	-06.021	0.250
290	1.000	-06.021	0.250
300	1.000	-06.021	0.250
310	1.000	-06.021	0.250
320	1.000	-06.021	0.250
330	1.000	-06.021	0.250
340	1.000	-06.021	0.250
350	1.000	-06.021	0.250

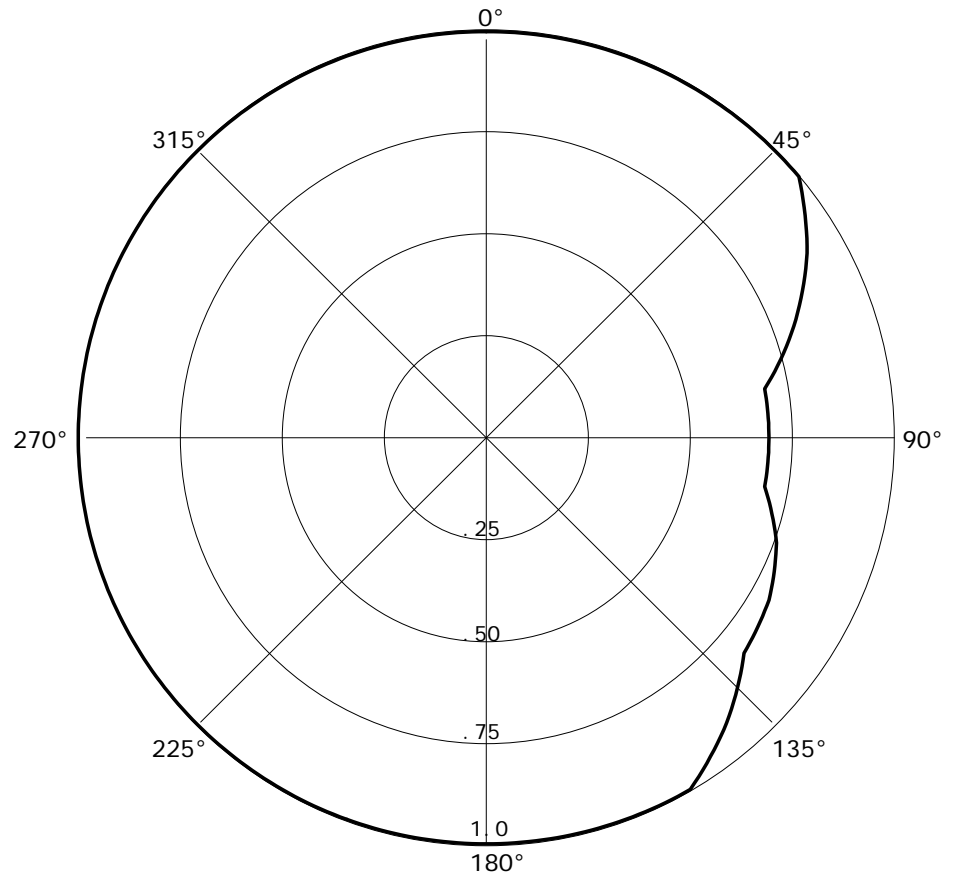


Exhibit 12B - Antenna Pattern
Compliance with 47 CFR 74.1235