


ATTACHMENT

RADIOFREQUENCY RADIATION ASSESSMENT

This exhibit has been included to address the issue of allowable radiofrequency radiation levels (RFR). The new WMTT antenna would conform to the FCC guidelines with respect to OET Bulletin No. 65 (Edition 97-01, August 1997), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields." It first should be noted that WMTT is a standalone FM, there are no AM, FM, or TV stations within 1 kilometer of the new WMTT antenna. Also, there are no other stations of any type that would be required to be factored into the RFR calculations. Included as the second page of this attachment is a printout showing the FCC's Power Density Program from the FCC's own website. The input values located on this program are for the new WMTT antenna. The type of antenna indicated on this printout is the "worst case" type of antenna with the same number of bays, four, which are half wave spaced. This is a circularly polarized antenna. The results from this printout show that the new WMTT antenna would have a predicted power density value at ground level of 0.015 mW per square cm which is lower than 0.2 mW per square cm, the maximum allowable level of RF radiation, which conforms to the FCC maximum permissible uncontrolled/general population RF exposure guidelines.

In addition to showing that the new WMTT antenna meets the new OET bulletin No. 65 guidelines for a safe center of radiation, it should be noted that the transmitting tower is appropriately marked with warning signs. When it becomes necessary for workers to ascend the tower, appropriate measures, such as reduction of power or shut down of power if necessary, shall be taken to ensure that the human exposure to radiofrequency electromagnetic fields will not exceed the FCC guidelines. All of this information demonstrates that this application conforms to the new FCC guidelines with respect to OET Bulletin No. 65 (Edition 97-01, August 1997), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields."

Power Density vs Distance

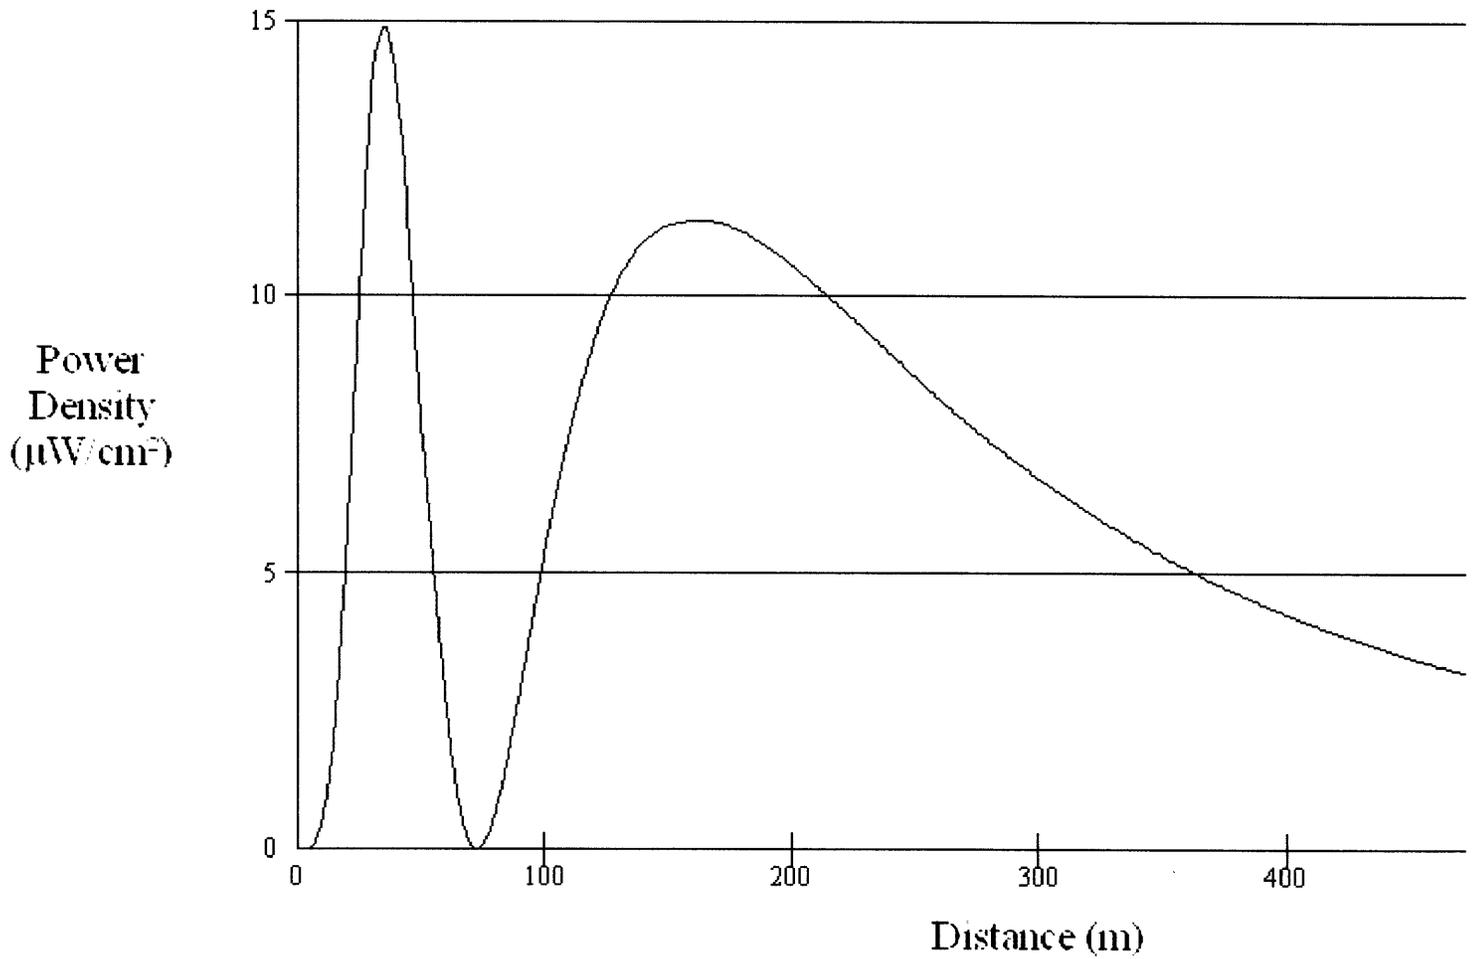

Office of Engineering and Technology

Distance (m):	<input type="text" value="600"/>	Antenna Type:	<input type="text" value="Phelps-Dodge 'Ring Stub' or Dipole (EP. ▾)"/>
Horizontal ERP (W):	<input type="text" value="12000"/>	Number of Elements:	<input type="text" value="4"/>
Vertical ERP (W):	<input type="text" value="12000"/>	Element Spacing:	<input type="text" value=".5"/>
Antenna Height (m):	<input type="text" value="44"/>		