

TECHNICAL EXHIBIT
CONCERNING HUMAN EXPOSURE TO RF ELECTROMAGNETIC ENERGY
PREPARED FOR
STATION WHLT-DT
HATTIESBURG, MISSISSIPPI
CH 22 135 KW-ND 243 M

Technical Statement

The proposed facilities were evaluated in terms of potential radio frequency (RF) energy exposure at ground level to workers and the general public. The radiation center for the proposed DTV antenna is located 215.5 meters above ground level. The maximum DTV ERP is 135 kW (horizontal polarization). A “worst-case” vertical plane relative field value of 0.1 (for angles below 60 degrees downward) is assumed for the antenna's downward radiation (see Figure 2). The calculated power density at a point 2 meters above ground level is 0.0010 mW/cm^2 . This is 0.3% of the FCC's recommended limit of 0.35 mW/cm^2 for channel 22 for an “uncontrolled” environment. Therefore, based on the responsibility threshold of 5%, the proposal will comply with the RF emission rules.

Access to the transmitting site is restricted by fencing and appropriately marked with RFR warning signs. Furthermore, as this is a multi-user site, a protocol is in effect with the other stations in the event that workers or other authorized personnel enter the restricted area or climb the tower to ensure that appropriate measures will be taken to assure worker safety with respect to radio frequency radiation exposure. Such measures include reducing the average exposure by spreading out the work over a longer period of time, wearing “accepted” RFR protective clothing and/or RFR exposure.

Finally, it is noted that this technical exhibit only addresses the potential for radio frequency electromagnetic field exposure. All other aspects of the

environmental processing analysis have already has been provided to the FCC by the tower owner as part of the tower registration process.

A handwritten signature in black ink, appearing to read 'J. Howell', with a stylized flourish at the end.

Thomas J. Howell

du Treil, Lundin & Rackley, Inc.

201 Fletcher Avenue

Sarasota, FL 34237-6019

(941) 329-6000

TOM@DLR.COM

March 27, 2008

Dielectric

Date

27 Mar 2008

Call Letters

Channel

22

Location

Customer

Antenna Type

TFU-26GTH 04

ELEVATION PATTERN

RMS Gain at Main Lobe

24.0 (13.80 dB)

Beam Tilt

0.50 Degrees

RMS Gain at Horizontal

21.3 (13.28 dB)

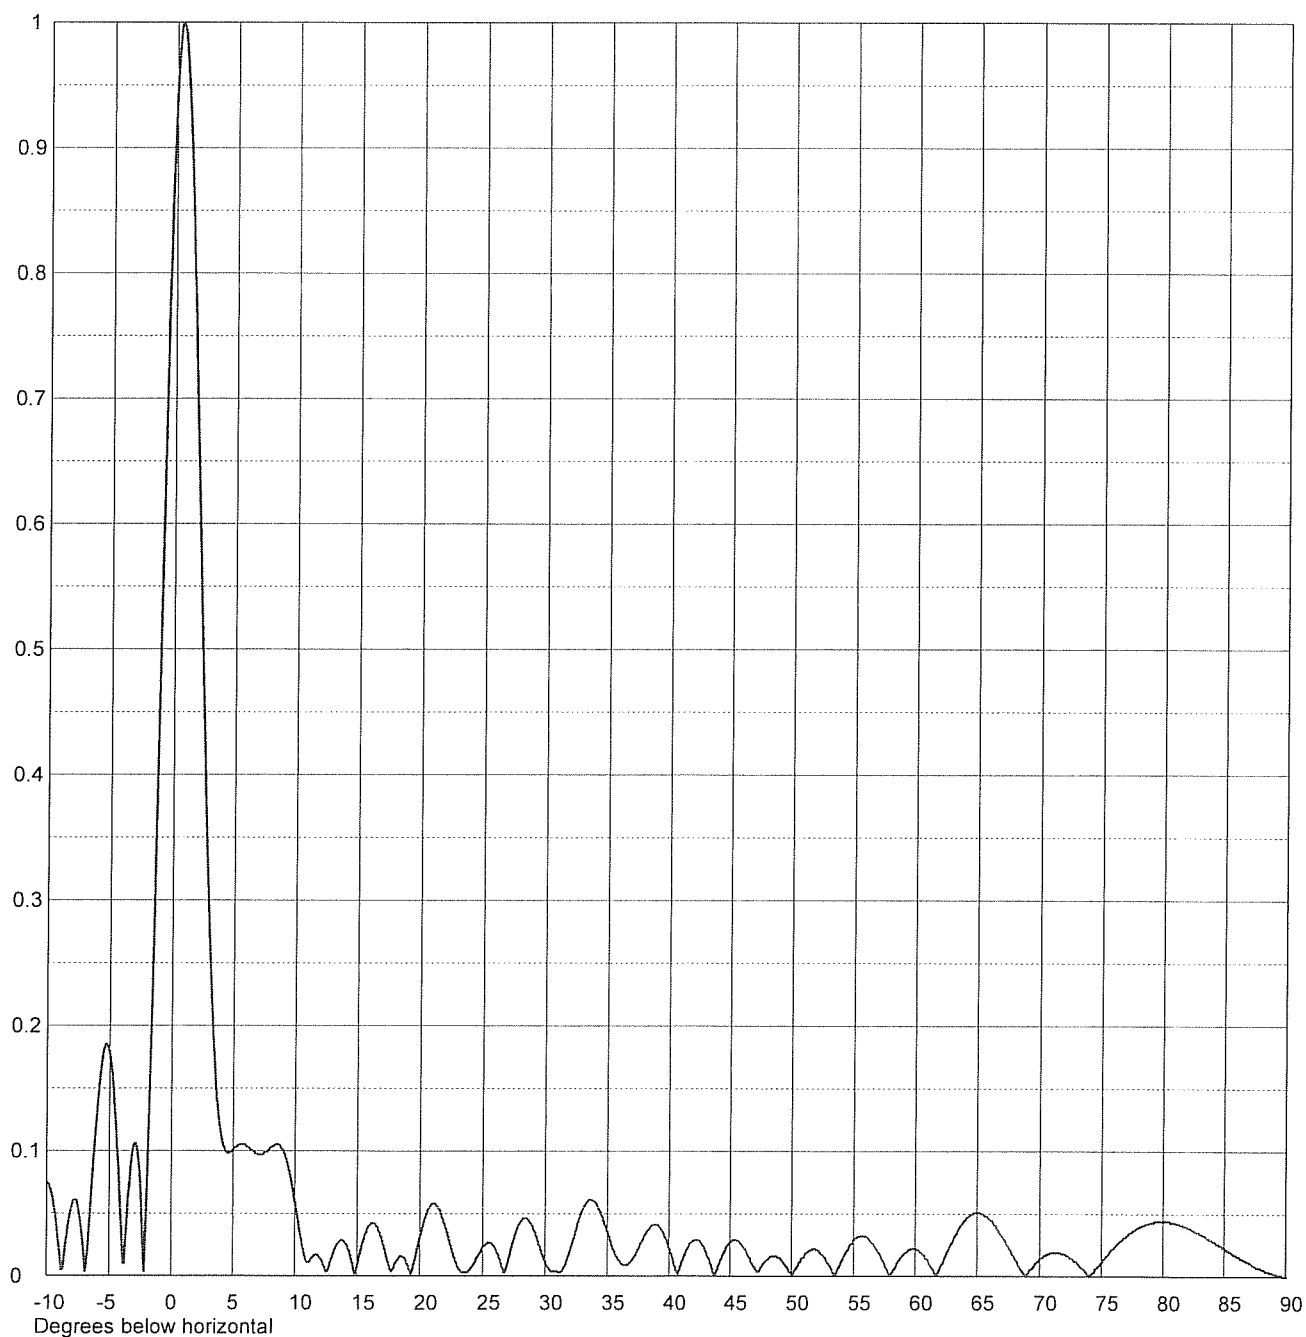
Frequency

521.00 MHz

Calculated / Measured

Calculated

Drawing #

26G240050-90

Remarks: