


Exhibit #1L14

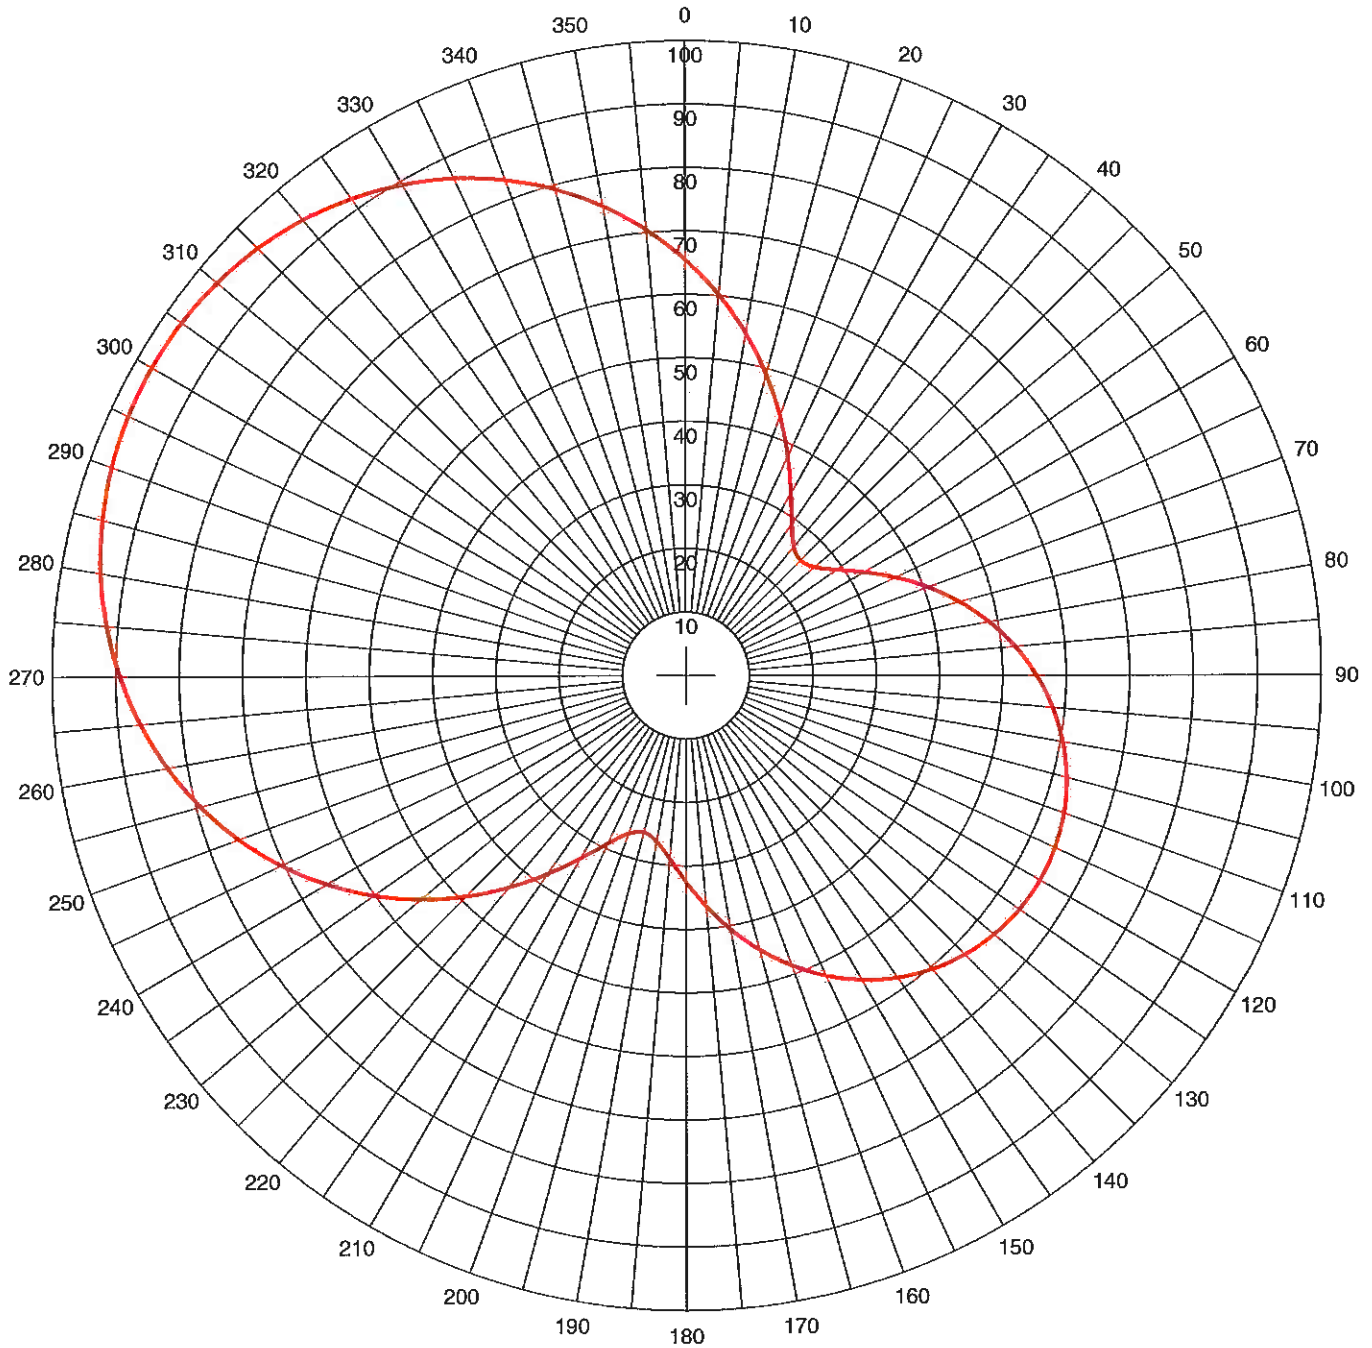

Theo RMS: 59.788 mV/m@1km
 Std RMS: 63.649 mV/m@1km
 Q: 10.0 mV/m@1km


Standard Horizontal Plane Pattern

— Pattern (mV/m @ 1km)
 — Pattern X10

#	Field Ratio	Phase (deg)	Spacing (deg)	Orient (deg)	Height (deg)	Ref Switch	TL Switch	A (deg)	B (deg)	C (deg)	D (deg)
1	0.709	-162.0	0.0	0.0	64.7	0	0	0.0	0.0	0.0	0.0
2	1.000	0.0	70.0	120.0	64.7	0	0	0.0	0.0	0.0	0.0

Call: WSRQ
 Freq: 1220 kHz
 SARASOTA, FL, US
 Hours: N
 Lat: 27-19-19 N
 Lng: 082-24-27 W
 Power: 0.039 kW
 Theo RMS: 59.79 mV/m@1km
 @ 0.039 kW

Exhibit #1L15

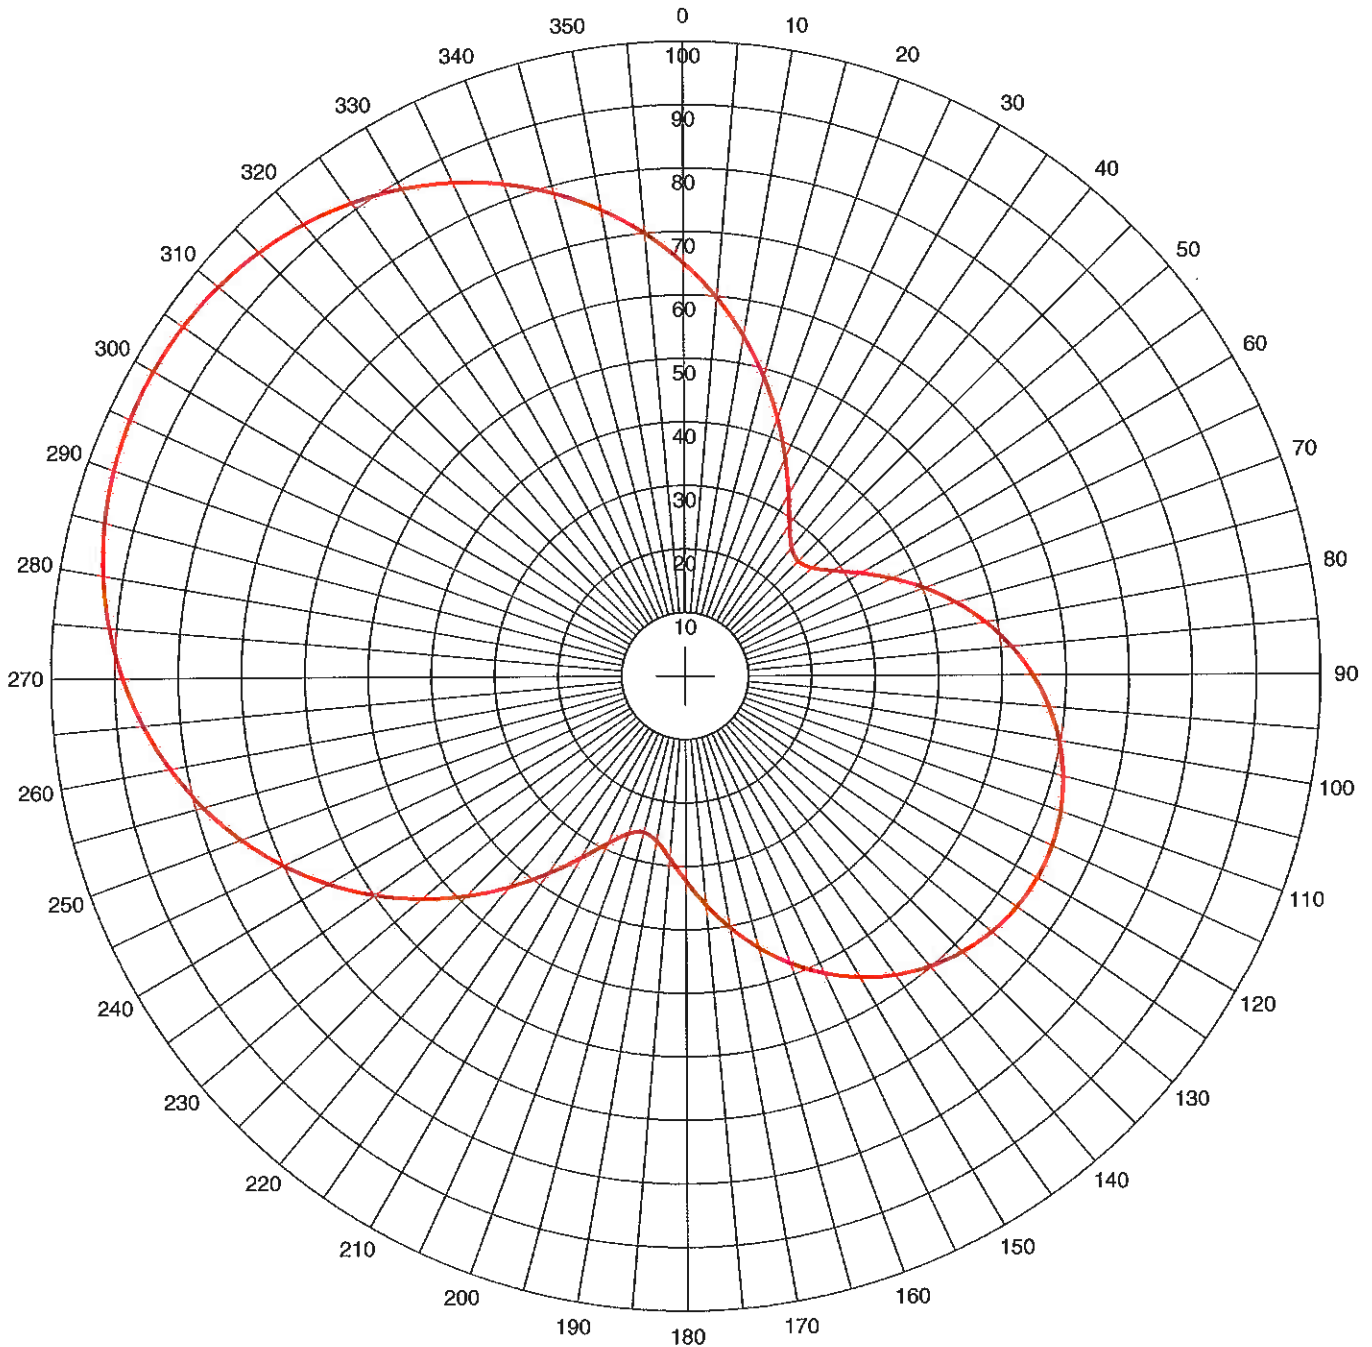

Theo RMS: 59.788 mV/m@1km

Std RMS: 63.649 mV/m@1km

Q: 10.0 mV/m@1km


Standard Pattern at Theta = 5.00 Degrees

— Pattern (mV/m @ 1km)
— Pattern X10

#	Field Ratio	Phase (deg)	Spacing (deg)	Orient (deg)	Height (deg)	Ref Switch	TL Switch	A (deg)	B (deg)	C (deg)	D (deg)
1	0.709	-162.0	0.0	0.0	64.7	0	0	0.0	0.0	0.0	0.0
2	1.000	0.0	70.0	120.0	64.7	0	0	0.0	0.0	0.0	0.0

Call: WSRQ
 Freq: 1220 kHz
 SARASOTA, FL, US
 Hours: N
 Lat: 27-19-19 N
 Lng: 082-24-27 W
 Power: 0.039 kW
 Theo RMS: 59.79 mV/m@1km
 @ 0.039 kW

Exhibit #1L16

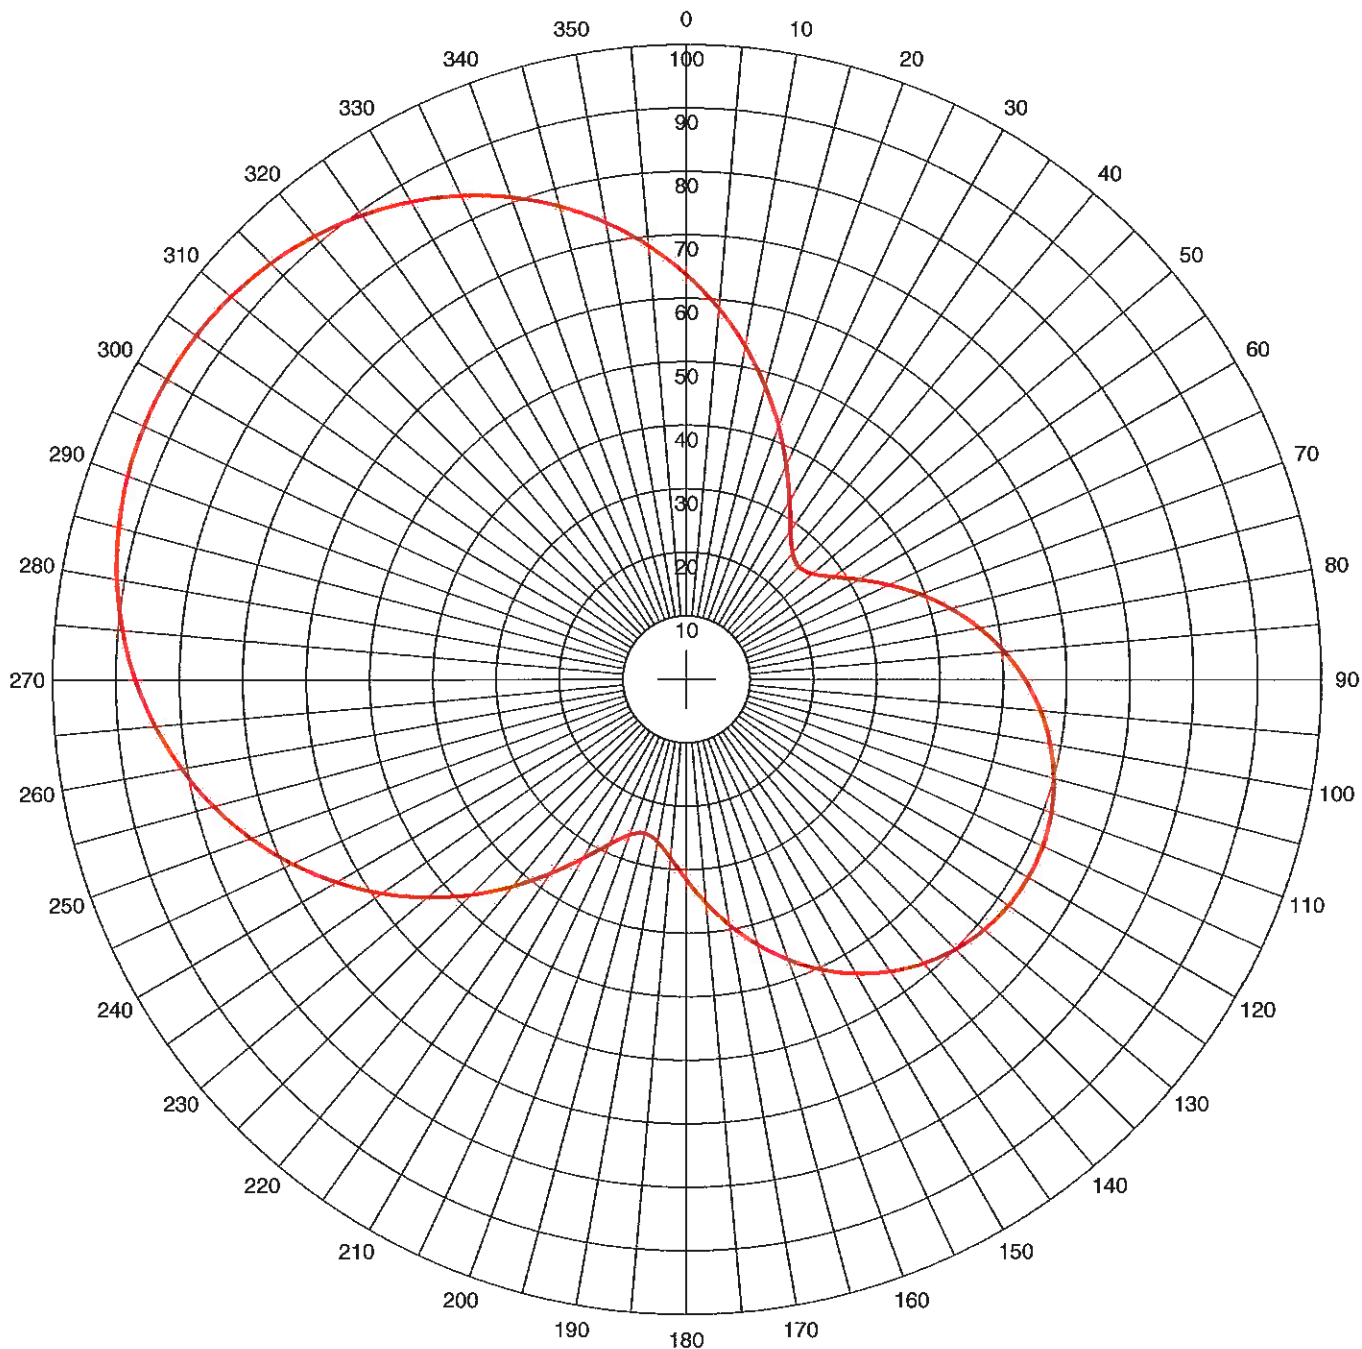

Theo RMS: 59.788 mV/m@1km

Std RMS: 63.649 mV/m@1km

Q: 10.0 mV/m@1km


Standard Pattern at Theta = 10.00 Degrees

— Pattern (mV/m @ 1km)
— Pattern X10

#	Field Ratio	Phase (deg)	Spacing (deg)	Orient (deg)	Height (deg)	Ref Switch	TL Switch	A (deg)	B (deg)	C (deg)	D (deg)
1	0.709	-162.0	0.0	0.0	64.7	0	0	0.0	0.0	0.0	0.0
2	1.000	0.0	70.0	120.0	64.7	0	0	0.0	0.0	0.0	0.0

Call: WSRQ
 Freq: 1220 kHz
 SARASOTA, FL, US
 Hours: N
 Lat: 27-19-19 N
 Lng: 082-24-27 W
 Power: 0.039 kW
 Theo RMS: 59.79 mV/m@1km
 @ 0.039 kW

Exhibit #1L17

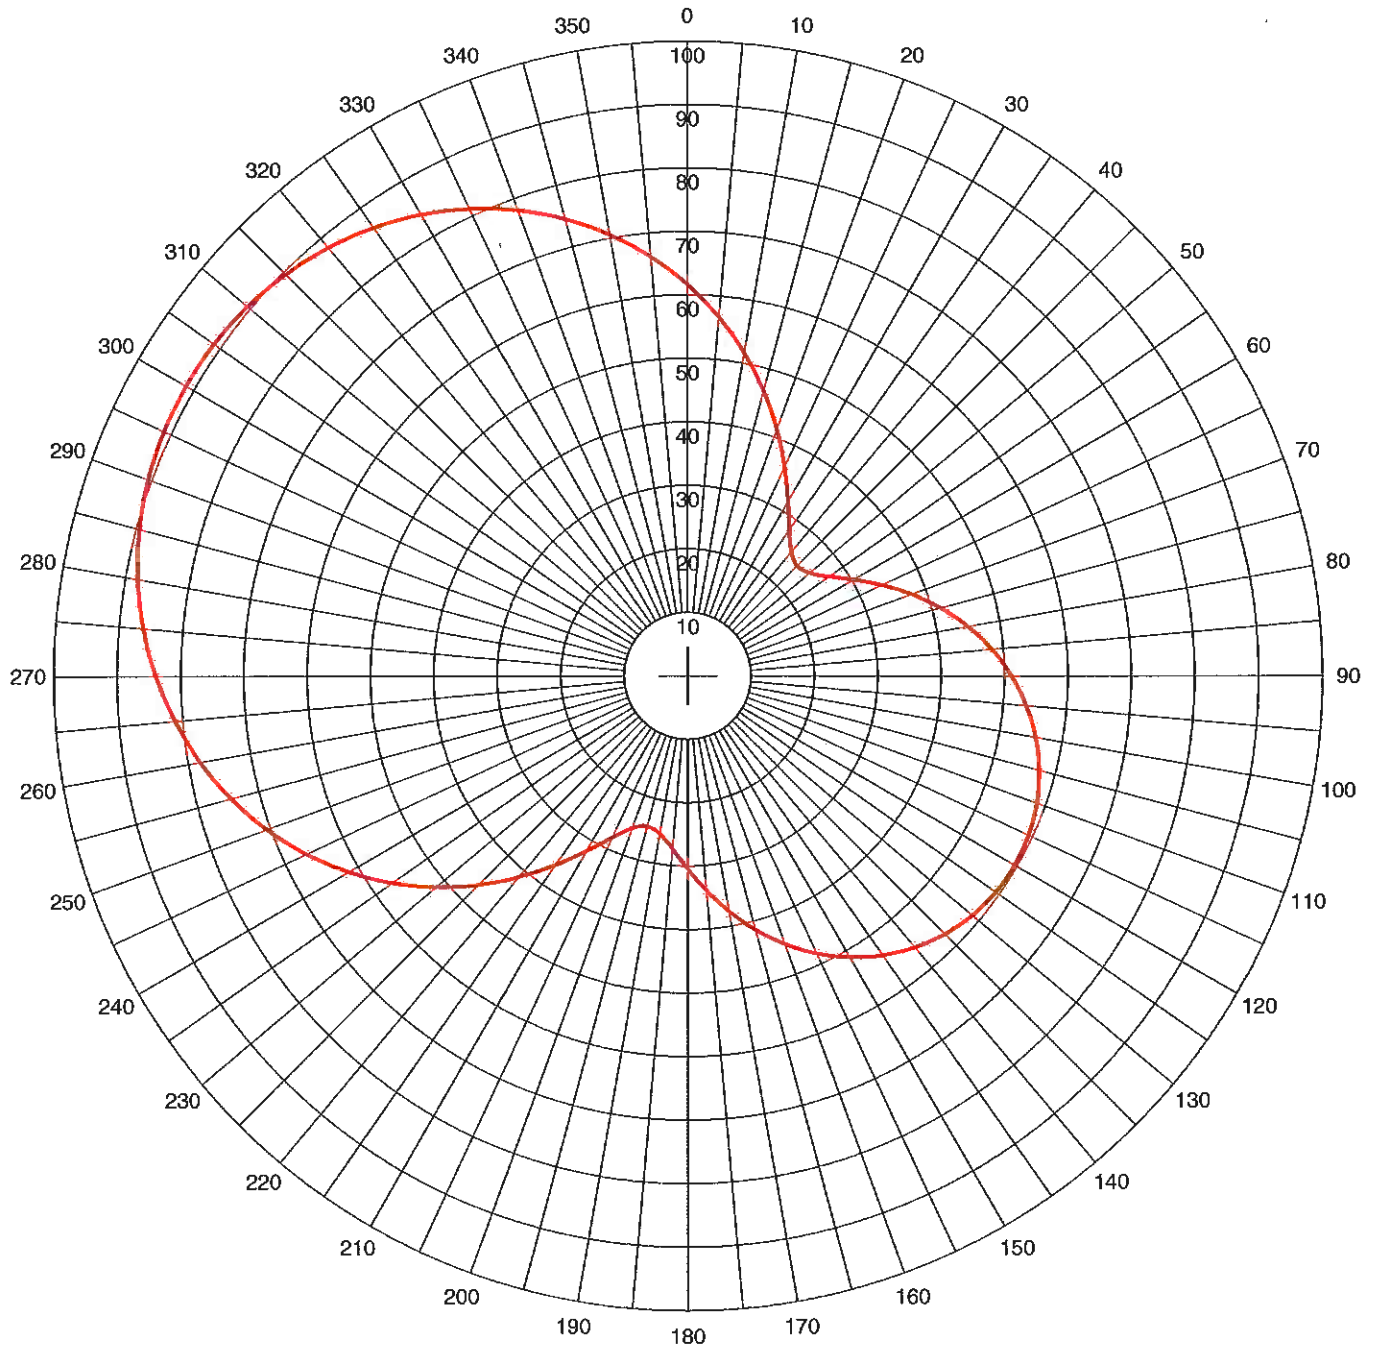

Theo RMS: 59.788 mV/m@1km

Std RMS: 63.649 mV/m@1km

Q: 10.0 mV/m@1km


Standard Pattern at Theta = 15.00 Degrees

— Pattern (mV/m @ 1km)
— Pattern X10

#	Field Ratio	Phase (deg)	Spacing (deg)	Orient (deg)	Height (deg)	Ref Switch	TL Switch	A (deg)	B (deg)	C (deg)	D (deg)
1	0.709	-162.0	0.0	0.0	64.7	0	0	0.0	0.0	0.0	0.0
2	1.000	0.0	70.0	120.0	64.7	0	0	0.0	0.0	0.0	0.0

Call: WSRQ
 Freq: 1220 kHz
 SARASOTA, FL, US
 Hours: N
 Lat: 27-19-19 N
 Lng: 082-24-27 W
 Power: 0.039 kW
 Theo RMS: 59.79 mV/m@1km
 @ 0.039 kW

Exhibit #1L18

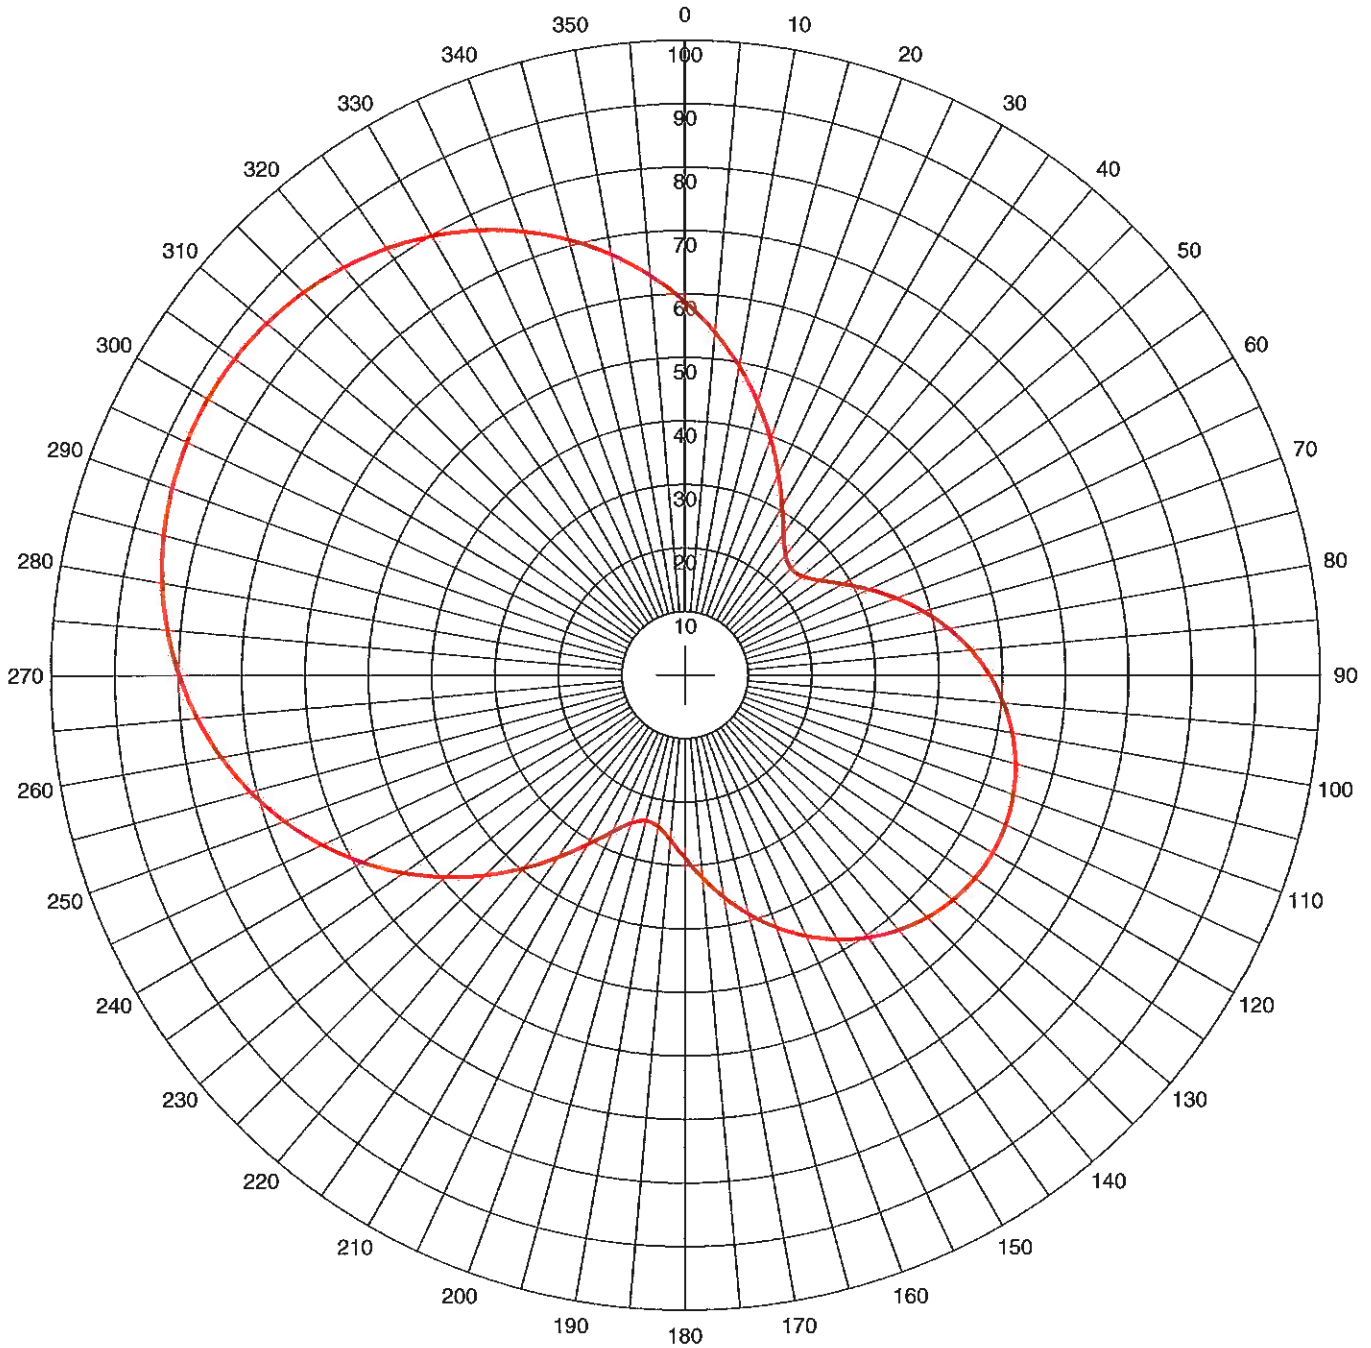

Theo RMS: 59.788 mV/m@1km

Std RMS: 63.649 mV/m@1km

Q: 10.0 mV/m@1km


Standard Pattern at Theta = 20.00 Degrees

— Pattern (mV/m @ 1km)
— Pattern X10

#	Field Ratio	Phase (deg)	Spacing (deg)	Orient (deg)	Height (deg)	Ref Switch	TL Switch	A (deg)	B (deg)	C (deg)	D (deg)
1	0.709	-162.0	0.0	0.0	64.7	0	0	0.0	0.0	0.0	0.0
2	1.000	0.0	70.0	120.0	64.7	0	0	0.0	0.0	0.0	0.0

Call: WSRQ
 Freq: 1220 kHz
 SARASOTA, FL, US
 Hours: N
 Lat: 27-19-19 N
 Lng: 082-24-27 W
 Power: 0.039 kW
 Theo RMS: 59.79 mV/m@1km
 @ 0.039 kW

Exhibit #1L19

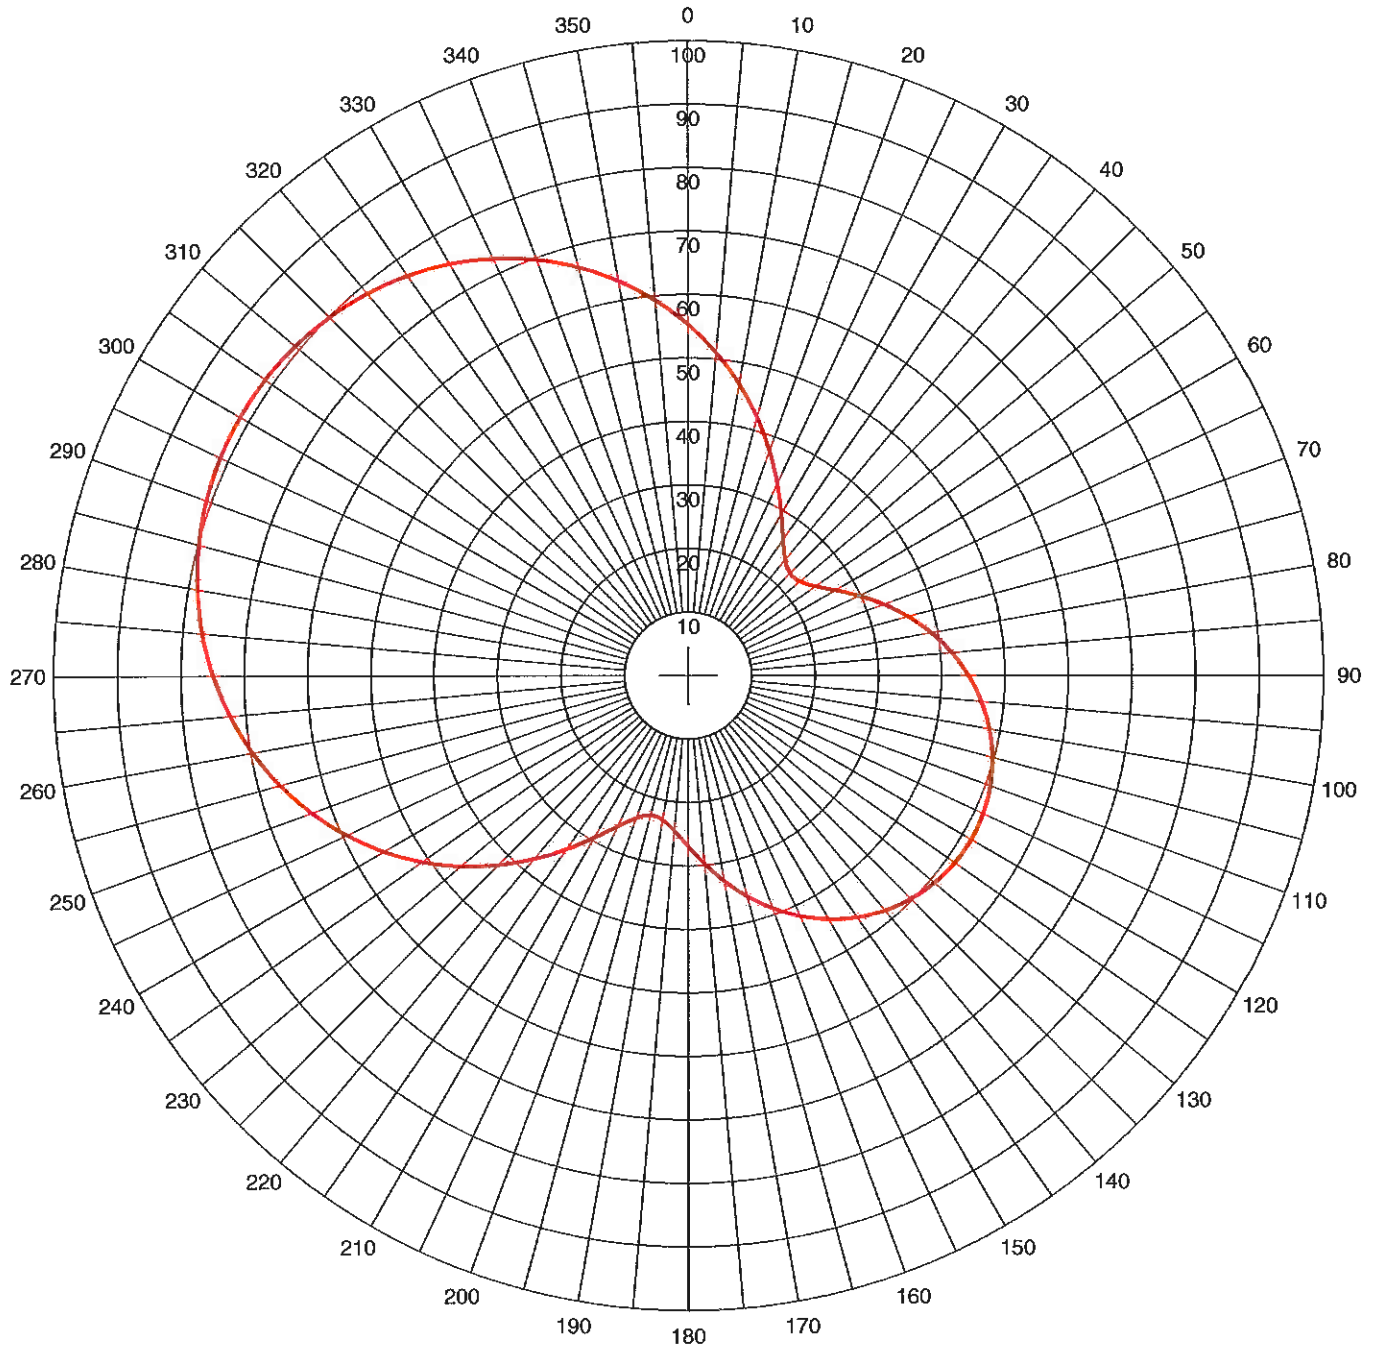

Theo RMS: 59.788 mV/m@1km

Std RMS: 63.649 mV/m@1km

Q: 10.0 mV/m@1km


Standard Pattern at Theta = 25.00 Degrees

— Pattern (mV/m @ 1km)
— Pattern X10

#	Field Ratio	Phase (deg)	Spacing (deg)	Orient (deg)	Height (deg)	Ref Switch	TL Switch	A (deg)	B (deg)	C (deg)	D (deg)
1	0.709	-162.0	0.0	0.0	64.7	0	0	0.0	0.0	0.0	0.0
2	1.000	0.0	70.0	120.0	64.7	0	0	0.0	0.0	0.0	0.0

Call: WSRQ
 Freq: 1220 kHz
 SARASOTA, FL, US
 Hours: N
 Lat: 27-19-19 N
 Lng: 082-24-27 W
 Power: 0.039 kW
 Theo RMS: 59.79 mV/m@1km
 @ 0.039 kW

Exhibit #1L20

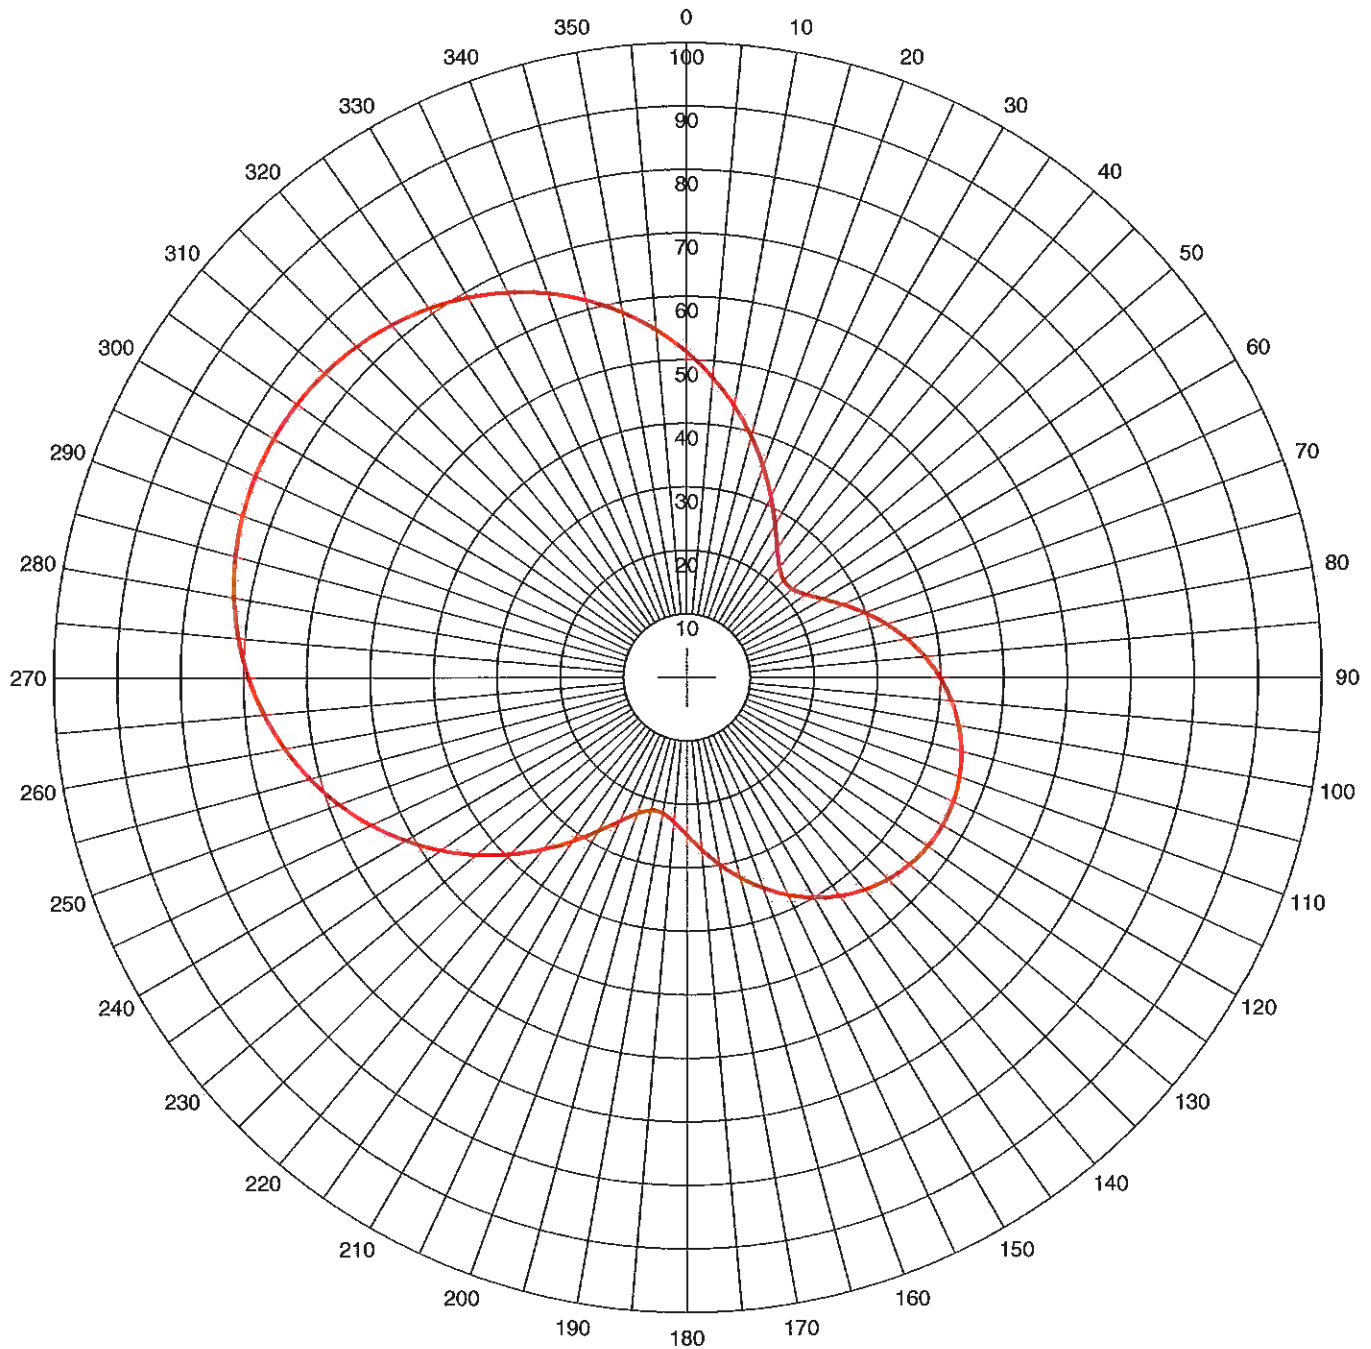

Theo RMS: 59.788 mV/m@1km

Std RMS: 63.649 mV/m@1km

Q: 10.0 mV/m@1km


Standard Pattern at Theta = 30.00 Degrees

— Pattern (mV/m @ 1km)
— Pattern X10

#	Field Ratio	Phase (deg)	Spacing (deg)	Orient (deg)	Height (deg)	Ref Switch	TL Switch	A (deg)	B (deg)	C (deg)	D (deg)
1	0.709	-162.0	0.0	0.0	64.7	0	0	0.0	0.0	0.0	0.0
2	1.000	0.0	70.0	120.0	64.7	0	0	0.0	0.0	0.0	0.0

Call: WSRQ
 Freq: 1220 kHz
 SARASOTA, FL, US
 Hours: N
 Lat: 27-19-19 N
 Lng: 082-24-27 W
 Power: 0.039 kW
 Theo RMS: 59.79 mV/m@1km
 @ 0.039 kW

Exhibit #1L21

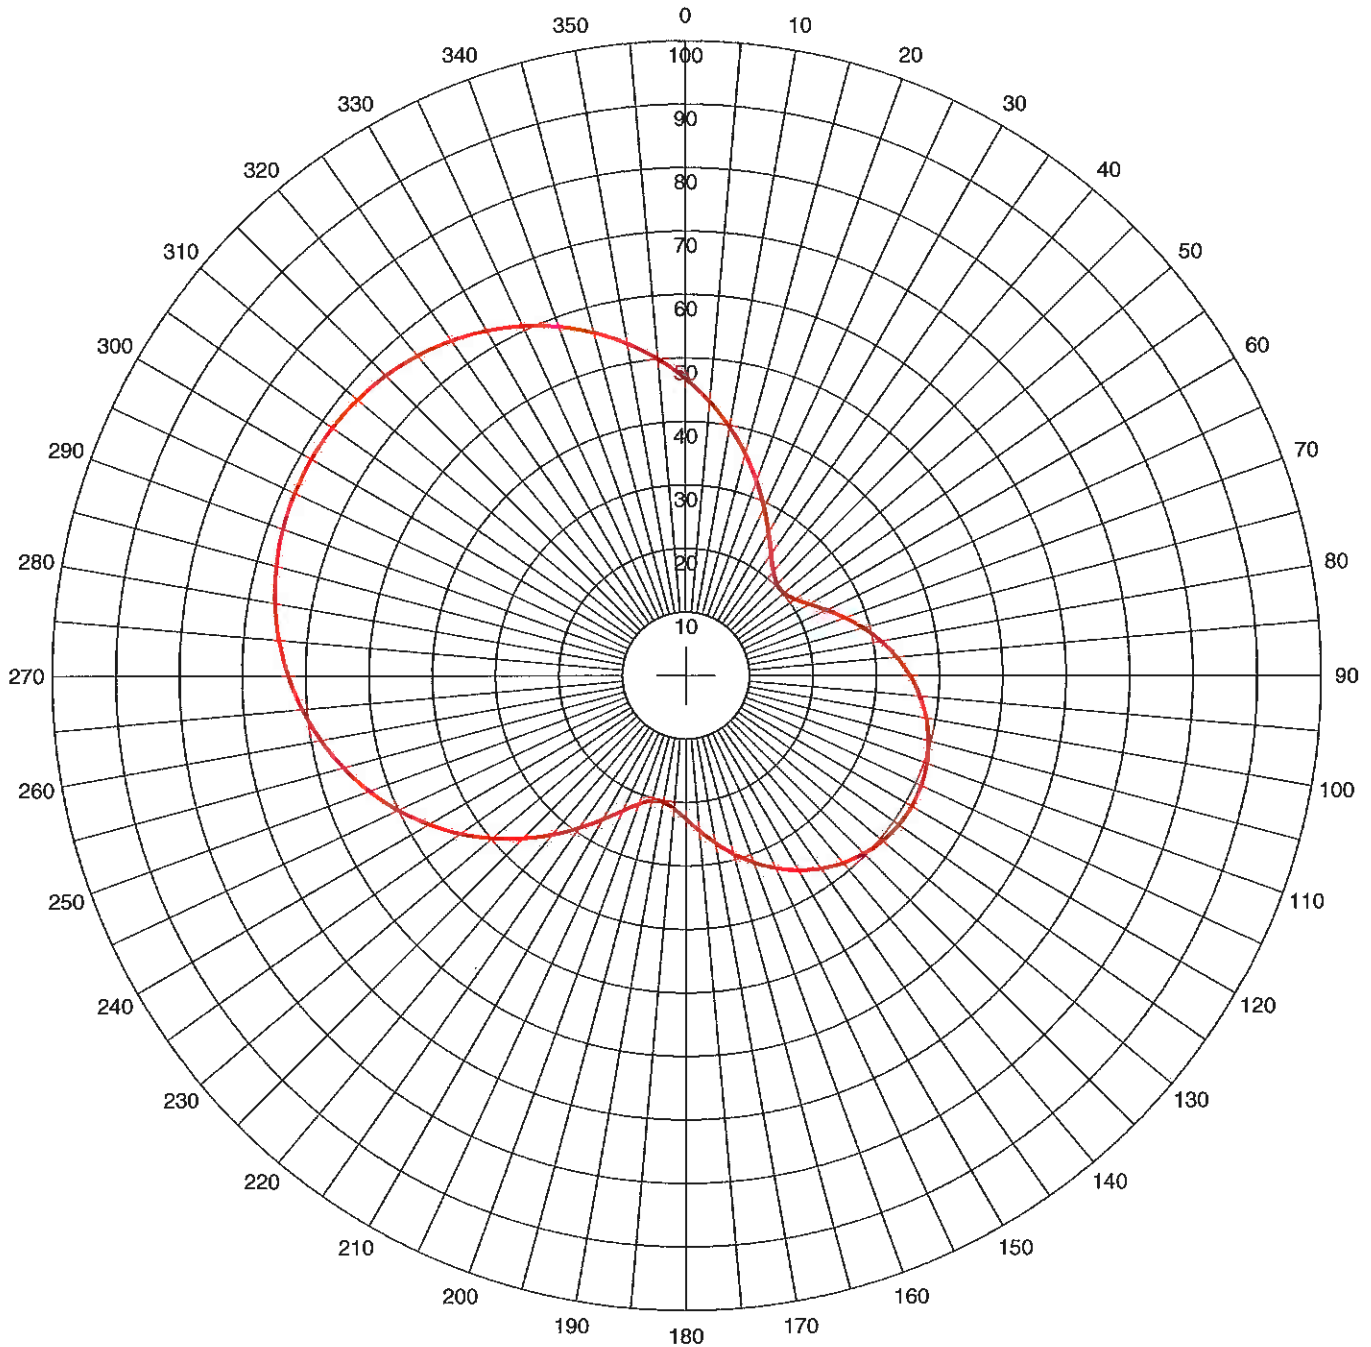

Theo RMS: 59.788 mV/m@1km

Std RMS: 63.649 mV/m@1km

Q: 10.0 mV/m@1km


Standard Pattern at Theta = 35.00 Degrees

— Pattern (mV/m @ 1km)
— Pattern X10

#	Field Ratio	Phase (deg)	Spacing (deg)	Orient (deg)	Height (deg)	Ref Switch	TL Switch	A (deg)	B (deg)	C (deg)	D (deg)
1	0.709	-162.0	0.0	0.0	64.7	0	0	0.0	0.0	0.0	0.0
2	1.000	0.0	70.0	120.0	64.7	0	0	0.0	0.0	0.0	0.0

Call: WSRQ
 Freq: 1220 kHz
 SARASOTA, FL, US
 Hours: N
 Lat: 27-19-19 N
 Lng: 082-24-27 W
 Power: 0.039 kW
 Theo RMS: 59.79 mV/m@1km
 @ 0.039 kW

Exhibit #1L22

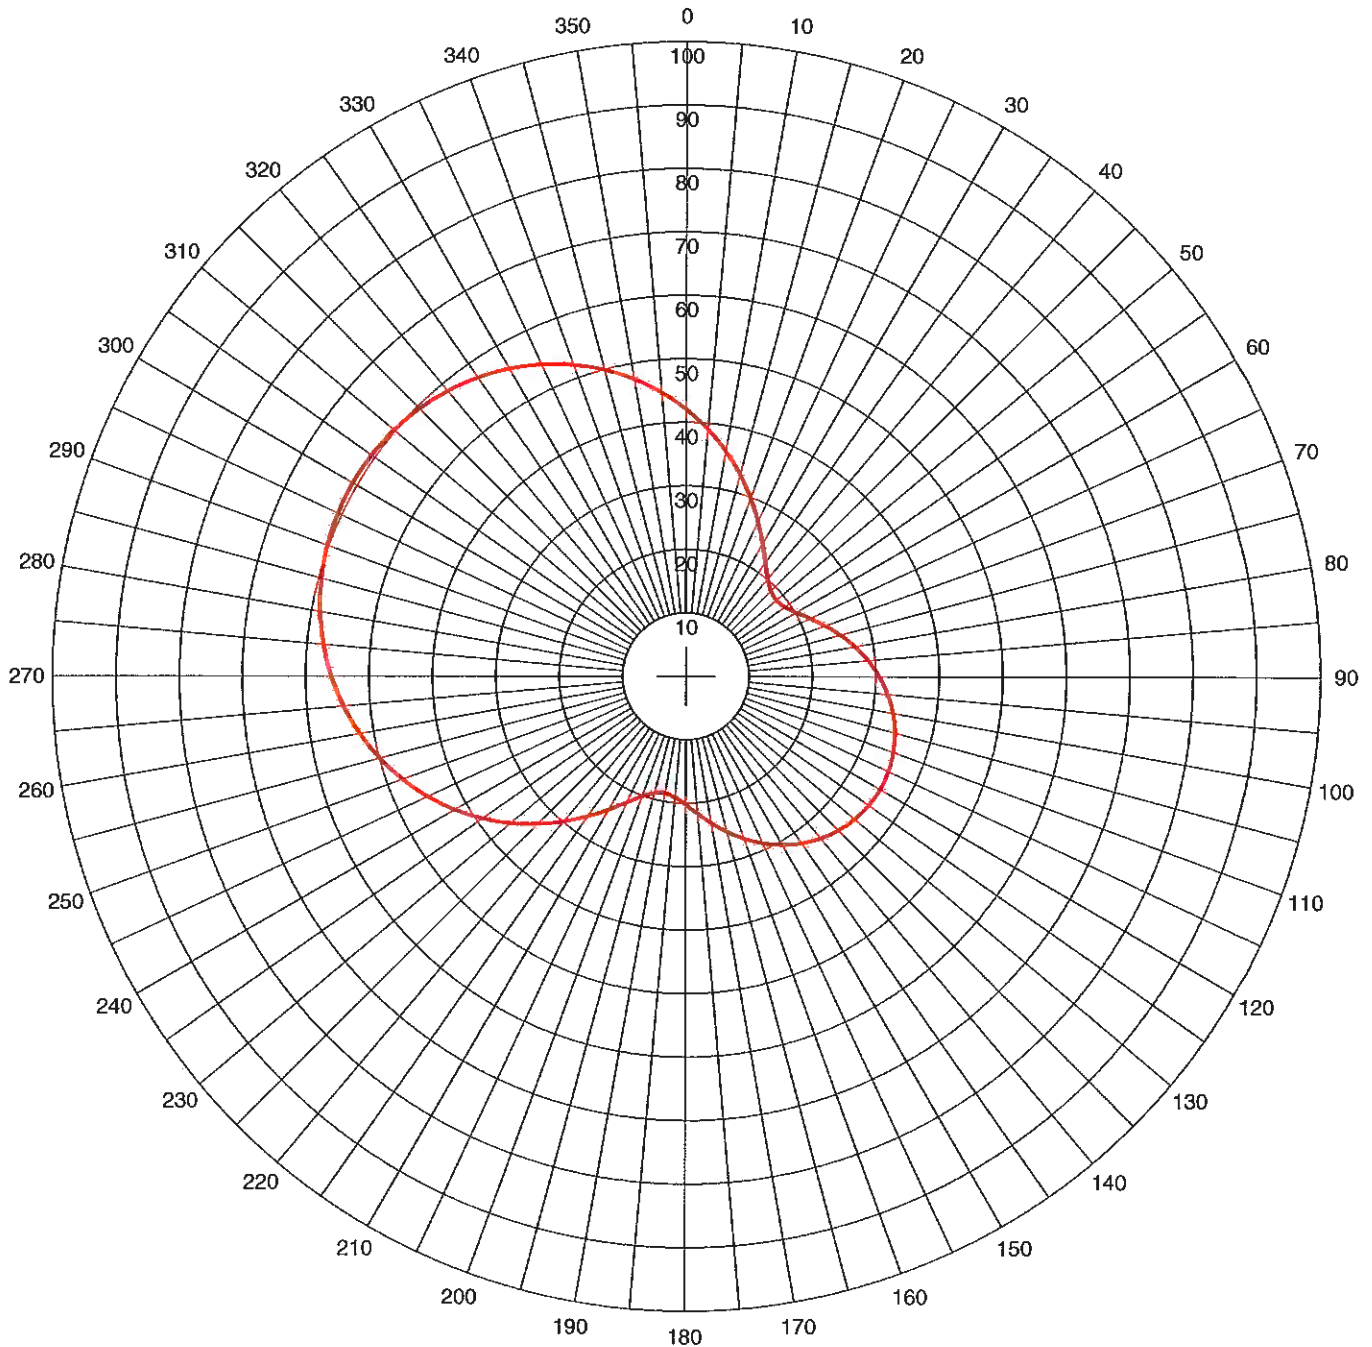

Theo RMS: 59.788 mV/m@1km
 Std RMS: 63.649 mV/m@1km
 Q: 10.0 mV/m@1km


Standard Pattern at Theta = 40.00 Degrees

— Pattern (mV/m @ 1km)
 — Pattern X10

#	Field Ratio	Phase (deg)	Spacing (deg)	Orient (deg)	Height (deg)	Ref Switch	TL Switch	A (deg)	B (deg)	C (deg)	D (deg)
1	0.709	-162.0	0.0	0.0	64.7	0	0	0.0	0.0	0.0	0.0
2	1.000	0.0	70.0	120.0	64.7	0	0	0.0	0.0	0.0	0.0

Call: WSRQ
 Freq: 1220 kHz
 SARASOTA, FL, US
 Hours: N
 Lat: 27-19-19 N
 Long: 082-24-27 W
 Power: 0.039 kW
 Theo RMS: 59.79 mV/m@1km
 @ 0.039 kW

Exhibit #1L23

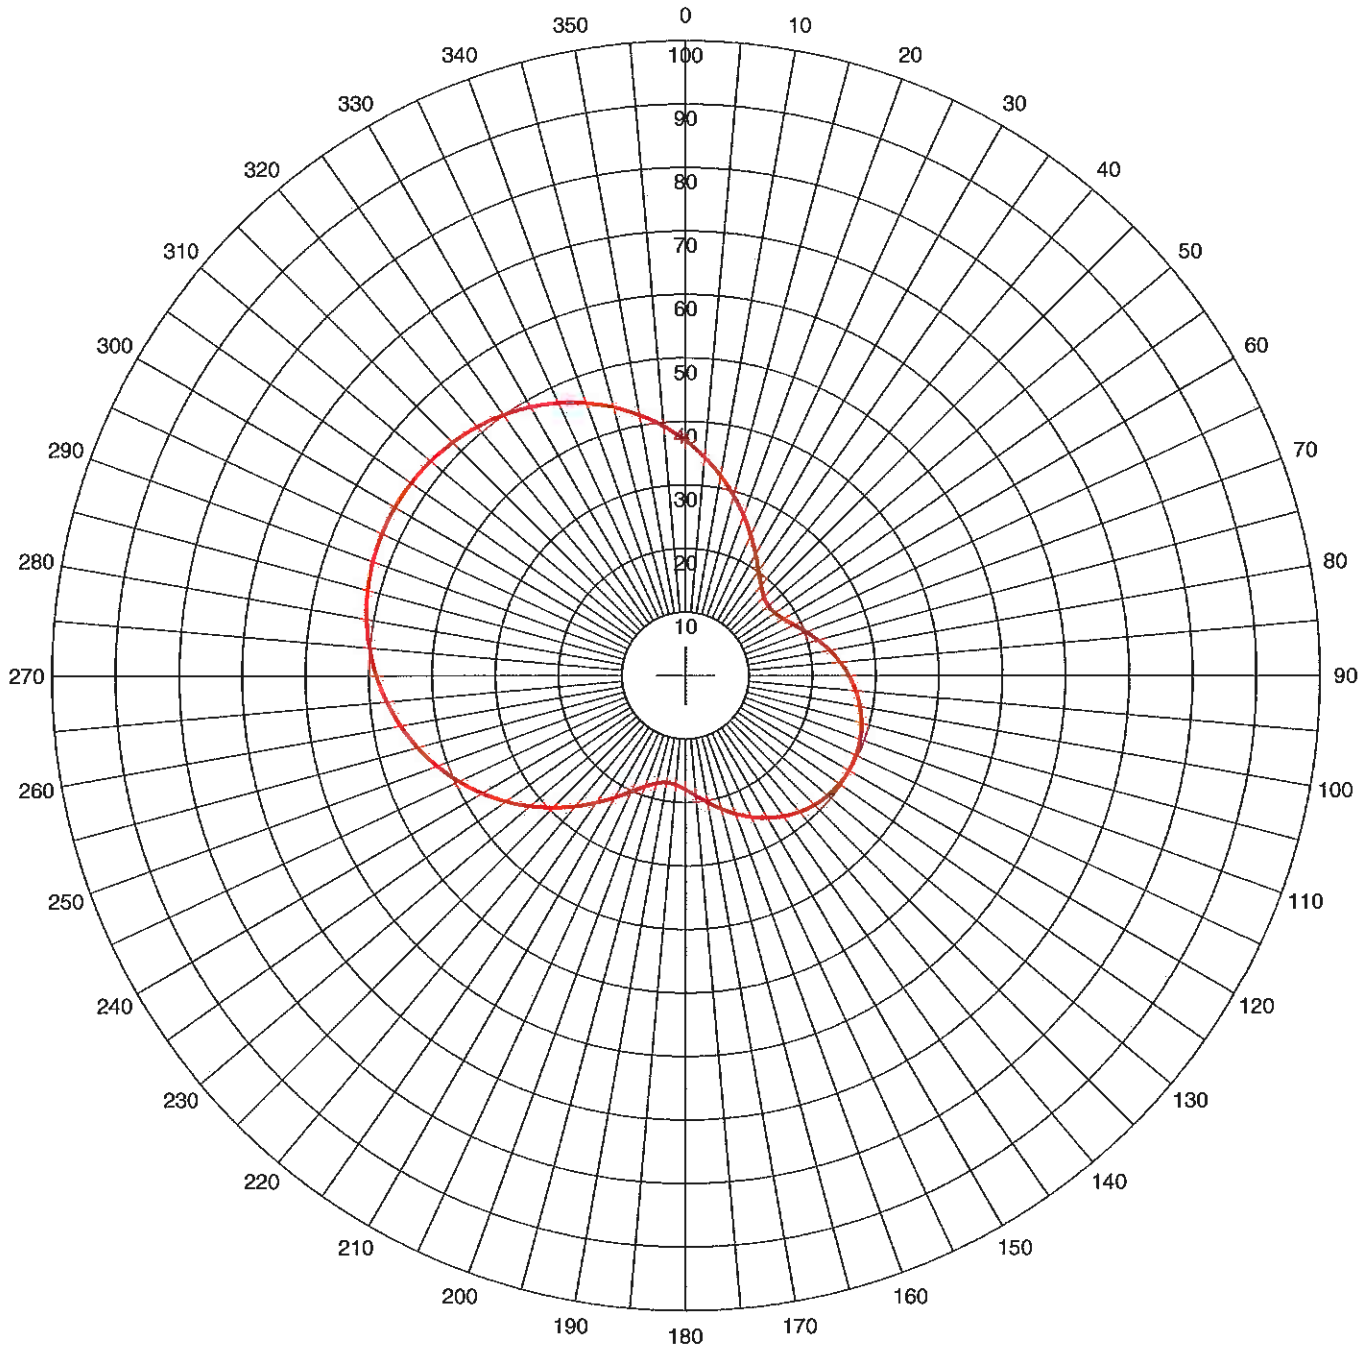

Theo RMS: 59.788 mV/m@1km

Std RMS: 63.649 mV/m@1km

Q: 10.0 mV/m@1km


Standard Pattern at Theta = 45.00 Degrees

— Pattern (mV/m @ 1km)
 - - - Pattern X10

#	Field Ratio	Phase (deg)	Spacing (deg)	Orient (deg)	Height (deg)	Ref Switch	TL Switch	A (deg)	B (deg)	C (deg)	D (deg)
1	0.709	-162.0	0.0	0.0	64.7	0	0	0.0	0.0	0.0	0.0
2	1.000	0.0	70.0	120.0	64.7	0	0	0.0	0.0	0.0	0.0

Call: WSRQ
 Freq: 1220 kHz
 SARASOTA, FL, US
 Hours: N
 Lat: 27-19-19 N
 Lng: 082-24-27 W
 Power: 0.039 kW
 Theo RMS: 59.79 mV/m@1km
 @ 0.039 kW

Exhibit #1L24

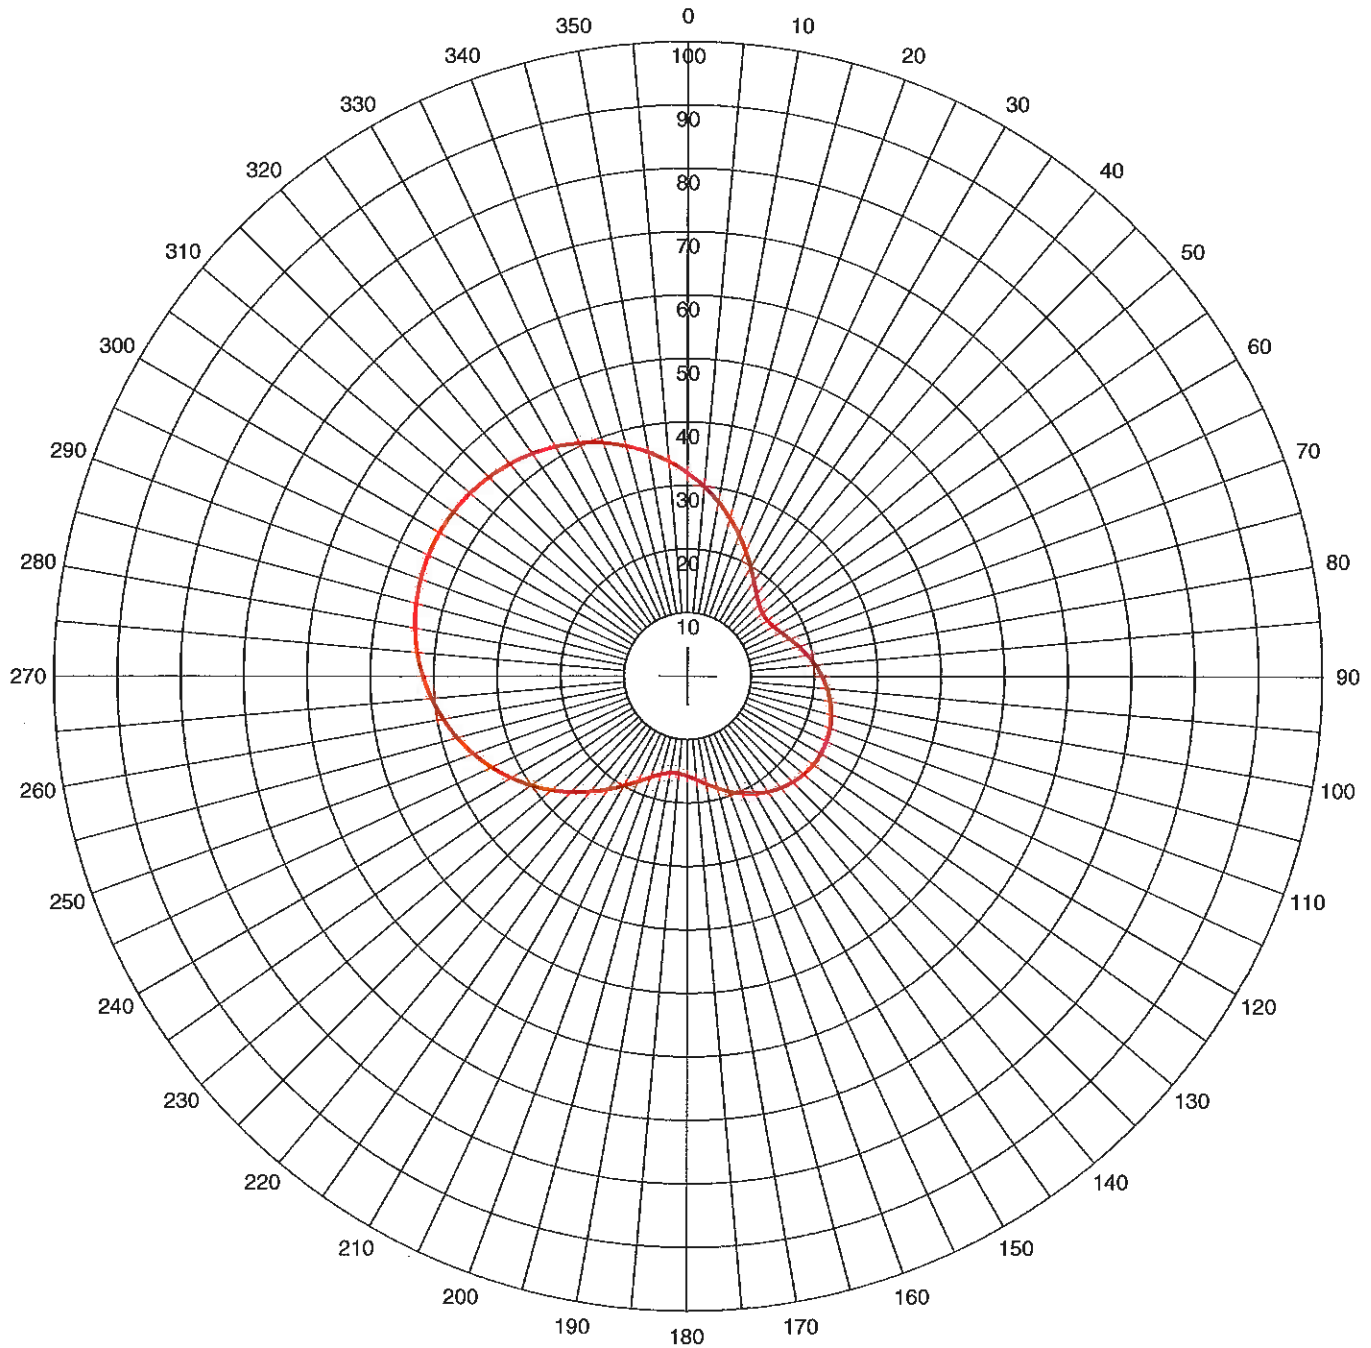

Theo RMS: 59.788 mV/m@1km
 Std RMS: 63.649 mV/m@1km
 Q: 10.0 mV/m@1km


Standard Pattern at Theta = 50.00 Degrees

— Pattern (mV/m @ 1km)
 — Pattern X10

#	Field Ratio	Phase (deg)	Spacing (deg)	Orient (deg)	Height (deg)	Ref Switch	TL Switch	A (deg)	B (deg)	C (deg)	D (deg)
1	0.709	-162.0	0.0	0.0	64.7	0	0	0.0	0.0	0.0	0.0
2	1.000	0.0	70.0	120.0	64.7	0	0	0.0	0.0	0.0	0.0

Call: WSRQ
 Freq: 1220 kHz
 SARASOTA, FL, US
 Hours: N
 Lat: 27-19-19 N
 Lng: 082-24-27 W
 Power: 0.039 kW
 Theo RMS: 59.79 mV/m@1km
 @ 0.039 kW

Exhibit #1L25

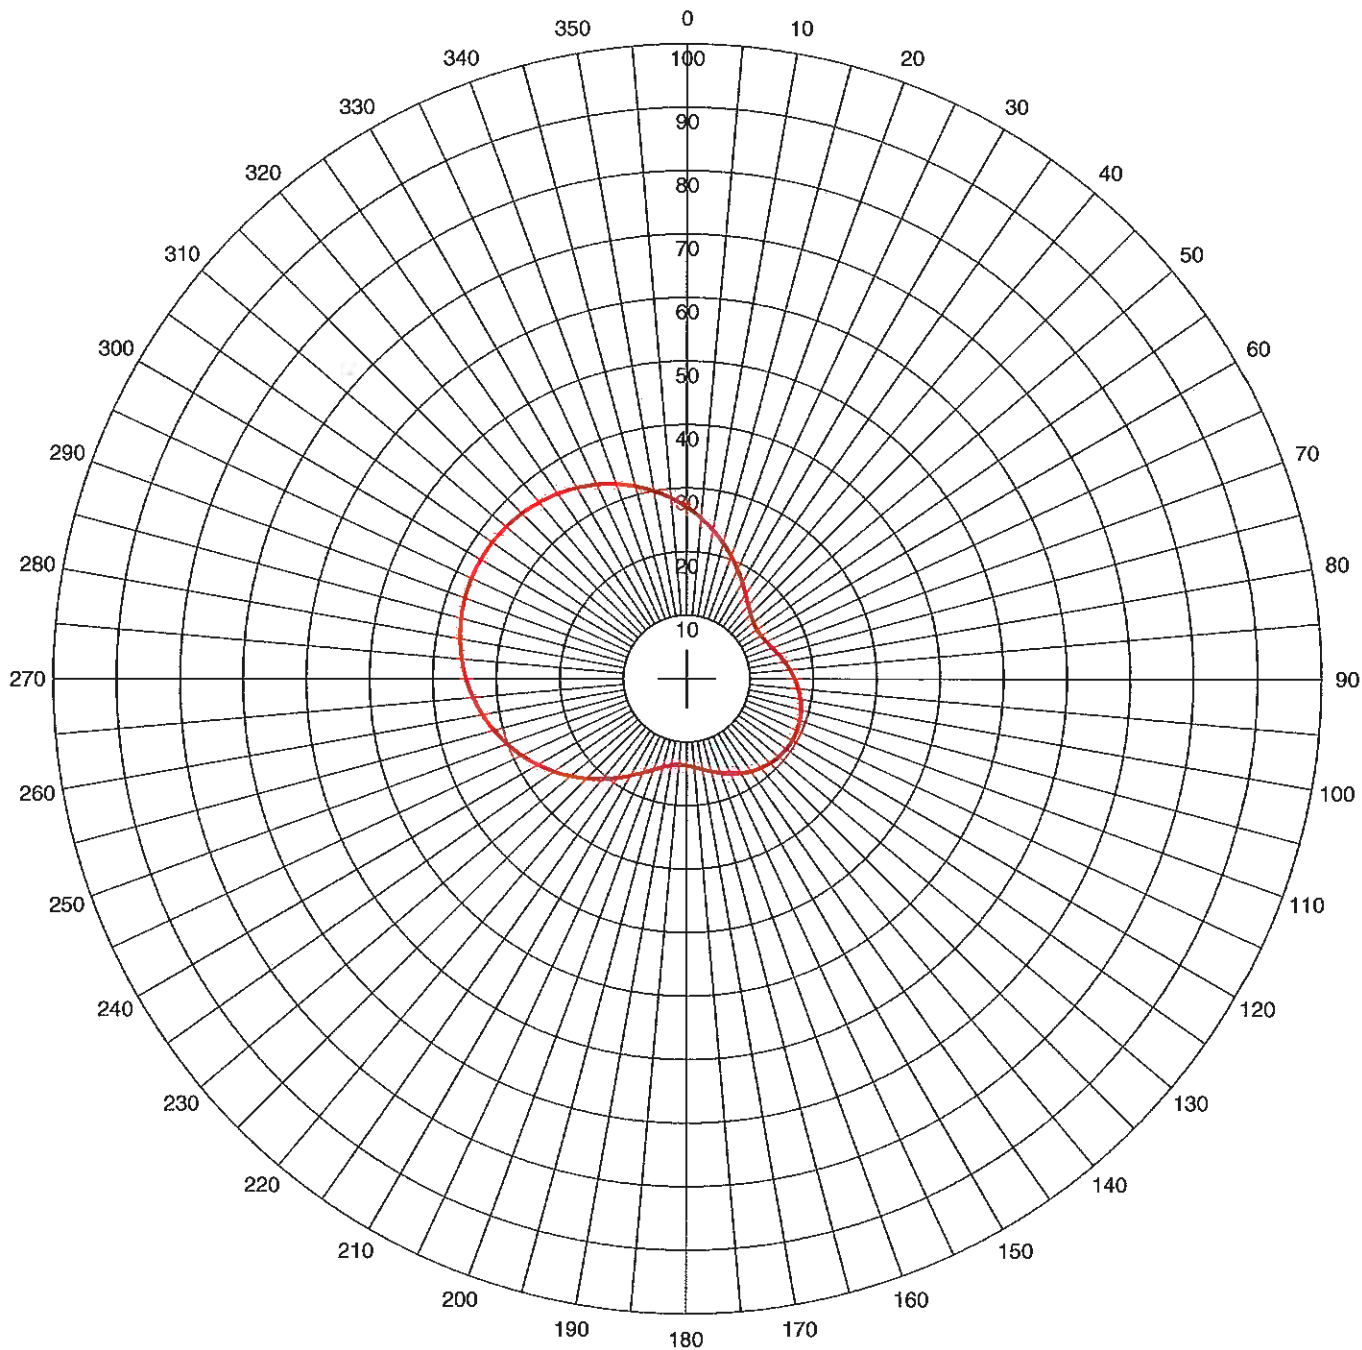

Theo RMS: 59.788 mV/m@1km
 Std RMS: 63.649 mV/m@1km
 Q: 10.0 mV/m@1km


Standard Pattern at Theta = 55.00 Degrees

— Pattern (mV/m @ 1km)
 — Pattern X10

#	Field Ratio	Phase (deg)	Spacing (deg)	Orient (deg)	Height (deg)	Ref Switch	TL Switch	A (deg)	B (deg)	C (deg)	D (deg)
1	0.709	-162.0	0.0	0.0	64.7	0	0	0.0	0.0	0.0	0.0
2	1.000	0.0	70.0	120.0	64.7	0	0	0.0	0.0	0.0	0.0

Call: WSRQ
 Freq: 1220 kHz
 SARASOTA, FL, US
 Hours: N
 Lat: 27-19-19 N
 Lng: 082-24-27 W
 Power: 0.039 kW
 Theo RMS: 59.79 mV/m@1km
 @ 0.039 kW

Exhibit #1L26

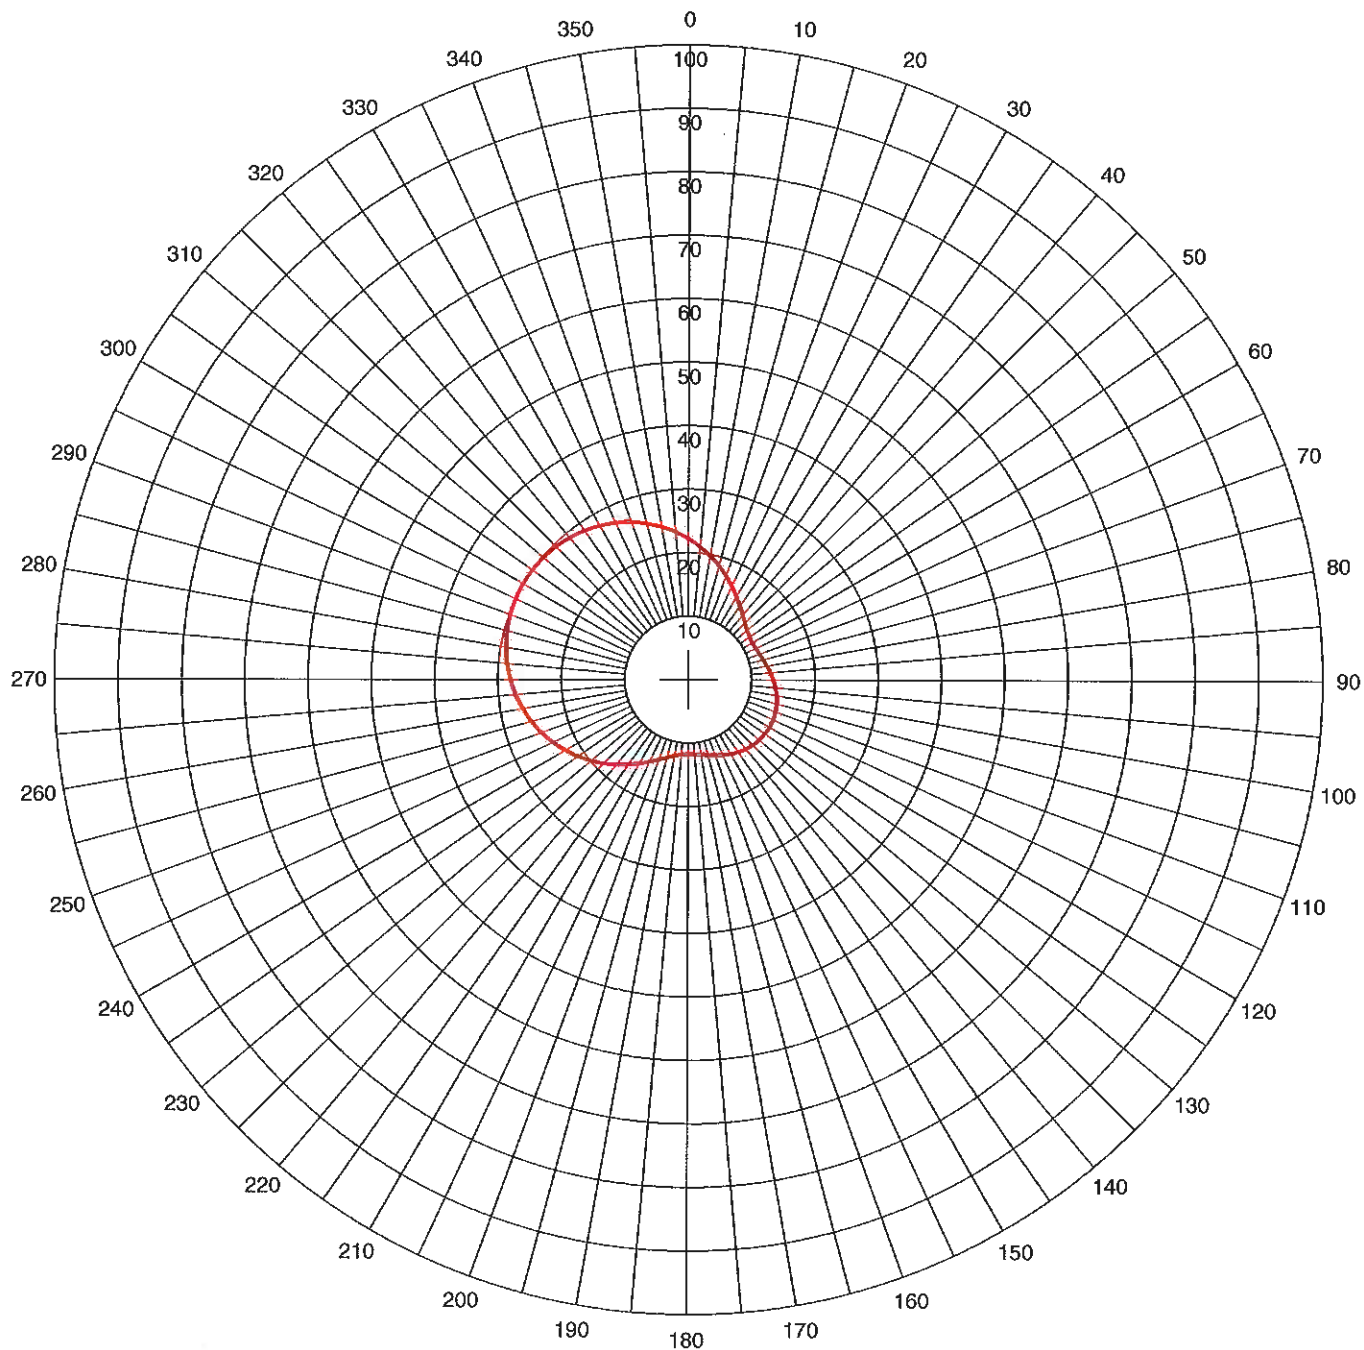

Theo RMS: 59.788 mV/m@1km
 Std RMS: 63.649 mV/m@1km
 Q: 10.0 mV/m@1km

Standard Pattern at Theta = 60.00 Degrees

— Pattern (mV/m @ 1km)
 - - - Pattern X10

#	Field Ratio	Phase (deg)	Spacing (deg)	Orient (deg)	Height (deg)	Ref Switch	TL Switch	A (deg)	B (deg)	C (deg)	D (deg)
1	0.709	-162.0	0.0	0.0	64.7	0	0	0.0	0.0	0.0	0.0
2	1.000	0.0	70.0	120.0	64.7	0	0	0.0	0.0	0.0	0.0

Call: WSRQ
 Freq: 1220 kHz
 SARASOTA, FL, US
 Hours: N
 Lat: 27-19-19 N
 Lng: 082-24-27 W
 Power: 0.039 kW
 Theo RMS: 59.79 mV/m@1km
 @ 0.039 kW

OVERALL
STRUCTURE
45.11 m
(148.0 ft)
AGL
55.78 m
(183.0 ft)
AMSL

AM
RADIATOR
44.20 m
(145.0 ft)

Base Insulator 0.9 m (3.0 ft)

North Latitude 27-19-19
West Longitude 82-24-28

Site Elev 10.67 m (35.0 ft) AMSL

(Sketch not drawn to scale)

TOWER #1 OF 2
CENTER OF ARRAY:
NAD 27
N. LAT. 27-19-19
W. LONG. 82-24-27

VERTICAL PLAN SKETCH

SITE ELEVATION - 11 m (35 ft) AMSL
TOP OF STRUCTURE - 45 m (148 ft) AGL
56 m (183 ft) AMSL
AM Radiator - 44 m (145 ft)

FIGURES ROUNDED TO NEAREST METER (FOOT).

EXHIBIT #1M1
MINOR CHANGE APPLICATION
FLORIDA TALK RADIO, LLC
WSRQ AM RADIO STATION
has: 1220 kHz - 0.159/1.0 kW - DA2
req: 1220 kHz - 0.039/1.0 kW - DA2
SARASOTA, FLORIDA
December 2011

GRAHAM BROCK, INC.
BROADCAST TECHNICAL CONSULTANTS

Output from NADCON for station WSQR TOWER 1 OF 2

North American Datum Conversion


NAD 27 to NAD 83

NADCON Program Version 2.11

=====

Transformation #: 1 Region: Conus

	Latitude	Longitude
NAD 27 datum values:	27 19 19.00000	82 24 28.00000
NAD 83 datum values:	27 19 20.16721	82 24 27.33996
NAD 83 - NAD 27 shift values:	1.16721	-0.66004 (secs.)
	35.927	-18.146 (meters)
Magnitude of total shift:		40.249 (meters)



[NGS HOME PAGE](#)

EXHIBIT #1M2
MINOR CHANGE APPLICATION
FLORIDA TALK RADIO, LLC
WSRQ AM RADIO STATION
has: 1220 kHz - 0.159/1.0 kW - DA2
req: 1220 kHz - 0.039/1.0 kW - DA2
SARASOTA, FLORIDA
December 2011

TOWAIR Determination Results

*** NOTICE ***

TOWAIR's findings are not definitive or binding, and we cannot guarantee that the data in TOWAIR are fully current and accurate. In some instances, TOWAIR may yield results that differ from application of the criteria set out in 47 C.F.R. Section 17.7 and 14 C.F.R. Section 77.13. A positive finding by TOWAIR recommending notification should be given considerable weight. On the other hand, a finding by TOWAIR recommending either for or against notification is not conclusive. It is the responsibility of each ASR participant to exercise due diligence to determine if it must coordinate its structure with the FAA. TOWAIR is only one tool designed to assist ASR participants in exercising this due diligence, and further investigation may be necessary to determine if FAA coordination is appropriate.

DETERMINATION Results

Structure does not require registration. There are no airports within 8 kilometers (5 miles) of the coordinates you provided.

Your Specifications

NAD83 Coordinates

Latitude	27-19-21.2 north
Longitude	082-24-27.3 west

Measurements (Meters)

Overall Structure Height (AGL)	45.1
Support Structure Height (AGL)	45.1
Site Elevation (AMSL)	10.7

Structure Type

TOWER - Free standing or Guyed Structure used for Communications Purposes

Tower Construction Notification

Notify Tribes and Historic Preservation Officers of your plans to build a tower.

Note: Notification does NOT replace [Section 106 Consultation](#).

EXHIBIT #1M3
MINOR CHANGE APPLICATION
FLORIDA TALK RADIO, LLC
WSRQ AM RADIO STATION
has: 1220 kHz - 0.159/1.0 kW - DA2
req: 1220 kHz - 0.039/1.0 kW - DA2
SARASOTA, FLORIDA
December 2011

Notice Criteria Tool

The requirements for filing with the Federal Aviation Administration for proposed structures vary based on a number of factors: height, proximity to an airport, location, and frequencies emitted from the structure, etc. For more details, please reference [CFR Title 14 Part 77.13](#).

You must file with the FAA at least 30 days prior to construction if:

- * your structure will exceed 200ft above ground level
- * your structure will be in proximity to an airport and will exceed the slope ratio
- * your structure involves construction of a traverseway (i.e. highway, railroad, waterway etc...)
- * your structure will emit frequencies, and does not meet the conditions of the [FAA Co-location Policy](#)
- * your structure will be in an instrument approach area and might exceed part 77 Subpart C
- * your structure will be on an airport or heliport

If you require additional information regarding the filing requirements for your structure, please identify and contact the appropriate FAA representative using the [Air Traffic Areas of Responsibility map](#) for Off Airport construction, or contact the [FAA Airports Region / District Office](#) for On Airport construction.


The tool below will assist in applying the appropriate slope calculations per part 77.13(a)(2)(i) through (iii)

Latitude:	<input type="text" value="27"/>	Deg	<input type="text" value="19"/>	M	<input type="text" value="21.2"/>	S	N
Longitude:	<input type="text" value="82"/>	Deg	<input type="text" value="24"/>	M	<input type="text" value="27.3"/>	S	W
Horizontal Datum:	<input type="text" value="NAD83"/>						
Site Elevation (SE):	<input type="text" value="35"/>	(nearest foot)					
Structure Height (AGL):	<input type="text" value="148"/>	(nearest foot)					

Results

You do not exceed Notice Criteria.

EXHIBIT #1M4
MINOR CHANGE APPLICATION
FLORIDA TALK RADIO, LLC
WSRQ AM RADIO STATION
has: 1220 kHz - 0.159/1.0 kW - DA2
req: 1220 kHz - 0.039/1.0 kW - DA2
SARASOTA, FLORIDA
December 2011

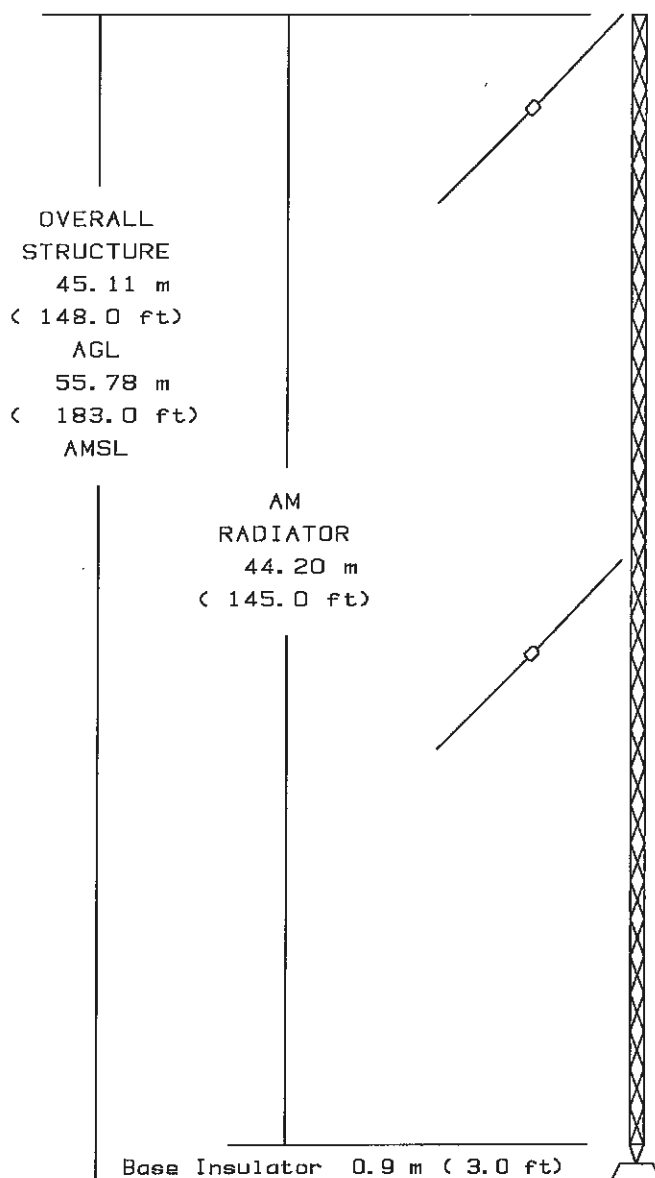

TOWER #2 OF 2
CENTER OF ARRAY:
NAD 27
N. LAT. 27-19-19
W. LONG. 82-24-27

North Latitude 27-19-19
West Longitude 82-24-26

Site Elev 10.67 m (35.0 ft) AMSL

(Sketch not drawn to scale)

VERTICAL PLAN SKETCH

SITE ELEVATION - 11 m (35 ft) AMSL

TOP OF STRUCTURE - 45 m (148 ft) AGL
56 m (183 ft) AMSL

AM Radiator - 44 m (145 ft)

FIGURES ROUNDED TO NEAREST METER (FOOT).

EXHIBIT #1N1
MINOR CHANGE APPLICATION
FLORIDA TALK RADIO, LLC
WSRQ AM RADIO STATION
has: 1220 kHz - 0.159/1.0 kW - DA2
req: 1220 kHz - 0.039/1.0 kW - DA2
SARASOTA, FLORIDA
December 2011

GRAHAM BROCK, INC.

BROADCAST TECHNICAL CONSULTANTS

Output from NADCON for station WSQR TOWER 2 OF 2

North American Datum Conversion


NAD 27 to NAD 83

NADCON Program Version 2.11

=====

Transformation #: 1 Region: Conus

	Latitude	Longitude
NAD 27 datum values:	27 19 19.00000	82 24 26.00000
NAD 83 datum values:	27 19 20.16721	82 24 25.33991
NAD 83 - NAD 27 shift values:	1.16721	-0.66009 (secs.)
	35.927	-18.147 (meters)
Magnitude of total shift:		40.250 (meters)



[NGS HOME PAGE](#)

EXHIBIT #IN2
MINOR CHANGE APPLICATION
FLORIDA TALK RADIO, LLC
WSRQ AM RADIO STATION
has: 1220 kHz - 0.159/1.0 kW - DA2
req: 1220 kHz - 0.039/1.0 kW - DA2
SARASOTA, FLORIDA
December 2011

TOWAIR Determination Results

*** NOTICE ***

TOWAIR's findings are not definitive or binding, and we cannot guarantee that the data in TOWAIR are fully current and accurate. In some instances, TOWAIR may yield results that differ from application of the criteria set out in 47 C.F.R. Section 17.7 and 14 C.F.R. Section 77.13. A positive finding by TOWAIR recommending notification should be given considerable weight. On the other hand, a finding by TOWAIR recommending either for or against notification is not conclusive. It is the responsibility of each ASR participant to exercise due diligence to determine if it must coordinate its structure with the FAA. TOWAIR is only one tool designed to assist ASR participants in exercising this due diligence, and further investigation may be necessary to determine if FAA coordination is appropriate.

DETERMINATION Results

Structure does not require registration. There are no airports within 8 kilometers (5 miles) of the coordinates you provided.

Your Specifications

NAD83 Coordinates

Latitude	27-19-20.2 north
Longitude	082-24-25.3 west

Measurements (Meters)

Overall Structure Height (AGL)	45.1
Support Structure Height (AGL)	45.1
Site Elevation (AMSL)	10.7

Structure Type

TOWER - Free standing or Guyed Structure used for Communications Purposes

Tower Construction Notification

Notify Tribes and Historic Preservation Officers of your plans to build a tower.

Note: Notification does NOT replace [Section 106 Consultation](#).

EXHIBIT #1N3
MINOR CHANGE APPLICATION
FLORIDA TALK RADIO, LLC
WSRQ AM RADIO STATION
has: 1220 kHz - 0.159/1.0 kW - DA2
req: 1220 kHz - 0.039/1.0 kW - DA2
SARASOTA, FLORIDA
December 2011

Notice Criteria Tool

The requirements for filing with the Federal Aviation Administration for proposed structures vary based on a number of factors: height, proximity to an airport, location, and frequencies emitted from the structure, etc. For more details, please reference [CFR Title 14 Part 77.13](#).

You must file with the FAA at least 30 days prior to construction if:

- your structure will exceed 200ft above ground level
- your structure will be in proximity to an airport and will exceed the slope ratio
- your structure involves construction of a traverseway (i.e. highway, railroad, waterway etc...)
- your structure will emit frequencies, and does not meet the conditions of the [FAA Co-location Policy](#)
- your structure will be in an instrument approach area and might exceed part 77 Subpart C
- your structure will be on an airport or heliport

If you require additional information regarding the filing requirements for your structure, please identify and contact the appropriate FAA representative using the [Air Traffic Areas of Responsibility map](#) for Off Airport construction, or contact the [FAA Airports Region / District Office](#) for On Airport construction.

The tool below will assist in applying the appropriate slope calculations per part 77.13(a)(2)(i) through (iii)

Latitude:	27	Deg	19	M	20.2	S	N
Longitude:	82	Deg	24	M	25.3	S	W
Horizontal Datum:	NAD83						
Site Elevation (SE):	35	(nearest foot)					
Structure Height (AGL):	148	(nearest foot)					

Results

You do not exceed Notice Criteria.

EXHIBIT #1N4
MINOR CHANGE APPLICATION
FLORIDA TALK RADIO, LLC
WSRO AM RADIO STATION
has: 1220 kHz - 0.159/1.0 kW - DA2
req: 1220 kHz - 0.039/1.0 kW - DA2
SARASOTA, FLORIDA
December 2011

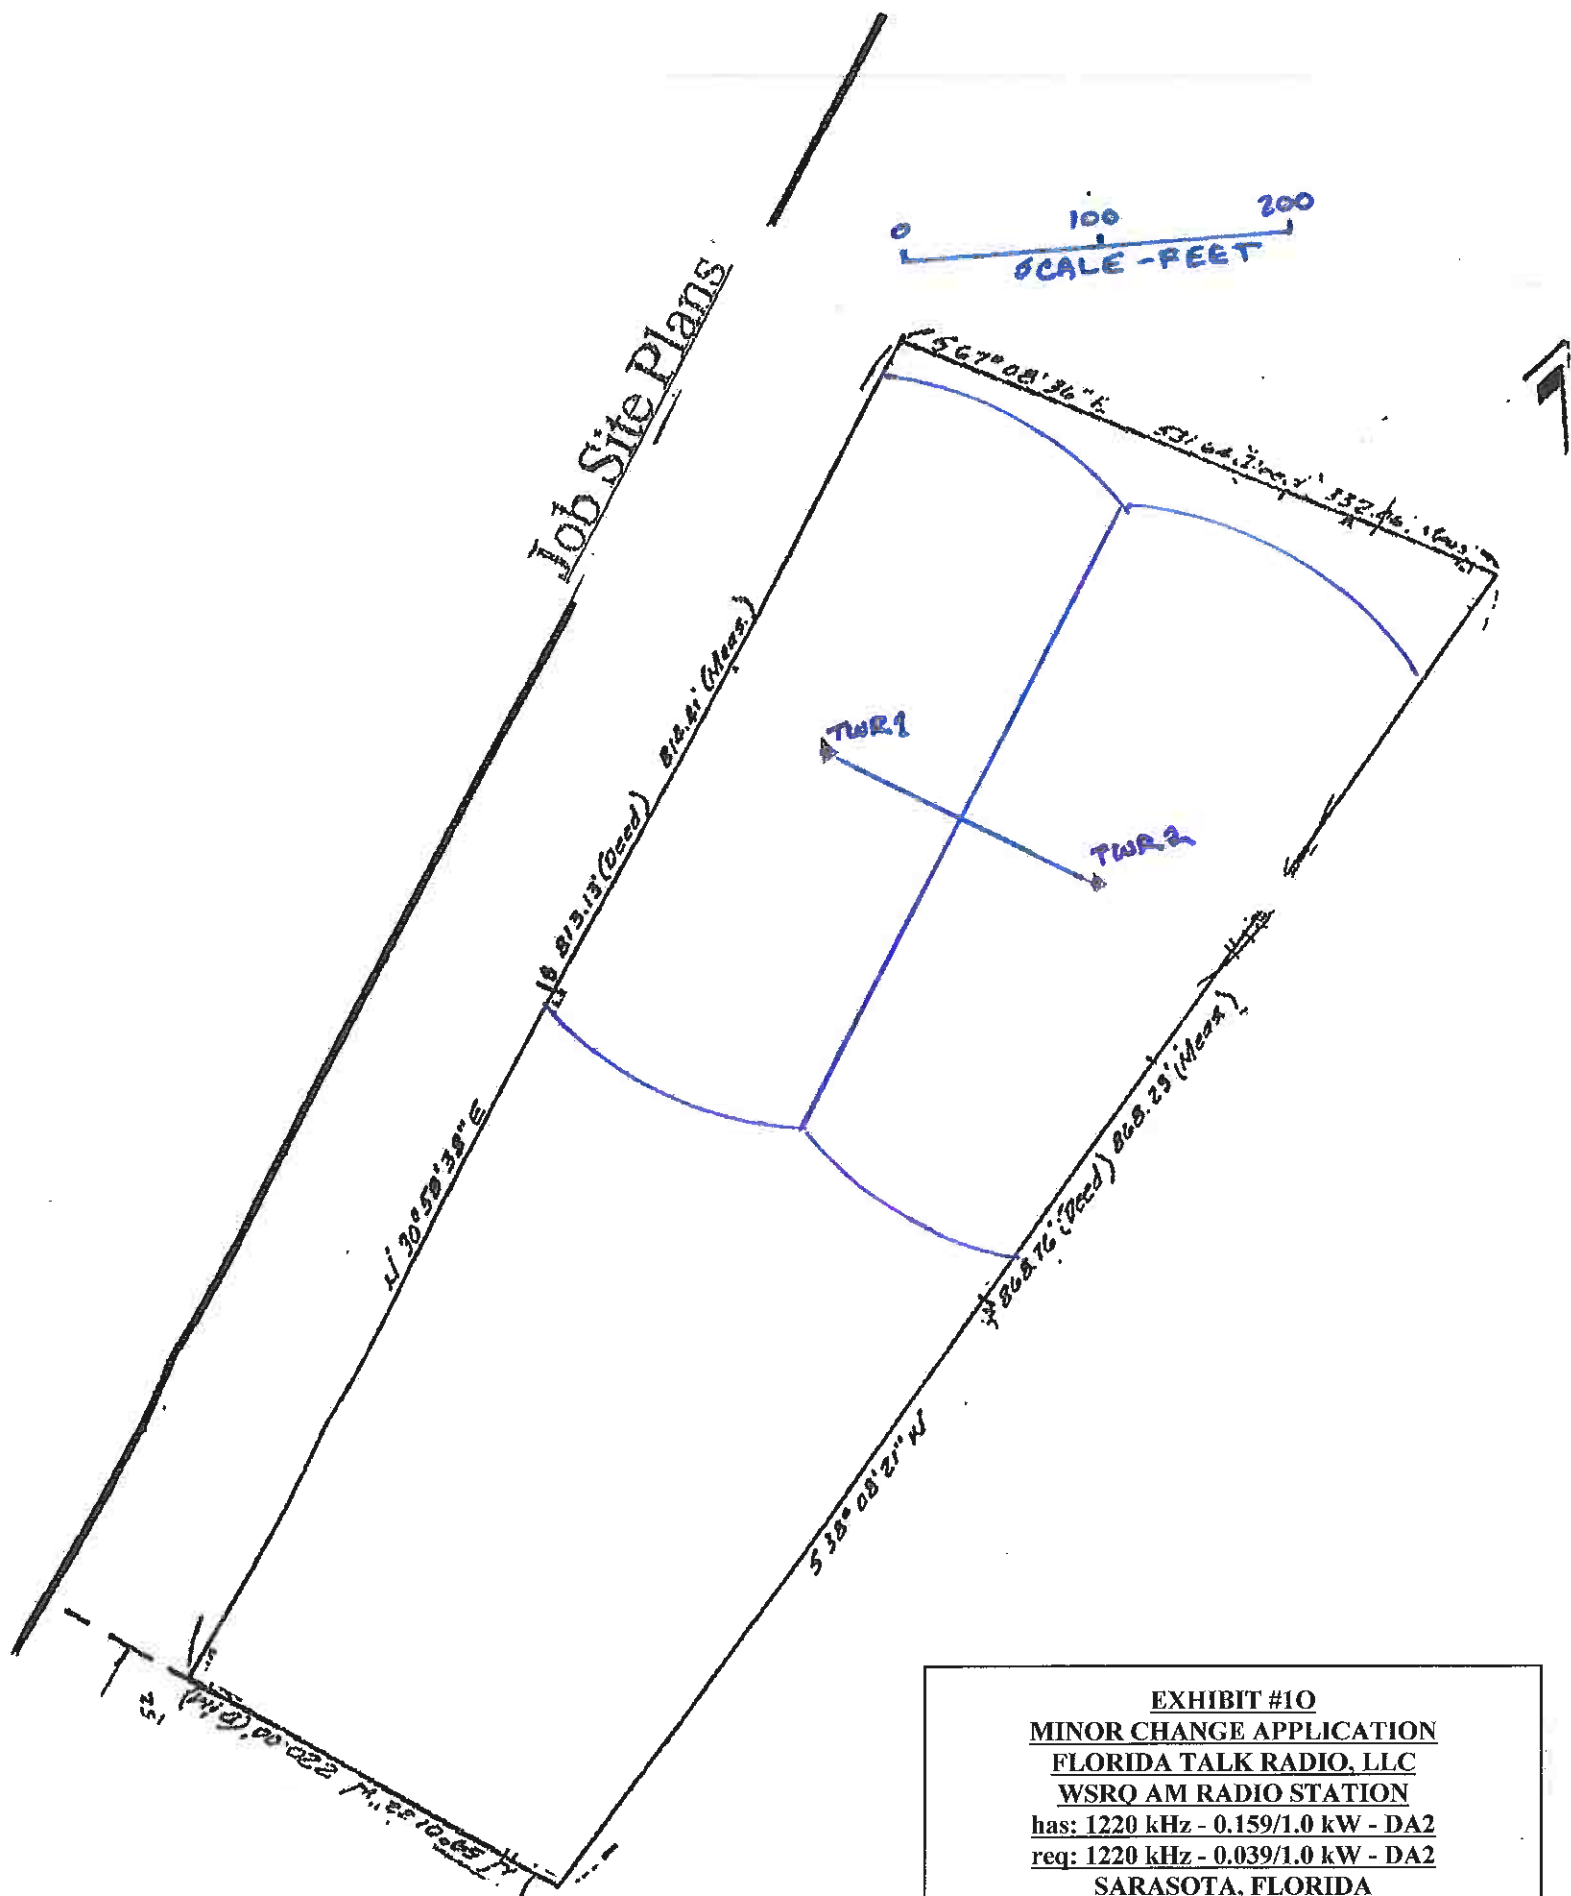


EXHIBIT #10
MINOR CHANGE APPLICATION
FLORIDA TALK RADIO, LLC
WSRO AM RADIO STATION
has: 1220 kHz - 0.159/1.0 kW - DA2
req: 1220 kHz - 0.039/1.0 kW - DA2
SARASOTA, FLORIDA
December 2011

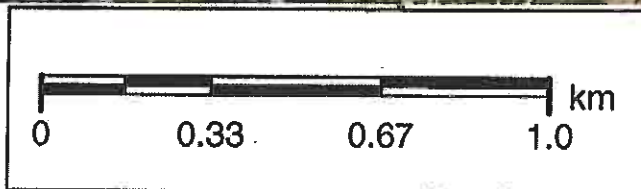


EXHIBIT #1P
MINOR CHANGE APPLICATION
FLORIDA TALK RADIO, LLC
WSRQ AM RADIO STATION
has: 1220 kHz - 0.159/1.0 kW - DA2
req: 1220 kHz - 0.039/1.0 kW - DA2
SARASOTA, FLORIDA
December 2011