

# Exhibit 15.1

## Tabulation of Proposed Allocation

Tabulations of contours will be supplied upon request.

REFERENCE		CH# 211A - 90.1 MHz, Pwr= 6.2 kW, HAAT=92.5M, COR= 386 M								DISPLAY DATES	
42 03 28 N.		Average Protected F(50-50)= 27.5 km								DATA	05-30-06
84 59 50 W.		Ave. F(50-10) 40 dBu= 85.9 54 dBu= 42.5 80 dBu= 8.8 100 dBu= 2.7								SEARCH	05-31-06
CH	CALL	TYPE	AZI.	DIST	LAT.	Pwr (kW)	COR (M)	PRO (km)	*IN*	*OUT*	
CITY		STATE	<--	FILE #	LNG.	HAAT (M)	INT (km)	LICENSEE	(Overlap in km)		
211A	NEW	CP	VX	0.0	0.00	42 03 28	2.500	390	23.4	-101.58*<	-110.15*<
Coldwater		MI		0.0	BNPED19991028AAE	84 59 50	101	73.4	Michiana Christian Broadca		
<b>210A</b>	<b>WKDS<sup>1</sup></b>	<b>LIC</b>	<b>CN</b>	<b>293.7</b>	<b>51.78</b>	<b>42 14 36</b>	<b>0.140</b>	<b>303</b>	<b>6.6</b>	<b>13.31</b>	<b>0.31</b>
<b>Kalamazoo</b>		<b>MI</b>		<b>113.3</b>	<b>BLED19830204AK</b>	<b>85 34 19</b>	<b>35</b>	<b>9.4</b>	<b>Kalamazoo Public Schools</b>		
<b>SPECIAL NEGOTIATED SHORT-SPACED ALLOTMENT</b>											
212B	WBCL	LIC	CX	188.9	107.26	41 06 13	26.000	457	51.3	3.83	13.08
Fort Wayne		IN		8.8	BLED20040528AHQ	85 11 46	198	75.7	Taylor University Broadcas		
211A	WXPZ.C	CP	DCX	300.0	114.62	42 33 57	1.500	261	16.1	28.61	10.92
Clyde Township		MI		119.2	BNPED19991029AAF	86 12 26	63	57.2	Larlen Communications Inc.		
208B1	WOFR	LIC	DCX	276.6	52.89	42 06 38	10.000	305	22.3	21.33	27.79
Schoolcraft		MI		96.2	BLED20021230AAW	85 37 57	46	2.3	Family Stations, Inc.		
209A	WOCR	LIC	CN	7.9	43.09	42 26 31	0.125	303	6.0	14.21	34.39
Olivet		MI		187.9	BLED19890525KD	84 55 30	17	0.8	Board Of Trustees/olivet C		
213B	WKARFM	LIC	EY	33.6	86.20	42 42 08	87.000	541	68.4	49.59	15.11
East Lansing		MI		214.0	BLED19861204KC	84 24 51	269	9.2	Michigan State University		
Grandfathered at 87. kw @ 273 M											
209A	WHWE	LIC	CN	223.9	51.21	41 43 32	0.100	287	5.6	22.55	42.84
Howe		IN		43.6	BLED19921208KA	85 25 30	15	0.7	Howe Military School		
210C1	CBEFM«	OPE	CN	85.7	169.52	42 09 09	100.000	348	74.4	52.59	38.29
Windsor		ON		267.1		82 57 05	169	90.7			
210A	WYBV.C	CP	CN	226.3	95.21	41 27 50	1.750	357	20.6	36.92	31.38
Wakarusa		IN		45.8	BPED19971009MC	85 49 22	93	30.3	Bible Broadcasting Network		
209A	WJCQ.C	CP	CN	65.7	62.05	42 17 05	0.500	328	8.6	33.74	50.81
Jackson		MI		246.2	BPED19981224MB	84 18 40	31	1.6	Great Lakes Community Broa		
Vertical Polarization Only-Amended 990514											
211C2	WUCXFM	LIC	CN	32.2	197.52	43 33 10	30.000	328	47.3	44.11	64.38
Bay City		MI		213.1	BLED19891010KB	83 41 24	148	126.0	Central Michigan Universit		
06-2C	WLNSTV	LI	HN	35.8	86.75	42 41 19	100.000	577	104.0	196.0R	-109.3M
Lansing		MI		216.2	BLCT20020103AAA	84 22 35	305	19.1	Young Broadcasting Of Lans		

ERP and HAAT on direct-line with reference station.

• affixed to TV6 Margin= no direct-line contour overlap.

\*\*\*affixed to 'IN' or 'Out' values = site inside protected contour.

« = Station meets FCC minimum distance spacing for its class.

"<" = Contour Overlap

<sup>1</sup> Contour Protection maps and Tabulations Towards WKDS, Kalamazoo, MI have been included in **Exhibit 15.2.**


## Exhibit 15.2

### Contour Protection Toward WKDS(FM) - Kalamazoo, MI

NEW CH 211 A  
6.2 kW 386 M COR  
Prot. = 60 dBu  
Intef. = 54 dBu

WKDS CH 210 A BLED19830204AK  
0.14 kW, 303 M COR  
Prot. = 60 dBu  
Intef. = 54 dBu

Scale = 1:750,000

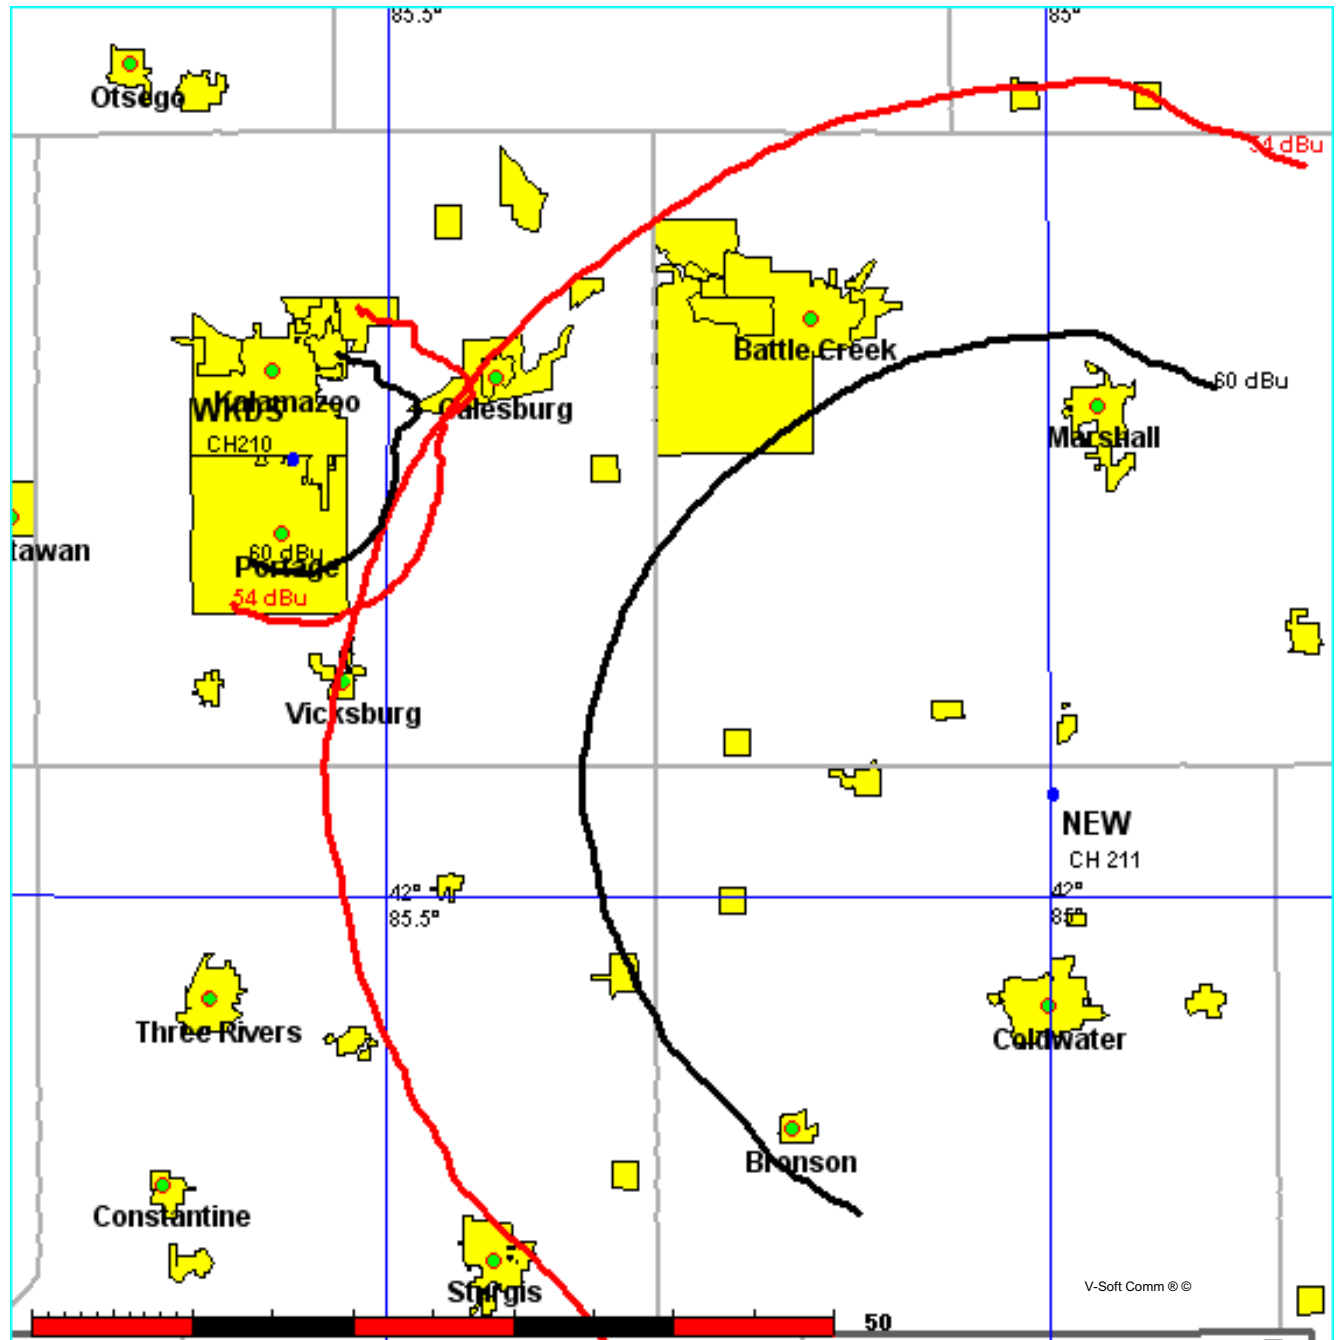

## Exhibit 15.2

### Contour Protection Towards WKDS(FM) – Kalamazoo, MI

05-31-2006 NED03 Sec. Terrain Data FMOver Analysis

NEW	WKDS
Channel = 211A	Channel = 210A
Max ERP = 6.2 kW	Max ERP = 0.14 kW
RCAMSL = 386 M	RCAMSL = 303 M
N. Lat = 42 03 28	N. Lat = 42 14 36
W. Lng = 84 59 50	W. Lng = 85 34 19
Protected	Interfering
60 dBu	54 dBu

Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Actual (dBu)
234.0	006.2000	0098.7	028.3	146.5	000.1400	0040.9	044.7	30.65
235.0	006.2000	0098.6	028.3	146.5	000.1400	0040.9	044.2	30.79
236.0	006.2000	0099.7	028.5	146.7	000.1400	0040.9	043.7	30.94
237.0	006.2000	0100.5	028.6	146.9	000.1400	0040.9	043.2	31.10
238.0	006.2000	0100.6	028.6	146.9	000.1400	0040.9	042.7	31.26
239.0	006.2000	0099.6	028.4	146.7	000.1400	0040.9	042.2	31.41
240.0	006.2000	0098.8	028.3	146.5	000.1400	0040.9	041.7	31.57
241.0	006.2000	0098.9	028.4	146.5	000.1400	0040.6	041.2	31.69
242.0	006.2000	0099.0	028.4	146.5	000.1400	0040.6	040.7	31.86
243.0	006.2000	0099.5	028.4	146.5	000.1400	0040.6	040.2	32.03
244.0	006.2000	0100.5	028.6	146.6	000.1400	0040.9	039.7	32.25
245.0	006.2000	0100.3	028.5	146.4	000.1400	0040.6	039.2	32.37
246.0	006.2000	0099.8	028.5	146.2	000.1400	0040.6	038.7	32.54
247.0	006.2000	0099.5	028.4	146.0	000.1400	0040.6	038.2	32.71
248.0	006.2000	0099.8	028.5	146.0	000.1400	0040.6	037.8	32.89
249.0	006.2000	0100.3	028.5	145.9	000.1400	0040.6	037.2	33.08
250.0	006.2000	0100.6	028.6	145.8	000.1400	0040.6	036.8	33.26
251.0	006.2000	0101.3	028.7	145.7	000.1400	0040.6	036.2	33.45
252.0	006.2000	0101.2	028.7	145.5	000.1400	0040.6	035.8	33.61
253.0	006.2000	0101.4	028.7	145.3	000.1400	0040.6	035.3	33.80
254.0	006.2000	0101.8	028.7	145.1	000.1400	0040.6	034.8	33.99
255.0	006.2000	0102.7	028.9	145.0	000.1400	0040.6	034.3	34.19
256.0	006.2000	0103.1	028.9	144.8	000.1400	0040.6	033.8	34.39
257.0	006.2000	0102.9	028.9	144.5	000.1400	0040.6	033.3	34.57
258.0	006.2000	0102.9	028.9	144.1	000.1400	0040.6	032.9	34.76
259.0	006.2000	0102.7	028.9	143.7	000.1400	0040.6	032.4	34.94
260.0	006.2000	0102.3	028.8	143.2	000.1400	0040.5	032.0	35.12
261.0	006.2000	0102.6	028.9	142.9	000.1400	0040.5	031.5	35.32
262.0	006.2000	0103.5	029.0	142.6	000.1400	0040.5	031.0	35.55
263.0	006.2000	0103.3	028.9	142.1	000.1400	0040.5	030.6	35.73
264.0	006.2000	0103.6	029.0	141.7	000.1400	0040.5	030.1	35.95
265.0	006.2000	0104.5	029.1	141.3	000.1400	0040.5	029.7	36.22
266.0	006.2000	0105.3	029.2	141.0	000.1400	0040.5	029.2	36.48
267.0	006.2000	0106.0	029.3	140.5	000.1400	0040.5	028.7	36.74
268.0	006.2000	0106.4	029.3	140.0	000.1400	0040.6	028.3	36.99
269.0	006.2000	0106.6	029.4	139.4	000.1400	0040.4	027.8	37.19
270.0	006.2000	0106.5	029.4	138.7	000.1400	0040.4	027.5	37.42
271.0	006.2000	0106.9	029.4	138.0	000.1400	0040.4	027.1	37.68
272.0	006.2000	0107.3	029.5	137.4	000.1400	0040.5	026.6	37.96
273.0	006.2000	0107.4	029.5	136.6	000.1400	0040.5	026.3	38.20
274.0	006.2000	0107.2	029.4	135.7	000.1400	0040.0	025.9	38.31
275.0	006.2000	0106.1	029.3	134.7	000.1400	0039.9	025.7	38.44
276.0	006.2000	0106.0	029.3	133.7	000.1400	0039.2	025.4	38.50
277.0	006.2000	0105.8	029.3	132.8	000.1400	0038.5	025.1	38.54
278.0	006.2000	0105.6	029.2	131.8	000.1400	0038.7	024.8	38.77
279.0	006.2000	0105.8	029.3	130.8	000.1400	0038.9	024.5	39.03
280.0	006.2000	0105.2	029.2	129.7	000.1400	0038.8	024.4	39.12
281.0	006.2000	0104.8	029.1	128.6	000.1400	0039.0	024.1	39.32
282.0	006.2000	0104.6	029.1	127.5	000.1400	0038.8	023.9	39.42
283.0	006.2000	0104.4	029.1	126.3	000.1400	0038.3	023.8	39.44
284.0	006.2000	0104.4	029.1	125.2	000.1400	0038.2	023.6	39.55
285.0	006.2000	0104.0	029.0	124.0	000.1400	0037.6	023.4	39.53

**MUNN-REESE, INC.**  
Broadcast Engineering Consultants  
Coldwater, MI 49036

## Exhibit 15.2

### Contour Protection Towards WKDS(FM) – Kalamazoo, MI

---

Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Actual (dBu)
286.0	006.2000	0103.9	029.0	122.8	000.1400	0037.2	023.3	39.53
287.0	006.2000	0104.1	029.0	121.6	000.1400	0036.8	023.1	39.55
288.0	006.2000	0104.1	029.1	120.4	000.1400	0036.4	023.0	39.56
289.0	006.2000	0103.7	029.0	119.1	000.1400	0036.4	023.0	39.61
290.0	006.2000	0103.8	029.0	117.9	000.1400	0036.3	022.9	39.64
291.0	006.2000	0104.1	029.0	116.6	000.1400	0036.1	022.8	39.66
292.0	006.2000	0104.2	029.1	115.3	000.1400	0035.3	022.7	39.52
293.0	006.2000	0104.2	029.1	114.1	000.1400	0035.3	022.7	39.53
294.0	006.2000	0103.9	029.0	112.8	000.1400	0035.1	022.7	39.46
295.0	006.2000	0103.6	029.0	111.5	000.1400	0035.0	022.8	39.40
296.0	006.2000	0103.4	029.0	110.3	000.1400	0034.7	022.9	39.27
297.0	006.2000	0103.3	028.9	109.0	000.1400	0034.6	022.9	39.20
298.0	006.2000	0103.1	028.9	107.8	000.1400	0035.1	023.0	39.24
299.0	006.2000	0103.0	028.9	106.5	000.1400	0035.0	023.1	39.14
300.0	006.2000	0102.7	028.9	105.3	000.1400	0035.0	023.3	39.00
301.0	006.2000	0102.1	028.8	104.2	000.1400	0035.0	023.5	38.85
302.0	006.2000	0101.6	028.7	103.1	000.1400	0035.0	023.7	38.71
303.0	006.2000	0101.4	028.7	102.0	000.1400	0035.1	023.9	38.60
304.0	006.2000	0101.2	028.7	100.9	000.1400	0034.9	024.1	38.40
305.0	006.2000	0100.7	028.6	099.9	000.1400	0034.9	024.4	38.21
306.0	006.2000	0100.7	028.6	098.8	000.1400	0034.5	024.6	37.97
307.0	006.2000	0100.4	028.6	097.8	000.1400	0034.5	024.9	37.78
308.0	006.2000	0100.1	028.5	096.9	000.1400	0034.6	025.2	37.61
309.0	006.2000	0099.7	028.5	096.0	000.1400	0034.3	025.5	37.34
310.0	006.2000	0099.2	028.4	095.2	000.1400	0034.2	025.8	37.10
311.0	006.2000	0099.1	028.4	094.3	000.1400	0034.2	026.1	36.91
312.0	006.2000	0099.1	028.4	093.4	000.1400	0034.3	026.4	36.73
313.0	006.2000	0098.9	028.4	092.6	000.1400	0034.3	026.7	36.52
314.0	006.2000	0098.8	028.3	091.8	000.1400	0034.5	027.1	36.37
315.0	006.2000	0098.1	028.2	091.2	000.1400	0034.4	027.5	36.09
316.0	006.2000	0097.4	028.1	090.6	000.1400	0034.4	027.9	35.84
317.0	006.2000	0097.0	028.1	090.0	000.1400	0034.1	028.3	35.56
318.0	006.2000	0096.5	028.0	089.4	000.1400	0033.2	028.7	35.14
319.0	006.2000	0096.0	028.0	088.9	000.1400	0033.2	029.1	34.92
320.0	006.2000	0095.7	027.9	088.4	000.1400	0032.9	029.5	34.64
321.0	006.2000	0095.7	027.9	087.8	000.1400	0032.9	029.9	34.44
322.0	006.2000	0095.9	027.9	087.2	000.1400	0032.6	030.3	34.18
323.0	006.2000	0095.9	028.0	086.7	000.1400	0032.6	030.7	33.99
324.0	006.2000	0095.3	027.9	086.3	000.1400	0032.7	031.1	33.80
325.0	006.2000	0095.3	027.9	085.8	000.1400	0032.7	031.5	33.63
326.0	006.2000	0095.6	027.9	085.3	000.1400	0033.0	031.9	33.53
327.0	006.2000	0095.5	027.9	084.9	000.1400	0033.0	032.4	33.35
328.0	006.2000	0095.4	027.9	084.5	000.1400	0033.0	032.8	33.18
329.0	006.2000	0095.6	027.9	084.1	000.1400	0033.5	033.2	33.14
330.0	006.2000	0095.3	027.9	083.8	000.1400	0033.5	033.7	32.96
331.0	006.2000	0096.1	028.0	083.4	000.1400	0033.9	034.1	32.88
332.0	006.2000	0096.2	028.0	083.0	000.1400	0033.9	034.5	32.71
333.0	006.2000	0096.1	028.0	082.8	000.1400	0033.9	035.0	32.54
334.0	006.2000	0096.1	028.0	082.5	000.1400	0034.1	035.4	32.42
335.0	006.2000	0096.6	028.0	082.1	000.1400	0034.1	035.9	32.25
336.0	006.2000	0096.6	028.0	081.9	000.1400	0034.1	036.4	32.08
337.0	006.2000	0096.5	028.0	081.7	000.1400	0034.1	036.8	31.91
338.0	006.2000	0096.5	028.0	081.5	000.1400	0034.1	037.3	31.74
339.0	006.2000	0097.1	028.1	081.2	000.1400	0035.2	037.8	31.82
340.0	006.2000	0097.0	028.1	081.1	000.1400	0035.2	038.2	31.65
341.0	006.2000	0097.1	028.1	080.9	000.1400	0035.2	038.7	31.48
342.0	006.2000	0097.2	028.1	080.8	000.1400	0035.2	039.2	31.32
343.0	006.2000	0097.2	028.1	080.7	000.1400	0035.2	039.7	31.16
344.0	006.2000	0096.9	028.1	080.7	000.1400	0035.2	040.2	31.00
345.0	006.2000	0096.5	028.0	080.7	000.1400	0035.2	040.7	30.84

## Exhibit 15.2

### Contour Protection Towards WKDS(FM) – Kalamazoo, MI

---

05-31-2006 NED 03 Sec. Sec. Terrain Data

WKDS BLED19830204AK

Channel = 210A

Max ERP = 0.14 kW

RCAMSL = 303 M

N. Lat = 42 14 36

W. Lng = 85 34 19

Protected

60 dBu

NEW

Channel = 211A

Max ERP = 6.2 kW

RCAMSL = 386 M

N. Lat = 42 03 28

W. Lng = 84 59 50

Interfering

54 dBu

Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Actual (dBu)
060.0	000.1400	0051.0	008.0	301.5	006.2000	0101.6	047.4	52.83
061.0	000.1400	0051.9	008.1	301.5	006.2000	0101.6	047.3	52.89
062.0	000.1400	0053.1	008.2	301.5	006.2000	0101.6	047.1	52.96
063.0	000.1400	0054.4	008.3	301.6	006.2000	0101.6	046.9	53.03
064.0	000.1400	0056.1	008.5	301.6	006.2000	0101.6	046.7	53.10
065.0	000.1400	0056.5	008.5	301.6	006.2000	0101.6	046.6	53.16
066.0	000.1400	0056.5	008.5	301.5	006.2000	0102.1	046.5	53.24
067.0	000.1400	0056.1	008.5	301.3	006.2000	0102.1	046.4	53.28
068.0	000.1400	0055.9	008.4	301.2	006.2000	0102.1	046.2	53.32
069.0	000.1400	0055.7	008.4	301.1	006.2000	0102.1	046.1	53.36
070.0	000.1400	0055.6	008.4	300.9	006.2000	0102.1	046.0	53.40
071.0	000.1400	0055.0	008.4	300.8	006.2000	0102.1	045.9	53.43
072.0	000.1400	0053.3	008.2	300.5	006.2000	0102.1	045.9	53.44
073.0	000.1400	0050.6	008.0	300.2	006.2000	0102.7	046.0	53.46
074.0	000.1400	0046.5	007.6	299.7	006.2000	0102.7	046.2	53.39
075.0	000.1400	0041.1	007.1	299.2	006.2000	0103.0	046.4	53.32
076.0	000.1400	0039.0	006.9	298.9	006.2000	0103.0	046.5	53.30
077.0	000.1400	0036.9	006.7	298.7	006.2000	0103.0	046.5	53.28
078.0	000.1400	0037.0	006.8	298.5	006.2000	0103.0	046.4	53.31
079.0	000.1400	0036.6	006.7	298.4	006.2000	0103.1	046.4	53.34
080.0	000.1400	0035.9	006.7	298.2	006.2000	0103.1	046.4	53.35
081.0	000.1400	0035.2	006.6	298.1	006.2000	0103.1	046.4	53.36
082.0	000.1400	0034.1	006.5	297.9	006.2000	0103.1	046.4	53.35
083.0	000.1400	0033.9	006.5	297.8	006.2000	0103.1	046.3	53.37
084.0	000.1400	0033.5	006.4	297.6	006.2000	0103.1	046.3	53.38
085.0	000.1400	0033.0	006.4	297.5	006.2000	0103.3	046.3	53.40
086.0	000.1400	0032.7	006.4	297.3	006.2000	0103.3	046.2	53.42
087.0	000.1400	0032.6	006.4	297.2	006.2000	0103.3	046.2	53.44
088.0	000.1400	0032.9	006.4	297.1	006.2000	0103.3	046.1	53.47
089.0	000.1400	0033.2	006.4	297.0	006.2000	0103.3	046.0	53.50
090.0	000.1400	0034.1	006.5	296.9	006.2000	0103.3	045.9	53.54
091.0	000.1400	0034.4	006.5	296.8	006.2000	0103.3	045.8	53.57
092.0	000.1400	0034.5	006.5	296.7	006.2000	0103.3	045.8	53.59
093.0	000.1400	0034.3	006.5	296.6	006.2000	0103.3	045.7	53.60
094.0	000.1400	0034.2	006.5	296.4	006.2000	0103.4	045.7	53.63
095.0	000.1400	0034.2	006.5	296.3	006.2000	0103.4	045.7	53.64
096.0	000.1400	0034.3	006.5	296.2	006.2000	0103.4	045.6	53.66
097.0	000.1400	0034.6	006.5	296.0	006.2000	0103.4	045.6	53.69
098.0	000.1400	0034.5	006.5	295.9	006.2000	0103.4	045.5	53.70
099.0	000.1400	0034.5	006.5	295.8	006.2000	0103.4	045.5	53.71
100.0	000.1400	0034.9	006.6	295.6	006.2000	0103.4	045.4	53.74
101.0	000.1400	0034.9	006.6	295.5	006.2000	0103.6	045.4	53.76
102.0	000.1400	0035.1	006.6	295.4	006.2000	0103.6	045.4	53.78
103.0	000.1400	0035.0	006.6	295.2	006.2000	0103.6	045.3	53.78
104.0	000.1400	0035.0	006.6	295.1	006.2000	0103.6	045.3	53.79
105.0	000.1400	0035.0	006.6	294.9	006.2000	0103.6	045.3	53.80
106.0	000.1400	0035.0	006.6	294.8	006.2000	0103.6	045.3	53.81
107.0	000.1400	0035.0	006.6	294.6	006.2000	0103.6	045.3	53.82
108.0	000.1400	0035.1	006.6	294.5	006.2000	0103.9	045.2	53.85
109.0	000.1400	0034.6	006.5	294.3	006.2000	0103.9	045.3	53.84
110.0	000.1400	0034.7	006.5	294.2	006.2000	0103.9	045.3	53.84

**MUNN-REESE, INC.**

Broadcast Engineering Consultants

Coldwater, MI 49036

## Exhibit 15.2

### Contour Protection Towards WKDS(FM) – Kalamazoo, MI

---

Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Actual (dBu)
111.0	000.1400	0035.1	006.6	294.1	006.2000	0103.9	045.2	53.86
112.0	000.1400	0035.0	006.6	293.9	006.2000	0103.9	045.2	53.86
113.0	000.1400	0035.1	006.6	293.8	006.2000	0103.9	045.2	53.86
114.0	000.1400	0035.3	006.6	293.6	006.2000	0103.9	045.2	53.87
115.0	000.1400	0035.3	006.6	293.5	006.2000	0104.2	045.2	53.89
116.0	000.1400	0035.9	006.6	293.3	006.2000	0104.2	045.2	53.91
117.0	000.1400	0036.1	006.7	293.2	006.2000	0104.2	045.1	53.91
118.0	000.1400	0036.3	006.7	293.0	006.2000	0104.2	045.1	53.92
119.0	000.1400	0036.4	006.7	292.9	006.2000	0104.2	045.1	53.92
120.0	000.1400	0036.4	006.7	292.7	006.2000	0104.2	045.1	53.91
121.0	000.1400	0036.6	006.7	292.6	006.2000	0104.2	045.1	53.91
122.0	000.1400	0036.8	006.7	292.4	006.2000	0104.2	045.2	53.90
123.0	000.1400	0037.2	006.8	292.3	006.2000	0104.2	045.1	53.91
124.0	000.1400	0037.6	006.8	292.1	006.2000	0104.2	045.1	53.92
125.0	000.1400	0038.2	006.9	291.9	006.2000	0104.2	045.1	53.92
126.0	000.1400	0038.3	006.9	291.8	006.2000	0104.2	045.1	53.91
127.0	000.1400	0038.8	006.9	291.6	006.2000	0104.2	045.1	53.92
128.0	000.1400	0038.7	006.9	291.5	006.2000	0104.1	045.2	53.90
129.0	000.1400	0039.0	006.9	291.3	006.2000	0104.1	045.2	53.89
130.0	000.1400	0038.8	006.9	291.2	006.2000	0104.1	045.2	53.87
131.0	000.1400	0038.9	006.9	291.0	006.2000	0104.1	045.2	53.86
132.0	000.1400	0038.7	006.9	290.9	006.2000	0104.1	045.3	53.83
133.0	000.1400	0038.5	006.9	290.8	006.2000	0104.1	045.4	53.81
134.0	000.1400	0039.2	006.9	290.6	006.2000	0104.1	045.4	53.81
135.0	000.1400	0039.9	007.0	290.4	006.2000	0103.8	045.4	53.80
136.0	000.1400	0040.0	007.0	290.3	006.2000	0103.8	045.4	53.78
137.0	000.1400	0040.5	007.1	290.1	006.2000	0103.8	045.4	53.77
138.0	000.1400	0040.4	007.0	290.0	006.2000	0103.8	045.5	53.75
139.0	000.1400	0040.4	007.0	289.9	006.2000	0103.8	045.5	53.72
140.0	000.1400	0040.6	007.1	289.7	006.2000	0103.8	045.6	53.71
141.0	000.1400	0040.5	007.1	289.6	006.2000	0103.8	045.7	53.68
142.0	000.1400	0040.5	007.1	289.5	006.2000	0103.7	045.7	53.65
143.0	000.1400	0040.5	007.1	289.3	006.2000	0103.7	045.8	53.62
144.0	000.1400	0040.6	007.1	289.2	006.2000	0103.7	045.9	53.59
145.0	000.1400	0040.6	007.1	289.1	006.2000	0103.7	045.9	53.57
146.0	000.1400	0040.6	007.1	288.9	006.2000	0103.7	046.0	53.54
147.0	000.1400	0040.9	007.1	288.8	006.2000	0103.7	046.1	53.52
148.0	000.1400	0041.1	007.1	288.7	006.2000	0103.7	046.1	53.49
149.0	000.1400	0041.2	007.1	288.5	006.2000	0103.7	046.2	53.46
150.0	000.1400	0041.4	007.1	288.4	006.2000	0104.1	046.3	53.47
151.0	000.1400	0041.2	007.1	288.3	006.2000	0104.1	046.4	53.43
152.0	000.1400	0040.8	007.1	288.2	006.2000	0104.1	046.5	53.38
153.0	000.1400	0040.3	007.0	288.2	006.2000	0104.1	046.6	53.34
154.0	000.1400	0039.9	007.0	288.1	006.2000	0104.1	046.7	53.30
155.0	000.1400	0039.8	007.0	288.0	006.2000	0104.1	046.8	53.26
156.0	000.1400	0040.3	007.0	287.9	006.2000	0104.1	046.9	53.23
157.0	000.1400	0040.2	007.0	287.8	006.2000	0104.1	047.0	53.20
158.0	000.1400	0040.5	007.1	287.6	006.2000	0104.1	047.0	53.17
159.0	000.1400	0040.5	007.1	287.5	006.2000	0104.1	047.1	53.13
160.0	000.1400	0040.4	007.1	287.5	006.2000	0104.1	047.2	53.09
161.0	000.1400	0041.3	007.1	287.3	006.2000	0104.1	047.3	53.07
162.0	000.1400	0041.4	007.1	287.2	006.2000	0104.1	047.4	53.03
163.0	000.1400	0042.0	007.2	287.1	006.2000	0104.1	047.5	53.01
164.0	000.1400	0041.9	007.2	287.0	006.2000	0104.1	047.6	52.96
165.0	000.1400	0041.7	007.2	286.9	006.2000	0104.1	047.7	52.92
166.0	000.1400	0041.8	007.2	286.8	006.2000	0104.1	047.8	52.88
167.0	000.1400	0042.1	007.2	286.7	006.2000	0104.1	047.9	52.84
168.0	000.1400	0042.2	007.2	286.7	006.2000	0104.1	048.0	52.81
169.0	000.1400	0042.1	007.2	286.6	006.2000	0104.1	048.1	52.76
170.0	000.1400	0041.9	007.2	286.5	006.2000	0104.1	048.2	52.72
171.0	000.1400	0041.6	007.2	286.5	006.2000	0104.1	048.3	52.67
172.0	000.1400	0041.5	007.1	286.5	006.2000	0103.9	048.5	52.61
173.0	000.1400	0041.5	007.2	286.4	006.2000	0103.9	048.6	52.57