

EXHIBIT A


ENGINEERING STATEMENT

The engineering data contained herein have been prepared on behalf of PAPPAS TELECASTING OF THE GULF COAST, L.P., licensee of Class A Television Station KHMV-LP, Channel 28 in Houston, Texas, in support of this request for Special Temporary Authority to specify operation from a new site. KHMV-LP has been displaced from its present tower site and seeks to temporarily locate its facility at the site specified herein until it is able to construct the station authorized in BPTTA-20051004ADH.

It is proposed to mount a standard MCI directional antenna at the 30-meter level of an existing 601-meter communications tower. Exhibit B is a map upon which the predicted service contours are plotted. It is important to note that the proposed STA 74 dBu contour is completely encompassed by that which obtains from the licensed and authorized KHMV-LP facilities. Therefore, no interference study is provided herein. Operating parameters for the proposed facility are tabulated in Exhibit C. A power density calculation follows as Exhibit D.

Because no change in the overall height or location of the existing tower is proposed, the FAA has not been notified of this application. The FCC issued Antenna Structure Registration Number 1064696 to this tower.

I declare under penalty of perjury that the foregoing statements and the attached exhibits, which were prepared by me or under my immediate supervision, are true and correct to the best of my knowledge and belief.

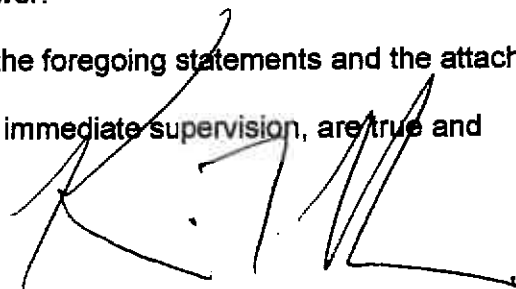A handwritten signature in black ink, appearing to read 'K. Fisher', is written over the signature line.

KEVIN T. FISHER

February 8, 2006

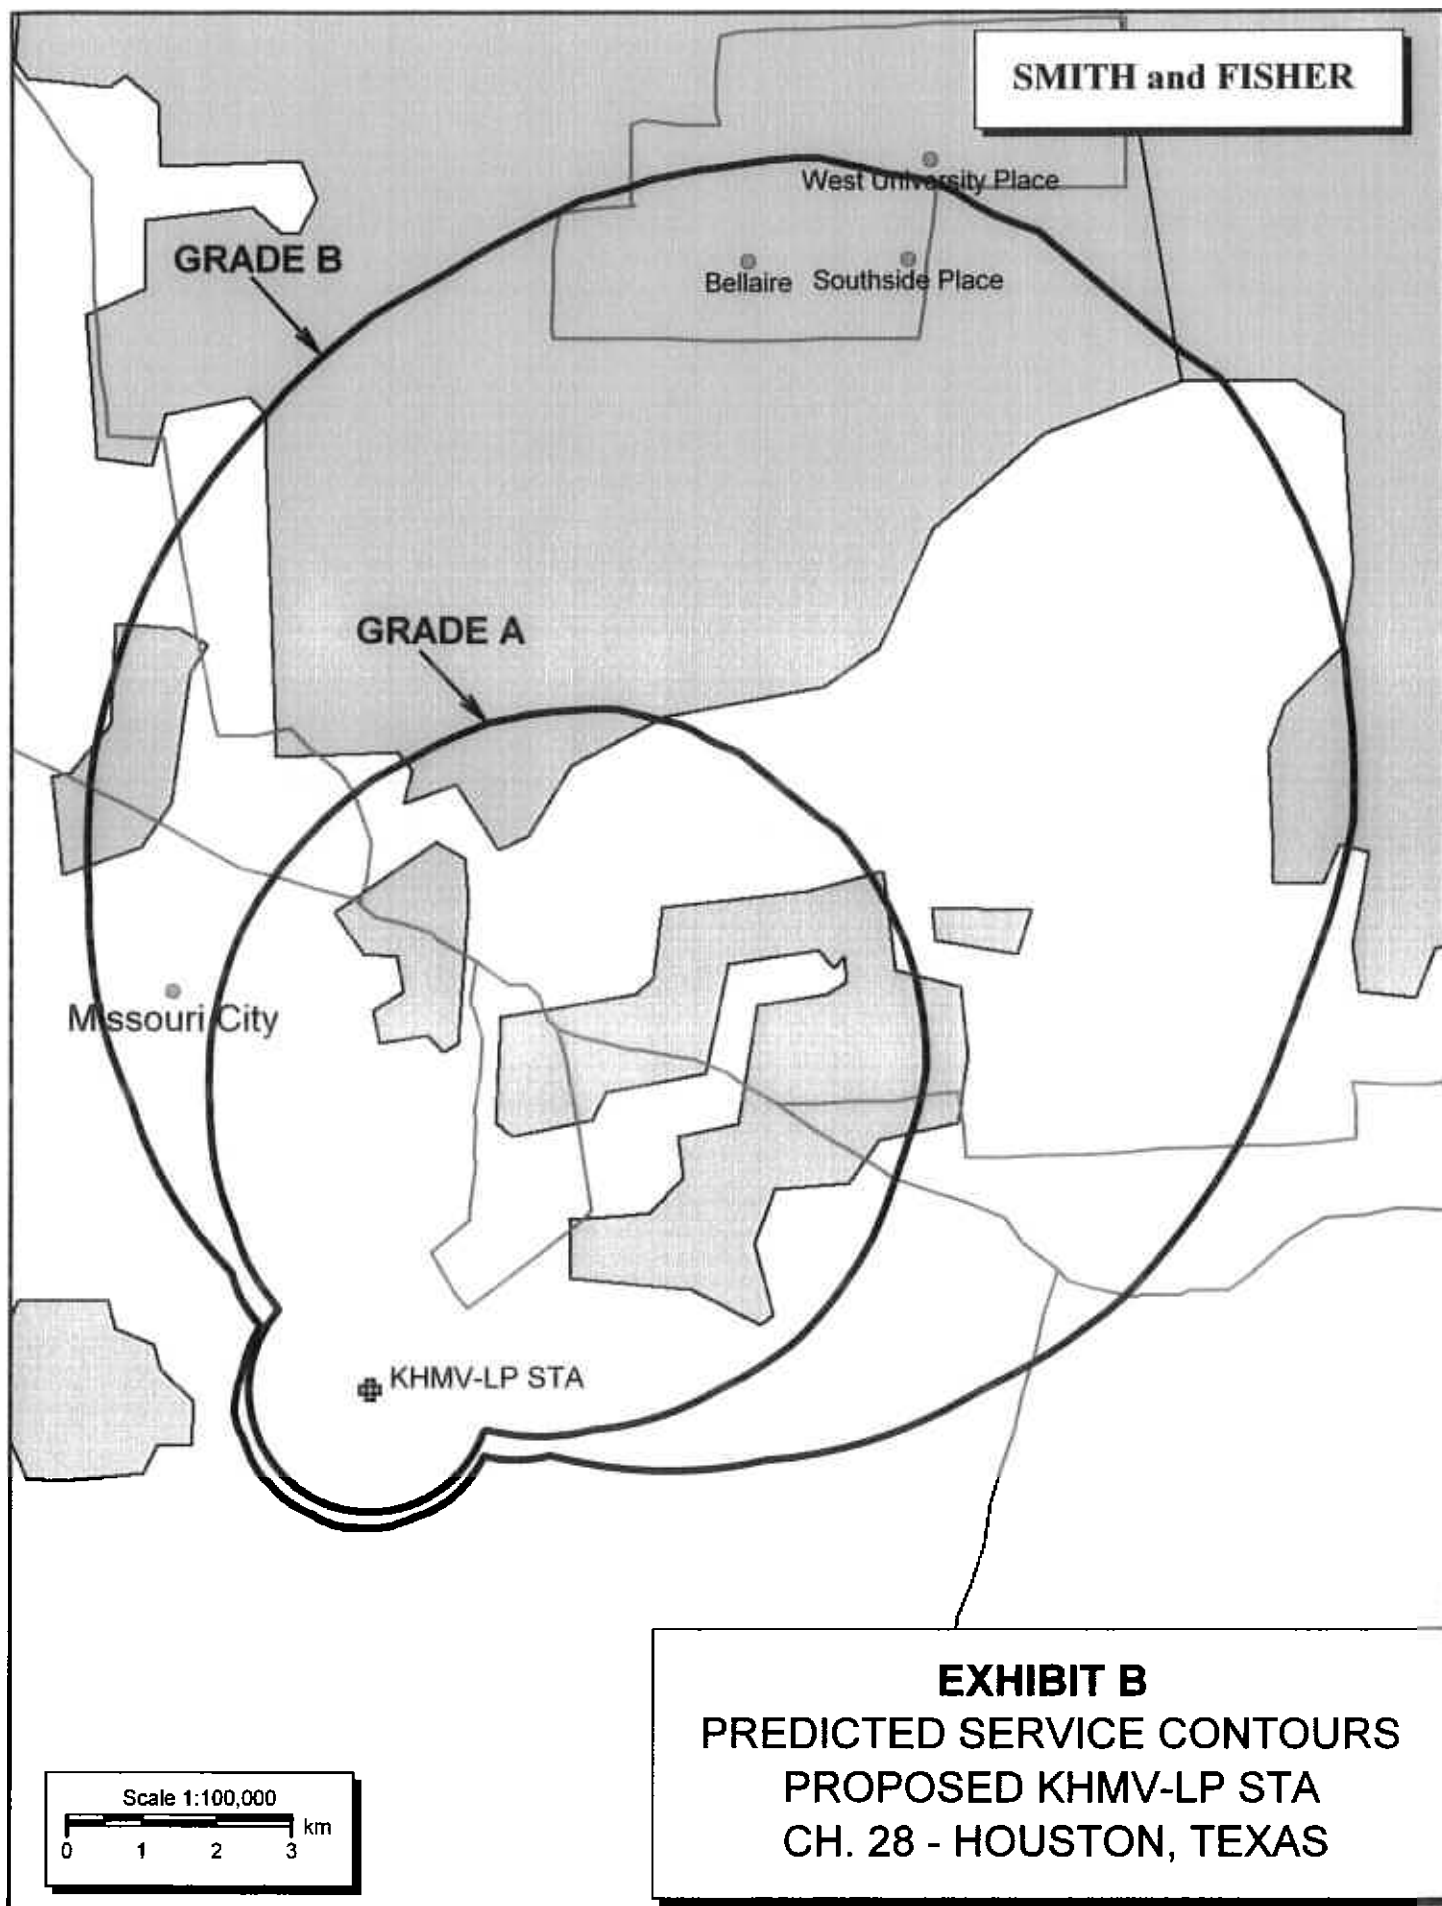


EXHIBIT C

PROPOSED OPERATING PARAMETERS

PROPOSED KHMV-LP STA
CHANNEL 28 – HOUSTON, TEXAS

| | |
|--|-------------------|
| Transmitter Power Output: | 1.0 kw |
| Transmission Line Efficiency: | 66.5% |
| Antenna Power Gain – Toward Horizon: | 25.0 |
| Antenna Power Gain – Main Lobe: | 25.0 |
| Effective Radiated Power – Toward Horizon: | 16.6 kw |
| Effective Radiated Power – Main Lobe: | 16.6 kw |
| Transmitter Make and Model: | Type-accepted |
| Rated Output | 1.0 kw |
| Transmission Line Make and Model: | Andrew HJ7-50A |
| Size and Type: | 1-5/8" air heliax |
| Length: | 350 feet |
| Antenna Make and Model: | MCI 955512 |
| Orientation | 30 degrees true |
| Beam Tilt | 0 degrees |
| Effective Height Above Ground: | 31 meters |
| Effective Height Above Mean Sea Level: | 54 meters |

EXHIBIT D

POWER DENSITY CALCULATION

PROPOSED KHMV-LP STA
CHANNEL 28 – HOUSTON, TEXAS

Since the FCC considers the possible biological effects of RF transmissions in its environmental determinations, we have studied the matter with respect to this Houston facility. Employing the methods set forth in *OET Bulletin No. 65* and considering a main-lobe effective radiated power of 16.6 kw, an antenna radiation center of 30 meters above ground, and the vertical pattern of the MCI antenna, maximum power density two meters above ground of 0.0042 mw/cm^2 is calculated to occur 26 meters northeast of the base of the tower. Since this is only 1.1 percent of the 0.37 mw/cm^2 reference for uncontrolled environments (areas with public access) surrounding a facility operating on Channel 28 (554-560 MHz), this proposal may be excluded from consideration with respect to public exposure to nonionizing electromagnetic radiation.

Further, the station owner will take whatever precautionary steps are necessary, such as reducing power or leaving the air temporarily, to ensure that workers operating in the vicinity of the antenna are not exposed to excessive nonionizing radiation.