


AM Directional Pattern

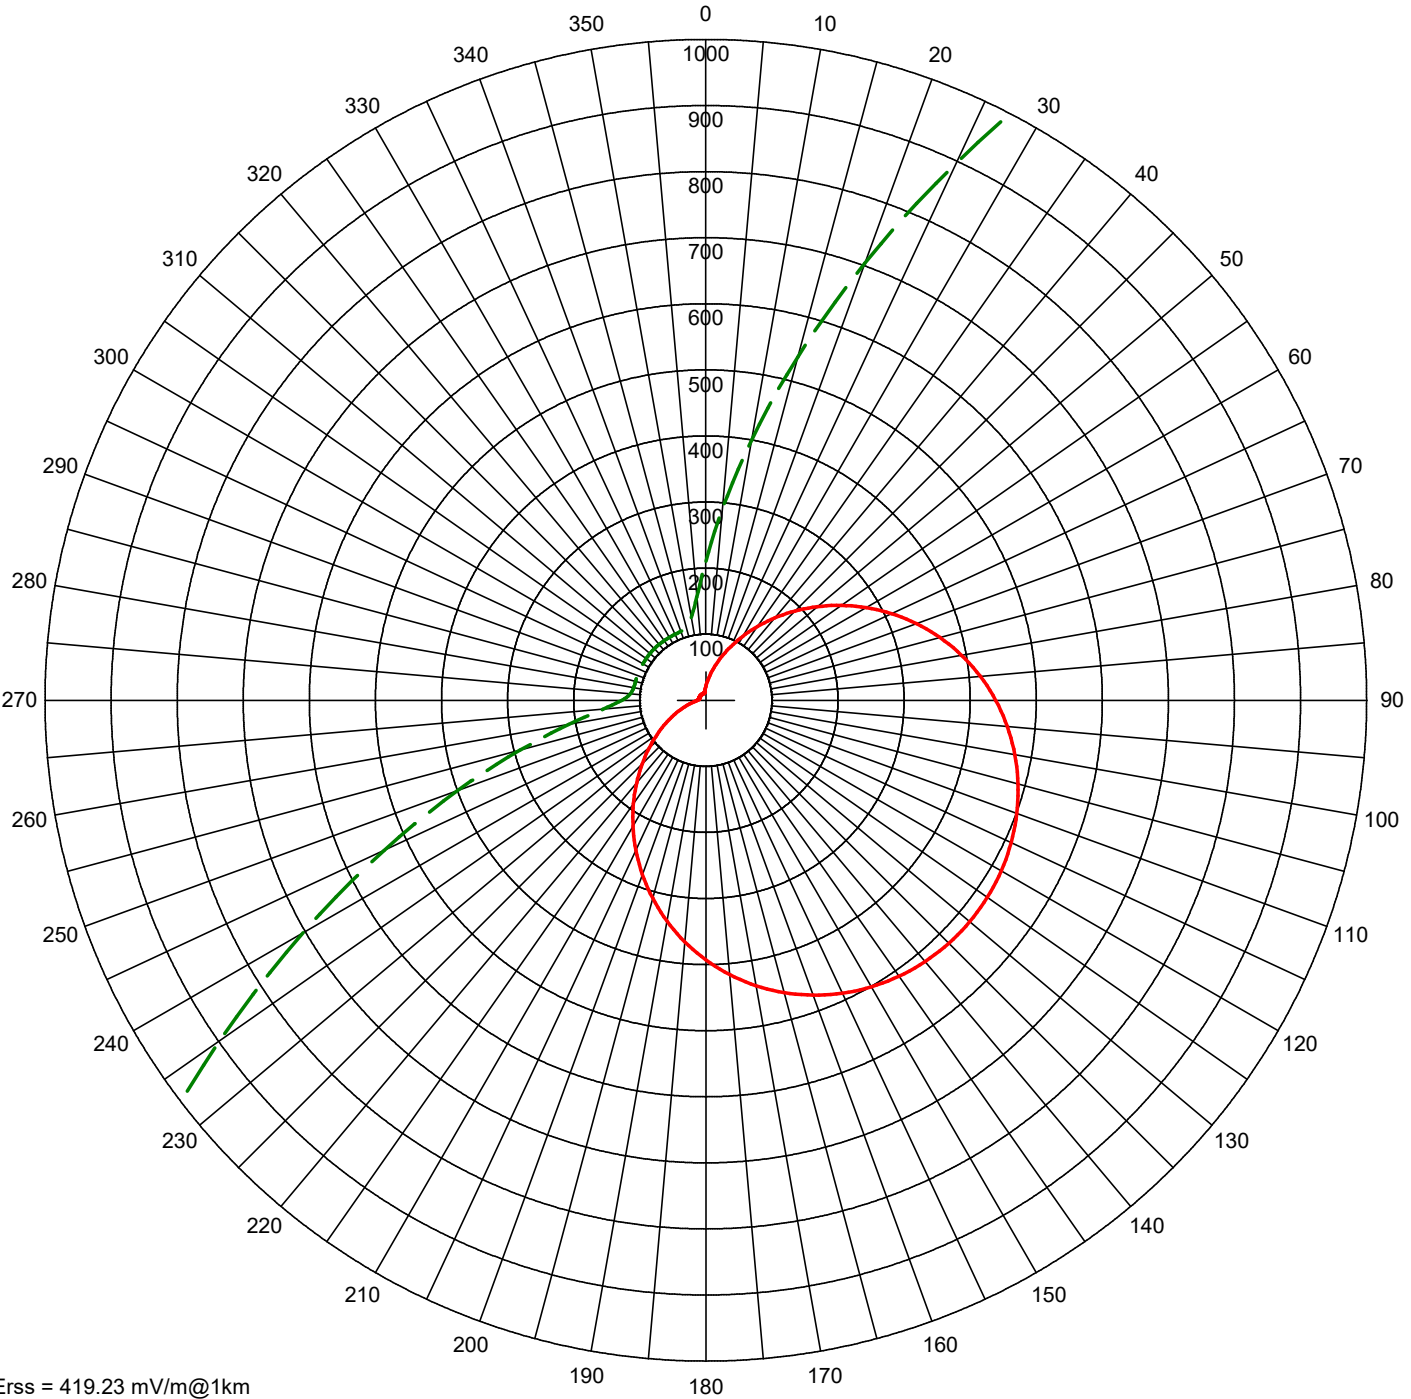

Erss = 419.23 mV/m@1km
Theo RMS: 276.016 mV/m@1km
Std RMS: 290.026 mV/m@1km
Q: 10.481 mV/m@1km

Standard Horizontal Plane Pattern

— Pattern (mV/m @ 1km)
- - Pattern X10

| # | Field Ratio | Phase (deg) | Spacing (deg) | Orient (deg) | Height (deg) | Ref Switch | TL Switch | A (deg) | B (deg) | C (deg) | D (deg) |
|---|-------------|-------------|---------------|--------------|--------------|------------|-----------|---------|---------|---------|---------|
| 1 | 1.000 | 0.0 | 0.0 | 0.0 | 85.6 | 0 | 0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 2 | 2.000 | -123.3 | 60.0 | 130.0 | 85.6 | 0 | 0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 3 | 1.000 | 113.5 | 120.0 | 130.0 | 85.6 | 0 | 0 | 0.0 | 0.0 | 0.0 | 0.0 |

Call: WAXA
Freq: 1200 kHz
PINE ISLAND CENTER, FL, US
Hours: U
Lat: 26-42-50.70 N
Lng: 082-02-43.80 W
Power: 0.75 kW
Theo RMS: 276.02 mV/m@1km
@ 0.75 kW