

Exhibit 13.1 - Copy of Existing Antenna Structure Registration



Registration Detail

Reg Number	1219887	Status	Constructed
File Number	A0659845	Constructed	07/15/1938
EMI	No	Dismantled	
NEPA	No		

Antenna Structure

Structure Type 3TA3 - Antenna Tower Array - 1st N = # towers 2nd N =

Location (in NAD83 Coordinates)

Lat/Long	43-41-26.4 N 070-19-03.0 W	Address	Lane Avenue, 0.12 mi SE of Pankin Rd & I-95
City, State	Portland , ME		
Zip	04103	County	CUMBERLAND
Center of AM Array	43-41-24.3 N 070-19-03.2 W	Position of Tower in Array	

Heights (meters)

Elevation of Site Above Mean Sea Level	Overall Height Above Ground (AGL)
21.6	109.7
Overall Height Above Mean Sea Level	Overall Height Above Ground w/o Appurtenances
131.3	108.8

Painting and Lighting Specifications

FCC Paragraphs 1, 3, 12, 21

FAA Notification

FAA Study	2005-ANE-172-OE	FAA Issue Date	03/11/2005
-----------	-----------------	----------------	------------

Owner & Contact Information

FRN	0009269424	Owner Entity Type	
-----	------------	-------------------	--

Owner

Saga Communications of New England, LLC
Attention To: Gregory Urbiel
73 Kercheval Avenue, Suite 201
Grosse Pointe Farms , MI 48236
P: (313)886-7070
F:
E: gurbiel@sagacom.com

Contact

Smithwick , Gary S Esq
5028 Wisconsin Avenue NW, Suite 301
Washington , DC 20016
P: (202)363-4050
F:
E: gsmithwick@fccworld.com

Last Action Status

Status	Constructed	Received	12/14/2009
Purpose	Notification	Entered	12/14/2009
Mode	Interactive		

Related Applications

12/14/2009 A0659845 - Notification (NT)
09/05/2008 A0608453 - Modification (MD)
06/22/2005 A0452809 - Admin Update (AU)

Related applications (8)

Comments

Comments

None

History

Date	Event
09/17/2011	Registration Printed
09/16/2011	Duplicate Registration Request Received
09/16/2011	Supersede - Internal Correction Applied

All History (22)

Automated Letters

09/17/2011 Authorization, Reference
09/09/2009 Construction Reminder, Reference 633381
09/06/2008 Authorization, Reference

All letters (9)

Exhibit 13.2

Vertical Plan of Antenna System

The site is located on Lane Ave, 0.12 miles southeast of Pankin Road and I-95; the city of Portland, Cumberland County, Maine.

Site Location (NAD 27)

NL: 43° 41' 26"

WL: 70° 19' 05"

(43-41-26.4NL; 70-19-03.0WL NAD1983)

NOTE: Existing Tower Construction

Antenna Structure Registration No.

1219887

WYNZ(FM) Antenna

126 meters AMSL

104 meters AGL

WQAH638/WQAF915

STL Antenna


118 meters AMSL

96 meters AGL

Proposed Antenna

COR: 111 meters AMSL

max HAAT: 111 meters

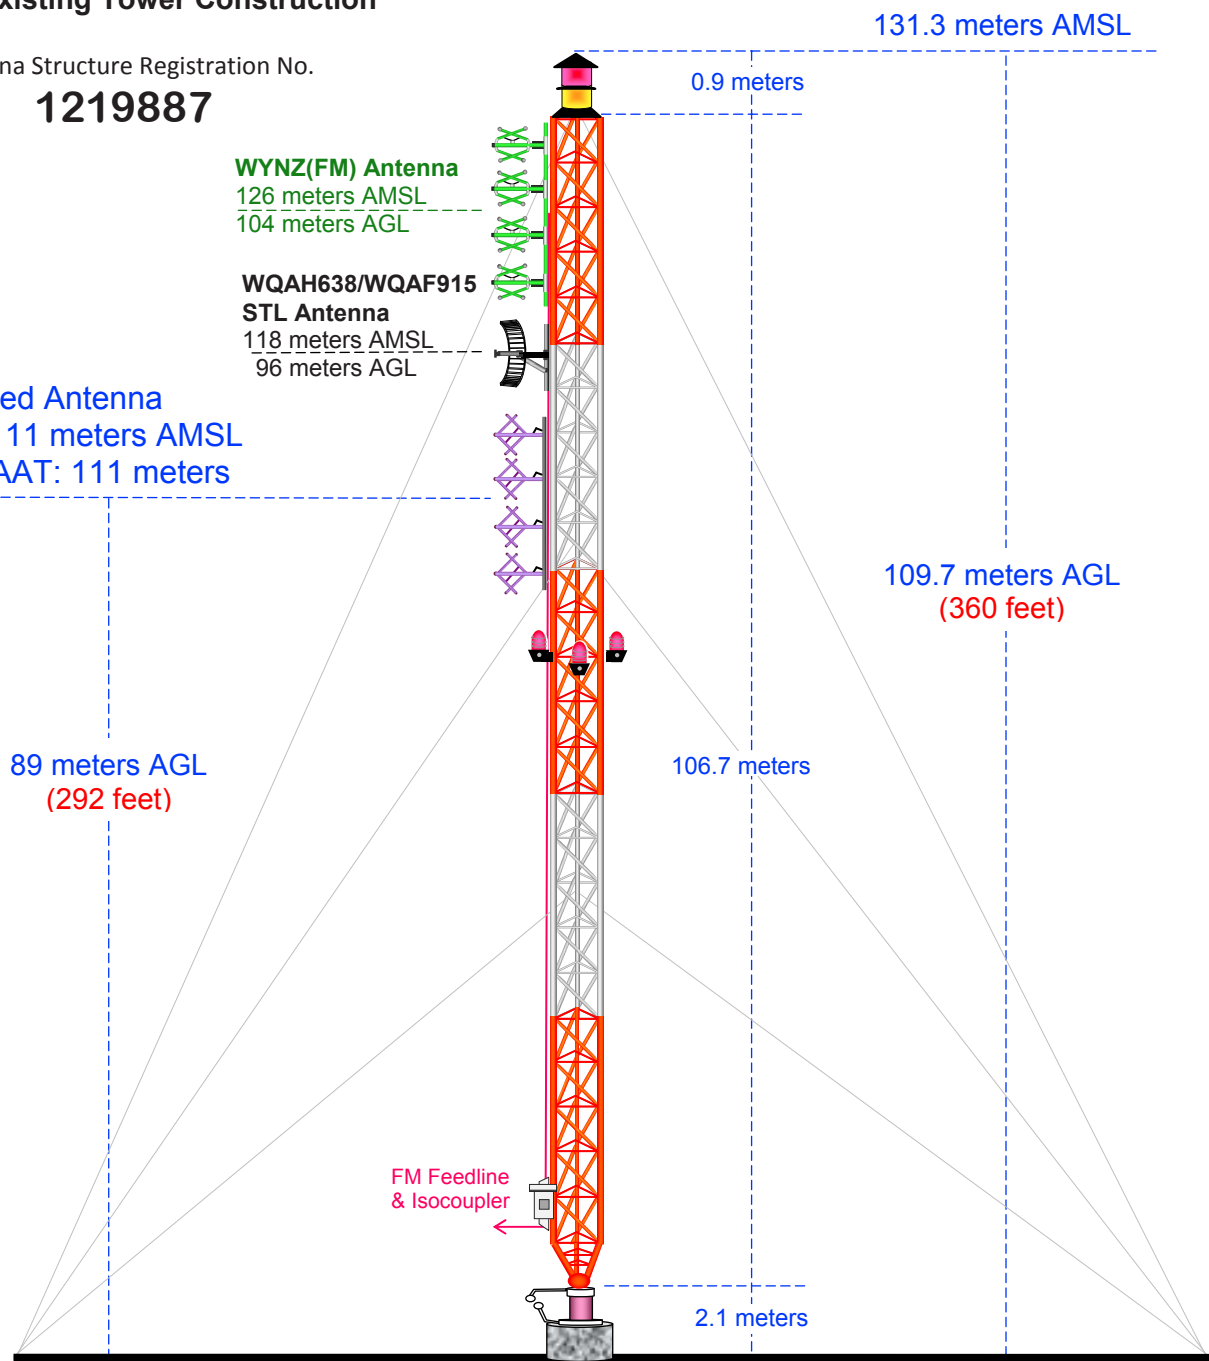

Ground Elevation = 21.6 m AMSL

Drawing is not to Scale

MUNN-REESE, INC.

Broadcast Engineering Consultants
Coldwater, MI 49036

Terrain
-2 152 m

NGDC 30 SEC Terrain Database
U.S. Census 2010 PL Database

Exhibit 13.3 Present vs. Proposed Service Contour Study

Long-Form 60 dBμ F(50:50) Contour
Short-Form 60 dBμ F(50:50) Contour


+ CH288D.long-form
CH288D.short-form

CH288D.long-form
Portland, ME
BNPFT20030317GVE
Facility ID: 150422
Latitude: 43-41-26 N
Longitude: 070-19-05 W
ERP: 0.019 kW
Channel: 288D
Frequency: 105.5 MHz
AMSL Height: 111.0 m
Horiz. Pattern: Omni

60 dBμ Contour
Total Population: 87,498
Total Area: 117 sq. km

CH288D.short-form
Portland, ME
BNPFT20030317GVE
Facility ID: 150422
Latitude: 43-41-26.10 N
Longitude: 070-19-04.80 W
ERP: 0.013 kW
Channel: 288D
Frequency: 105.5 MHz
AMSL Height: 126.6 m
Horiz. Pattern: Omni

60 dBμ Contour
Total Population: 87,421
Total Area: 115 sq. km





NGDC 30 SEC Terrain Database
U.S. Census 2010 PL Database

Exhibit 13.4 Proposed vs Primary Service Contour Study

CH288D.long-form
Portland, ME
BNPFT20030317GVE
Facility ID: 150422
Latitude: 43-41-26 N
Longitude: 070-19-05 W
ERP: 0.019 kW
Channel: 288D
Frequency: 105.5 MHz
AMSL Height: 111.0 m
Horiz. Pattern: Omni

WMGX(FM)
Portland, ME
BLH20050428AAH
Facility ID: 58548
Latitude: 43-41-17 N
Longitude: 070-15-27 W
ERP: 50.00 kW
Channel: 226B
Frequency: 93.1 MHz
AMSL Height: 158.0 m
Horiz. Pattern: Omni

Long-Form 54 dBμ F(50:50) Contour

CH288D.long-form

WMGX(FM)

Portland




Exhibit 13.5

Tabulation of Proposed Translator Allocation

Bible Broadcasting Network, Inc. CH# 288D - 105.5 MHz, Pwr= 0.019 kW, HAAT= 80.0 M, COR= 111 M Average Protected F(50-50)= 6.08 km Omni -directional											
REFERENCE										DISPLAY DATES	
43 41 26.0 N.										DATA 08-01-13	
70 19 05.0 W.										SEARCH 08-01-13	
CH	CALL	TYPE	ANT	AZI	DIST	LAT	PWR(kW)	INT(km)	PRO(km)	*IN*	*OUT*
CITY		STATE		<--	FILE #	LNG	HAAT(M)	COR(M)	LICENSEE	(Overlap in km)	
288D	643376	APP_C_		0.0	0.00	43 41 26.1	0.013	20.0	6.0	-24.4*<	-20.0*<
Portland		ME		235.3	BNPFT20030317GVE	70 19 04.8	96	127	Radio Assist Ministry, Inc		
290B	WBCI	LIC_CN		36.7	52.60	44 04 09.0	50.000	6.0	65.5	40.5	-13.5*<
Bath		ME		217.0	BLH7422	69 55 28.0	152	213	Blount Communications, Inc		
Grandfathered 50.0 kw @ 152 m											
288D	1562389	APP_C_		6.8	47.52	44 06 54.0	0.250	41.6	12.1	0.6	18.3
Lewiston		ME		186.8	BNPFT20030317DOX	70 14 52.0		162	Edgewater Broadcasting, Inc		
286D	1561506	APP_DC_		203.1	17.72	43 32 38.0	0.013	0.1	4.1	11.3	13.3
Saco		ME		23.1	BNPFT20030313AFV	70 24 16.0		127	Bible Broadcasting Networ		
288B1	WBYA	LIC_ZCN		56.7	128.29	44 18 58.0	25.000	102.8	31.3	18.8	70.6
Islesboro		ME		237.6	BLH19990202KB	68 58 12.0	93	142	Wbin Media Co., Inc.		
288A	WJYY	LIC_CN		244.9	106.03	43 16 46.0	1.550	68.5	22.0	31.7	64.8
Concord		NH		64.1	BLH19871005KD	71 30 15.0	139	298	Wbin Media Co., Inc.		
287A	WSHK	LIC_CN		213.2	68.46	43 10 28.0	2.200	30.6	20.8	31.7	39.0
Kittery		ME		32.9	BLH19921030KC	70 46 50.0	113	142	Radio License Holding Cbc,		
289A	WLKC	LIC_ZCX		274.7	107.31	43 45 45.0	4.100	47.1	31.2	54.9	68.8
Campton		NH		93.8	BLH20061012ABU	71 39 00.0	119	412	Devon Broadcasting Company		
285A	WLKZ	LIC_CX		259.7	86.85	43 32 45.3	0.560	1.5	31.1	80.0	55.4
Wolfeboro		NH		79.0	BLH20110228ABN	71 22 42.8	325	560	Great Eastern Radio, LIc		
286C	WTOS-FM	LIC_CX		0.1	149.10	45 01 54.0	57.000	11.9	88.4	132.8	60.4
Skowhegan		ME		180.1	BLH20020905AAI	70 18 50.0	747	1324	Blueberry Broadcasting, LI		
288A	WKXH	LIC_C_		301.8	154.39	44 24 38.0	1.250	77.7	26.6	71.5	110.7
St. Johnsbury		VT		120.7	BLH20031205ACR	71 58 13.0	217	552	Vermont Broadcast Associat		
289B	WROR-FM	LIC_C_		202.9	161.77	42 20 50.0	23.000	78.3	66.1	77.2	83.3
Framingham		MA		22.3	BLH20000223AAP	71 04 59.0	224	247	Greater Boston Radio, Inc.		

Terrain database is NGDC 30 SEC, R= 73.215 qualifying spacings or FCC minimum Spacings in KM, M= Margin in KM
 Contour distances are on direct line to and from reference station. Reference zone= East Zone, Co to 3rd adjacent.
 All separation margins (if shown) include rounding
 Ant Column: (D= DA Standard, Z= DA 73.215, N= Not DA 73.215, _= Omni), Polarization (C,H,V,E), Beamtilt(Y,N,X)
 "*"affixed to 'IN' or 'OUT' values = site inside protected contour.
 < = Contour Overlap
 Reference station has protected zone issue:

Green Text denotes the Auction 83 Application facility to be modified by this Form 349 Long-Form filing.
 This facility need not be protected.

Blue Highlighted Text denotes supplemental contour protection studies toward select facilities as included in **Exhibit(s) 13.6**.

Yellow Highlighted text denotes a §74.1204(d) waiver request for Second Adjacent Channel Given Interference toward WBCI(FM) - Bath, ME (CH290B). The portion of the §74.1204(d) WBCI(FM) protection from 170 meters to the extent of the calculated 100.0 dBμ F(50:10) interference contour has been demonstrated through a downward radiation study as included in **Exhibit 13.7a**. Full protection will be afforded WBCI(FM) from 170 meters to the extent of the calculated 100.0 dBμ F(50:10) interference contour as this area will not reach the ground nor a 2 meter artificial plane representing a human at ground level when taking into account the downward radiation characteristics of the antenna as supplied by the antenna manufacturer. A copy of the antenna manufacturer specifications has been included in **Exhibit 13.7c**. The portion of the §74.1204(d) WBCI(FM) protection within 170 meters of the site are currently void of population, buildings (with the exception of the dedicated transmitter building) or major roads as noted in **Exhibit 13.7b**.

Exhibit 13.6 (AS AMENDED)

Contour Protection Studies Toward APP288D - Lewiston, ME

Bible Broadcasting Network, Inc.

FMCommander Single Allocation Study - 08-01-2013 - NGDC 30 SEC
CH288D.P's Overlaps (In= 0.63 km, Out= 18.31 km)

CH288D.P CH 288 D
Lat= 43 41 26.0, Lng= 70 19 05.0
0.019 kW 80 M HAAT, 111 M COR
Prot.= 60 dBu, Intef.= 40 dBu

1562389 CH 288 D BNPFT20030317DOX
Lat= 44 06 54.0, Lng= 70 14 52.0
0.25 kW 0 M HAAT, 162 M COR
Prot.= 60 dBu, Intef.= 40 dBu

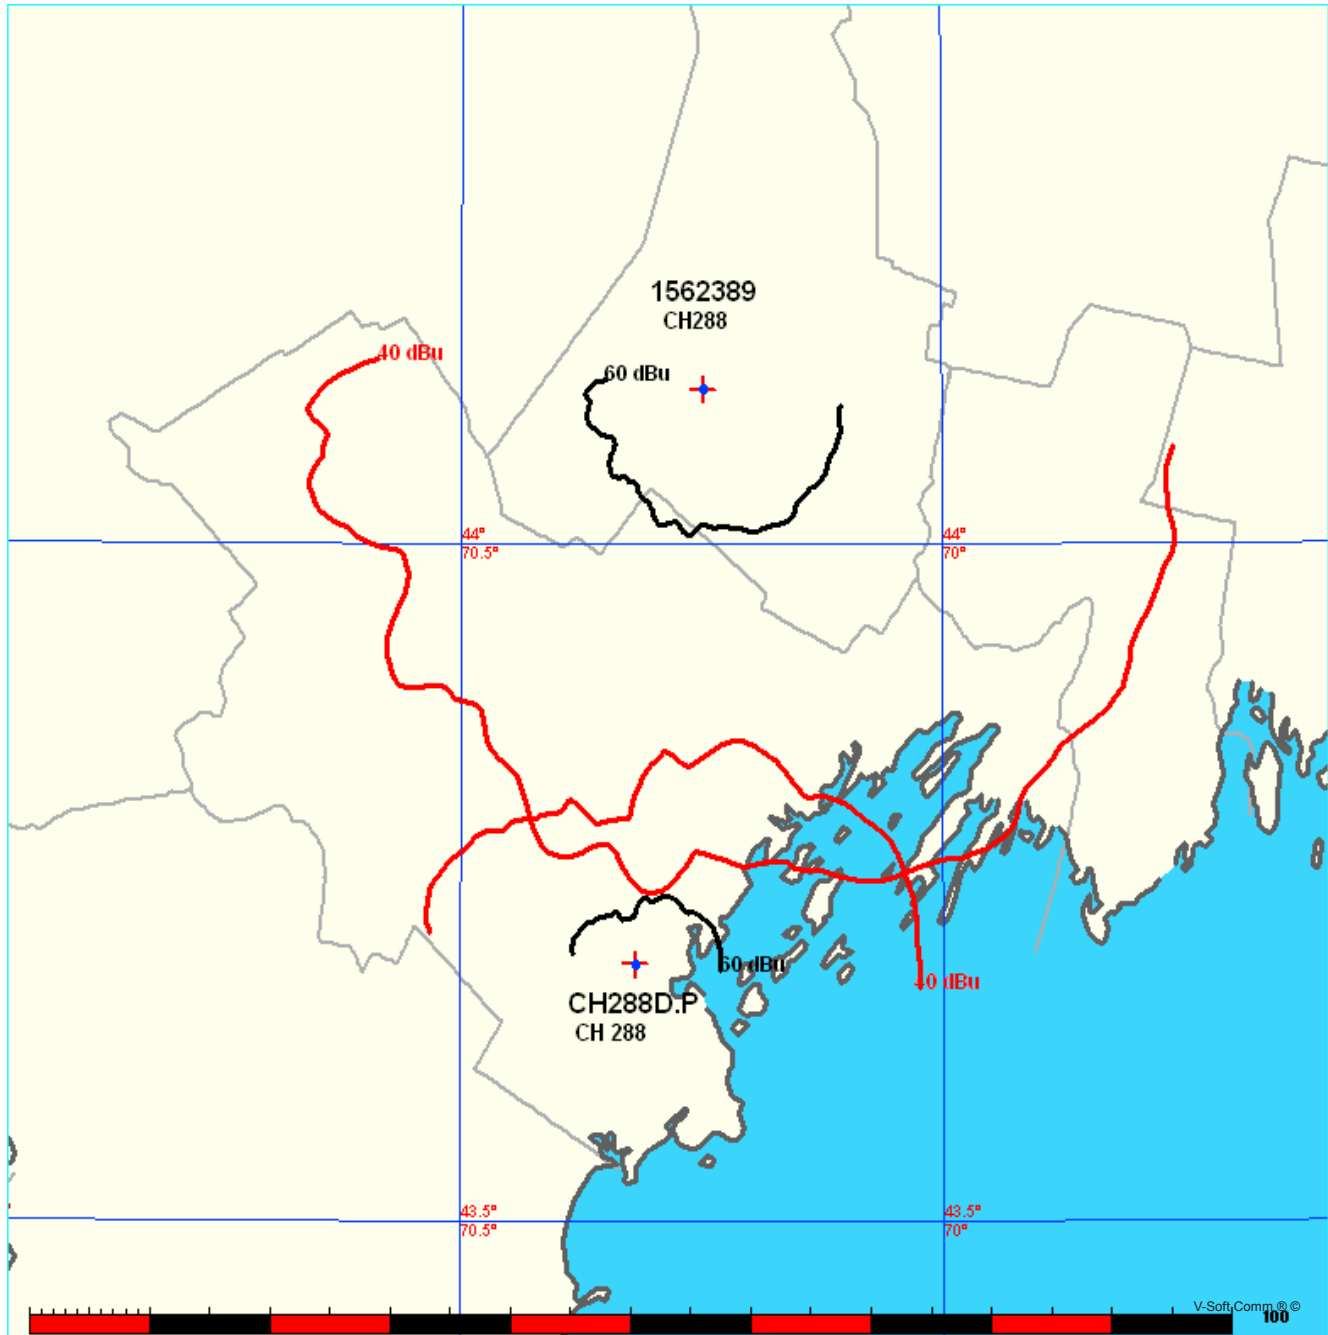


Exhibit 13.6 (AS AMENDED)

Contour Protection Studies Toward APP288D - Lewiston, ME

08-15-2013

Terrain Data: NGDC 30 SEC

FMOver Analysis

CH288D.P

1562389 BNPFT20030317DOX

Channel = 288D

Max ERP = 0.019 kW

RCAMSL = 111 M

N. Lat. 43 41 26.0

W. Lng. 70 19 05.0

Protected

60 dBu

Channel = 288D

Max ERP = 0.25 kW

RCAMSL = 162 M

N. Lat. 44 06 54.0

W. Lng. 70 14 52.0

Interfering

40 dBu

Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Actual (dBu)	IX (km)
324.0	000.0190	0046.7	004.7	190.9	000.2500	0076.7	044.2	37.88	
325.0	000.0190	0046.0	004.6	190.8	000.2500	0077.0	044.2	37.92	
326.0	000.0190	0045.6	004.6	190.7	000.2500	0077.3	044.1	37.97	
327.0	000.0190	0045.4	004.6	190.6	000.2500	0077.6	044.1	38.01	
328.0	000.0190	0044.9	004.5	190.5	000.2500	0077.9	044.1	38.06	
329.0	000.0190	0044.3	004.5	190.4	000.2500	0078.3	044.0	38.10	
330.0	000.0190	0043.5	004.5	190.3	000.2500	0078.7	044.0	38.15	
331.0	000.0190	0042.7	004.4	190.2	000.2500	0079.1	044.0	38.19	
332.0	000.0190	0042.3	004.4	190.1	000.2500	0079.4	044.0	38.24	
333.0	000.0190	0042.5	004.4	190.0	000.2500	0079.7	043.9	38.29	
334.0	000.0190	0043.1	004.4	190.0	000.2500	0079.9	043.9	38.34	
335.0	000.0190	0044.0	004.5	189.9	000.2500	0080.0	043.8	38.38	
336.0	000.0190	0044.9	004.5	189.9	000.2500	0080.2	043.7	38.44	
337.0	000.0190	0045.5	004.6	189.8	000.2500	0080.5	043.6	38.49	
338.0	000.0190	0045.2	004.6	189.7	000.2500	0080.8	043.6	38.53	
339.0	000.0190	0043.5	004.5	189.6	000.2500	0081.4	043.6	38.58	
340.0	000.0190	0040.9	004.3	189.4	000.2500	0082.1	043.7	38.61	
341.0	000.0190	0038.0	004.1	189.2	000.2500	0082.8	043.8	38.63	
342.0	000.0190	0034.2	003.9	189.0	000.2500	0083.5	044.0	38.64	
343.0	000.0190	0028.9	003.7	188.8	000.2500	0084.1	044.2	38.63	
344.0	000.0190	0023.8	003.7	188.7	000.2500	0084.3	044.1	38.66	
345.0	000.0190	0020.5	003.7	188.6	000.2500	0084.5	044.1	38.69	
346.0	000.0190	0018.0	003.7	188.5	000.2500	0084.7	044.1	38.71	
347.0	000.0190	0014.6	003.7	188.5	000.2500	0084.9	044.1	38.74	
348.0	000.0190	0011.9	003.7	188.4	000.2500	0085.0	044.0	38.76	
349.0	000.0190	0009.9	003.7	188.3	000.2500	0085.2	044.0	38.79	
350.0	000.0190	0008.4	003.7	188.2	000.2500	0085.4	044.0	38.81	
351.0	000.0190	0008.3	003.7	188.1	000.2500	0085.5	044.0	38.83	
352.0	000.0190	0009.5	003.7	188.1	000.2500	0085.7	044.0	38.85	
353.0	000.0190	0011.6	003.7	188.0	000.2500	0085.9	043.9	38.88	
354.0	000.0190	0014.4	003.7	187.9	000.2500	0086.0	043.9	38.90	
355.0	000.0190	0018.3	003.7	187.8	000.2500	0086.2	043.9	38.92	
356.0	000.0190	0021.9	003.7	187.7	000.2500	0086.4	043.9	38.95	
357.0	000.0190	0027.1	003.7	187.6	000.2500	0086.6	043.9	38.97	

MUNN-REESE, INC.

Broadcast Engineering Consultants
COLDWATER, MI 49036

Exhibit 13.6 (AS AMENDED)

Contour Protection Studies Toward APP288D - Lewiston, ME

Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Actual (dBu)
358.0	000.0190	0033.3	003.9	187.6	000.2500	0086.7	043.7	39.05
359.0	000.0190	0038.2	004.2	187.6	000.2500	0086.8	043.4	39.17
000.0	000.0190	0043.0	004.4	187.5	000.2500	0086.9	043.1	39.29
001.0	000.0190	0046.5	004.6	187.5	000.2500	0087.1	042.9	39.39
002.0	000.0190	0048.7	004.8	187.4	000.2500	0087.3	042.8	39.46
003.0	000.0190	0050.8	004.9	187.3	000.2500	0087.5	042.7	39.53
004.0	000.0190	0053.0	005.0	187.2	000.2500	0087.7	042.5	39.60
005.0	000.0190	0054.7	005.1	187.0	000.2500	0087.9	042.4	39.65
006.0	000.0190	0056.7	005.2	186.9	000.2500	0088.0	042.3	39.70
007.0	000.0190	0059.1	005.3	186.8	000.2500	0088.2	042.2	39.76
008.0	000.0190	0061.0	005.4	186.7	000.2500	0088.3	042.2	39.80
009.0	000.0190	0061.0	005.4	186.5	000.2500	0088.4	042.2	39.81
010.0	000.0190	0060.5	005.3	186.4	000.2500	0088.4	042.2	39.80
011.0	000.0190	0059.4	005.3	186.3	000.2500	0088.4	042.2	39.78
012.0	000.0190	0057.9	005.2	186.2	000.2500	0088.4	042.3	39.75
013.0	000.0190	0056.7	005.2	186.1	000.2500	0088.4	042.4	39.73
014.0	000.0190	0056.2	005.2	186.0	000.2500	0088.4	042.4	39.71
015.0	000.0190	0056.2	005.1	185.8	000.2500	0088.4	042.4	39.70
016.0	000.0190	0057.3	005.2	185.7	000.2500	0088.3	042.4	39.71
017.0	000.0190	0059.7	005.3	185.6	000.2500	0088.2	042.3	39.73
018.0	000.0190	0062.6	005.4	185.4	000.2500	0088.1	042.2	39.76
019.0	000.0190	0065.4	005.5	185.2	000.2500	0087.9	042.1	39.77
020.0	000.0190	0068.3	005.6	185.1	000.2500	0087.6	042.1	39.78
021.0	000.0190	0071.3	005.7	184.9	000.2500	0087.3	042.0	39.79
022.0	000.0190	0074.0	005.9	184.7	000.2500	0087.0	041.9	39.79
023.0	000.0190	0076.4	005.9	184.6	000.2500	0086.7	041.8	39.78
024.0	000.0190	0078.2	006.0	184.4	000.2500	0086.3	041.8	39.75
025.0	000.0190	0079.4	006.1	184.2	000.2500	0085.9	041.8	39.72
026.0	000.0190	0080.4	006.1	184.1	000.2500	0085.4	041.8	39.67
027.0	000.0190	0080.9	006.1	183.9	000.2500	0085.0	041.8	39.62
028.0	000.0190	0081.0	006.1	183.8	000.2500	0084.5	041.9	39.56
029.0	000.0190	0081.0	006.1	183.7	000.2500	0084.1	041.9	39.50
030.0	000.0190	0081.0	006.1	183.5	000.2500	0083.7	042.0	39.44
031.0	000.0190	0081.0	006.1	183.4	000.2500	0083.2	042.0	39.38
032.0	000.0190	0081.0	006.1	183.3	000.2500	0082.8	042.1	39.32
033.0	000.0190	0081.0	006.1	183.1	000.2500	0082.4	042.1	39.25
034.0	000.0190	0081.0	006.1	183.0	000.2500	0081.9	042.2	39.19
035.0	000.0190	0080.9	006.1	182.9	000.2500	0081.5	042.2	39.12
036.0	000.0190	0080.5	006.1	182.8	000.2500	0081.1	042.3	39.05
037.0	000.0190	0079.9	006.1	182.7	000.2500	0080.7	042.4	38.98
038.0	000.0190	0079.2	006.1	182.6	000.2500	0080.3	042.5	38.91
039.0	000.0190	0078.5	006.0	182.5	000.2500	0080.0	042.5	38.84
040.0	000.0190	0078.1	006.0	182.4	000.2500	0079.6	042.6	38.78
041.0	000.0190	0077.9	006.0	182.3	000.2500	0079.2	042.7	38.71
042.0	000.0190	0077.6	006.0	182.2	000.2500	0078.8	042.8	38.65
043.0	000.0190	0077.1	006.0	182.1	000.2500	0078.5	042.9	38.58
044.0	000.0190	0076.5	005.9	182.0	000.2500	0078.2	042.9	38.52

Exhibit 13.6 (AS AMENDED)

Contour Protection Studies Toward APP288D - Lewiston, ME

08-15-2013

Terrain Data: NGDC 30 SEC

FMOver Analysis

1562389 BNPFT20030317DOX

CH288D.P

Channel = 288D

Max ERP = 0.25 kW

RCAMSL = 162 M

N. Lat. 44 06 54.0

W. Lng. 70 14 52.0

Protected

60 dBu

Channel = 288D

Max ERP = 0.019 kW

RCAMSL = 111 M

N. Lat. 43 41 26.0

W. Lng. 70 19 05.0

Interfering

40 dBu

Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Actual (dBu)	IX (km)
142.0	000.2500	0093.6	012.5	019.5	000.0190	0066.9	039.7	27.39	
143.0	000.2500	0096.3	012.6	019.5	000.0190	0067.0	039.4	27.51	
144.0	000.2500	0099.0	012.8	019.6	000.0190	0067.1	039.1	27.63	
145.0	000.2500	0100.8	012.9	019.5	000.0190	0067.0	038.9	27.71	
146.0	000.2500	0101.7	013.0	019.4	000.0190	0066.6	038.6	27.75	
147.0	000.2500	0101.9	013.0	019.2	000.0190	0066.0	038.4	27.77	
148.0	000.2500	0101.7	013.0	019.0	000.0190	0065.4	038.3	27.76	
149.0	000.2500	0101.2	012.9	018.7	000.0190	0064.7	038.1	27.74	
150.0	000.2500	0100.4	012.9	018.5	000.0190	0063.9	038.0	27.71	
151.0	000.2500	0099.4	012.8	018.2	000.0190	0063.0	037.9	27.65	
152.0	000.2500	0098.0	012.7	017.8	000.0190	0062.1	037.8	27.58	
153.0	000.2500	0096.8	012.7	017.5	000.0190	0061.2	037.7	27.52	
154.0	000.2500	0096.2	012.6	017.2	000.0190	0060.3	037.5	27.46	
155.0	000.2500	0095.6	012.6	017.0	000.0190	0059.5	037.4	27.41	
156.0	000.2500	0095.0	012.5	016.7	000.0190	0058.8	037.3	27.36	
157.0	000.2500	0094.8	012.5	016.4	000.0190	0058.1	037.2	27.33	
158.0	000.2500	0095.2	012.6	016.2	000.0190	0057.6	037.0	27.32	
159.0	000.2500	0095.4	012.6	015.9	000.0190	0057.1	036.9	27.31	
160.0	000.2500	0094.7	012.5	015.6	000.0190	0056.6	036.8	27.28	
161.0	000.2500	0093.3	012.4	015.2	000.0190	0056.3	036.7	27.25	
162.0	000.2500	0091.7	012.3	014.9	000.0190	0056.1	036.7	27.25	
163.0	000.2500	0090.3	012.2	014.5	000.0190	0056.1	036.6	27.26	
164.0	000.2500	0088.5	012.1	014.1	000.0190	0056.2	036.6	27.28	
165.0	000.2500	0086.4	012.0	013.7	000.0190	0056.3	036.7	27.28	
166.0	000.2500	0084.5	011.9	013.4	000.0190	0056.4	036.7	27.30	
167.0	000.2500	0084.0	011.8	013.1	000.0190	0056.6	036.6	27.35	
168.0	000.2500	0083.6	011.8	012.7	000.0190	0057.0	036.5	27.42	
169.0	000.2500	0081.9	011.7	012.4	000.0190	0057.4	036.6	27.48	
170.0	000.2500	0079.6	011.5	012.0	000.0190	0057.9	036.6	27.52	
171.0	000.2500	0078.6	011.5	011.7	000.0190	0058.3	036.6	27.58	
172.0	000.2500	0078.5	011.5	011.4	000.0190	0058.8	036.5	27.66	
173.0	000.2500	0078.5	011.5	011.1	000.0190	0059.3	036.5	27.75	
174.0	000.2500	0079.0	011.5	010.8	000.0190	0059.7	036.4	27.85	

Exhibit 13.6 (AS AMENDED)

Contour Protection Studies Toward APP288D - Lewiston, ME

Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Actual (dBu)
175.0	000.2500	0079.4	011.5	010.5	000.0190	0060.2	036.3	27.94
176.0	000.2500	0078.5	011.5	010.2	000.0190	0060.4	036.3	27.97
177.0	000.2500	0076.9	011.4	009.8	000.0190	0060.6	036.4	27.97
178.0	000.2500	0076.1	011.3	009.5	000.0190	0060.7	036.4	27.98
179.0	000.2500	0075.2	011.2	009.2	000.0190	0060.9	036.4	27.99
180.0	000.2500	0074.2	011.2	008.9	000.0190	0061.1	036.4	28.00
181.0	000.2500	0074.0	011.2	008.6	000.0190	0061.3	036.4	28.02
182.0	000.2500	0078.1	011.4	008.3	000.0190	0061.2	036.1	28.14
183.0	000.2500	0081.9	011.7	008.0	000.0190	0061.1	035.9	28.23
184.0	000.2500	0085.2	011.9	007.7	000.0190	0060.7	035.6	28.28
185.0	000.2500	0087.5	012.1	007.4	000.0190	0060.0	035.5	28.27
186.0	000.2500	0088.4	012.1	007.1	000.0190	0059.3	035.4	28.20
187.0	000.2500	0087.9	012.1	006.7	000.0190	0058.5	035.4	28.09
188.0	000.2500	0085.8	012.0	006.4	000.0190	0057.8	035.6	27.93
189.0	000.2500	0083.4	011.8	006.1	000.0190	0057.0	035.7	27.75
190.0	000.2500	0079.8	011.6	005.8	000.0190	0056.2	036.0	27.54
191.0	000.2500	0076.5	011.3	005.5	000.0190	0055.5	036.2	27.35
192.0	000.2500	0074.8	011.2	005.2	000.0190	0055.0	036.4	27.22
193.0	000.2500	0075.4	011.3	004.9	000.0190	0054.6	036.3	27.16
194.0	000.2500	0077.3	011.4	004.6	000.0190	0054.0	036.2	27.11
195.0	000.2500	0079.5	011.5	004.2	000.0190	0053.4	036.1	27.06
196.0	000.2500	0081.3	011.7	003.9	000.0190	0052.7	036.1	26.99
197.0	000.2500	0082.3	011.7	003.5	000.0190	0052.0	036.0	26.89
198.0	000.2500	0082.5	011.7	003.2	000.0190	0051.3	036.1	26.76
199.0	000.2500	0082.0	011.7	002.9	000.0190	0050.6	036.2	26.60
200.0	000.2500	0080.8	011.6	002.6	000.0190	0050.0	036.3	26.45
201.0	000.2500	0078.3	011.5	002.4	000.0190	0049.5	036.5	26.29
202.0	000.2500	0075.0	011.2	002.2	000.0190	0049.1	036.8	26.12
203.0	000.2500	0071.8	011.0	002.1	000.0190	0048.8	037.1	25.95
204.0	000.2500	0068.9	010.8	001.9	000.0190	0048.5	037.3	25.80
205.0	000.2500	0066.2	010.6	001.8	000.0190	0048.1	037.6	25.65
206.0	000.2500	0064.2	010.5	001.6	000.0190	0047.8	037.8	25.51
207.0	000.2500	0063.3	010.4	001.4	000.0190	0047.3	037.9	25.38
208.0	000.2500	0062.9	010.4	001.2	000.0190	0046.8	038.0	25.25
209.0	000.2500	0062.4	010.4	000.9	000.0190	0046.4	038.1	25.14
210.0	000.2500	0061.8	010.3	000.7	000.0190	0046.1	038.3	25.04
211.0	000.2500	0061.1	010.3	000.5	000.0190	0045.6	038.4	24.90
212.0	000.2500	0060.0	010.2	000.4	000.0190	0044.9	038.6	24.71
213.0	000.2500	0058.1	010.0	000.3	000.0190	0044.3	038.8	24.54
214.0	000.2500	0056.1	009.9	000.2	000.0190	0044.0	039.0	24.39
215.0	000.2500	0054.6	009.7	000.1	000.0190	0043.5	039.2	24.23
216.0	000.2500	0054.1	009.7	359.9	000.0190	0042.8	039.4	24.04
217.0	000.2500	0054.5	009.7	359.7	000.0190	0041.6	039.4	23.81
218.0	000.2500	0055.4	009.8	359.5	000.0190	0040.4	039.5	23.55
219.0	000.2500	0056.0	009.8	359.2	000.0190	0039.2	039.5	23.31
220.0	000.2500	0055.7	009.8	359.0	000.0190	0038.4	039.7	23.11
221.0	000.2500	0055.3	009.8	358.9	000.0190	0037.7	039.8	22.92

Exhibit 13.7a

§74.1204(d) 2nd Adjacent Channel Given Interference Waiver Request Study Toward WBCI(FM)

Terrain
-2 280 m

NGDC 30 SEC Terrain Database
U.S. Census 2010 PL Database


WBCI(FM)
+

The portion of the §74.1204(d) WBCI(FM) - Bath, ME (CH290B) protection from 145 meters to the extent of the calculated 100.0 dBμ F(50:10) interference contour have been demonstrated through a downward radiation study as included in **Exhibit 13.7a**. Full protection will be afforded WBCI(FM) from 145 meters to the extent of the calculated 100.0 dBμ F(50:10) interference contour as this area will not reach the ground nor a two meter artificial plane representing a standard human at ground level when taking into account the downward radiation characteristics of the antenna as supplied by the antenna manufacturer. A copy of the antenna manufacturer specifications has been included in **Exhibit 13.8**.

The portion of the §74.1204(d) WBCI(FM) protection within 145 meters of the site are currently void of population, buildings (with the exception of the dedicated transmitter building) or major roads as noted in **Exhibit 13.7b**.

WBCI(FM)
Bath, ME
BLH7422
Facility ID: 33288
Latitude: 44-04-09 N
Longitude: 069-55-28 W
ERP: 50.00 kW
Channel: 290B
Frequency: 105.9 MHz
AMSL Height: 213.0 m
Horiz. Pattern: Omni


CH288D.long-form
Portland, ME
Proposed Operation
Facility ID: 150422
Latitude: 43-41-26 N
Longitude: 070-19-05 W
ERP: 0.019 kW
Channel: 288D
Frequency: 105.5 MHz
AMSL Height: 111.0 m
Horiz. Pattern: Omni

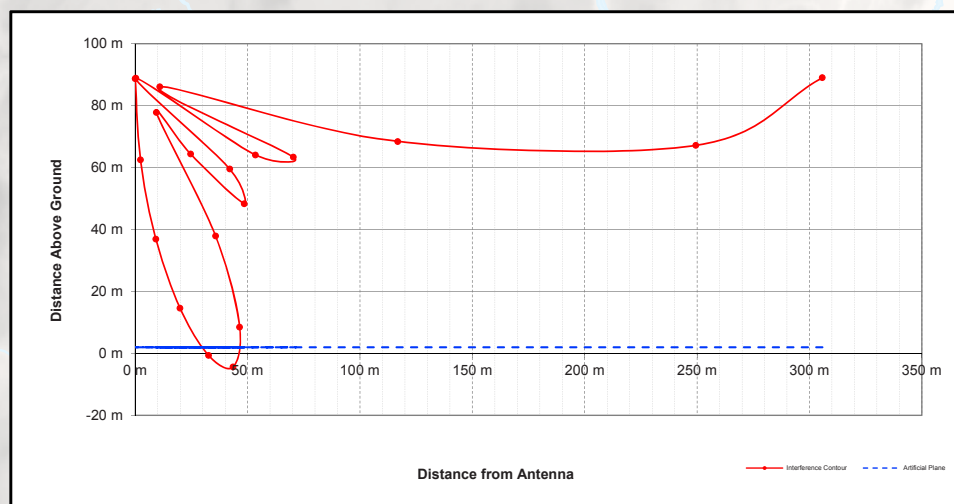

Proposed Antenna: PSIFML-4A (Four Bay Fully Spaced)								
Proposed Power: 0.019 kW								
Antenna Height AGL: 89 meters								
Interference Contour: 100 dBμ F(50:10)								
Artificial Ground Plane Height: 2 meters								
Distance (Free Space) Equation: $= (10^{\frac{1}{20}} \cdot (106.92 - [\text{desired dB}\mu] + [\text{ERP in dBK}] / 20))^2 \cdot 1000$								
Field Strength (dBμ) Equation: $= 106.92 - (20 \cdot (\text{LOG}_{10}[\text{DistMeters}] / 1000)) + [\text{ERP in dBK}]$								
Depression	Antenna	ERP	ERP	Distance	Distance	Field Strength	Distance	Field Strength
Angle	Relative	in kW	in dBK	from Ant.	from Ant. to	in dBμ @	from Ant.	in dBμ @
Below	Field			Contour	Artificial Plane	Artificial Plane	to Ground Level	Ground Level
Horizon								
0°	1.000	0.019	-17.21	305.76 m	infinite	---	---	---
-5°	0.819	0.013	-18.95	250.42 m	998.21 m	87.99 dBμ	1021.16 m	87.79 dBμ
-10°	0.388	0.003	-25.44	118.63 m	501.01 m	87.49 dBμ	512.53 m	87.29 dBμ
-15°	0.037	0.000	-45.85	11.31 m	336.14 m	70.54 dBμ	343.87 m	70.34 dBμ
-20°	0.245	0.001	-29.43	74.91 m	254.37 m	89.38 dBμ	260.22 m	89.18 dBμ
-25°	0.193	0.001	-31.50	59.01 m	205.86 m	89.15 dBμ	210.59 m	88.95 dBμ
-30°	0.001	0.000	-77.21	0.31 m	174.00 m	44.90 dBμ	178.00 m	44.70 dBμ
-35°	0.168	0.001	-32.71	51.37 m	151.68 m	90.60 dBμ	155.17 m	90.40 dBμ
-40°	0.207	0.001	-30.89	63.29 m	135.35 m	93.40 dBμ	138.46 m	93.20 dBμ
-45°	0.114	0.000	-36.07	34.86 m	123.04 m	89.04 dBμ	125.87 m	88.85 dBμ
-50°	0.048	0.000	-43.59	14.68 m	113.57 m	82.23 dBμ	116.18 m	82.03 dBμ
-55°	0.204	0.001	-31.02	62.37 m	106.21 m	95.38 dBμ	108.65 m	95.18 dBμ
-60°	0.304	0.002	-27.55	92.95 m	100.46 m	99.33 dBμ	102.77 m	99.13 dBμ
-65°	0.337	0.002	-26.66	103.04 m	95.99 m	100.62 dBμ	98.20 m	100.42 dBμ
-70°	0.312	0.002	-27.33	95.40 m	92.58 m	100.26 dBμ	94.71 m	100.06 dBμ
-75°	0.252	0.001	-29.18	77.05 m	90.07 m	98.64 dBμ	92.14 m	98.45 dBμ
-80°	0.173	0.001	-32.45	52.90 m	88.34 m	95.55 dBμ	90.37 m	95.35 dBμ
-85°	0.087	0.000	-38.42	26.60 m	87.33 m	89.67 dBμ	89.34 m	89.48 dBμ
-90°	0.001	0.000	-77.21	0.31 m	87.00 m	50.92 dBμ	89.00 m	50.72 dBμ

CH288D.long-form+

WBCI(FM) - 60.0 dBμ F(50:50)



**Exhibit 13.7b - Copy of USGS Aerial
Photograph of Existing Site &
§74.1204(d) Second Adjacent Channel
Given Interference Waiver Request with
WBCI(FM) - Bath, ME (CH290B)**

Proposed Site
43° 41' 26" NL
70° 19' 05" WL
NAD 1927

(43-41-26.4 NL; 70-19-03.0 WL NAD83)

145 meter Radius

The portion of the §74.1204(d) WBCI(FM) - Bath, ME (CH290B) protection from 145 meters to the extent of the calculated 100.0 dBμ F(50:10) interference contour have been demonstrated through a downward radiation study as included in **Exhibit 13.7a**. Full protection will be afforded WBCI(FM) from 145 meters to the extent of the calculated 100.0 dBμ F(50:10) interference contour as this area will not reach the ground nor a two meter artificial plane representing a standard human at ground level when taking into account the downward radiation characteristics of the antenna as supplied by the antenna manufacturer. A copy of the antenna manufacturer specifications has been included in **Exhibit 13.8**.

The portion of the §74.1204(d) WBCI(FM) protection within 145 meters of the site are currently void of population, buildings (with the exception of the dedicated transmitter building) or major roads as noted in **Exhibit 13.7b**.



0 300 600ft

USGS
The National Map

Exhibit 13.8 - Copy of Manufacturer's Vertical Radiation Data

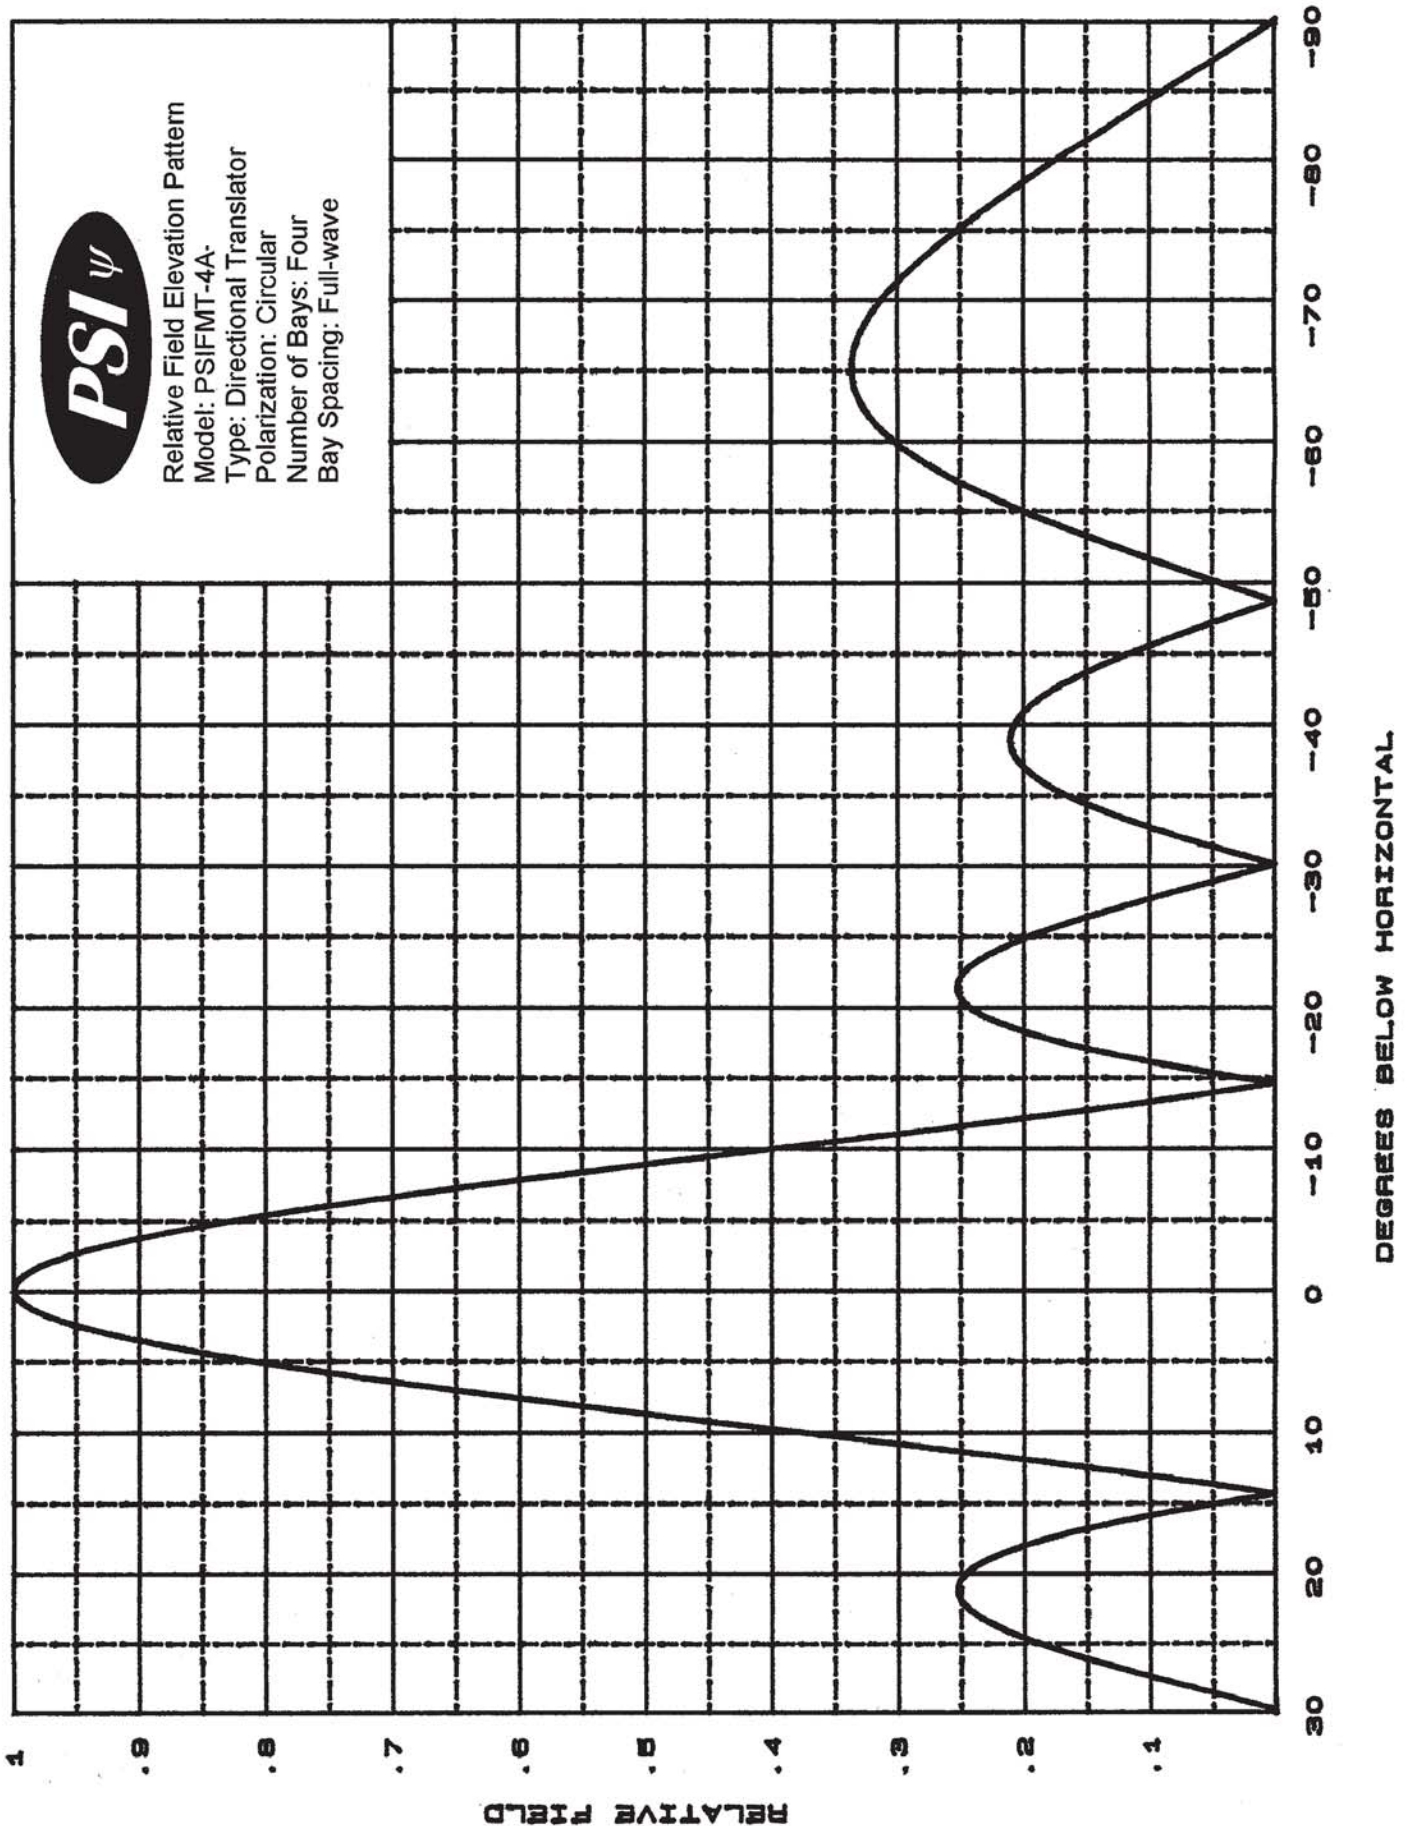


Exhibit 13.8 - Copy of Manufacturer's Vertical Radiation Data



Propagation Systems Inc.
Elevation Pattern Tabulation
Antenna Model: PSIFMT-4A
Bay spacing: Fullwave

Angle	Field	dB	Angle	Field	dB	Angle	Field	dB
-90.0	0.001	-60.000	-50.0	0.048	-26.315	-10.0	0.388	-8.216
-89.0	0.017	-35.177	-49.0	0.014	-36.928	-9.0	0.483	-6.326
-88.0	0.035	-29.156	-48.0	0.020	-34.179	-8.0	0.575	-4.804
-87.0	0.052	-25.634	-47.0	0.053	-25.584	-7.0	0.663	-3.563
-86.0	0.070	-23.136	-46.0	0.084	-21.489	-6.0	0.745	-2.553
-85.0	0.087	-21.198	-45.0	0.114	-18.890	-5.0	0.819	-1.738
-84.0	0.104	-19.626	-44.0	0.140	-17.049	-4.0	0.882	-1.095
-83.0	0.122	-18.297	-43.0	0.164	-15.714	-3.0	0.932	-0.609
-82.0	0.139	-17.153	-42.0	0.183	-14.750	-2.0	0.970	-0.269
-81.0	0.156	-16.151	-41.0	0.198	-14.085	-1.0	0.992	-0.067
-80.0	0.173	-15.260	-40.0	0.207	-13.676	0.0	1.000	0.000
-79.0	0.189	-14.460	-39.0	0.211	-13.512	1.0	0.992	-0.067
-78.0	0.205	-13.746	-38.0	0.209	-13.587	2.0	0.970	-0.269
-77.0	0.221	-13.104	-37.0	0.202	-13.914	3.0	0.932	-0.609
-76.0	0.237	-12.517	-36.0	0.188	-14.529	4.0	0.882	-1.094
-75.0	0.252	-11.989	-35.0	0.168	-15.492	5.0	0.819	-1.737
-74.0	0.266	-11.515	-34.0	0.143	-16.901	6.0	0.745	-2.552
-73.0	0.279	-11.095	-33.0	0.113	-18.959	7.0	0.664	-3.561
-72.0	0.291	-10.720	-32.0	0.078	-22.121	8.0	0.575	-4.802
-71.0	0.302	-10.392	-31.0	0.040	-27.861	9.0	0.483	-6.323
-70.0	0.312	-10.114	-30.0	0.001	-60.000	10.0	0.388	-8.213
-69.0	0.321	-9.881	-29.0	0.041	-27.700	11.0	0.294	-10.621
-68.0	0.327	-9.698	-28.0	0.083	-21.647	12.0	0.203	-13.855
-67.0	0.332	-9.566	-27.0	0.123	-18.221	13.0	0.116	-18.718
-66.0	0.336	-9.483	-26.0	0.160	-15.926	14.0	0.035	-29.007
-65.0	0.337	-9.460	-25.0	0.193	-14.301	15.0	0.037	-28.679
-64.0	0.335	-9.495	-24.0	0.220	-13.164	16.0	0.100	-20.013
-63.0	0.331	-9.594	-23.0	0.240	-12.412	17.0	0.153	-16.322
-62.0	0.325	-9.758	-22.0	0.251	-12.010	18.0	0.195	-14.220
-61.0	0.316	-10.005	-21.0	0.253	-11.942	19.0	0.225	-12.951
-60.0	0.304	-10.336	-20.0	0.245	-12.233	20.0	0.245	-12.233
-59.0	0.290	-10.761	-19.0	0.225	-12.951	21.0	0.253	-11.942
-58.0	0.272	-11.300	-18.0	0.195	-14.213	22.0	0.251	-12.010
-57.0	0.252	-11.968	-17.0	0.153	-16.313	23.0	0.240	-12.412
-56.0	0.229	-12.794	-16.0	0.100	-20.000	24.0	0.220	-13.164
-55.0	0.204	-13.816	-15.0	0.037	-28.643	25.0	0.193	-14.301
-54.0	0.176	-15.087	-14.0	0.035	-29.044	26.0	0.160	-15.918
-53.0	0.146	-16.691	-13.0	0.116	-18.729	27.0	0.123	-18.221
-52.0	0.115	-18.797	-12.0	0.203	-13.862	28.0	0.083	-21.647
-51.0	0.082	-21.727	-11.0	0.294	-10.626	29.0	0.041	-27.700