

EXHIBIT

2ND ADJACENT CHANNEL INTERFERENCE WAIVER REQUEST


The proposed facilities are not compliant with the 2nd adjacent channel spacing requirements in relation to at least one full-power FM facility, application or construction permit. As is shown by the analyses presented within this exhibit, no population is located within any region of interference caused by the proposed facilities to the existing stations either because the region does not extend far enough radially to encounter a populated area, exists entirely sufficiently above the ground to avoid populated areas, or a combination of both. Since no population will be subjected to interference, a waiver of the 2nd adjacent channel spacing requirements is requested.

INTERFERENCE DETERMINATION PROCEDURE

The following procedure was used to predict the region of interference caused to any existing 2nd adjacent station by the proposed facilities:

1. The distance and bearing from the existing transmitter to the proposed transmitter was determined.
2. The height above average terrain of the existing station's antenna in the direction of the proposed transmitter was determined.
3. The F(50,50) curves were used to determine the existing station's protected field strength at the proposed transmitter site.
4. A 40 dB protection factor was added to the existing station's protected field to determine the maximum allowed proposed facilities' interfering field on a second adjacent channel.
5. For a particular elevation angle, ϕ , the proposed facilities' maximum ERP (250.0 W) was scaled by the square of the antenna voltage gain to determine the ERP at this angle. Antenna voltage gain versus elevation angle was taken from the manufacturer data sheet (attached) for a 6-bay, half-wave spaced antenna system.
6. The free-space equation was used to determine the distance, ρ , from the proposed facilities' center of radiation to the maximum allowed interfering field contour at this elevation angle.
7. Radial displacement from the center of radiation, Δr , and vertical displacement from the center of radiation, Δz , were computed.
8. Height of this contour point above ground, Δh , was computed by subtracting Δz from 100.0, the height of the proposed facilities' center of radiation above ground.
9. Steps 5 through 8 were repeated for the complete range of elevation angles, tabulated, and plotted on an elevation diagram.

The following figure depicts the procedure for producing an elevation diagram.

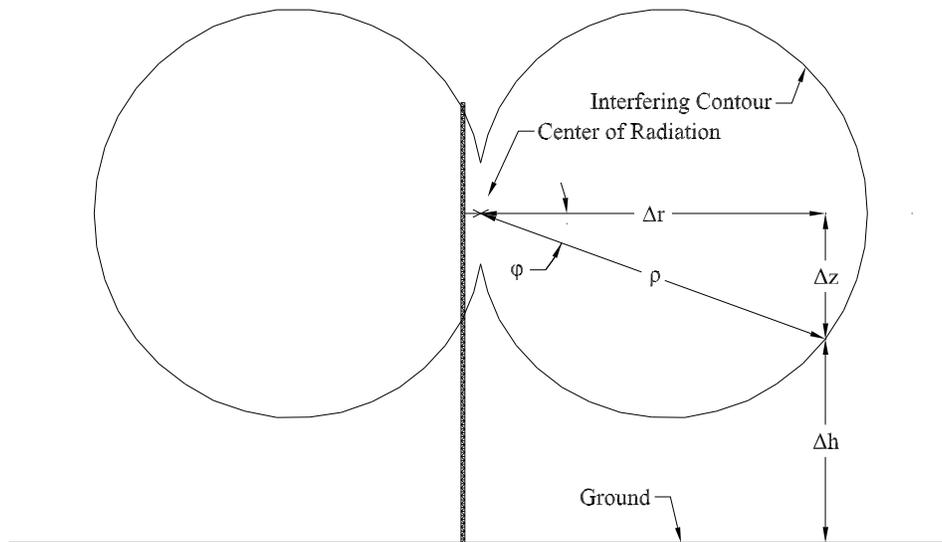

INTERFERENCE CAUSED TO WZLD

Protected Station Details

Callsign.....WZLD
 File Number.....BLH-20091009ACM
 Record Type.....LIC
 Community of License.....PETAL, MS
 Latitude (NAD27).....31-31-37 N
 Longitude (NAD27).....089-08-07 W
 Channel.....292C2
 Effective Radiated Power.....10.500 kW
 Antenna Height above Average Terrain.....324 m

Analysis


Azimuth from WZLD Transmitter to Proposed Transmitter.....224°
 WZLD HAAT in direction of Proposed Transmitter.....321.2 m
 WZLD ERP in direction of Proposed Transmitter.....10.50 kW
 Distance from WZLD Transmitter to Proposed Transmitter.....33.69 km
 WZLD F(50,50) Protected Field at Proposed Transmitter.....69.46 dB μ
 Protection Ratio.....40.00 dB
 Interfering Contour of Proposed Transmitter.....109.46 dB μ

Elevation Angle [deg]	Antenna Voltage Gain	Effective Radiated Power [W]	Field [dB μ]	ρ [m]	Δr [m]	Δz [m]	Δh [m]
0	1.000	250.0	109.46	373.1	373.1	0.0	100.0
-5	0.891	198.3	109.46	332.3	331.0	29.0	71.0
-10	0.615	94.5	109.46	229.3	225.9	39.8	60.2
-15	0.266	17.6	109.46	99.1	95.7	25.7	74.3
-20	0.001	0.0	109.46	0.3	0.2	0.1	99.9
-25	0.170	7.2	109.46	63.3	57.4	26.8	73.2
-30	0.201	10.1	109.46	74.9	64.9	37.5	62.5
-35	0.129	4.2	109.46	48.1	39.4	27.6	72.4
-40	0.037	0.3	109.46	13.7	10.5	8.8	91.2
-45	0.041	0.4	109.46	15.2	10.8	10.8	89.2
-50	0.083	1.7	109.46	31.0	19.9	23.7	76.3
-55	0.087	1.9	109.46	32.5	18.6	26.6	73.4
-60	0.072	1.3	109.46	26.7	13.3	23.1	76.9
-65	0.047	0.5	109.46	17.5	7.4	15.8	84.2
-70	0.026	0.2	109.46	9.6	3.3	9.0	91.0
-75	0.011	0.0	109.46	4.1	1.1	4.0	96.0
-80	0.006	0.0	109.46	2.1	0.4	2.0	98.0
-85	0.002	0.0	109.46	0.7	0.1	0.7	99.3
-90	0.000	0.0	109.46	0.0	0.0	0.0	100.0

INTERFERENCE CAUSED TO WZLD

Protected Station Details

Callsign.....WZLD
File Number.....BLH-20091009ACM
Record Type.....LIC
Community of License.....PETAL, MS
Latitude (NAD27).....31-31-37 N
Longitude (NAD27).....089-08-07 W
Channel.....292C2
Effective Radiated Power.....10.500 kW
Antenna Height above Average Terrain.....324 m

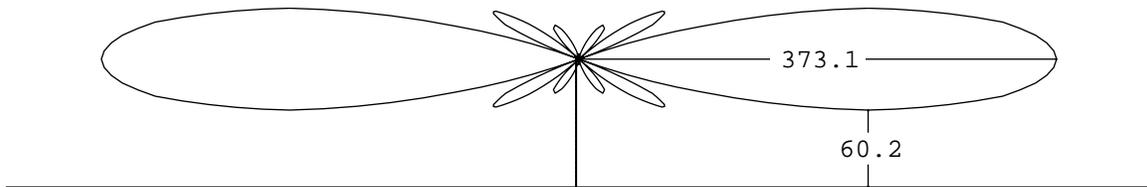

INTERFERENCE CAUSED TO WZLD

Protected Station Details

Callsign.....WZLD
File Number.....BLH-20091009ACM
Record Type.....LIC
Community of License.....PETAL, MS
Latitude (NAD27).....31-31-37 N
Longitude (NAD27).....089-08-07 W
Channel.....292C2
Effective Radiated Power.....10.500 kW
Antenna Height above Average Terrain.....324 m



ANTENNA ELEVATION PATTERN

BKG77 3 (.85)

