

## **Non-Interference Compliance**

Regarding Facility id 154612

Channel 293

### **Description of Exhibit 12 Contents**

This exhibit demonstrates that the proposed facility complies with contour overlap and interference protection provisions in all of the applicable rule sections and that this application for a construction permit is in full compliance with 47 C.F.R. § 74.1204.

**Let it be noted that should any actual real world interference occur, the applicant acknowledges that it will promptly suspend operation of this translator in accordance with 47 C.F.R. § 74.1203.**

Page 2 of this exhibit is an explanation of the method used to demonstrate compliance with contour overlap and interference provisions based on 47 C.F.R. § 74.1204(d), which states:

*[A]n application otherwise precluded by this section will be accepted if it can be demonstrated that no actual interference will occur due to intervening terrain, lack of population or such other factors as may be applicable.*

Page 3 contains a tabulation of the vertical radiation pattern of the proposed antenna and the minimum ground clearance of the interfering contour based on this pattern.

Pages 4 through 6 include a plot and a tabulation of the vertical radiation pattern for the proposed antenna provided by the antenna manufacturer.

Page 7 of this exhibit contains the tabulated data from the interference analysis, which shows all stations whose protected contours come within 50 km of the 34 dBμ F(50,10) contour of the proposed translator. These tabulated values were calculated using data from the FCC's CDBS files and 30 arc second terrain data. The column labeled "Adj" shows the number of channels difference between the entry and the proposed translator. The column labeled "Dist" shows the distance in km. The column labeled "Overlap" shows the area of contour overlap in square kilometers.

The second tabulation on page 7 shows all stations in the vicinity of the proposed translator operating on intermediate frequencies to the proposed translator. The column labeled "Clr" shows the station's clearance in km of the minimum separation distance required by 47 C.F.R. § 74.1204(g) and § 73.207.

Page 8 of this exhibit is a portion of a USGS 1:24,000 scale 7.5 minute quadrangle at full scale with the calculated area of interference overlaid. The sheet includes the quadrangle name and measurement scale at the bottom-left corner (note: "Mt" refers to meters). The area of interference was calculated using the free space equation and 120 radials.

Page 9 of this exhibit is a high resolution aerial photo of the vicinity surrounding the proposed translator's tower site provided by the U.S. Geological Survey's National Aerial Photography Program. It has been included to provide clarification of the nature of the buildings in the vicinity.

### Compliance with 47 C.F.R. § 74.1204(d)

All authorized second and third adjacent stations with which the proposed translator has contour overlap are tabulated below. Column four show the station's signal level at the proposed translator's tower site, and column five gives the minimum value within the entire standard interfering contour of the proposed translator (100 dBμ for most classes, 94 for class B, 97 for class B1). The minimum second or third adjacent F(50,50) contour within the proposed translator's standard interfering contour was used to calculate the proposed translator's actual "worst-case" interfering contour.


Application_id	File Number	Callsign	Contour at Tower	Min. Contour
150710	BLH19900727KA	KTXY	85	84.5
277637	BLH19981125KG	KOQL	75.3	74.9
Minimum F(50,50) Contour of Adjacent Station within Proposed Translator's Standard Interfering Contour				<b>74.9</b>

FCC 02-244 at Section II.A.5 states that "when demonstrating that 'no actual interference will occur due to . . . other factors,' pursuant to Section 74.1204(d), an applicant may use the undesired-to-desired signal ratio method." The undesired-to-desired ratio for second and third adjacent stations required by § 74.1204(a) is 40 dB. Since the minimum protected contour strength within the proposed translator's standard interference contour is **74.9 dBμ**, this makes the proposed translator's worst-case interfering contour **114.9 dBμ**. By the free-space equation, this contour is calculated to extend a maximum of **126.2 m** from the transmit antenna.

The maximum horizontal plane of the interfering contour was calculated for 120 radials and plotted on the pertinent portion of a USGS quadrangle (page 8 of this exhibit). However, the field strength of the proposed translator's antenna varies with angle of depression from horizontal. The antenna relative fields are tabulated on the following page at 5 degree increments, starting at 5 degrees below horizontal. Antenna relative field strength data was provided and certified by the manufacturer of the proposed antenna. Using a free-space calculation that neglects any loss due to reflection, the vertical ground clearance of the proposed translator's interference contour has been tabulated. As shown on the following page, the area of interference clears the tower ground level (TGL) by **14.8 m** at the lowest point. The applicant has taken into account USGS quadrangles and relevant aerial photography in stating that no structures, except possibly tower support structures, puncture the area of interference. Hence, in accordance with 47 C.F.R. § 74.1204(d) and the clarification provided by the FCC in the decision *Re: Living Way Ministries* (FCC 02-244), a lack of population has been demonstrated within the area of interference and this application is therefore in full compliance with 47 C.F.R. § 74.1204.

<b>Antenna Manufacturer:</b>	<b>sca</b>
<b>Antenna Model:</b>	<b>gp-fm</b>
<b>CORAGL:</b>	<b>74 m</b>
<b>Maximum ERP:</b>	<b>0.1 kW</b>
<b>Interfering Contour:</b>	<b>114.9 dBμ</b>
<b>Max Int. Contour Distance:</b>	<b>126.2 m</b>
<b>Min Ground Clearance:</b>	<b>14.8 m</b>

Depression Angle Below Horizontal	Antenna Relative Field	ERP (watts)	Distance to Interfering Contour from Antenna (m)	Horizontal Distance of Interfering Contour from Tower (m)	Vertical Clearance of Interfering Contour above TGL (m)
45	.663	44.0	83.7	59.2	14.8
10	.976	95.3	123.2	121.3	52.6
20	.920	84.6	116.1	109.1	34.3
25	.881	77.6	111.2	100.8	27.0
30	.835	69.7	105.4	91.2	21.3
35	.783	61.3	98.8	80.9	17.3
40	.725	52.6	91.5	70.1	15.2
15	.952	90.6	120.1	116.0	42.9
50	.597	35.6	75.3	48.4	16.3
55	.527	27.8	66.5	38.1	19.5
60	.456	20.8	57.5	28.8	24.2
65	.382	14.6	48.2	20.4	30.3
70	.307	9.4	38.7	13.2	37.6
75	.231	5.3	29.1	7.5	45.8
80	.154	2.4	19.4	3.4	54.9
90	.010	0.0	1.3	0.0	72.7
5	.992	98.4	125.2	124.7	63.1
85	.077	0.6	9.7	0.8	64.3
Minimum Clearance above TGL:					<b>14.8 m</b>

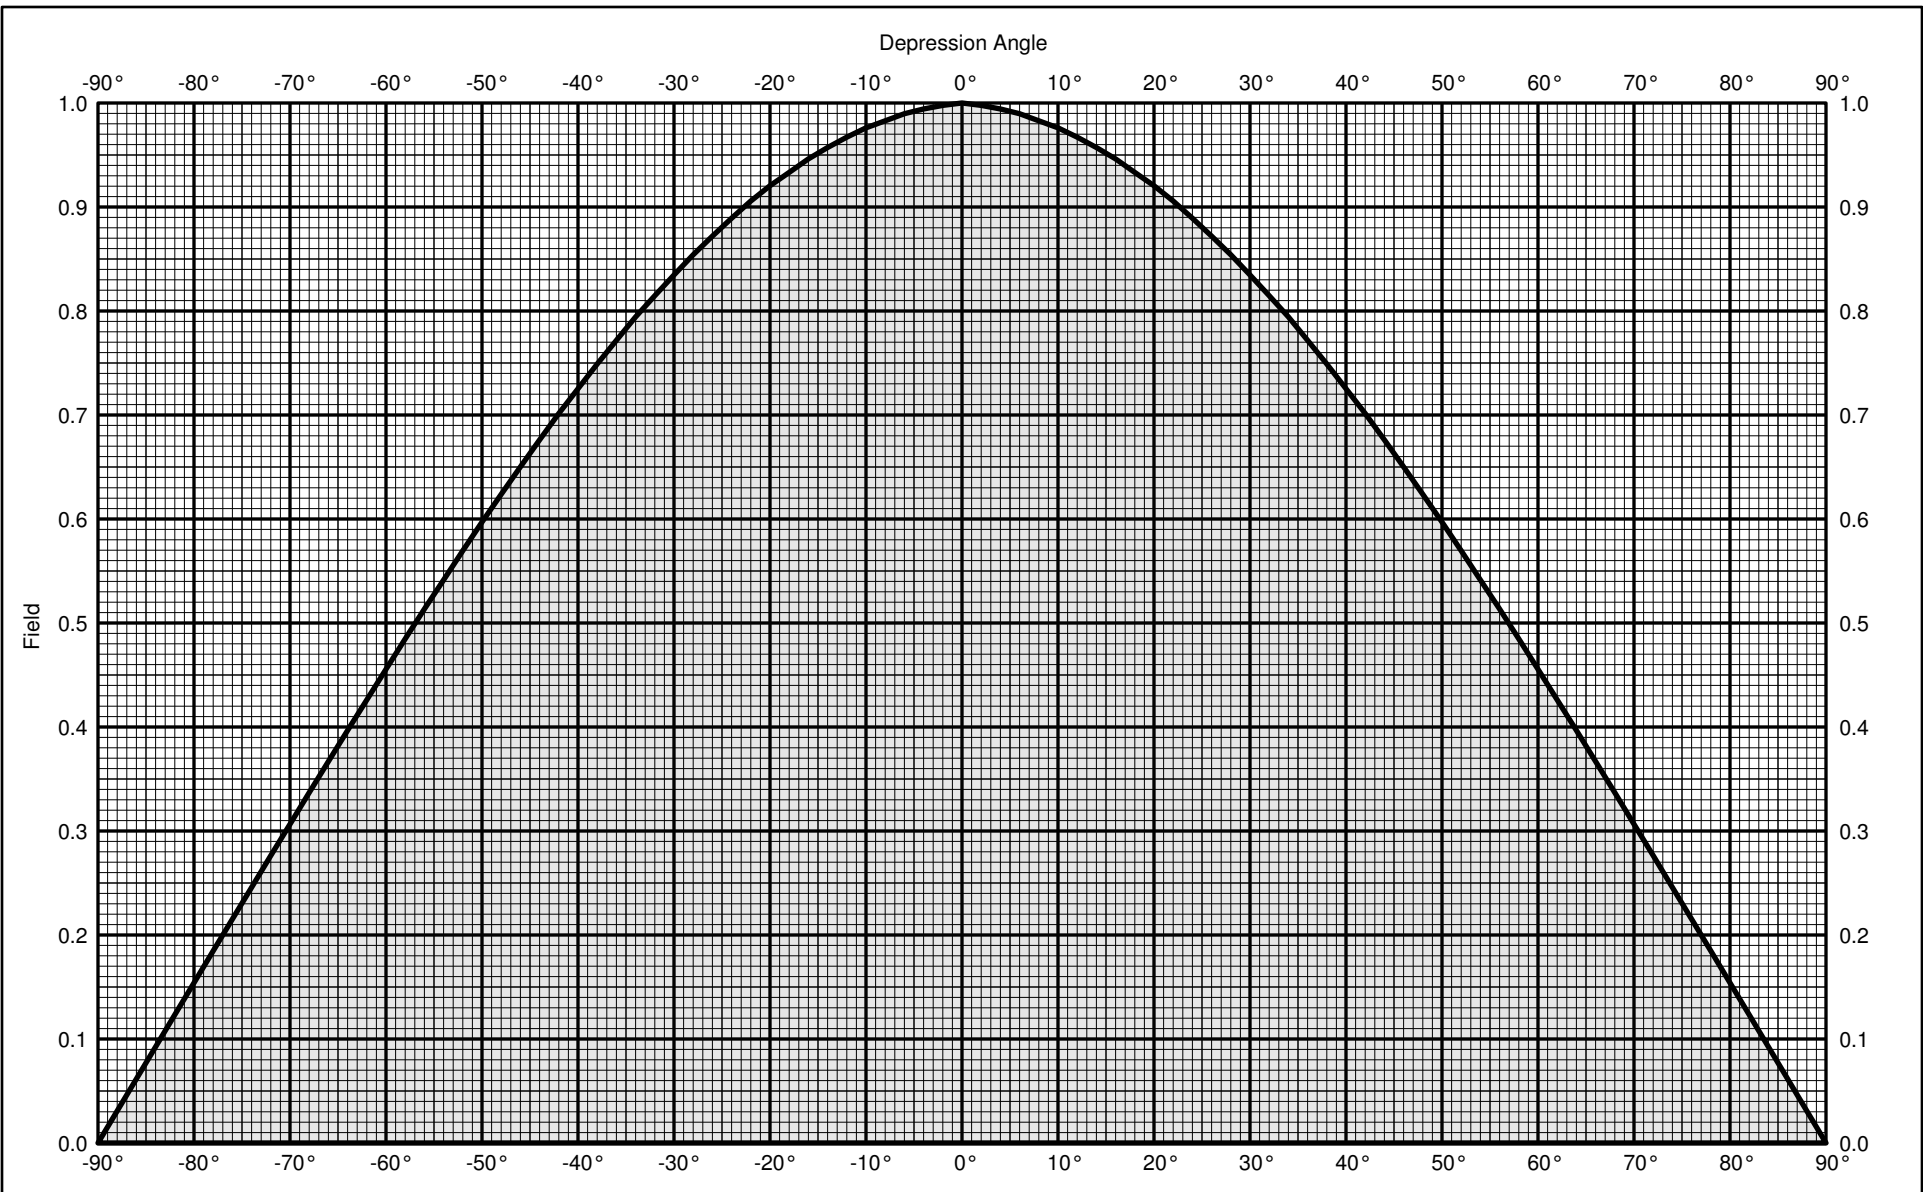

GP-FM Groundplane

Vertical radiation pattern

FM

0.0 dBd (2.15 dBi)

Vertical polarization



**KATHREIN**  
**SCALA DIVISION**  
 Post Office Box 4580 Phone:(541)779-6500  
 Medford, OR 97501 (USA) Fax:(541)779-3991  
<http://www.kathrein-scala.com>



GP-FM Groundplane

Vertical radiation pattern

FM

0.0 dBd (2.15 dBi )

Vertical polarization

Angle	Field	Rel.dB	dBd	PwrMult	Angle	Field	Rel.dB	dBd	PwrMult
-90	0.010	-40.00	-40.00	0.00	-45	0.663	-3.57	-3.57	0.44
-89	0.015	-36.24	-36.24	0.00	-44	0.676	-3.40	-3.40	0.46
-88	0.031	-30.22	-30.22	0.00	-43	0.689	-3.24	-3.24	0.47
-87	0.046	-26.70	-26.70	0.00	-42	0.701	-3.08	-3.08	0.49
-86	0.062	-24.20	-24.20	0.00	-41	0.713	-2.93	-2.93	0.51
-85	0.077	-22.26	-22.26	0.01	-40	0.725	-2.79	-2.79	0.53
-84	0.092	-20.68	-20.68	0.01	-39	0.737	-2.65	-2.65	0.54
-83	0.108	-19.34	-19.34	0.01	-38	0.749	-2.51	-2.51	0.56
-82	0.123	-18.18	-18.18	0.02	-37	0.760	-2.38	-2.38	0.58
-81	0.139	-17.16	-17.16	0.02	-36	0.772	-2.25	-2.25	0.60
-80	0.154	-16.25	-16.25	0.02	-35	0.783	-2.12	-2.12	0.61
-79	0.169	-15.42	-15.42	0.03	-34	0.794	-2.00	-2.00	0.63
-78	0.185	-14.67	-14.67	0.03	-33	0.805	-1.89	-1.89	0.65
-77	0.200	-13.98	-13.98	0.04	-32	0.815	-1.78	-1.78	0.66
-76	0.215	-13.34	-13.34	0.05	-31	0.825	-1.67	-1.67	0.68
-75	0.231	-12.75	-12.75	0.05	-30	0.835	-1.57	-1.57	0.70
-74	0.246	-12.19	-12.19	0.06	-29	0.844	-1.47	-1.47	0.71
-73	0.261	-11.67	-11.67	0.07	-28	0.854	-1.37	-1.37	0.73
-72	0.276	-11.17	-11.17	0.08	-27	0.863	-1.28	-1.28	0.74
-71	0.291	-10.71	-10.71	0.08	-26	0.872	-1.19	-1.19	0.76
-70	0.307	-10.27	-10.27	0.09	-25	0.881	-1.10	-1.10	0.78
-69	0.322	-9.85	-9.85	0.10	-24	0.889	-1.02	-1.02	0.79
-68	0.337	-9.45	-9.45	0.11	-23	0.897	-0.94	-0.94	0.81
-67	0.352	-9.07	-9.07	0.12	-22	0.906	-0.86	-0.86	0.82
-66	0.367	-8.71	-8.71	0.13	-21	0.913	-0.79	-0.79	0.83
-65	0.382	-8.36	-8.36	0.15	-20	0.920	-0.72	-0.72	0.85
-64	0.397	-8.03	-8.03	0.16	-19	0.927	-0.66	-0.66	0.86
-63	0.411	-7.71	-7.71	0.17	-18	0.933	-0.60	-0.60	0.87
-62	0.426	-7.41	-7.41	0.18	-17	0.940	-0.54	-0.54	0.88
-61	0.441	-7.12	-7.12	0.19	-16	0.946	-0.48	-0.48	0.90
-60	0.456	-6.83	-6.83	0.21	-15	0.952	-0.43	-0.43	0.91
-59	0.470	-6.56	-6.56	0.22	-14	0.957	-0.38	-0.38	0.92
-58	0.485	-6.29	-6.29	0.23	-13	0.962	-0.33	-0.33	0.93
-57	0.499	-6.04	-6.04	0.25	-12	0.967	-0.29	-0.29	0.94
-56	0.513	-5.79	-5.79	0.26	-11	0.972	-0.25	-0.25	0.94
-55	0.527	-5.56	-5.56	0.28	-10	0.976	-0.21	-0.21	0.95
-54	0.541	-5.33	-5.33	0.29	-9	0.979	-0.18	-0.18	0.96
-53	0.555	-5.11	-5.11	0.31	-8	0.983	-0.15	-0.15	0.97
-52	0.570	-4.89	-4.89	0.32	-7	0.986	-0.12	-0.12	0.97
-51	0.583	-4.68	-4.68	0.34	-6	0.990	-0.09	-0.09	0.98
-50	0.597	-4.48	-4.48	0.36	-5	0.992	-0.07	-0.07	0.98
-49	0.610	-4.29	-4.29	0.37	-4	0.994	-0.05	-0.05	0.99
-48	0.624	-4.10	-4.10	0.39	-3	0.996	-0.03	-0.03	0.99
-47	0.637	-3.92	-3.92	0.41	-2	0.998	-0.02	-0.02	1.00
-46	0.650	-3.74	-3.74	0.42	-1	0.999	-0.01	-0.01	1.00
					0	1.000	0.00	0.00	1.00



GP-FM Groundplane  
FM

0.0 dBd (2.15 dBi )

Vertical polarization

Vertical radiation pattern

Angle	Field	Rel.dB	dBd	PwrMult	Angle	Field	Rel.dB	dBd	PwrMult
0	1.000	0.00	0.00	1.00	45	0.663	-3.57	-3.57	0.44
1	0.999	-0.01	-0.01	1.00	46	0.650	-3.74	-3.74	0.42
2	0.998	-0.02	-0.02	1.00	47	0.637	-3.92	-3.92	0.41
3	0.996	-0.03	-0.03	0.99	48	0.624	-4.10	-4.10	0.39
4	0.994	-0.05	-0.05	0.99	49	0.610	-4.29	-4.29	0.37
5	0.992	-0.07	-0.07	0.98	50	0.597	-4.48	-4.48	0.36
6	0.990	-0.09	-0.09	0.98	51	0.583	-4.68	-4.68	0.34
7	0.986	-0.12	-0.12	0.97	52	0.570	-4.89	-4.89	0.32
8	0.983	-0.15	-0.15	0.97	53	0.555	-5.11	-5.11	0.31
9	0.979	-0.18	-0.18	0.96	54	0.541	-5.33	-5.33	0.29
10	0.976	-0.21	-0.21	0.95	55	0.527	-5.56	-5.56	0.28
11	0.972	-0.25	-0.25	0.94	56	0.513	-5.79	-5.79	0.26
12	0.967	-0.29	-0.29	0.94	57	0.499	-6.04	-6.04	0.25
13	0.962	-0.33	-0.33	0.93	58	0.485	-6.29	-6.29	0.23
14	0.957	-0.38	-0.38	0.92	59	0.470	-6.56	-6.56	0.22
15	0.952	-0.43	-0.43	0.91	60	0.456	-6.83	-6.83	0.21
16	0.946	-0.48	-0.48	0.90	61	0.441	-7.12	-7.12	0.19
17	0.940	-0.54	-0.54	0.88	62	0.426	-7.41	-7.41	0.18
18	0.933	-0.60	-0.60	0.87	63	0.411	-7.71	-7.71	0.17
19	0.927	-0.66	-0.66	0.86	64	0.397	-8.03	-8.03	0.16
20	0.920	-0.72	-0.72	0.85	65	0.382	-8.36	-8.36	0.15
21	0.913	-0.79	-0.79	0.83	66	0.367	-8.71	-8.71	0.13
22	0.906	-0.86	-0.86	0.82	67	0.352	-9.07	-9.07	0.12
23	0.897	-0.94	-0.94	0.81	68	0.337	-9.45	-9.45	0.11
24	0.889	-1.02	-1.02	0.79	69	0.322	-9.85	-9.85	0.10
25	0.881	-1.10	-1.10	0.78	70	0.307	-10.27	-10.27	0.09
26	0.872	-1.19	-1.19	0.76	71	0.291	-10.71	-10.71	0.08
27	0.863	-1.28	-1.28	0.74	72	0.276	-11.17	-11.17	0.08
28	0.854	-1.37	-1.37	0.73	73	0.261	-11.67	-11.67	0.07
29	0.844	-1.47	-1.47	0.71	74	0.246	-12.19	-12.19	0.06
30	0.835	-1.57	-1.57	0.70	75	0.231	-12.75	-12.75	0.05
31	0.825	-1.67	-1.67	0.68	76	0.215	-13.34	-13.34	0.05
32	0.815	-1.78	-1.78	0.66	77	0.200	-13.98	-13.98	0.04
33	0.805	-1.89	-1.89	0.65	78	0.185	-14.67	-14.67	0.03
34	0.794	-2.00	-2.00	0.63	79	0.169	-15.42	-15.42	0.03
35	0.783	-2.12	-2.12	0.61	80	0.154	-16.25	-16.25	0.02
36	0.772	-2.25	-2.25	0.60	81	0.139	-17.16	-17.16	0.02
37	0.760	-2.38	-2.38	0.58	82	0.123	-18.18	-18.18	0.02
38	0.749	-2.51	-2.51	0.56	83	0.108	-19.34	-19.34	0.01
39	0.737	-2.65	-2.65	0.54	84	0.092	-20.68	-20.68	0.01
40	0.725	-2.79	-2.79	0.53	85	0.077	-22.26	-22.26	0.01
41	0.713	-2.93	-2.93	0.51	86	0.062	-24.20	-24.20	0.00
42	0.701	-3.08	-3.08	0.49	87	0.046	-26.70	-26.70	0.00
43	0.689	-3.24	-3.24	0.47	88	0.031	-30.22	-30.22	0.00
44	0.676	-3.40	-3.40	0.46	89	0.015	-36.24	-36.24	0.00
					90	0.010	-40.00	-40.00	0.00

# Adjacent Channel Study

## For Station NEW, Facility\_id: 154612

### Co-channel through third adjacent:

Application_id	Facility_id	Prefix	ARN	Call	Licensee	Class	City	State	Status	ERP	RCAMSL	Channel	Adj	Dist	Overlap
150710	9929	BLH	19900727KA	KTXV	CENTRAL MISSOURI BROADCASTING, INC.	C	JEFFERSON CITY	MO	LIC	96	609	295	2	26.4	0.5967
277637	60731	BLH	19981125KG	KOQL	MID-MISSOURI BROADCASTING, INC.	C1	ASHLAND	MO	LIC	69	519	291	2	38	0.5967
647801	154581	BNPFT	20030317IMH	NEW	RADIO ASSIST MINISTRY, INC.	D	COLUMBIA	MO	APP	0.019	568.5	293	0	53.6	0
675849	138457	BNPFT	20030828AIV	K292FO	COMMUNITY BROADCASTING, INC.	D	ROLLA	MO	CP	0.115	410	292	1	73.9	0
647817	154597	BNPFT	20030317IMJ	NEW	RADIO ASSIST MINISTRY, INC.	D	FORT LEONARD WOOD	MO	APP	0.075	434.6	293	0	79.7	0
628813	138459	BNPFT	20030312AWL	NEW	COMMUNITY BROADCASTING, INC.	D	ST. ROBERT	MO	APP	0.205	375	293	0	81.2	0
650358	157058	BNPFT	20030317KPS	NEW	FM 105, INC.	D	MOBERLY	MO	APP	0.25	339	293	0	99.3	0
647907	154687	BNPFT	20030317IMU	NEW	RADIO ASSIST MINISTRY, INC.	D	LEBANON	MO	APP	0.062	529.4	293	0	101.2	0
1045424	164301	BNPH	20050103ABN	NEW	WORLD RADIO LINK INCORPORATED	C3	BUNKER	MO	CP	25	478	292	1	131.8	0
134087	74577	BLH	19891003KA	WSSM	EMMIS 106.5 FM RADIO LIC. CORP. OF S	C1	GRANITE CITY	IL	LIC	90	466	293	0	164.8	0
128451	74577	BLH	19890509KC	WSSM	EMMIS 106.5 FM RADIO LIC. CORP. OF S	C1	GRANITE CITY	IL	LIC	90	466	293	0	164.8	0

### Intermediate Frequencies (53 and 54 channels difference):

Application_id	Facility_id	Prefix	ARN	Call	Licensee	Class	City	State	Status	ERP	RCAMSL	Channel	Adj	Dist	Clr
631731	140408	BNPFT	20030312BAX	NEW	COMMUNITY BROADCASTING, INC.	D	IBERIA	MO	APP	0.17	353	240	53	48.9	38.9
647600	154380	BNPFT	20030317BMX	NEW	COVENANT NETWORK	D	IBERIA	MO	APP	0.25	329	240	53	49.6	39.6
635848	143626	BNPFT	20030314BZF	NEW	COVENANT NETWORK INC.	D	IBERIA	MO	APP	0.25	329	240	53	49.6	39.6
502170	35952	BLH	20000530ACL	KWWR	KXEO RADIO, INC.	C	MEXICO	MO	LIC	91	608	239	54	81.5	52.5
633729	141993	BNPFT	20030310BDW	NEW	MISSOURI RIVER CHRISTIAN BROADCASTING, IN	D	ST. ROBERT	MO	APP	0.25	341	240	53	81.2	71.2



