

[Exhibit 13]

## **Non-Interference Compliance**

Regarding Facility id 145194

Channel 261

### **Description of Exhibit 13 Contents**

This exhibit demonstrates that the proposed facility complies with contour overlap and interference protection provisions in all of the applicable rule sections and that this application for a construction permit is in full compliance with 47 C.F.R. § 74.1204.

**Let it be noted that should any actual real world interference occur, the applicant acknowledges that it will promptly suspend operation of this translator in accordance with 47 C.F.R. § 74.1203.**

Page 2 of this exhibit is an explanation of the method used to demonstrate compliance with contour overlap and interference provisions based on 47 C.F.R. § 74.1204(d), which states:

*[A]n application otherwise precluded by this section will be accepted if it can be demonstrated that no actual interference will occur due to intervening terrain, lack of population or such other factors as may be applicable.*

Page 3 of this exhibit contains the tabulated data from the interference analysis, which shows all stations whose protected contours come within 50 km of the 34 dB $\mu$  F(50,10) contour of the proposed translator. These tabulated values were calculated using data from the FCC's CDBS files and 30 arc second terrain data. The column labeled "Adj" shows the number of channels difference between the entry and the proposed translator. The column labeled "Dist" shows the distance in km. The column labeled "Overlap" shows the area of contour overlap in square kilometers.

Page 4 of this exhibit is a portion of a USGS 1:24,000 scale 7.5 minute quadrangle at full scale with the calculated area of interference overlaid. The sheet includes the quadrangle name and measurement scale at the bottom-left corner (note: "Mt" refers to meters). The area of interference was calculated using the free space equation and 120 radials.

Page 5 of this exhibit is an aerial photo of the vicinity surrounding the proposed translator's tower site.

## Compliance with 47 C.F.R. § 74.1204(d)

All authorized second and third adjacent stations with which the proposed translator has contour overlap are tabulated below. Column four show the station's signal level at the proposed translator's tower site, and column five gives the minimum value within the entire standard interfering contour of the proposed translator (100 dB $\mu$  for most classes, 94 for class B, 97 for class B1). The minimum second or third adjacent F(50,50) contour within the proposed translator's standard interfering contour was used to calculate the proposed translator's actual "worst-case" interfering contour.

| <b>Application_id</b>   | <b>File Number</b> | <b>Callsign</b> | <b>Contour at Tower</b> | <b>Min. Contour</b> |
|---|--------------------|-----------------|-------------------------|---------------------|
| 1626448   | BLFT20140224AAC    | K266BR          | 63.7                    | 63.7                |
| 1627878   | BPFT20140304AAA    | K266BR          | 63.3                    | 63.3                |
| Minimum F(50,50) Contour of Adjacent Station within<br>Proposed Translator's Standard Interfering Contour |                    |                 |                         | <b>63.3</b>         |

FCC 02-244 at Section II.A.5 states that "when demonstrating that 'no actual interference will occur due to . . . other factors,' pursuant to Section 74.1204(d), an applicant may use the undesired-to-desired signal ratio method." The undesired-to-desired ratio for second and third adjacent stations required by § 74.1204(a) is 40 dB. Since the minimum protected contour strength within the proposed translator's standard interference contour is **63.3 dB $\mu$** , this makes the proposed translator's worst-case interfering contour **103.3 dB $\mu$** . By the free-space equation, this contour is calculated to extend a maximum of **758.5 m** from the transmit antenna.

The interfering contour of the proposed translator was calculated for 120 radials and plotted on the pertinent portion of a USGS quadrangle (page 4 of this exhibit). As demonstrated on the quadrangle, there are no populated structures or highways within the area of interference (Note: FCC 02-244 at Section II.A.6 states that USGS quadrangles "have been recognized as acceptable to demonstrate lack of population").

Note: The only structures within the zone of predicted interference are unoccupied communications buildings so in accordance with 47 C.F.R. § 74.1204(d) and the clarification provided by the FCC in the decision *Re: Living Way Ministries* (FCC 02-244), a lack of population has been demonstrated within the area of interference and this application is therefore in full compliance with 47 C.F.R. § 74.1204.

**Antenna Manufacturer:** SCA  
**Antenna Model:** YA7-FML(V) @ 215°  
**CORAGL:** 8 m  
**Maximum ERP:** 0.25 kW  
**Interfering Contour:** 103.3 dB $\mu$   
**Max Int. Contour Distance:** 758.5 m


**Adjacent Channel Study  
For Station K261EN, Facility\_id: 145194**

**Co-channel through third adjacent:**

| App_id  | Fac_id | File_Number      | Call   | Licensee                  | Class | City            | State | Status | ERP   | RCAMSL | Char | Adj | Dist  | Overlap |
|---------|--------|------------------|--------|---------------------------|-------|-----------------|-------|--------|-------|--------|------|-----|-------|---------|
| 1227829 | 164258 | BLH-20080122ADT  | KMXD   | SANPETE COUNTY BROADCAST  | C     | MONROE          | UT    | LIC    | 33    | 3600   | 263  | 2   | 51.2  | 0.2399  |
| 195670  | 51699  | BLFT-19940310TC  | K258AA | PAROWAN CITY CORPORATION  | D     | PAROWAN         | UT    | LIC    | 0.019 | 2067   | 258  | 3   | 35.7  | 0       |
| 1211855 | 141827 | BLFT-20071022BEI | K262BM | BRIGHAM YOUNG UNIVERSITY  | D     | CEDAR CITY      | UT    | LIC    | 0.01  | 2671   | 262  | 1   | 58.8  | 0       |
| 76634   | 59041  | BLFT-19850304TJ  | K261BP | GARFIELD COUNTY           | D     | RURAL PIUTE, ET | UT    | LIC    | 0.076 | 3433   | 261  | 0   | 79.3  | 0       |
| 1047654 | 59031  | BLFT-20050225ABM | K259AR | AIRFREE WIRELESS, INC.    | D     | FILLMORE, ETC.  | UT    | LIC    | 0.076 | 3128   | 259  | 2   | 95    | 0       |
| 1739962 | 59031  | BPFT-20160927AEA | K259AR | AIRFREE WIRELESS, INC.    | D     | FILLMORE        | UT    | CP     | 0.25  | 3108   | 259  | 2   | 95.8  | 0       |
| 1503961 | 38352  | BLFT-20120628AAA | K264BK | WESTERN KANE COUNTY SPECI | D     | ORDERVILLE, ET  | UT    | LIC    | 0.009 | 1882   | 264  | 3   | 98.4  | 0       |
| 1801485 | 201450 | BLFT-20190307AAA | K264CT | TRI-STAR MEDIA, LLC       | D     | SANTA CLARA     | UT    | LIC    | 0.25  | 1630   | 264  | 3   | 102.7 | 0       |
| 1725736 | 141740 | BLFT-20160405ABF | K264BM | BRIGHAM YOUNG UNIVERSITY  | D     | IVINS           | UT    | LIC    | 0.01  | 2278   | 264  | 3   | 143.7 | 0       |
| 1788173 | 58260  | BPFT-20180813AAA | K231BP | CARL L. RIECK             | D     | ST. GEORGE      | UT    | CP     | 0.25  | 1896   | 258  | 3   | 155.3 | 0       |
| 1483476 | 18140  | BLH-20120315AAA  | KONY   | CANYON MEDIA CORPORATION  | C     | ST. GEORGE      | UT    | LIC    | 89    | 1985   | 260  | 1   | 155.5 | 0       |


**Intermediate Frequencies (53 and 54 channels difference):**

| App_id  | Fac_id | File_Number      | Call | Licensee                    | Class | City      | State | Status | ERP | RCAMSL | Channel | Adj | Dist | Clr  |
|---------|--------|------------------|------|-----------------------------|-------|-----------|-------|--------|-----|--------|---------|-----|------|------|
| 1404794 | 173336 | BLED-20101210ALL | KUSL | UTAH STATE UNIVERSITY OF AG | C1    | RICHFIELD | UT    | LIC    | 2   | 3577   | 207     | 54  | 51.2 | 29.2 |

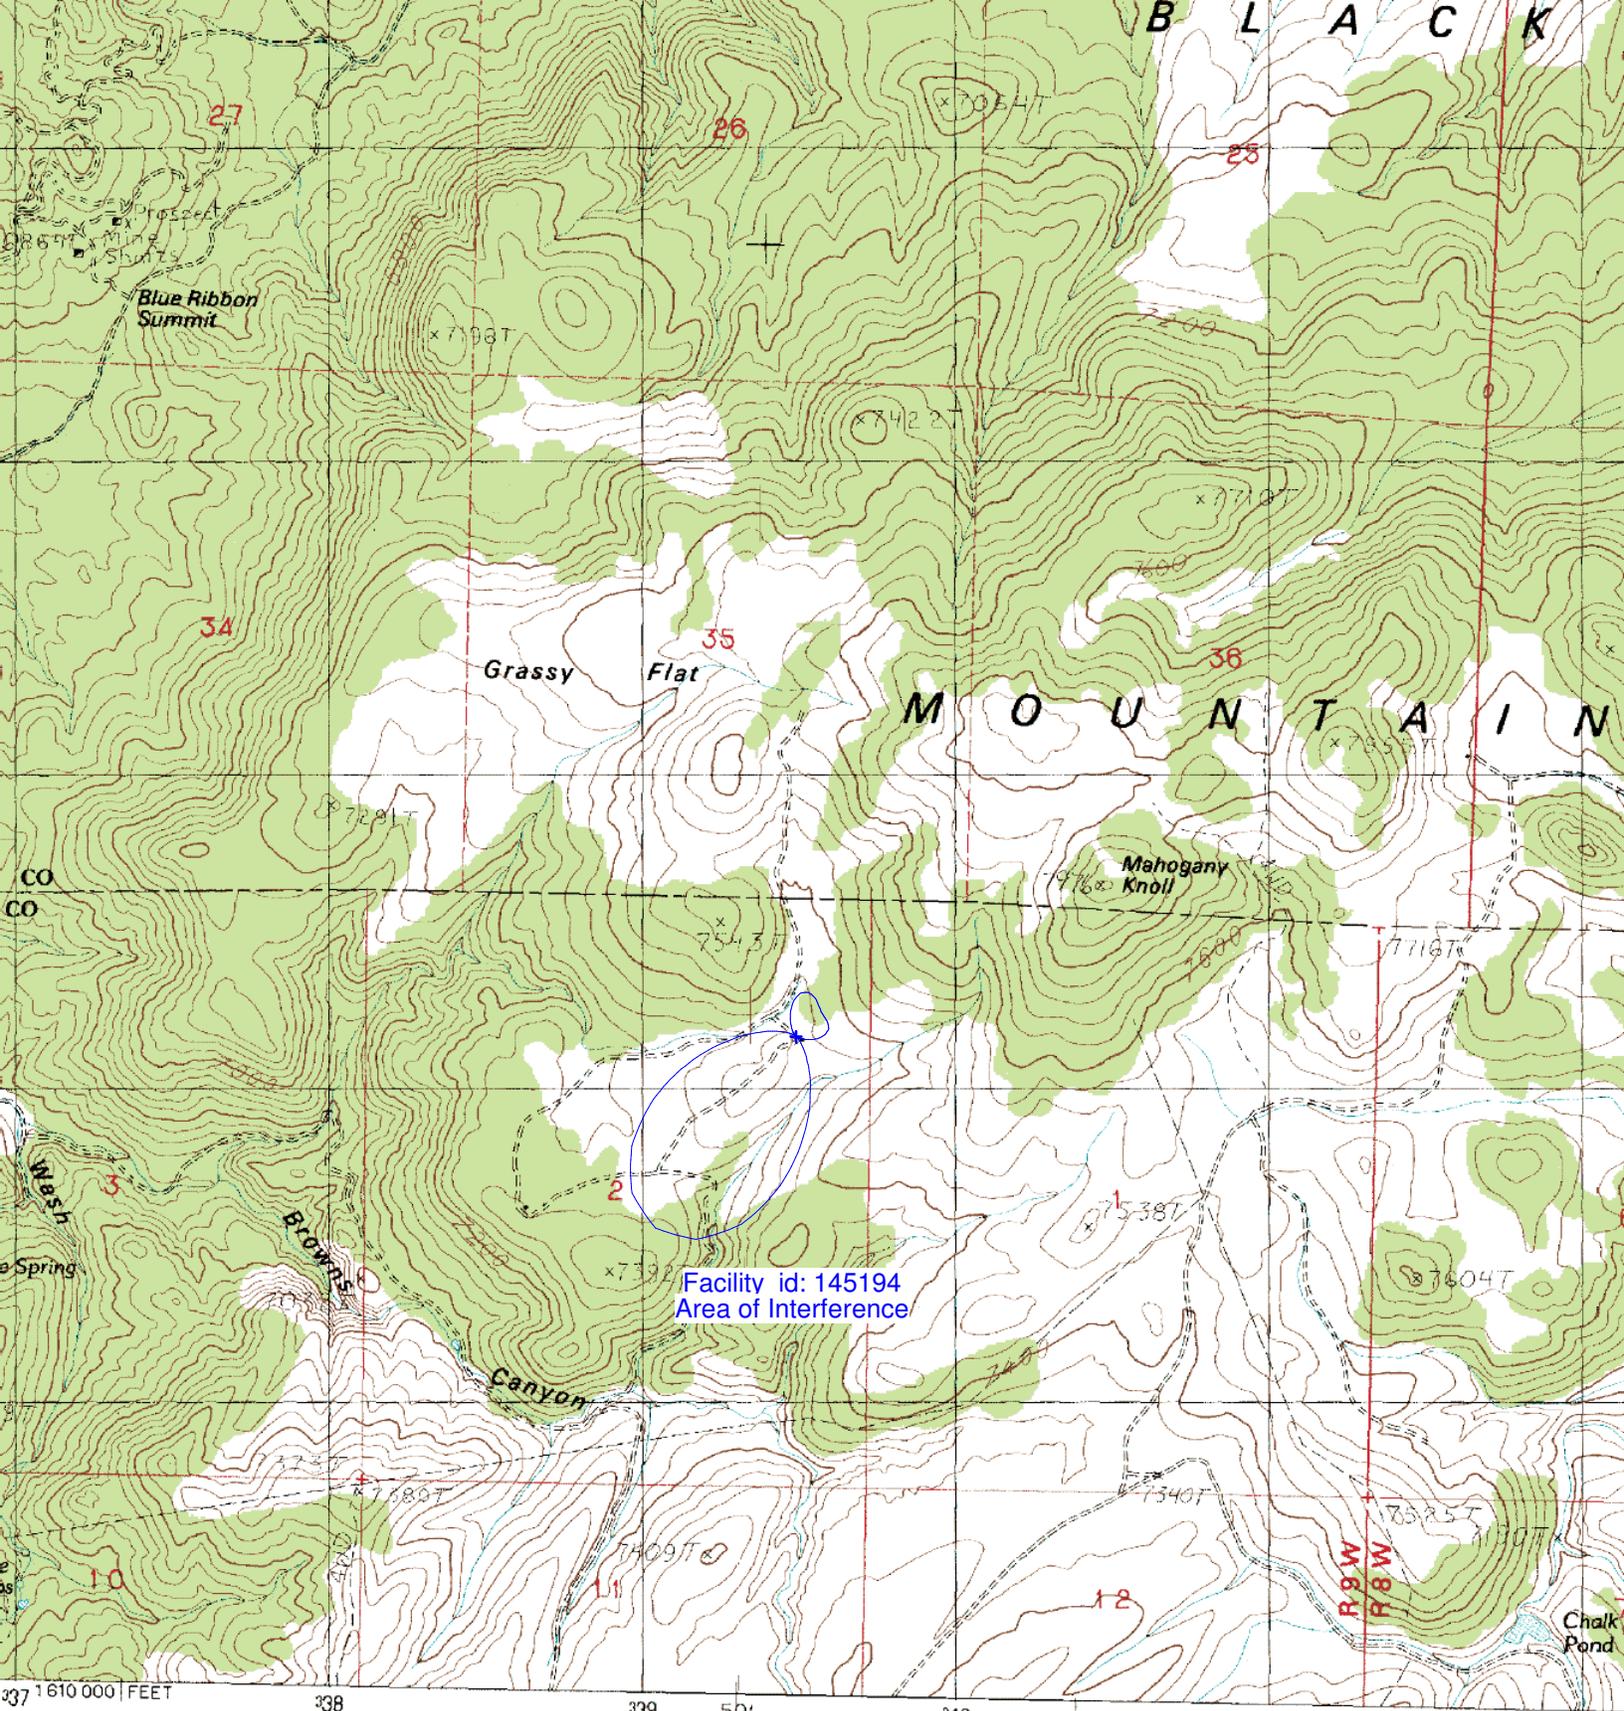

Facility id: 145194  
Area of Interference

UNITED STATES GEOLOGICAL SURVEY  
 USGS, NOS/NOAA  
 1951-53  
 1953  
 1958  
 1983  
 1986  
 LAMBERT CONFORMAL CONIC  
 MERCATOR ..... ZONE 12  
 UTAH, SOUTH ZONE  
 1°07' WEST  
 14° EAST  
 METRIC VERTICAL DATUM OF 1929  
 1927 NORTH AMERICAN DATUM  
 American Datum of 1983,  
 by dashed corner ticks  
 Minersville Reservoir; UT; Scale: 1" = 0.379Mi 610M 2,000Ft, 1 Mi = 2.640", 1 cm = 240M

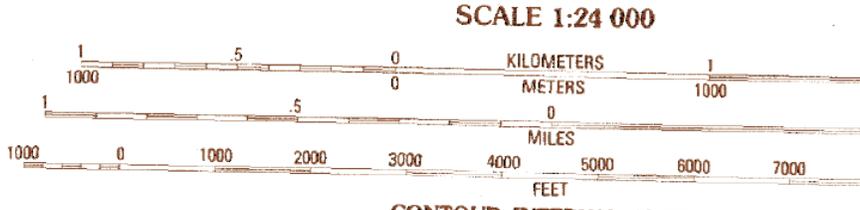

SCALE 1:24 000

CONTOUR INTERVAL 40 FEET

**PROVISIONAL MAP**  
 Produced from original

To convert meters to feet multiply by 3.2808  
 To convert feet to meters multiply by .3048

