

**APPLICATION FOR A
MINOR
MODIFICATION TO A
LICENSED LPFM
BROADCAST
STATION HAVING
FCC CALL SIGN
KZNQ-LP, FACILITY
ID 196311, AND FCC
FILE NO.: BLL-
20160210AAB
SANTA CLARITA, CA**

March 16, 2016

Prepared For:

Santa Clarita Public Service
Broadcasters Corporation
22450 Claremont Dr. Santa
Clarita, CA 91350-1364

Prepared By:

Ryan Wilhour
Kessler and Gehman Assoc.
507 NW 60th Street Suite C
Gainesville, FL 32607

1.0	PURPOSE OF LPFM MODIFICATION APPLICATION.....	2
2.0	EFFECTIVE RADIATED POWER	2
3.0	FREQUENCY ALLOCATION ANALYSIS AND WAIVER REQUEST	2
3.1	Second Adjacent Channel Short Spacing Waiver for KRTH-FM	2
3.2	Second Adjacent Channel Short Spacing Waiver for KSCA-FM	2
3.3	Co-Channel short Spacing to K268CO	3
4.0	INTERNATIONAL COORDINATION	3
5.0	NATIONAL ENVIRONMENTAL POLICY ACT (NEPA)	3
5.1	General Environmental Requirements	3
5.2	Radio Frequency Radiation (RFR) Compliance.	4
6.0	CERTIFICATION	4
	APPENDIX A – HAAT CALCULATION	5
	APPENDIX B – ALLOCATION ANALYSIS.....	6
	APPENDIX C - Short Spacing Waiver Calculation for KRTH-FM.....	7
	APPENDIX D - Short Spacing Waiver Calculation for KSCA-FM.....	9
	APPENDIX E – Broadcast Antenna Specifications	11
	APPENDIX F - Far Field Exposure to RF Emissions.....	21

1.0 PURPOSE OF LPFM MODIFICATION APPLICATION

It is herein proposed to modify the above reference licensed facility to increase the ERP from 49 to 100 Watts, and rotate the existing directional antenna from 150 degrees to 102 degrees from true north. No other changes are proposed.

2.0 EFFECTIVE RADIATED POWER

Pursuant to 47 C.F.R. Section 73.811(a) entitled "LPFM power and antenna height requirements.", LPFM stations will be authorized to operate with maximum facilities of 100W ERP at 30 meters HAAT. An LPFM station with a HAAT that exceeds 30 meters will not be permitted to operate with an ERP greater than that which would result in a 1 mV/m (60 dBu) contour which exceeds of 5.6km.

Since the calculated HAAT is -121m as demonstrated in Appendix A, the applicant may employ the statutory maximum power of 100 Watt ERP.

3.0 FREQUENCY ALLOCATION ANALYSIS AND WAIVER REQUEST

Appendix B is a LPFM spacing study which indicates short spacing to stations KRTH (FCC File No.: BMLH-20071015AJG), KSCA (FCC File No.: BMLH-20111031ADQ), and K268CO (FCC File No.: BMPFT-20160128BER).

3.1 Second Adjacent Channel Short Spacing Waiver for KRTH-FM

Appendix C demonstrates the Undesired-to-Desired signal ratio method using the directional antenna illustrated in Appendix E rotated 102 degrees from true north and the corresponding interfering and protected contours. As shown, the Interfering contour does not touch occupied structures or major roadways. Therefore, no population shall be subject to interference from the proposed station according to the undesired-to-desired ratio method. As such, a wavier is respectfully requested for the proposed LPFM second-adjacent channel short-spacing with KRTH-FM FCC File BMLH-20071015AJG, facility ID 28631 and of which is not an existing station designated with a Radio Reading Service.

3.2 Second Adjacent Channel Short Spacing Waiver for KSCA-FM

Appendix D demonstrates the Undesired-to-Desired signal ratio method using the directional antenna illustrated in Appendix E rotated 102 degrees from true north and the corresponding interfering and protected contours. As shown, the interfering contour does not touch occupied structures or major roadways. Therefore, no population shall be subject to interference from the proposed station according to the undesired-to-desired ratio method. As such, a wavier is respectfully requested for the proposed

LPFM second-adjacent channel short-spacing with KSCA-FM FCC File BMLH-20111031ADQ, facility ID 24548 and of which is not an existing station designated with a Radio Reading Service.

3.3 Co-Channel short Spacing to K268CO

The proposed LPFM facility KZNQ-LP received its construction permit on August 20, 2014, K268CO applied for and received a construction permit on February 5, 2016 for a radical change in transmitter site and frequency as part of the AM revitalization filing window which opened January 29, 2016. The frequency and site change placed K268CO in a location which allowed them to protect KZNQ-LP from their prospective using standard contour analysis; however, from the perspective of KZNQ-LP it created a short spacing scenario. The herein proposed KZNQ-LP application does not propose a site change; therefore, short-spacing to K268CO shall remain as permitted and is not a mitigating factor for the grant of the instant application.

4.0 INTERNATIONAL COORDINATION

The proposed facility lies 250km from the Mexican border and is thus within the 320km coordination distance. Applicants between 125 km and 320 km of Mexico require coordination only if they specify an ERP exceeding 50 watts in the direction of Mexico. The instant amendment specifies an ERP of 100 Watts and thus will require coordination with Mexican officials.

5.0 NATIONAL ENVIRONMENTAL POLICY ACT (NEPA)

5.1 General Environmental Requirements

The proposed support structure and antenna will not:

- Require high intensity white lighting.
- Is not located in an official designated wilderness area or wildlife preserve.
- Does not threaten the existence or habitat of endangered species.
- Does not affect districts, sites, buildings, structures or objects significant in American history, architecture, archaeology, engineering or culture that are listed in the National Register of Historic Places or are eligible for listing.
- Does not affect Indian religious sites.
- Is not located in a floodplain
- Does not require construction that involves significant changes in surface features (e.g., wetland fill, deforestation or water diversion).

5.2 Radio Frequency Radiation (RFR) Compliance.

Appendix F is a RFR analysis which demonstrates that the peak RFR exposure is less than 5% of the most restrictive permissible exposure threshold standing anywhere at ground level and in any proximity to the proposed support structure. Pursuant to OET Bulletin 65, since the proposed operation does not exceed 5% of the most permissible exposure at any location 2 meters above the ground, it is not considered a significant contributor to RFR and other sources of RFR need not be taken into consideration for a net effect. The instant application is compliant with the FCC limits for human exposure to RFR and thus is excluded from further environmental processing.

6.0 CERTIFICATION

The foregoing statement and the report regarding the aforementioned Engineering work are true and correct to the best of my knowledge. Executed on March 16, 2016.

KESSLER AND GEHMAN ASSOCIATES, INC.



Ryan Wilhour
Consulting Engineer

APPENDIX A – HAAT CALCULATION

The Height Above Average Terrain (HAAT) was calculated from the FCC's HAAT Calculator tool:

<https://www.fcc.gov/media/radio/haat-calculator>

Results are as follows:

Antenna Height Above Average Terrain Calculations -- Results

Input Data

Latitude **34° 25' 45" North**

Longitude **118° 34' 51.1" West (NAD 27)**

These coordinates convert to NAD 83 coordinates of
34° 25' 44.98", North, 118° 34' 54.41" West (NAD 83).

Height of antenna radiation center above mean sea level: **398.7 meters** AMSL

Number of Evenly Spaced Radials = **8** 0° is referenced to True North

Results

Calculated HAAT = **-121 meters**

Antenna Height Above Average Terrain calculated
using FCC 30 second terrain database (continental USA only)

Individual "Radial HAAT" Values, in meters

0°	-115.8 m
45°	-189.0 m
90°	-58.9 m
135°	-98.4 m
180°	-200.0 m
225°	-156.3 m
270°	-4.3 m
315°	-142.8 m

All radial HAAT values are negative.
Radiation center height AMSL may be underground!

APPENDIX B – ALLOCATION ANALYSIS

Santa Clarita Public Service Broadcasters Corporation

REFERENCE							DISPLAY DATES
34 25 45.0 N.		CLASS = L1 Int = L1					DATA 03-08-16
118 34 51.1 W.		Current Spacings to 2nd Adj.					SEARCH 03-08-16
----- Channel 268 - 101.5 MHz -----							

Call		Channel	Location		Azi	Dist	FCC	Margin
KRTH	LIC	266B	Los Angeles	CA	115.3	52.35	66.5	-14.2
KSCA	LIC	270B	Glendale	CA	115.5	52.86	66.5	-13.6
K268CO	CP -D	268D	Lake Los Angeles	CA	68.7	36.30	38.5	-2.2
KGFM	LIC	268B	Bakersfield	CA	352.7	112.85	111.5	1.4
1692268	APP	268L1	Panorama City	CA	141.1	25.12	23.5	1.6
1584805	APP	268L1	Canoga Park	CA	182.0	29.10	23.5	5.6
KSCA-FM1	LIC-D	270D	Santa Clarita	CA	188.5	11.12	5.5	5.6
KSBL	CP -Z	269B	Isla Vista	CA	244.5	109.10	96.5	12.6
1658284	APP	268L1	Los Angeles	CA	149.8	38.93	23.5	15.4
1658282	APP	268L1	Los Angeles	CA	149.8	38.93	23.5	15.4
1658262	APP	268L1	Los Angeles	CA	153.8	39.77	23.5	16.3
1658276	APP	268L1	Los Angeles	CA	138.2	42.21	23.5	18.7
1676421	APP	268L1	Los Angeles	CA	176.7	42.55	23.5	19.1
1593515	APP	268L1	Los Angeles	CA	144.7	50.87	23.5	27.4
1676899	APP	268L1	Pasadena	CA	128.0	51.52	23.5	28.0
1654169	APP	268L1	Los Angeles	CA	144.4	52.22	23.5	28.7
1654722	APP	268L1	Pasadena	CA	126.1	54.78	23.5	31.3
1654142	APP	268L1	Los Angeles	CA	140.8	55.04	23.5	31.5
KOCC-LP	LIC	268L1	Oxnard	CA	244.2	58.66	23.5	35.2
1658387	APP	268L1	El Monte	CA	130.5	62.32	23.5	38.8
KSBL	LIC	269B1	Carpinteria	CA	274.4	116.79	73.5	43.3
1581964	APP	268L1	Compton	CA	149.4	67.56	23.5	44.1
KOVY-LP	CP	267L1	Ojai	CA	270.5	59.61	13.5	46.1
1715076	APP	268L1	West Covina	CA	124.9	70.95	23.5	47.5

All separation margins include rounding

APPENDIX C - Short Spacing Waiver Calculation for KRTH-FM

Short Spacing Undesired-to-Desired Ratio Calculation to second-adjacent channel facility:

Undesired-to-Desired Ratio Method:

BMLH-20071015AJG f(50,50) signal: 75.78 dBu

Second-adjacent protection: + 40 dB

Interference-zone boundary: 115.78 dBu

Using the directional antenna shown in Appendix E rotated with its maximum lobe of radiation pointed towards 102 degrees from true north, the peak interference zone propagates 113 meters. As demonstrated below the directional antenna pulls a null in order to keep the 115.78 dBu interfering contour from intersecting neither occupied structures nor major roadways, thus as demonstrated no population will be subject to interference from the proposed station according to the undesired-to-desired ratio method.



APPENDIX D - Short Spacing Waiver Calculation for KSCA-FM

Short Spacing Undesired-to-Desired Ratio Calculation to second-adjacent channel facility:


Undesired-to-Desired Ratio Method:

BMLH-20111031ADQ f(50,50) signal: 63.57 dBu

Second-adjacent protection: + 40 dB

Interference-zone boundary: 103.57 dBu

Using the directional antenna shown in Appendix E rotated with its maximum lobe of radiation pointed towards 102 degrees from true north, the peak interference zone propagates 464 meters. As demonstrated below the directional antenna pulls a null in order to keep the 103.57 dBu interfering contour from intersecting neither occupied structures nor major roadways, thus as demonstrated no population will be subject to interference from the proposed station according to the undesired-to-desired ratio method.

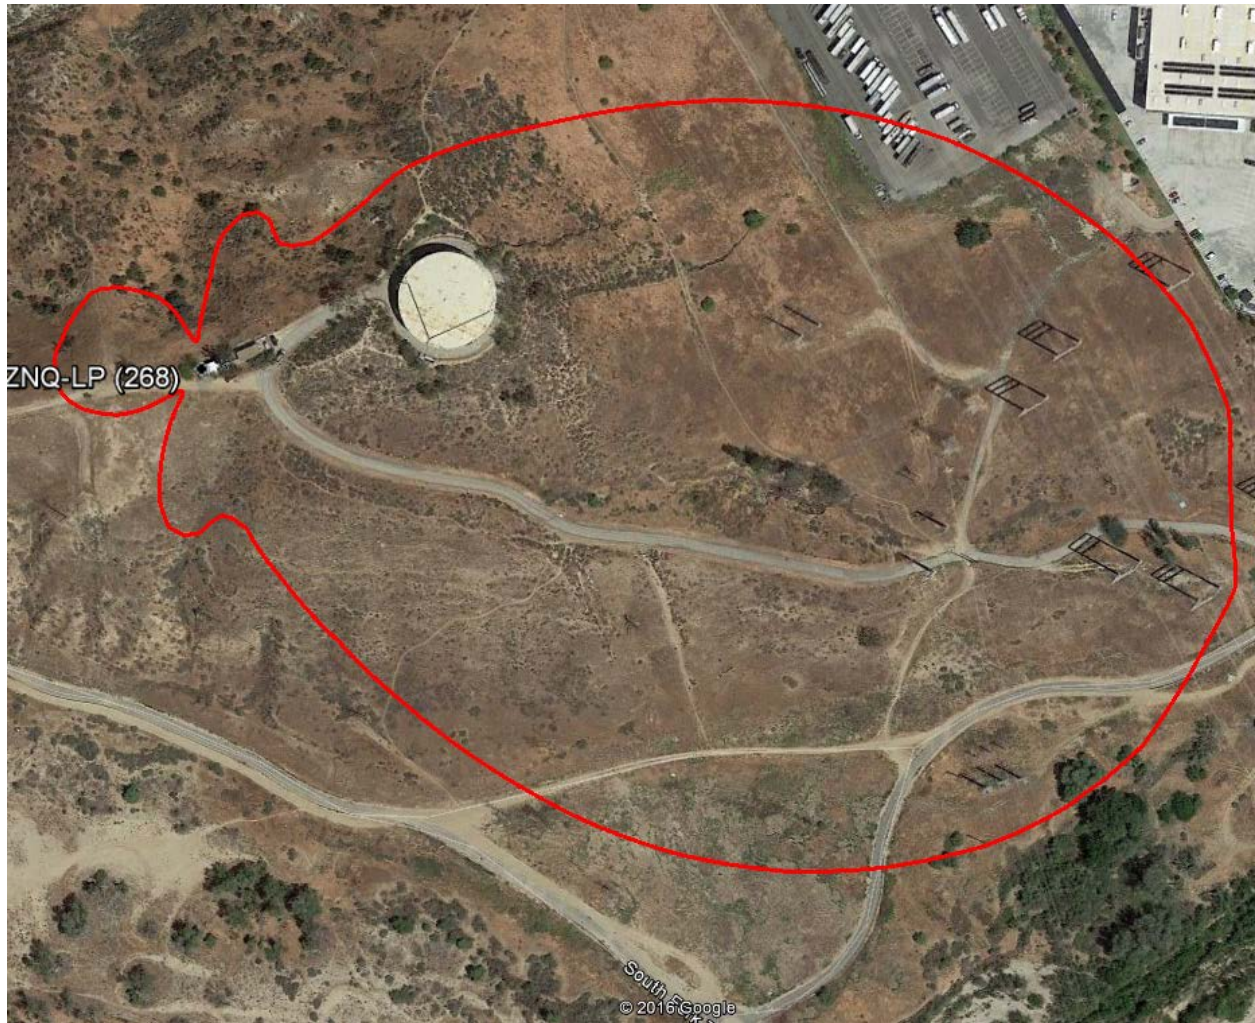

APPENDIX E – Broadcast Antenna Specifications



HDCA-5CP/RM

FM Yagi Antenna
88 to 108 MHz

The Kathrein-Scala HDCA-5CP/RM is a ruggedly built yagi antenna, designed for professional FM transmit and receive applications.

Like all Kathrein-Scala antennas, the HDCA-5CP/RM is made of the finest materials resulting in superior performance and long service life.

The HDCA-5CP/RM may be used stand-alone or in stacked arrays for higher gain, increased side-lobe suppression, or custom azimuth patterns.


Specifications:

Frequency range	Any specified FM channel 88 to 108 MHz
Gain	4.5 dBd
Power gain	2.82
Impedance	50 or 75 ohms
VSWR	< 1.5:1
Polarization	Circular
Front-to-back ratio	>14 dB
Maximum input power	100 watts (75Ω N) 250 watts (50Ω N)
Azimuth pattern	62 degrees (half-power)
Elevation pattern	62 degrees (half-power)
Connector	50Ω N or 75Ω N
Weight	34.5 lb (15.6 kg)
Dimensions	74.1 x 54 x 51 inches maximum (1882 x 1372 x 1295 mm)
Wind load	at 100 mph (160 kph) 79 lbf (350 N) maximum
Wind survival rating*	120 mph (200 kph)
Shipping dimensions	84 x 13 x 8 inches maximum (2134 x 330 x 203 mm)
Shipping weight	37.5 lb (15.6 kg)
Mounting	For masts of 2.375 inches (60 mm) OD.


* Mechanical design is based on environmental conditions as stipulated in TIA-222-G-2 (December 2009) and/or ETS 300 019-1-4 which include the static mechanical load imposed on an antenna by wind at maximum velocity. See the Engineering Section of the catalog for further details.

Order Information:

Contact Kathrein-Scala Customer Service for detailed order information.

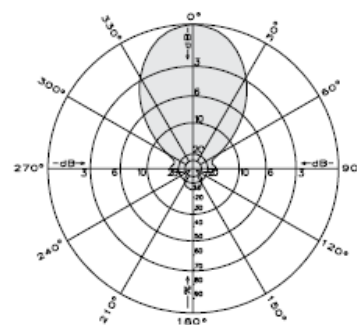




Azimuth pattern

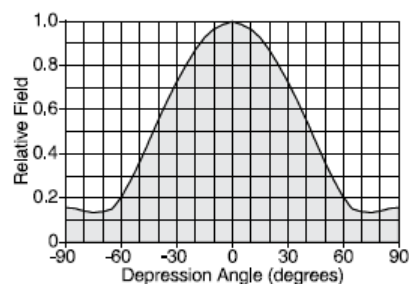

Elevation pattern




HDCA-5CP/RM
FM Yagi Antenna
88 to 108 MHz

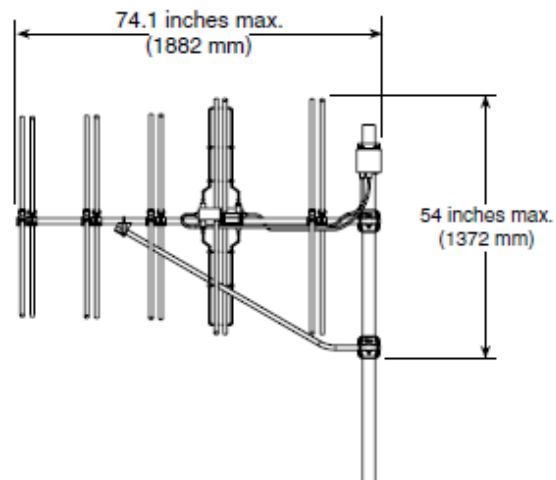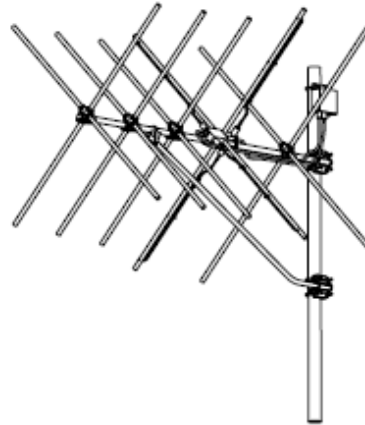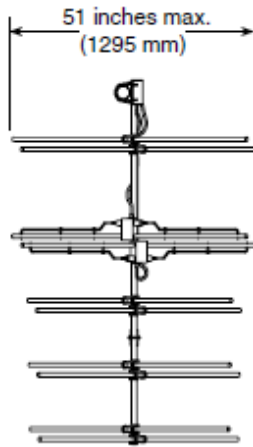

Order Information:

Contact Kathrein-Scala Customer Service for detailed order information.

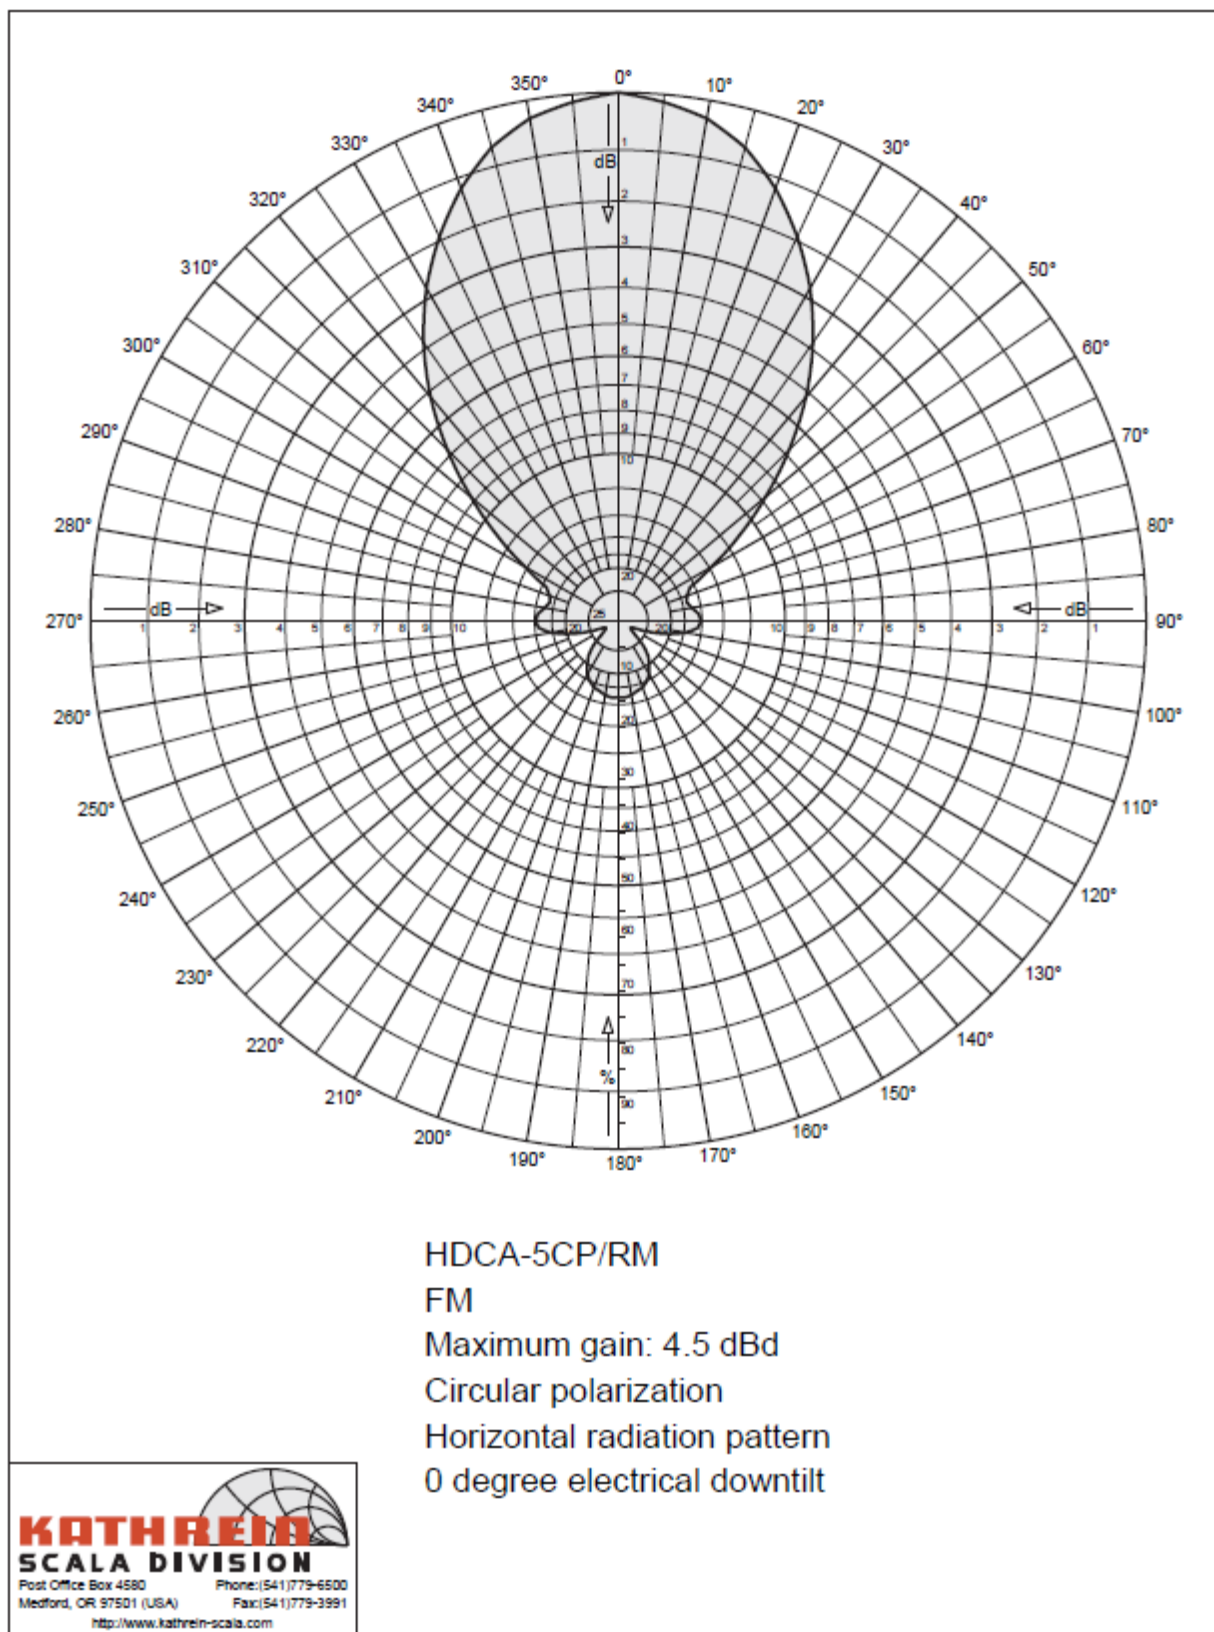



HDCA-5CP/RM

FM

Maximum gain: 4.5 dBd

Circular polarization

Horizontal radiation pattern

0 degree electrical downtilt

Angle	Field	Rel.dB	dBd	PwrMult	Angle	Field	Rel.dB	dBd	PwrMult
0	1.000	0.00	4.50	2.82	45	0.458	-6.79	-2.29	0.59
1	0.997	-0.02	4.48	2.80	46	0.439	-7.15	-2.65	0.54
2	0.994	-0.05	4.45	2.79	47	0.420	-7.53	-3.03	0.50
3	0.992	-0.07	4.43	2.77	48	0.401	-7.93	-3.43	0.45
4	0.989	-0.10	4.40	2.75	49	0.382	-8.35	-3.85	0.41
5	0.986	-0.12	4.38	2.74	50	0.363	-8.79	-4.29	0.37
6	0.982	-0.16	4.34	2.72	51	0.346	-9.21	-4.71	0.34
7	0.978	-0.20	4.30	2.69	52	0.329	-9.65	-5.15	0.31
8	0.974	-0.23	4.27	2.67	53	0.312	-10.11	-5.61	0.27
9	0.970	-0.27	4.23	2.65	54	0.295	-10.59	-6.09	0.25
10	0.966	-0.30	4.20	2.63	55	0.278	-11.11	-6.61	0.22
11	0.958	-0.37	4.13	2.59	56	0.263	-11.59	-7.09	0.20
12	0.951	-0.44	4.06	2.55	57	0.248	-12.10	-7.60	0.17
13	0.943	-0.51	3.99	2.51	58	0.233	-12.64	-8.14	0.15
14	0.935	-0.58	3.92	2.47	59	0.218	-13.22	-8.72	0.13
15	0.928	-0.65	3.85	2.43	60	0.203	-13.84	-9.34	0.12
16	0.916	-0.76	3.74	2.37	61	0.193	-14.30	-9.80	0.10
17	0.905	-0.87	3.63	2.31	62	0.182	-14.80	-10.30	0.09
18	0.894	-0.98	3.52	2.25	63	0.171	-15.32	-10.82	0.08
19	0.882	-1.09	3.41	2.19	64	0.161	-15.88	-11.38	0.07
20	0.871	-1.20	3.30	2.14	65	0.150	-16.48	-11.98	0.06
21	0.857	-1.34	3.16	2.07	66	0.148	-16.61	-12.11	0.06
22	0.843	-1.48	3.02	2.00	67	0.145	-16.75	-12.25	0.06
23	0.830	-1.62	2.88	1.94	68	0.143	-16.89	-12.39	0.06
24	0.816	-1.77	2.73	1.88	69	0.141	-17.04	-12.54	0.06
25	0.802	-1.91	2.59	1.81	70	0.138	-17.18	-12.68	0.05
26	0.787	-2.08	2.42	1.75	71	0.138	-17.23	-12.73	0.05
27	0.772	-2.25	2.25	1.68	72	0.137	-17.28	-12.78	0.05
28	0.757	-2.42	2.08	1.62	73	0.136	-17.33	-12.83	0.05
29	0.742	-2.59	1.91	1.55	74	0.135	-17.38	-12.88	0.05
30	0.727	-2.77	1.73	1.49	75	0.134	-17.44	-12.94	0.05
31	0.710	-2.97	1.53	1.42	76	0.136	-17.35	-12.85	0.05
32	0.693	-3.18	1.32	1.36	77	0.137	-17.26	-12.76	0.05
33	0.677	-3.39	1.11	1.29	78	0.138	-17.18	-12.68	0.05
34	0.660	-3.61	0.89	1.23	79	0.140	-17.09	-12.59	0.06
35	0.643	-3.83	0.67	1.17	80	0.141	-17.01	-12.51	0.06
36	0.625	-4.08	0.42	1.10	81	0.143	-16.87	-12.37	0.06
37	0.607	-4.33	0.17	1.04	82	0.146	-16.73	-12.23	0.06
38	0.589	-4.59	-0.09	0.98	83	0.148	-16.59	-12.09	0.06
39	0.571	-4.86	-0.36	0.92	84	0.150	-16.46	-11.96	0.06
40	0.553	-5.14	-0.64	0.86	85	0.153	-16.33	-11.83	0.07
41	0.534	-5.44	-0.94	0.80	86	0.153	-16.28	-11.78	0.07
42	0.515	-5.76	-1.26	0.75	87	0.154	-16.23	-11.73	0.07
43	0.496	-6.09	-1.59	0.69	88	0.155	-16.19	-11.69	0.07
44	0.477	-6.43	-1.93	0.64	89	0.156	-16.14	-11.64	0.07

26-Oct-2011



HDCA-5CP/RM

FM

Maximum gain: 4.5 dBd

Circular polarization

Horizontal radiation pattern

0 degree electrical downtilt

Angle	Field	Rel.dB	dBd	PwrMult	Angle	Field	Rel.dB	dBd	PwrMult
90	0.157	-16.10	-11.60	0.07	135	0.067	-23.41	-18.91	0.01
91	0.156	-16.16	-11.66	0.07	136	0.072	-22.89	-18.39	0.01
92	0.155	-16.21	-11.71	0.07	137	0.076	-22.40	-17.90	0.02
93	0.154	-16.27	-11.77	0.07	138	0.080	-21.94	-17.44	0.02
94	0.153	-16.33	-11.83	0.07	139	0.084	-21.50	-17.00	0.02
95	0.152	-16.38	-11.88	0.06	140	0.088	-21.08	-16.58	0.02
96	0.147	-16.63	-12.13	0.06	141	0.091	-20.81	-16.31	0.02
97	0.143	-16.89	-12.39	0.06	142	0.094	-20.54	-16.04	0.02
98	0.139	-17.16	-12.66	0.05	143	0.097	-20.29	-15.79	0.03
99	0.134	-17.44	-12.94	0.05	144	0.100	-20.04	-15.54	0.03
100	0.130	-17.72	-13.22	0.05	145	0.102	-19.80	-15.30	0.03
101	0.123	-18.18	-13.68	0.04	146	0.105	-19.56	-15.06	0.03
102	0.117	-18.66	-14.16	0.04	147	0.108	-19.33	-14.83	0.03
103	0.110	-19.17	-14.67	0.03	148	0.111	-19.10	-14.60	0.03
104	0.103	-19.72	-15.22	0.03	149	0.114	-18.88	-14.38	0.04
105	0.097	-20.29	-15.79	0.03	150	0.117	-18.66	-14.16	0.04
106	0.089	-20.98	-16.48	0.02	151	0.119	-18.51	-14.01	0.04
107	0.082	-21.72	-17.22	0.02	152	0.121	-18.37	-13.87	0.04
108	0.075	-22.54	-18.04	0.02	153	0.123	-18.23	-13.73	0.04
109	0.067	-23.44	-18.94	0.01	154	0.125	-18.08	-13.58	0.04
110	0.060	-24.44	-19.94	0.01	155	0.127	-17.95	-13.45	0.05
111	0.054	-25.35	-20.85	0.01	156	0.128	-17.84	-13.34	0.05
112	0.048	-26.38	-21.88	0.01	157	0.130	-17.74	-13.24	0.05
113	0.042	-27.54	-23.04	0.00	158	0.131	-17.64	-13.14	0.05
114	0.036	-28.87	-24.37	0.00	159	0.133	-17.54	-13.04	0.05
115	0.030	-30.46	-25.96	0.00	160	0.134	-17.45	-12.95	0.05
116	0.029	-30.65	-26.15	0.00	161	0.135	-17.40	-12.90	0.05
117	0.029	-30.85	-26.35	0.00	162	0.136	-17.36	-12.86	0.05
118	0.028	-31.06	-26.56	0.00	163	0.136	-17.32	-12.82	0.05
119	0.027	-31.27	-26.77	0.00	164	0.137	-17.27	-12.77	0.05
120	0.027	-31.48	-26.98	0.00	165	0.138	-17.23	-12.73	0.05
121	0.027	-31.27	-26.77	0.00	166	0.139	-17.17	-12.67	0.05
122	0.028	-31.06	-26.56	0.00	167	0.140	-17.10	-12.60	0.05
123	0.029	-30.85	-26.35	0.00	168	0.141	-17.03	-12.53	0.06
124	0.029	-30.65	-26.15	0.00	169	0.142	-16.97	-12.47	0.06
125	0.030	-30.46	-25.96	0.00	170	0.143	-16.90	-12.40	0.06
126	0.032	-29.81	-25.31	0.00	171	0.143	-16.87	-12.37	0.06
127	0.035	-29.20	-24.70	0.00	172	0.144	-16.82	-12.32	0.06
128	0.037	-28.64	-24.14	0.00	173	0.145	-16.79	-12.29	0.06
129	0.039	-28.10	-23.60	0.00	174	0.146	-16.74	-12.24	0.06
130	0.042	-27.60	-23.10	0.00	175	0.146	-16.70	-12.20	0.06
131	0.047	-26.59	-22.09	0.01	176	0.146	-16.71	-12.21	0.06
132	0.052	-25.68	-21.18	0.01	177	0.146	-16.73	-12.23	0.06
133	0.057	-24.86	-20.36	0.01	178	0.146	-16.74	-12.24	0.06
134	0.062	-24.11	-19.61	0.01	179	0.145	-16.76	-12.26	0.06

25-Oct-2011



HDCA-5CP/RM

FM

Maximum gain: 4.5 dBd

Circular polarization

Horizontal radiation pattern

0 degree electrical downtilt

Angle	Field	Rel.dB	dBd	PwrMult	Angle	Field	Rel.dB	dBd	PwrMult
180	0.145	-16.77	-12.27	0.06	225	0.067	-23.41	-18.91	0.01
181	0.145	-16.76	-12.26	0.06	226	0.062	-24.11	-19.61	0.01
182	0.146	-16.74	-12.24	0.06	227	0.057	-24.86	-20.36	0.01
183	0.146	-16.73	-12.23	0.06	228	0.052	-25.68	-21.18	0.01
184	0.146	-16.71	-12.21	0.06	229	0.047	-26.59	-22.09	0.01
185	0.146	-16.70	-12.20	0.06	230	0.042	-27.60	-23.10	0.00
186	0.146	-16.74	-12.24	0.06	231	0.039	-28.10	-23.60	0.00
187	0.145	-16.79	-12.29	0.06	232	0.037	-28.64	-24.14	0.00
188	0.144	-16.82	-12.32	0.06	233	0.035	-29.20	-24.70	0.00
189	0.143	-16.87	-12.37	0.06	234	0.032	-29.81	-25.31	0.00
190	0.143	-16.90	-12.40	0.06	235	0.030	-30.46	-25.96	0.00
191	0.142	-16.97	-12.47	0.06	236	0.029	-30.65	-26.15	0.00
192	0.141	-17.03	-12.53	0.06	237	0.029	-30.85	-26.35	0.00
193	0.140	-17.10	-12.60	0.05	238	0.028	-31.06	-26.56	0.00
194	0.139	-17.17	-12.67	0.05	239	0.027	-31.27	-26.77	0.00
195	0.138	-17.23	-12.73	0.05	240	0.027	-31.48	-26.98	0.00
196	0.137	-17.27	-12.77	0.05	241	0.027	-31.27	-26.77	0.00
197	0.136	-17.32	-12.82	0.05	242	0.028	-31.06	-26.56	0.00
198	0.136	-17.36	-12.86	0.05	243	0.029	-30.85	-26.35	0.00
199	0.135	-17.40	-12.90	0.05	244	0.029	-30.65	-26.15	0.00
200	0.134	-17.45	-12.95	0.05	245	0.030	-30.46	-25.96	0.00
201	0.133	-17.54	-13.04	0.05	246	0.036	-28.87	-24.37	0.00
202	0.131	-17.64	-13.14	0.05	247	0.042	-27.54	-23.04	0.00
203	0.130	-17.74	-13.24	0.05	248	0.048	-26.38	-21.88	0.01
204	0.128	-17.84	-13.34	0.05	249	0.054	-25.35	-20.85	0.01
205	0.127	-17.95	-13.45	0.05	250	0.060	-24.44	-19.94	0.01
206	0.125	-18.08	-13.58	0.04	251	0.067	-23.44	-18.94	0.01
207	0.123	-18.23	-13.73	0.04	252	0.075	-22.54	-18.04	0.02
208	0.121	-18.37	-13.87	0.04	253	0.082	-21.72	-17.22	0.02
209	0.119	-18.51	-14.01	0.04	254	0.089	-20.98	-16.48	0.02
210	0.117	-18.66	-14.16	0.04	255	0.097	-20.29	-15.79	0.03
211	0.114	-18.88	-14.38	0.04	256	0.103	-19.72	-15.22	0.03
212	0.111	-19.10	-14.60	0.03	257	0.110	-19.17	-14.67	0.03
213	0.108	-19.33	-14.83	0.03	258	0.117	-18.66	-14.16	0.04
214	0.105	-19.56	-15.06	0.03	259	0.123	-18.18	-13.68	0.04
215	0.102	-19.80	-15.30	0.03	260	0.130	-17.72	-13.22	0.05
216	0.100	-20.04	-15.54	0.03	261	0.134	-17.44	-12.94	0.05
217	0.097	-20.29	-15.79	0.03	262	0.139	-17.16	-12.66	0.05
218	0.094	-20.54	-16.04	0.02	263	0.143	-16.89	-12.39	0.06
219	0.091	-20.81	-16.31	0.02	264	0.147	-16.63	-12.13	0.06
220	0.088	-21.08	-16.58	0.02	265	0.152	-16.38	-11.88	0.06
221	0.084	-21.50	-17.00	0.02	266	0.153	-16.33	-11.83	0.07
222	0.080	-21.94	-17.44	0.02	267	0.154	-16.27	-11.77	0.07
223	0.076	-22.40	-17.90	0.02	268	0.155	-16.21	-11.71	0.07
224	0.072	-22.89	-18.39	0.01	269	0.156	-16.16	-11.66	0.07

26-Oct-2011



HDCA-5CP/RM

FM

Maximum gain: 4.5 dBd

Circular polarization

Horizontal radiation pattern

0 degree electrical downtilt


Angle	Field	Rel.dB	dBd	PwrMult	Angle	Field	Rel.dB	dBd	PwrMult
270	0.157	-16.10	-11.60	0.07	315	0.458	-6.79	-2.29	0.59
271	0.156	-16.14	-11.64	0.07	316	0.477	-6.43	-1.93	0.64
272	0.155	-16.19	-11.69	0.07	317	0.496	-6.09	-1.59	0.69
273	0.154	-16.23	-11.73	0.07	318	0.515	-5.76	-1.26	0.75
274	0.153	-16.28	-11.78	0.07	319	0.534	-5.44	-0.94	0.80
275	0.153	-16.33	-11.83	0.07	320	0.553	-5.14	-0.64	0.86
276	0.150	-16.46	-11.96	0.06	321	0.571	-4.86	-0.36	0.92
277	0.148	-16.59	-12.09	0.06	322	0.589	-4.59	-0.09	0.98
278	0.146	-16.73	-12.23	0.06	323	0.607	-4.33	0.17	1.04
279	0.143	-16.87	-12.37	0.06	324	0.625	-4.08	0.42	1.10
280	0.141	-17.01	-12.51	0.06	325	0.643	-3.83	0.67	1.17
281	0.140	-17.09	-12.59	0.06	326	0.660	-3.61	0.89	1.23
282	0.138	-17.18	-12.68	0.05	327	0.677	-3.39	1.11	1.29
283	0.137	-17.26	-12.76	0.05	328	0.693	-3.18	1.32	1.36
284	0.136	-17.35	-12.85	0.05	329	0.710	-2.97	1.53	1.42
285	0.134	-17.44	-12.94	0.05	330	0.727	-2.77	1.73	1.49
286	0.135	-17.38	-12.88	0.05	331	0.742	-2.59	1.91	1.55
287	0.136	-17.33	-12.83	0.05	332	0.757	-2.42	2.08	1.62
288	0.137	-17.28	-12.78	0.05	333	0.772	-2.25	2.25	1.68
289	0.138	-17.23	-12.73	0.05	334	0.787	-2.08	2.42	1.75
290	0.138	-17.18	-12.68	0.05	335	0.802	-1.91	2.59	1.81
291	0.141	-17.04	-12.54	0.06	336	0.816	-1.77	2.73	1.88
292	0.143	-16.89	-12.39	0.06	337	0.830	-1.62	2.88	1.94
293	0.145	-16.75	-12.25	0.06	338	0.843	-1.48	3.02	2.00
294	0.148	-16.61	-12.11	0.06	339	0.857	-1.34	3.16	2.07
295	0.150	-16.48	-11.98	0.06	340	0.871	-1.20	3.30	2.14
296	0.161	-15.88	-11.38	0.07	341	0.882	-1.09	3.41	2.19
297	0.171	-15.32	-10.82	0.08	342	0.894	-0.98	3.52	2.25
298	0.182	-14.80	-10.30	0.09	343	0.905	-0.87	3.63	2.31
299	0.193	-14.30	-9.80	0.10	344	0.916	-0.76	3.74	2.37
300	0.203	-13.84	-9.34	0.12	345	0.928	-0.65	3.85	2.43
301	0.218	-13.22	-8.72	0.13	346	0.935	-0.58	3.92	2.47
302	0.233	-12.64	-8.14	0.15	347	0.943	-0.51	3.99	2.51
303	0.248	-12.10	-7.60	0.17	348	0.951	-0.44	4.06	2.55
304	0.263	-11.59	-7.09	0.20	349	0.958	-0.37	4.13	2.59
305	0.278	-11.11	-6.61	0.22	350	0.966	-0.30	4.20	2.63
306	0.295	-10.59	-6.09	0.25	351	0.970	-0.27	4.23	2.65
307	0.312	-10.11	-5.61	0.27	352	0.974	-0.23	4.27	2.67
308	0.329	-9.65	-5.15	0.31	353	0.978	-0.20	4.30	2.69
309	0.346	-9.21	-4.71	0.34	354	0.982	-0.16	4.34	2.72
310	0.363	-8.79	-4.29	0.37	355	0.986	-0.12	4.38	2.74
311	0.382	-8.35	-3.85	0.41	356	0.989	-0.10	4.40	2.75
312	0.401	-7.93	-3.43	0.45	357	0.992	-0.07	4.43	2.77
313	0.420	-7.53	-3.03	0.50	358	0.994	-0.05	4.45	2.79
314	0.439	-7.15	-2.65	0.54	359	0.997	-0.02	4.48	2.80

26-Oct-2011

APPLICATION FOR MINOR MODIFICATION TO KZNQ-LP

Santa Clarita Public Service Broadcasters Corporation

March 16, 2016

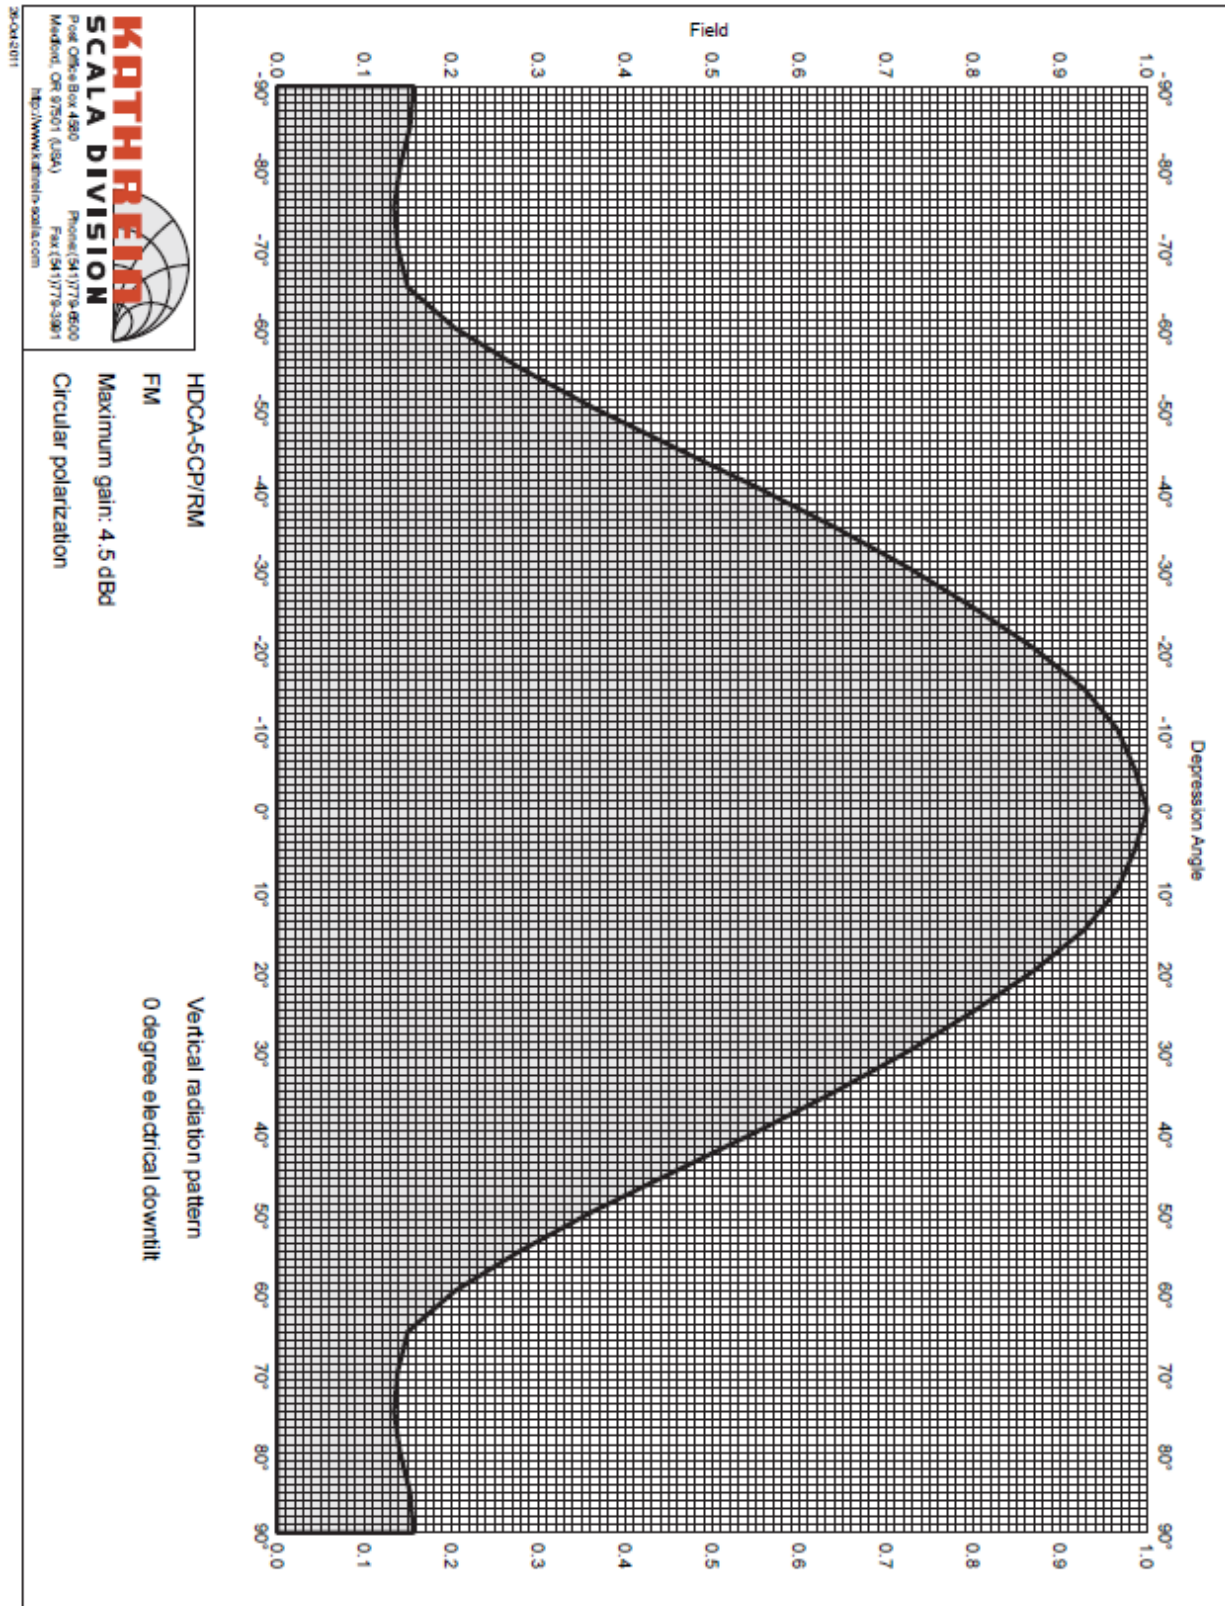



HDCA-5CP/RM

FM

Maximum gain: 4.5 dBd

Circular polarization

Vertical radiation pattern

0 degree electrical downtilt

Angle	Field	Rel.dB	dBd	PwrMult	Angle	Field	Rel.dB	dBd	PwrMult
-90	0.157	-16.10	-11.60	0.07	-45	0.458	-6.79	-2.29	0.59
-89	0.156	-16.14	-11.64	0.07	-44	0.477	-6.43	-1.93	0.64
-88	0.155	-16.19	-11.69	0.07	-43	0.496	-6.09	-1.59	0.69
-87	0.154	-16.23	-11.73	0.07	-42	0.515	-5.76	-1.26	0.75
-86	0.153	-16.28	-11.78	0.07	-41	0.534	-5.44	-0.94	0.80
-85	0.153	-16.33	-11.83	0.07	-40	0.553	-5.14	-0.64	0.86
-84	0.150	-16.46	-11.96	0.06	-39	0.571	-4.86	-0.36	0.92
-83	0.148	-16.59	-12.09	0.06	-38	0.589	-4.59	-0.09	0.98
-82	0.146	-16.73	-12.23	0.06	-37	0.607	-4.33	0.17	1.04
-81	0.143	-16.87	-12.37	0.06	-36	0.625	-4.08	0.42	1.10
-80	0.141	-17.01	-12.51	0.06	-35	0.643	-3.83	0.67	1.17
-79	0.140	-17.09	-12.59	0.06	-34	0.660	-3.61	0.89	1.23
-78	0.138	-17.18	-12.68	0.05	-33	0.677	-3.39	1.11	1.29
-77	0.137	-17.26	-12.76	0.05	-32	0.693	-3.18	1.32	1.36
-76	0.136	-17.35	-12.85	0.05	-31	0.710	-2.97	1.53	1.42
-75	0.134	-17.44	-12.94	0.05	-30	0.727	-2.77	1.73	1.49
-74	0.135	-17.38	-12.88	0.05	-29	0.742	-2.59	1.91	1.55
-73	0.136	-17.33	-12.83	0.05	-28	0.757	-2.42	2.08	1.62
-72	0.137	-17.28	-12.78	0.05	-27	0.772	-2.25	2.25	1.68
-71	0.138	-17.23	-12.73	0.05	-26	0.787	-2.08	2.42	1.75
-70	0.138	-17.18	-12.68	0.05	-25	0.802	-1.91	2.59	1.81
-69	0.141	-17.04	-12.54	0.06	-24	0.816	-1.77	2.73	1.88
-68	0.143	-16.89	-12.39	0.06	-23	0.830	-1.62	2.88	1.94
-67	0.145	-16.75	-12.25	0.06	-22	0.843	-1.48	3.02	2.00
-66	0.148	-16.61	-12.11	0.06	-21	0.857	-1.34	3.16	2.07
-65	0.150	-16.48	-11.98	0.06	-20	0.871	-1.20	3.30	2.14
-64	0.161	-15.88	-11.38	0.07	-19	0.882	-1.09	3.41	2.19
-63	0.171	-15.32	-10.82	0.08	-18	0.894	-0.98	3.52	2.25
-62	0.182	-14.80	-10.30	0.09	-17	0.905	-0.87	3.63	2.31
-61	0.193	-14.30	-9.80	0.10	-16	0.916	-0.76	3.74	2.37
-60	0.203	-13.84	-9.34	0.12	-15	0.928	-0.65	3.85	2.43
-59	0.218	-13.22	-8.72	0.13	-14	0.935	-0.58	3.92	2.47
-58	0.233	-12.64	-8.14	0.15	-13	0.943	-0.51	3.99	2.51
-57	0.248	-12.10	-7.60	0.17	-12	0.951	-0.44	4.06	2.55
-56	0.263	-11.59	-7.09	0.20	-11	0.958	-0.37	4.13	2.59
-55	0.278	-11.11	-6.61	0.22	-10	0.966	-0.30	4.20	2.63
-54	0.295	-10.59	-6.09	0.25	-9	0.970	-0.27	4.23	2.65
-53	0.312	-10.11	-5.61	0.27	-8	0.974	-0.23	4.27	2.67
-52	0.329	-9.65	-5.15	0.31	-7	0.978	-0.20	4.30	2.69
-51	0.346	-9.21	-4.71	0.34	-6	0.982	-0.16	4.34	2.72
-50	0.363	-8.79	-4.29	0.37	-5	0.986	-0.12	4.38	2.74
-49	0.382	-8.35	-3.85	0.41	-4	0.989	-0.10	4.40	2.75
-48	0.401	-7.93	-3.43	0.45	-3	0.992	-0.07	4.43	2.77
-47	0.420	-7.53	-3.03	0.50	-2	0.994	-0.05	4.45	2.79
-46	0.439	-7.15	-2.65	0.54	-1	0.997	-0.02	4.48	2.80
					0	1.000	0.00	4.50	2.82

26-Oct-2011



HDCA-5CP/RM

FM

Maximum gain: 4.5 dBd

Circular polarization

Vertical radiation pattern

0 degree electrical downtilt

Angle	Field	Rel.dB	dBd	PwrMult	Angle	Field	Rel.dB	dBd	PwrMult
0	1.000	0.00	4.50	2.82	45	0.458	-6.79	-2.29	0.59
1	0.997	-0.02	4.48	2.80	46	0.439	-7.15	-2.65	0.54
2	0.994	-0.05	4.45	2.79	47	0.420	-7.53	-3.03	0.50
3	0.992	-0.07	4.43	2.77	48	0.401	-7.93	-3.43	0.45
4	0.989	-0.10	4.40	2.75	49	0.382	-8.35	-3.85	0.41
5	0.986	-0.12	4.38	2.74	50	0.363	-8.79	-4.29	0.37
6	0.982	-0.16	4.34	2.72	51	0.346	-9.21	-4.71	0.34
7	0.978	-0.20	4.30	2.69	52	0.329	-9.65	-5.15	0.31
8	0.974	-0.23	4.27	2.67	53	0.312	-10.11	-5.61	0.27
9	0.970	-0.27	4.23	2.65	54	0.295	-10.59	-6.09	0.25
10	0.966	-0.30	4.20	2.63	55	0.278	-11.11	-6.61	0.22
11	0.958	-0.37	4.13	2.59	56	0.263	-11.59	-7.09	0.20
12	0.951	-0.44	4.06	2.55	57	0.248	-12.10	-7.60	0.17
13	0.943	-0.51	3.99	2.51	58	0.233	-12.64	-8.14	0.15
14	0.935	-0.58	3.92	2.47	59	0.218	-13.22	-8.72	0.13
15	0.928	-0.65	3.85	2.43	60	0.203	-13.84	-9.34	0.12
16	0.916	-0.76	3.74	2.37	61	0.193	-14.30	-9.80	0.10
17	0.905	-0.87	3.63	2.31	62	0.182	-14.80	-10.30	0.09
18	0.894	-0.98	3.52	2.25	63	0.171	-15.32	-10.82	0.08
19	0.882	-1.09	3.41	2.19	64	0.161	-15.88	-11.38	0.07
20	0.871	-1.20	3.30	2.14	65	0.150	-16.48	-11.98	0.06
21	0.857	-1.34	3.16	2.07	66	0.148	-16.61	-12.11	0.06
22	0.843	-1.48	3.02	2.00	67	0.145	-16.75	-12.25	0.06
23	0.830	-1.62	2.88	1.94	68	0.143	-16.89	-12.39	0.06
24	0.816	-1.77	2.73	1.88	69	0.141	-17.04	-12.54	0.06
25	0.802	-1.91	2.59	1.81	70	0.138	-17.18	-12.68	0.05
26	0.787	-2.08	2.42	1.75	71	0.138	-17.23	-12.73	0.05
27	0.772	-2.25	2.25	1.68	72	0.137	-17.28	-12.78	0.05
28	0.757	-2.42	2.08	1.62	73	0.136	-17.33	-12.83	0.05
29	0.742	-2.59	1.91	1.55	74	0.135	-17.38	-12.88	0.05
30	0.727	-2.77	1.73	1.49	75	0.134	-17.44	-12.94	0.05
31	0.710	-2.97	1.53	1.42	76	0.136	-17.35	-12.85	0.05
32	0.693	-3.18	1.32	1.36	77	0.137	-17.26	-12.76	0.05
33	0.677	-3.39	1.11	1.29	78	0.138	-17.18	-12.68	0.05
34	0.660	-3.61	0.89	1.23	79	0.140	-17.09	-12.59	0.06
35	0.643	-3.83	0.67	1.17	80	0.141	-17.01	-12.51	0.06
36	0.625	-4.08	0.42	1.10	81	0.143	-16.87	-12.37	0.06
37	0.607	-4.33	0.17	1.04	82	0.146	-16.73	-12.23	0.06
38	0.589	-4.59	-0.09	0.98	83	0.148	-16.59	-12.09	0.06
39	0.571	-4.86	-0.36	0.92	84	0.150	-16.46	-11.96	0.06
40	0.553	-5.14	-0.64	0.86	85	0.153	-16.33	-11.83	0.07
41	0.534	-5.44	-0.94	0.80	86	0.153	-16.28	-11.78	0.07
42	0.515	-5.76	-1.26	0.75	87	0.154	-16.23	-11.73	0.07
43	0.496	-6.09	-1.59	0.69	88	0.155	-16.19	-11.69	0.07
44	0.477	-6.43	-1.93	0.64	89	0.156	-16.14	-11.64	0.07
					90	0.157	-16.10	-11.60	0.07

26-03-2011

APPENDIX F - Far Field Exposure to RF Emissions

A theoretical analysis has been conducted of the human exposure to radio frequency radiation ("RFR") using the calculation methodology described in OET Bulletin 65, Edition 97-01. The RFR analysis is conducted pursuant to the following methodology:

Terrain extraction is compiled from the support structure site, if the support structure is on a rooftop with no higher elevations (e.g., elevator shaft) then flat terrain is compiled. Terrain is extracted using radial lengths of 0.25 miles in 0.001 mile increments for 360 radials. The power density is calculated for each terrain point at 6 feet above ground level using the elevation and azimuth pattern of the proposed broadcast antenna. The power density calculations are conducted using the lower edge of the proposed channel frequency. To account for ground reflections, a coefficient of 1.6 was included in the calculation.

The resulting cylindrical polar analysis is then summarized into a coordinate plane graph using the following methodology:

Starting from the origin the maximum calculated RFR value is determined among the 360 degree radials for each 0.001 mile increment, the value is then converted into a percentage of the maximum allowable general population or uncontrolled exposure and plotted as a function of perpendicular distance from the tower.

FAR FIELD EXPOSURE TO RF EMISSIONS

