


ERI/JAMPRO JBCP "Roto" (EPA)-Type 3, 8 Bays, Spac= 0.5, H=20 kW, V=20 kW, 16 M AG

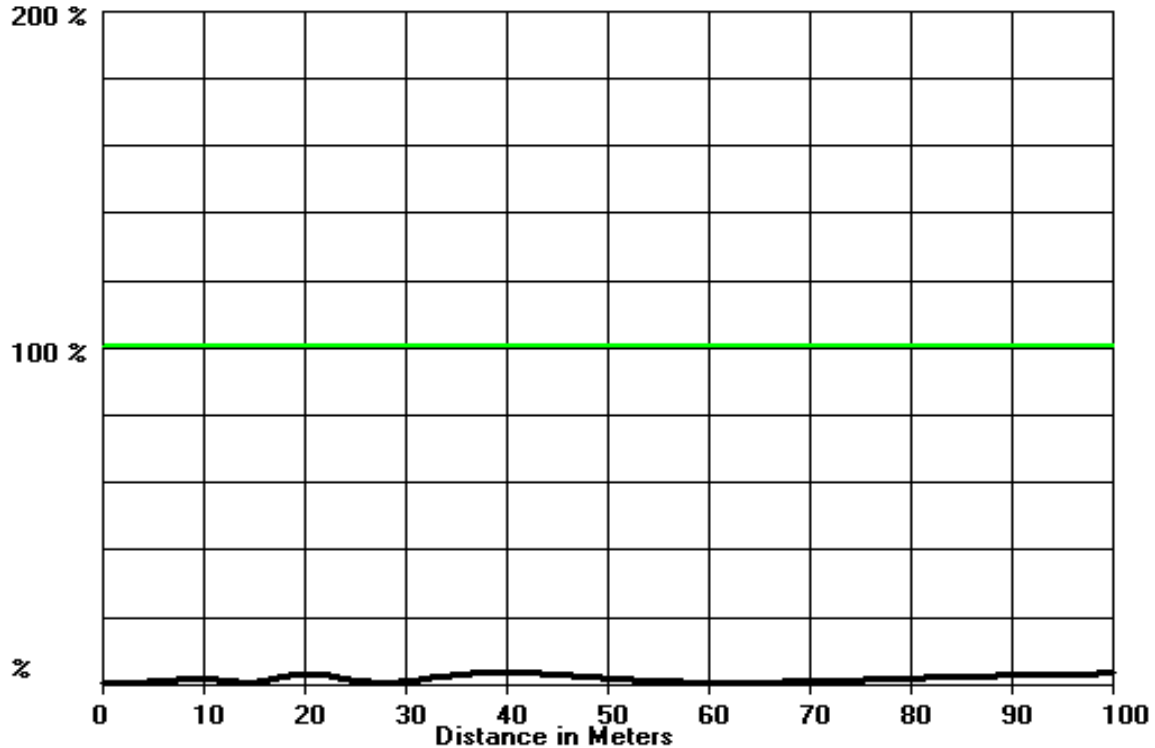

HORZ. DISTANCE FROM FM RADIATOR VS POWER DENSITY (Microwatt/Square cm)
 Dist(Meters) PD (H) PD (V) Total(uW/cm2) Percent Max.(1000)

Dist(Meters)	PD (H)	PD (V)	Total(uW/cm2)	Percent Max.(1000)
0	0.00	0.00	0.00	0.0
1	0.00	0.00	0.00	0.0
2	0.01	0.01	0.03	0.0
3	0.10	0.09	0.19	0.0
4	0.42	0.34	0.76	0.1
5	1.13	0.96	2.09	0.2
6	2.31	2.14	4.45	0.4
7	3.91	3.83	7.73	0.8
8	5.70	5.52	11.23	1.1
9	7.10	6.55	13.65	1.4
10	7.30	6.54	13.85	1.4
11	5.97	5.25	11.22	1.1
12	3.48	3.01	6.49	0.6
13	1.11	0.95	2.07	0.2
14	0.01	0.01	0.02	0.0
15	0.78	0.63	1.41	0.1
16	3.35	2.61	5.96	0.6
17	6.78	5.47	12.25	1.2
18	10.08	8.39	18.47	1.8
19	12.41	10.62	23.02	2.3
20	13.32	11.77	25.09	2.5
21	12.73	11.58	24.31	2.4
22	10.92	10.19	21.10	2.1
23	8.33	7.98	16.32	1.6
24	5.48	5.44	10.92	1.1
25	3.00	3.08	6.08	0.6

Dist (Meters)	PD (H)	PD (V)	Total (uW/cm2)	Percent Max.
26	1.19	1.26	2.45	0.2
27	0.20	0.22	0.42	0.0
28	0.03	0.03	0.07	0.0
29	0.59	0.68	1.27	0.1
30	1.75	2.03	3.78	0.4
31	3.32	3.94	7.25	0.7
32	5.12	6.18	11.30	1.1
33	6.99	8.58	15.57	1.6
34	8.78	10.95	19.72	2.0
35	10.42	12.94	23.36	2.3
36	11.83	14.49	26.33	2.6
37	12.94	15.65	28.59	2.9
38	13.72	16.39	30.11	3.0
39	14.17	16.73	30.90	3.1
40	14.30	16.70	31.01	3.1
41	14.15	16.35	30.49	3.0
42	13.74	15.72	29.46	2.9
43	13.12	14.86	27.98	2.8
44	12.33	13.85	26.17	2.6
45	11.38	12.76	24.14	2.4
46	10.35	11.59	21.94	2.2
47	9.28	10.37	19.65	2.0
48	8.20	9.15	17.34	1.7
49	7.12	7.94	15.07	1.5
50	6.09	6.78	12.87	1.3
51	5.11	5.68	10.80	1.1
52	4.21	4.67	8.88	0.9
53	3.38	3.75	7.13	0.7
54	2.64	2.92	5.56	0.6
55	1.99	2.20	4.19	0.4
56	1.44	1.59	3.03	0.3
57	0.98	1.08	2.06	0.2
58	0.61	0.67	1.29	0.1
59	0.33	0.37	0.70	0.1
60	0.14	0.16	0.30	0.0
61	0.03	0.04	0.07	0.0
62	0.00	0.00	0.00	0.0
63	0.04	0.04	0.08	0.0
64	0.14	0.15	0.29	0.0
65	0.29	0.32	0.62	0.1
66	0.50	0.56	1.06	0.1
67	0.76	0.84	1.60	0.2
68	1.06	1.16	2.22	0.2
69	1.39	1.53	2.92	0.3
70	1.75	1.93	3.68	0.4
71	2.14	2.35	4.49	0.4
72	2.55	2.80	5.35	0.5
73	2.97	3.27	6.24	0.6
74	3.41	3.75	7.16	0.7
75	3.86	4.24	8.10	0.8
76	4.32	4.74	9.06	0.9
77	4.78	5.25	10.02	1.0

Dist (Meters)	PD (H)	PD (V)	Total (uW/cm2)	Percent Max.
78	5.24	5.75	10.99	1.1
79	5.70	6.26	11.96	1.2
80	6.16	6.76	12.92	1.3
81	6.61	7.26	13.87	1.4
82	7.06	7.75	14.81	1.5
83	7.50	8.23	15.74	1.6
84	7.93	8.71	16.64	1.7
85	8.36	9.17	17.53	1.8
86	8.77	9.62	18.39	1.8
87	9.17	10.06	19.23	1.9
88	9.56	10.49	20.05	2.0
89	9.94	10.90	20.84	2.1
90	10.31	11.30	21.61	2.2
91	10.66	11.69	22.35	2.2
92	11.01	12.06	23.07	2.3
93	11.34	12.41	23.76	2.4
94	11.66	12.75	24.42	2.4
95	11.97	13.08	25.05	2.5
96	12.27	13.39	25.66	2.6
97	12.55	13.69	26.24	2.6
98	12.82	13.97	26.79	2.7
99	13.08	14.24	27.32	2.7
100	13.32	14.50	27.82	2.8