



Proposal Number

Revision

Date

10 May 2001

Call Letters

Channel

281

Location

Coty, WY

Customer

Antenna Type

SKH-8AC

ELEVATION PATTERN

RMS Gain at Main Lobe

3.7 (5.68 dB)

Beam Tilt

1.10 Degrees

RMS Gain at Horizontal

3.4 (5.31 dB)

Frequency


104.10 MHz

Calculated / Measured

Calculated

Drawing #

8SK037110

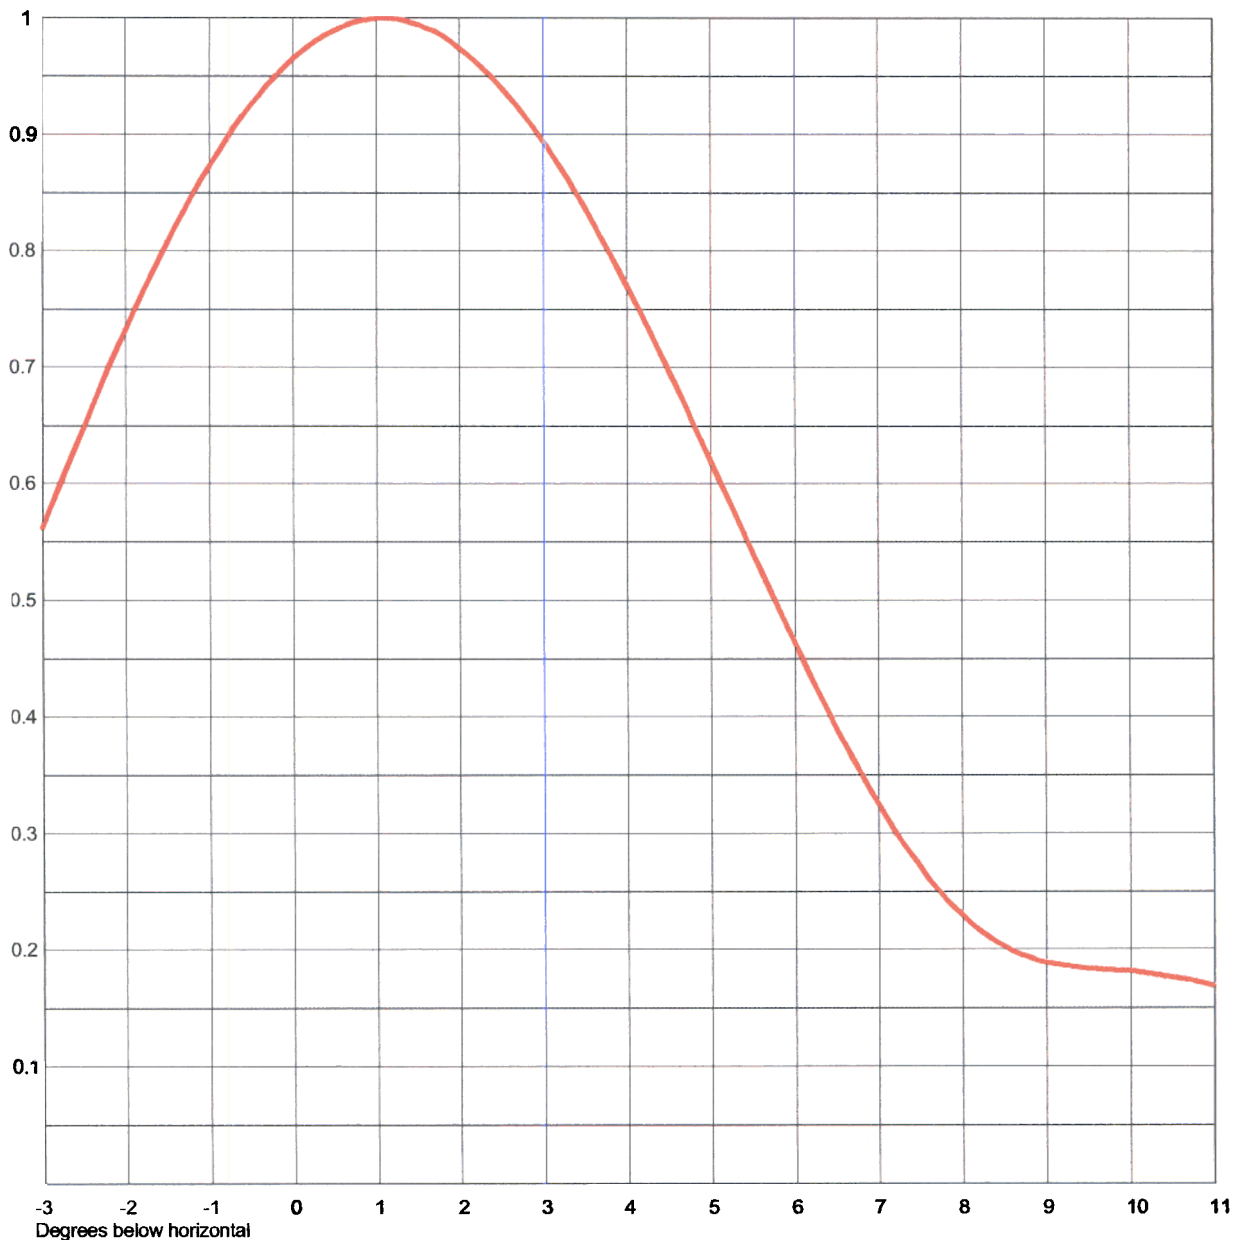

Remarks:

EXHIBIT B(1)



Proposal Number

Revision

Date **10 May 2001**

Call Letters

Channel **281**

Location **Coty, WY**

Customer

Antenna Type **SKH-8AC**

ELEVATION PATTERN

RMS Gain at Main Lobe

3.7 (5.68 dB)

Beam Tilt

1.10 Degrees

RMS Gain at Horizontal

3.4 (5.31 dB)

Frequency


104.10 MHz

Calculated / Measured

Calculated

Drawing #

8SK037110-90

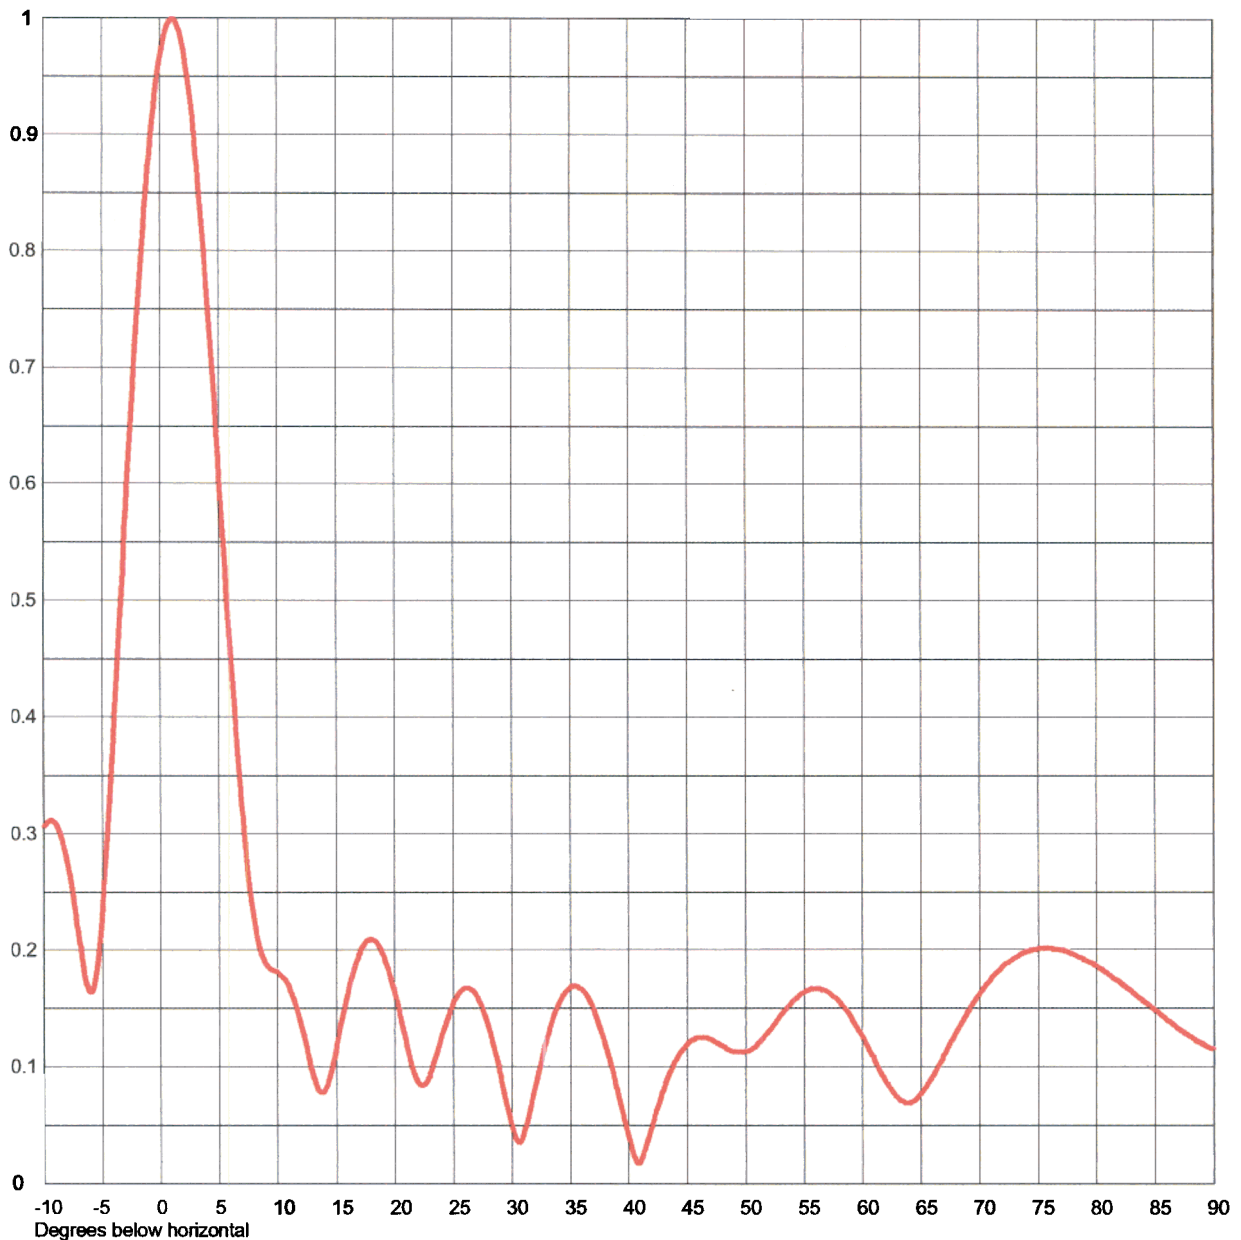

Remarks:

EXHIBIT B(2)



Proposal Number

Revision

Date **10 May 2001**

Call Letters

Channel **281**

Location **Coty, WY**

Customer

Antenna Type **SKH-8AC**

TABULATION OF ELEVATION PATTERN

Elevation Pattern Drawing # **8SK037110-90**

Angle	Field	Angle	Field	Angle	Field	Angle	Field	Angle	Field	Angle	Field
-10.0	0.305	2.4	0.949	10.6	0.176	30.5	0.038	51.0	0.119	71.5	0.181
-9.5	0.312	2.6	0.933	10.8	0.173	31.0	0.041	51.5	0.124	72.0	0.186
-9.0	0.310	2.8	0.915	11.0	0.169	31.5	0.058	52.0	0.130	72.5	0.190
-8.5	0.299	3.0	0.895	11.5	0.156	32.0	0.080	52.5	0.137	73.0	0.194
-8.0	0.279	3.2	0.873	12.0	0.138	32.5	0.102	53.0	0.144	73.5	0.197
-7.5	0.250	3.4	0.850	12.5	0.117	33.0	0.122	53.5	0.150	74.0	0.199
-7.0	0.216	3.6	0.825	13.0	0.096	33.5	0.139	54.0	0.156	74.5	0.200
-6.5	0.183	3.8	0.799	13.5	0.081	34.0	0.153	54.5	0.160	75.0	0.201
-6.0	0.164	4.0	0.771	14.0	0.079	34.5	0.162	55.0	0.164	75.5	0.202
-5.5	0.178	4.2	0.743	14.5	0.092	35.0	0.168	55.5	0.166	76.0	0.202
-5.0	0.227	4.4	0.713	15.0	0.114	35.5	0.170	56.0	0.167	76.5	0.201
-4.5	0.298	4.6	0.683	15.5	0.139	36.0	0.167	56.5	0.167	77.0	0.200
-4.0	0.382	4.8	0.652	16.0	0.162	36.5	0.161	57.0	0.165	77.5	0.199
-3.5	0.472	5.0	0.621	16.5	0.182	37.0	0.151	57.5	0.161	78.0	0.197
-3.0	0.562	5.2	0.589	17.0	0.197	37.5	0.137	58.0	0.157	78.5	0.195
-2.8	0.598	5.4	0.558	17.5	0.206	38.0	0.122	58.5	0.151	79.0	0.192
-2.6	0.633	5.6	0.526	18.0	0.210	38.5	0.103	59.0	0.144	79.5	0.190
-2.4	0.667	5.8	0.495	18.5	0.207	39.0	0.084	59.5	0.135	80.0	0.187
-2.2	0.701	6.0	0.465	19.0	0.198	39.5	0.063	60.0	0.127	80.5	0.184
-2.0	0.733	6.2	0.435	19.5	0.184	40.0	0.043	60.5	0.117	81.0	0.180
-1.8	0.764	6.4	0.406	20.0	0.166	40.5	0.024	61.0	0.108	81.5	0.176
-1.6	0.794	6.6	0.378	20.5	0.144	41.0	0.018	61.5	0.098	82.0	0.173
-1.4	0.822	6.8	0.351	21.0	0.122	41.5	0.031	62.0	0.089	82.5	0.169
-1.2	0.848	7.0	0.326	21.5	0.102	42.0	0.048	62.5	0.081	83.0	0.165
-1.0	0.873	7.2	0.302	22.0	0.088	42.5	0.065	63.0	0.075	83.5	0.161
-0.8	0.895	7.4	0.281	22.5	0.085	43.0	0.080	63.5	0.071	84.0	0.157
-0.6	0.916	7.6	0.261	23.0	0.092	43.5	0.094	64.0	0.070	84.5	0.153
-0.4	0.934	7.8	0.244	23.5	0.107	44.0	0.105	64.5	0.072	85.0	0.149

48.0	0.119
48.5	0.116
49.0	0.114
49.5	0.113
50.0	0.113
50.5	0.115

Remarks:

EXHIBIT B(3)