

#28626

20100302 ACK



Jo Ann Haller  
Senior Vice President & General Counsel

July 14, 2010

Ms. Marlene H. Dortch  
Secretary  
Federal Communications Commission  
445 Twelfth Street, S.W.  
Washington, D.C. 20554

RECEIVED  
JUL 19 A 6:22  
FILED/ACCEPTED

JUL 15 2010

Federal Communications Commission  
Office of the Secretary

Re: WIP 302 License Application  
File # BMML 20100302ACK

Dear Ms. Dortch:


CBS Radio Inc. of Philadelphia, a subsidiary of CBS Corporation, (CBS) hereby submits an amendment to the above referenced application file number BMML-2010302ACK.

This amendment corrects the deficiencies noted in the staff review letter. The amendment also changes the status of the application to a cover a Construction Permit license application. CBS requests that processing of the license application be deferred until the construction permit is granted.

The construction permit was filed to correct an error in the stations center of array coordinates. It appears from examining the stations license granted in 1940, that the error in the coordinates appears to be a typo that occurred prior to the grant of the 1940 license.

If there are any engineering questions regarding the amendment, please contact Raymond Benedict, CBS engineering, 202 457-4518.

Respectfully submitted,

  
Jo Ann Haller  
Assistant Secretary.

Cc: Ann Gallagher  
Media Bureau

B2-L-1210  
 File No. B2-2-461  
 Official No. 356  
 Call letters W I P

UNITED STATES OF AMERICA  
 FEDERAL COMMUNICATIONS COMMISSION

RADIO BROADCASTING STATION LICENSE

Modified as of September 16, 1940  
 Subject to the provisions of the Communications Act of 1934, subsequent acts, and treaties, and all regulations heretofore or hereafter made by this Commission, and further subject to conditions set forth in this license, the LICENSEE

PENNSYLVANIA BROADCASTING COMPANY  
 is hereby authorized to use and operate the radio transmitting apparatus hereinafter described for the purpose of broadcast-  
 ing for the term beginning September 16, 1940, and ending March 29, 1941.  
 (3 a. m., Eastern Standard Time)

The licensee shall use and operate said apparatus only in accordance with the following terms:

1. On a frequency of 610 kc.
2. With power of 5 kilo watts/with an additional XXX watts from local sunrise to local sunset only.  
 Antenna current 8.25 amperes for 5 kilo watts; XXX amperes for XXX watts.  
 Antenna resistance 74.0 ohms. of common input for 5 kilowatts for directional antenna.
3. During the following period or periods of time: antenna.  
 \*Employing directional antenna day and night.  
 Unlimited time. Antenna specifications attached.

4. Under the call letters W I P

5. With the main studio of the station located at:

35 South Ninth Street, Philadelphia, Pennsylvania.

The apparatus hereinabove authorized to be used and operated is located at:

Creek Road, Bellmawr, New Jersey.

Lat. 39 51' 56" North,  
 Long. 75 06 43 West.

and is described as follows: WESTERN ELECTRIC, Type 406-B-1, Broadcasting Transmitter. Direct Crystal Control. Last radio stage: two 2.5 kilowatt vacuum tubes for low level modulation (W.E. 343-AA). Maximum rated carrier power output 5 kilowatts. The field intensity of WIP measured at the monitoring points described on the attached sheet shall not exceed the following values: Point #1, 129 mv/m; Point #2, 76 mv/m; Point #3, 91 mv/m; Point #4, 76 mv/m.

Towers painted and lighted in accordance with the attached specifications.

The Commission reserves the right during said license period of terminating this license or making effective any changes or modification of this license which may be necessary to comply with any decision of the Commission rendered as a result of any hearing held under the rules of the Commission prior to the commencement of this license period or any decision rendered as a result of any such hearing which has been designated but not held, prior to the commencement of this license period.

This license is issued on the licensee's representation that the statements contained in licensee's application are true and that the undertakings therein contained so far as they are consistent herewith, will be carried out in good faith. The licensee shall, during the term of this license, render such broadcasting service as will serve public interest, convenience, or necessity to the full extent of the privileges herein conferred.

This license shall not vest in the licensee any right to operate the station nor any right in the use of the frequency designated in the license beyond the term hereof, nor in any other manner than authorized herein. Neither the license nor the right granted hereunder shall be assigned or otherwise transferred in violation of the Communications Act of 1934. This license is subject to the right of use or control by the Government of the United States conferred by section 606 of the Communications Act of 1934.

Dated this 16th day of September, 1940

[SEAL]

By direction of the FEDERAL COMMUNICATIONS COMMISSION

*[Signature]*  
 Secretary.

FOR  
FCC  
USE  
ONLY

**FCC 302-AM**  
**APPLICATION FOR AM**  
**BROADCAST STATION LICENSE**

(Please read instructions before filling out form.)

**FOR COMMISSION USE ONLY**  
**FILE NO.**

**SECTION I - APPLICANT FEE INFORMATION**

1. PAYOR NAME (Last, First, Middle Initial)

CBS Corporation

FILED/ACCEPTED

MAILING ADDRESS (Line 1) (Maximum 35 characters)  
Suite 350

III 15 2010

MAILING ADDRESS (Line 2) (Maximum 35 characters)  
2175 K St NW

Federal Communications Commission  
Office of the Secretary

CITY  
Washington

STATE OR COUNTRY (if foreign address)  
DC

ZIP CODE  
21046

TELEPHONE NUMBER (include area code)  
202 457-4518

CALL LETTERS  
WIP

OTHER FCC IDENTIFIER (If applicable)  
FAC ID 28626

2. A. Is a fee submitted with this application?

☐ Yes ☒ No

B. If No, indicate reason for fee exemption (see 47 C.F.R. Section

☐ Governmental Entity

☐ Noncommercial educational licensee

☒ Other (Please explain):

C. If Yes, provide the following information:

Enter in Column (A) the correct Fee Type Code for the service you are applying for. Fee Type Codes may be found in the "Mass Media Services Fee Filing Guide." Column (B) lists the Fee Multiple applicable for this application. Enter fee amount due in Column (C).

(A)		
FEE TYPE CODE		

(B)			
FEE MULTIPLE			
0	0	0	1

(C)
FEE DUE FOR FEE TYPE CODE IN COLUMN (A)
\$

FOR FCC USE ONLY

To be used only when you are requesting concurrent actions which result in a requirement to list more than one Fee Type Code.

(A)

(B)			
0	0	0	1

(C)
\$

FOR FCC USE ONLY

ADD ALL AMOUNTS SHOWN IN COLUMN C, AND ENTER THE TOTAL HERE. THIS AMOUNT SHOULD EQUAL YOUR ENCLOSED REMITTANCE.

TOTAL AMOUNT REMITTED WITH THIS APPLICATION
\$

FOR FCC USE ONLY

<b>SECTION II - APPLICANT INFORMATION</b>		
1. NAME OF APPLICANT CBS Radio inc of Philadelphia		
MAILING ADDRESS 2175 K ST NW		
CITY Washington	STATE DC	ZIP CODE 20037

2. This application is for:

- ☒ Commercial
 ☐ Noncommercial  
☒ AM Directional
 ☐ AM Non-Directional

Call letters WIP	Community of License Philadelphia	Construction Permit File No.	Modification of Construction Permit File No(s).	Expiration Date of Last Construction Permit
---------------------	--------------------------------------	------------------------------	---	---

3. Is the station now operating pursuant to automatic program test authority in accordance with 47 C.F.R. Section 73.1620?

☒ Yes ☐ No

If No, explain in an Exhibit.

Exhibit No.

4. Have all the terms, conditions, and obligations set forth in the above described construction permit been fully met?

☐ Yes ☐ No

If No, state exceptions in an Exhibit.

Exhibit No.

5. Apart from the changes already reported, has any cause or circumstance arisen since the grant of the underlying construction permit which would result in any statement or representation contained in the construction permit application to be now incorrect?

☐ Yes ☐ No

If Yes, explain in an Exhibit.

Exhibit No.

6. Has the permittee filed its Ownership Report (FCC Form 323) or ownership certification in accordance with 47 C.F.R. Section 73.3615(b)?

☐ Yes ☐ No

☒ Does not apply

If No, explain in an Exhibit.

Exhibit No.

7. Has an adverse finding been made or an adverse final action been taken by any court or administrative body with respect to the applicant or parties to the application in a civil or criminal proceeding, brought under the provisions of any law relating to the following: any felony; mass media related antitrust or unfair competition; fraudulent statements to another governmental unit; or discrimination?

☐ Yes ☒ No

If the answer is Yes, attach as an Exhibit a full disclosure of the persons and matters involved, including an identification of the court or administrative body and the proceeding (by dates and file numbers), and the disposition of the litigation. Where the requisite information has been earlier disclosed in connection with another application or as required by 47 U.S.C. Section 1.65(c), the applicant need only provide: (i) an identification of that previous submission by reference to the file number in the case of an application, the call letters of the station regarding which the application or Section 1.65 information was filed, and the date of filing; and (ii) the disposition of the previously reported matter.

Exhibit No.

8. Does the applicant, or any party to the application, have a petition on file to migrate to the expanded band (1605-1705 kHz) or a permit or license either in the existing band or expanded band that is held in combination (pursuant to the 5 year holding period allowed) with the AM facility proposed to be modified herein?

☐ Yes ☒ No

If Yes, provide particulars as an Exhibit.

Exhibit No.

The APPLICANT hereby waives any claim to the use of any particular frequency or of the electromagnetic spectrum as against the regulatory power of the United States because use of the same, whether by license or otherwise, and requests and authorization in accordance with this application. (See Section 304 of the Communications Act of 1934, as amended).


The APPLICANT acknowledges that all the statements made in this application and attached exhibits are considered material representations and that all the exhibits are a material part hereof and are incorporated herein as set out in full in

### CERTIFICATION

1. By checking Yes, the applicant certifies, that, in the case of an individual applicant, he or she is not subject to a denial of federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. Section 862, or, in the case of a non-individual applicant (e.g., corporation, partnership or other unincorporated association), no party to the application is subject to a denial of federal benefits that includes FCC benefits pursuant to that section. For the definition of a "party" for these purposes, see 47 C.F.R. Section 1.2002(b).

☒ Yes ☐ No

2. I certify that the statements in this application are true, complete, and correct to the best of my knowledge and belief, and are made in good faith.

Name Jo Ann Haller	Signature 	
Title Senior Vice President	Date 7/12/2010	Telephone Number 202 457-4518

**WILLFUL FALSE STATEMENTS ON THIS FORM ARE PUNISHABLE BY FINE AND/OR IMPRISONMENT (U.S. CODE, TITLE 18, SECTION 1001), AND/OR REVOCATION OF ANY STATION LICENSE OR CONSTRUCTION**

### FCC NOTICE TO INDIVIDUALS REQUIRED BY THE PRIVACY ACT AND THE PAPERWORK REDUCTION ACT

The solicitation of personal information requested in this application is authorized by the Communications Act of 1934, as amended. The Commission will use the information provided in this form to determine whether grant of the application is in the public interest. In reaching that determination, or for law enforcement purposes, it may become necessary to refer personal information contained in this form to another government agency. In addition, all information provided in this form will be available for public inspection. If information requested on the form is not provided, the application may be returned without action having been taken upon it or its processing may be delayed while a request is made to provide the missing information. Your response is required to obtain the requested authorization.

Public reporting burden for this collection of information is estimated to average 639 hours and 53 minutes per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, can be sent to the Federal Communications Commission, Records Management Branch, Paperwork Reduction Project (3060-0627), Washington, D. C. 20554. Do NOT send completed forms to this address.

THE FOREGOING NOTICE IS REQUIRED BY THE PRIVACY ACT OF 1974, P.L. 93-579, DECEMBER 31, 1974, 5 U.S.C. 552a(e)(3), AND THE PAPERWORK REDUCTION ACT OF 1980, P.L. 96-511, DECEMBER 11, 1980, 44 U.S.C. 3507.

# SECTION III - LICENSE APPLICATION ENGINEERING DATA

Name of Applicant

CBS RADIO INC. OF PHILADELPHIA

PURPOSE OF AUTHORIZATION APPLIED FOR: (check one)



Station License



Direct Measurement of Power

## 1. Facilities authorized in construction permit

Call Sign <b>WIP</b>	File No. of Construction Permit (if applicable) BMP-20100715AAG	Frequency (kHz) 610	Hours of Operation UNLIMITED	Power in kilowatts	
				Night 5.0	Day 5.0

## 2. Station location

State <b>PENNSYLVANIA</b>	City or Town <b>PHILADELPHIA</b>
------------------------------	-------------------------------------

## 3. Transmitter location

State <b>NJ</b>	County <b>CAMDEN</b>	City or Town <b>BELLMWR</b>	Street address (or other identification) 775 CREEK ROAD
--------------------	-------------------------	--------------------------------	---

## 4. Main studio location

State <b>PA</b>	County <b>MONTGOMERY</b>	City or Town <b>BALA CYNWYD</b>	Street address (or other identification) 333 CITY AVENUE
--------------------	-----------------------------	------------------------------------	--

## 5. Remote control point location (specify only if authorized directional antenna)

State <b>PA</b>	County <b>MONTGOMERY</b>	City or Town <b>BALA CYNWYD</b>	Street address (or other identification) 333 CITY AVENUE
--------------------	-----------------------------	------------------------------------	--

6. Has type-approved stereo generating equipment been installed?



Yes



No

7. Does the sampling system meet the requirements of 47 C.F.R. Section 73.68?



Yes



No



Not Applicable

Attach as an Exhibit a detailed description of the sampling system as installed.

Exhibit No. ENG
--------------------

## 8. Operating constants:

RF common point or antenna current (in amperes) without modulation for night system 10.4	RF common point or antenna current (in amperes) without modulation for day system 10.4
Measured antenna or common point resistance (in ohms) at operating frequency Night 50 Day 50	Measured antenna or common point reactance (in ohms) at operating frequency Night -3.8 Day -3.8

## Antenna indications for directional operation

Towers	Antenna monitor Phase reading(s) in degrees		Antenna monitor sample current ratio(s)		Antenna base currents	
	Night	Day	Night	Day	Night	Day
1 (SW)	0.0	0.0	1.000	1.000		
2 (NE)	-7.4	-7.4	.669	.669		

Manufacturer and type of antenna monitor:

POTOMAC INSTRUMENTS AM 19 (204)

# SECTION III - Page 2

9. Description of antenna system ((f directional antenna is used, the information requested below should be given for each element of the array. Use separate sheets if necessary.)

Type Radiator  SELF SUPPORTING TOWER	Overall height in meters of radiator above base insulator, or above base, if grounded.  83.8	Overall height in meters above ground (without obstruction lighting)  TWR 1: 85.8 TWR 2: 84.8	Overall height in meters above ground (include obstruction lighting)  TWR 1: 86.6 TWR 2: 85.6	If antenna is either top loaded or sectionalized, describe fully in an Exhibit.  Exhibit No. ENG
--	--	---	---	--

Excitation

☒

Series

☐

Shunt

Geographic coordinates to nearest second. For directional antenna give coordinates of center of array. For single vertical radiator give tower location.

North Latitude	39 °	51 '	55 "	West Longitude	75 °	06 '	34 "
----------------	------	------	------	----------------	------	------	------

If not fully described above, attach as an Exhibit further details and dimensions including any other antenna mounted on tower and associated isolation circuits.

Exhibit No.  
ENG

Also, if necessary for a complete description, attach as an Exhibit a sketch of the details and dimensions of ground system.

Exhibit No.  
ENG


10. In what respect, if any, does the apparatus constructed differ from that described in the application for construction permit or in the permit?

N/A

11. Give reasons for the change in antenna or common point resistance.

EQUIPMENT CHANGES

I certify that I represent the applicant in the capacity indicated below and that I have examined the foregoing statement of technical information and that it is true to the best of my knowledge and belief.

Name (Please Print or Type) KURT GORMAN	Signature (check appropriate box below) 
Address (include ZIP Code) 550 CALIFORNIA ROAD, UNIT 11 QUAKERTOWN, PA 18951	Date JUNE 4, 2010
	Telephone No. (Include Area Code) 215-536-6648

☐

Technical Director

☐

Registered Professional Engineer

☐

Chief Operator

☒

Technical Consultant

☐

Other (specify)

**ENGINEERING STATEMENT CONCERNING**

**APPLICATION FOR LICENSE INFORMATION**

**EMPLOYING MOMENT METHOD MODELING**

**WIP, 610 KHZ, DA-1**

**PHILADELPHIA, PENNSLVANIA**

**FEBRUARY, 2010**

**REVISED JUNE 4, 2010**



**PHASETEK INC.**  
**550 CALIFORNIA ROAD, UNIT 11**  
**QUAKERTOWN, PA 18951**  
**PHONE: 215-536-6648**  
**FAX: 215-536-7180**

**ENGINEERING STATEMENT CONCERNING  
APPLICATION FOR LICENSE INFORMATION  
EMPLOYING MOMENT METHOD MODELING  
WIP, 610 KHZ, DA-1  
PHILADELPHIA, PA**

**JUNE 4, 2010**

In response to the Commission's letter dated May 11, 2010, the Engineering Statement concerning Radio Station WIP, 610 kHz, Philadelphia, Pennsylvania, has been revised. The following items have been addressed:

1. The Tower model segments have been revised such that the wire segment length/radius values exceed 2.57; a convergence test was performed on the model to validate accuracy.
2. Figure 5A was generated to show modeled wire radius versus actual Tower face width for all wire sections.
3. The Sampling System data includes TCT measurement and that the Sampling Line impedance measurement connected to TCT was performed at 610 kHz.
4. A revised Form 302 is attached with corrected operating parameters and correct coordinates for the center of the Array. In addition, a 301 application is being submitted to correct the coordinates.



Kurt Gorman  
President  
Phasetek Inc.

# ***PHASETEK INC.***

## **ENGINEERING STATEMENT CONCERNING APPLICATION FOR LICENSE INFORMATION EMPLOYING MOMENT METHOD MODELING WIP, 610 KHZ, DA-1 PHILADELPHIA, PA FEBRUARY, 2010 REVISED JUNE 4, 2010**

### **TABLE OF CONTENTS**

**302-AM**

#### **ENGINEERING STATEMENT**

<b>FIGURE 1:</b>	<b>ANTENNA SYSTEM AS ADJUSTED</b>
<b>FIGURE 2:</b>	<b>SAMPLING SYSTEM DESCRIPTION/MEASUREMENTS</b>
<b>FIGURE 3:</b>	<b>POTOMAC INSTRUMENTS RECOMMENDATIONS</b>
<b>FIGURE 4:</b>	<b>TOWER IMPEDANCE MEASUREMENTS VS. MODELED</b>
<b>FIGURE 5:</b>	<b>MOMENT MODEL PARAMETERS</b>
<b>FIGURE 5A:</b>	<b>WIRE RADIUS VERSUS TOWER FACE WIDTH</b>
<b>FIGURE 6A – 6B:</b>	<b>MOMENT MODEL SUMMARY FOR INDIVIDUAL TOWERS</b>
<b>FIGURE 7:</b>	<b>DERIVED DIRECTIONAL PARAMETERS</b>
<b>FIGURE 8:</b>	<b>MOMENT MODEL ARRAY SYNTHESIS</b>
<b>FIGURE 9:</b>	<b>MOMENT MODEL SUMMARY FOR DIRECTIONAL MODE</b>
<b>FIGURE 10:</b>	<b>TOWER BASE CIRCUIT ANALYSIS MODEL</b>
<b>FIGURE 11A – 11B:</b>	<b>CIRCUIT ANALYSIS FOR INDIVIDUAL TOWERS</b>
<b>FIGURE 12A – 12B:</b>	<b>CIRCUIT ANALYSIS FOR DIRECTIONAL MODE</b>
<b>FIGURE 13:</b>	<b>REFERENCE FIELD INTENSITY MEASUREMENTS</b>

# ***PHASETEK INC.***

## **ENGINEERING STATEMENT CONCERNING APPLICATION FOR LICENSE INFORMATION EMPLOYING MOMENT METHOD MODELING WIP, 610 KHZ, DA-1 PHILADELPHIA, PA FEBRUARY, 2010 REVISED JUNE 4, 2010**

### **SUMMARY**

Adjustment of the Antenna System and a Proof of Performance employing Moment Method Modeling was performed on Radio Station WIP, 610 kHz, Philadelphia, Pennsylvania, after replacement of Antenna Phasing equipment, Transmission and Sampling Lines, and new Tower Feed Assemblies. This report was prepared on behalf of CBS Radio Inc., of Philadelphia, licensee of Radio Station WIP.

### **SITE MODIFICATIONS**

The WIP Transmitter site remains that as previously licensed. Due to the age of the equipment, new Transmission Lines, Sampling Lines, and Antenna Phasing and Branching equipment have been installed. The Towers have not been changed except for maintenance of Tower lighting conduits, Tower repainting, and new feed connection at base. In conjunction with these upgrades and determination that the licensed coordinates were incorrect (a Form 301 is being submitted to amend this), a License Application employing Moment Method Modeling as set forth in Section 73.151(C) has been done to cover the 301 CP application and license under the new rules.

### **REFERENCE POINTS**

Reference Points were measured at pattern minima and maxima for the Directional mode of operation. These Points and their measured field intensity are shown in Figure 13.

### **MEASURING EQUIPMENT AND PERSONNEL**


All Resistance and Reactance measurements were made with a Delta Electronics OIB-3 Operating Impedance Bridge. Before use, tests of known impedances were made to verify operation. All Field Intensity Measurements were made with a Potomac Instruments Field Intensity Meter; FIM-41, Serial Number 2181, calibrated on June 27, 2006. The meter was calibrated by Potomac Instruments, Silver Spring, Maryland. All measurements were taken by Phasetek Inc. personnel supervised by Kurt Gorman of Phasetek Inc.

***PHASETEK INC.***

**ENGINEERING STATEMENT CONCERNING  
APPLICATION FOR LICENSE INFORMATION  
EMPLOYING MOMENT METHOD MODELING  
WIP, 610 KHZ, DA-1  
PHILADELPHIA, PA  
FEBRUARY, 2010  
REVISED JUNE 4, 2010**

**CONCLUSION**

It is believed that the WIP Antenna System has been adjusted in accordance with all applicable Commission rules and regulations. The foregoing was prepared on behalf of CBS Radio, Inc. of Philadelphia, under the immediate supervision of Kurt Gorman, Phasetek Inc., Quakertown, Pennsylvania, whose qualifications are a matter of record with the Federal Communications Commission. The statements herein are true and correct of his knowledge, except such statements made on information and belief, and as to these statements he believes them to be true and correct.

  
\_\_\_\_\_  
**Kurt Gorman, President  
Phasetek Inc.  
Quakertown, Pennsylvania**

## FIGURE 1

### ANTENNA SYSTEM AS ADJUSTED

**APPLICATION FOR LICENSE INFORMATION  
EMPLOYING MOMENT METHOD MODELING  
WIP, 610 KHZ, DA-1  
PHILADELPHIA, PA  
REVISED JUNE 4, 2010**

#### **ANTENNA SYSTEM DESCRIPTION**

1. The Antenna System consists of two (2), self-supporting, tapered, vertical steel transmitting Towers. Both Towers stand 83.8M (61.4°) above their Base Insulators. Both Towers are top loaded with a 9.15M Top Hat. Both Towers have aviation obstruction lighting. The Towers are arranged with Tower 1 as a reference; Tower 2 is spaced 181.0° on a bearing of 50.0°T. Lighting for both Towers is isolated at each base by a Ring Isolation Transformer. Additionally, a "Star" Feed Assembly, attached to all (4) legs, is connected at the base and provides the connection to each Antenna Tuning Unit.
2. The Ground System for each Tower consists of (120) buried copper Radials, 122M in length, except where they intersect with copper transverse straps between Towers or property boundaries. Additionally, a 12.2M x 12.2M copper ground screen is installed at the base of each Tower. Copper strap connects all Towers to the main Transmitter grounding point.
3. The Sampling System consists of two (2), Delta Electronics TCT-1, 0.5 V/A Toroidal Current Transformers. Both TCT's are at the Output of each Antenna Tuning Unit. These TCT's are connected to a Potomac Instruments AM19 (204) Phase Monitor via two (2) equal lengths of Andrew, LDF-2, 3/8" phase stabilized foam coaxial cable.

#### **TOWER PARAMETERS (DIRECTIONAL)**

Theoretical			Modeled TCT		Operating *	
<u>Tower</u>	<u>Field</u>	<u>Phase</u>	<u>Amplitude</u>	<u>Phase</u>	<u>Amplitude</u>	<u>Phase</u>
1 (SW)	1.540	0.0°	1.000	0.0°	1.000	0.0°
2 (NE)	1.000	0.0°	.669	-0.6°	.669	-7.4°

\* As Indicated on Potomac Instruments AM19 (204) Antenna Monitor with additional jumper for Tower #2. See Figures 2 and 3.

**FIGURE 1  
ANTENNA SYSTEM AS ADJUSTED**

**APPLICATION FOR LICENSE INFORMATION  
EMPLOYING MOMENT METHOD MODELING  
WIP, 610 KHZ, DA-1  
PHILADELPHIA, PA  
CONTINUED  
REVISED JUNE 4, 2010**

**ANTENNA SYSTEM DESCRIPTION – Continued**

**DIRECTIONAL OPERATION**

**COMMON POINT**

Impedance = 50.0 – j 3.8 ohms  
Current = 10.4 Amperes  
Power = 5,400 Watts

Directional Antenna Monitor Indications are within  $\pm 5\%$  and  $\pm 3^\circ$  of the modeled TCT values.

**TOWER REGISTRATION NUMBERS**

Tower #1 (SW): 1040104  
Tower #2 (NE): 1040105

**FIGURE 2**  
**WIP SAMPLING SYSTEM DESCRIPTION/MEASUREMENTS**  
**REVISED JUNE 4, 2010**

**SAMPLING SYSTEM DESCRIPTION**

The Sampling System consists of Delta Electronics TCT-1 Toroidal Sampling Transformers (0.5 volt/amp) mounted at the base of each Tower. The sampling devices are connected to the Phase Monitor with equal lengths of Andrew LDF-2. Each Sample Line was ordered and tested by the manufacturer to be phase stabilized and of equal lengths. The Phase Monitor is a Potomac Instruments Model AM-19 (204), Serial Number 546.

Toroidal sample devices were tested for accuracy by the manufacturer prior to shipment as being within 1 percent ratio and 1 degree phase accuracy. Measurement of both TCT's connected at Tower #1 in series yields the following as indicated on the Potomac Instruments AM19 (204) Monitor:

TCT 1: 1.000, 0.0°

TCT 2: 1.000, -0.5°

**SAMPLE SYSTEM MEASUREMENTS**

Impedance measurements were made of the Antenna Sampling System using an Array Solutions Model AIM4170C Vector Network Analyzer (VNA) and verified with a Delta Electronics OIB-3 Operating Impedance Bridge and Potomac Instruments SD-31/RX-31 RF Generator/Detector. Measurements were done with the lines open circuited and then connected to the TCT's.

The table below shows the frequencies above and below the carrier frequency where resonance, defined as zero reactance corresponding with low resistance, was found. Frequencies of resonance occur at odd multiples of 90 degrees electrical length, the Sample Line length at the resonant frequency below the carrier frequency, which is the closest one to the carrier frequency, was found to be 270 electrical degrees. The electrical length at carrier frequency appearing in the table below was calculated by ratioing the frequencies.

**WIP Tower  
Sample Line  
Measurements**

	<b>Resonant Frequency (kHz) below 610 kHz</b>	<b>Resonant Frequency (kHz) above 610 kHz</b>	<b>Calculated Electrical Length (deg) at 610 kHz</b>	<b>Measured Impedance Connected to TCT @ 610kHz</b>
<b>Tower 1</b>	566.3	929.0	290.8	50.0 +j0.7
<b>Tower 2</b>	566.6	928.9	290.7	50.5 +j0.6

**FIGURE 2**  
**WIP SAMPLING SYSTEM DESCRIPTION/MEASUREMENTS**  
**CONTINUED**  
**REVISED JUNE 4, 2010**

**SAMPLE SYSTEM MEASUREMENTS (CONTINUED)**

To determine the characteristic impedance values of the Sample Lines, open-circuited measurements were made with frequencies offset to produce  $\pm 45$  degrees of electrical length from resonance. The characteristic impedance was calculated using the following formula, where  $R_1 + jX_1$  and  $R_2 + jX_2$  are the measured impedances at the +45 and -45 degree offset frequencies, respectively:

$$Z_0 = ((R_1^2 + X_1^2)^{1/2} \times (R_2^2 + X_2^2)^{1/2})^{1/2}$$

**WIP TOWER SAMPLE LINE MEASUREMENTS**

	<b>+ 45 Degree Offset Frequency (kHz)</b>	<b>+45 Degree Measured Impedance (Ohms)</b>	<b>- 45 Degree Offset Frequency (kHz)</b>	<b>-45 Degree Measured Impedance (Ohms)</b>	<b>Calculated Characteristic Impedance (Ohms)</b>
<b>Tower 1</b>	680.7	9.8 +j51.93	471.9	6.51 -j48.97	51.09
<b>Tower 2</b>	661.0	9.6 +j51.10	472.2	6.49 -j48.70	50.54
<b>Impedance Delta</b>					<b>0.55</b>

Due to the nature of the WIP Array, the required phase indication on the Antenna Monitor is close to  $0^\circ$ . This situation provides difficulty in accurate measurement with the Potomac Instruments AM19 (204) Antenna Monitor. A short jumper constructed of RG-58/U, 50 ohm, coaxial cable is installed at the Antenna Monitor in series with the Tower #2 (non-reference) Sample Line. Measurement of this jumper yields an open circuit resonant frequency of 8.1044 MHz. This corresponds to a lagging phase of  $6.8^\circ$  at 610 kHz. The jumper is mounted in the equipment rack and at constant environmental conditions. Attached as Figure 3 are the recommendations as found in the Potomac Instruments Instruction Manual.



**(PAGE 3-3 FROM TYPE 19 ANTENNA MONITOR INSTRUCTION MANUAL)**

When installing the Sampling Lines, it is recommended that the cable lengths be as nearly equal as possible; both to preserve the absolute accuracy of the phase measurements, and also to "cancel" variations in line characteristics due to temperature changes and other causes.

An important exception to this rule is sometimes made for those arrays which produce measured phase angles near 0 degrees. In this case, the sense (leading or lagging) indication of a phase angle must be interpreted carefully, and also the monitor is most susceptible to interference at these angles. If desired, these effects may be eliminated by inserting an extra length of coaxial cable in series with the sampling lines from the towers in question. The length of the extra cables should be sufficient to affect a phase delay of about 5 degrees as determined from the following formula:

$$\text{LENGTH OF CABLE (FEET)} = \frac{2733 \cdot V \cdot \text{PHASE DELAY (DEGREES)}}{\text{OPERATING FREQUENCY (KILOCYCLES)}}$$

V (Cable Velocity Factor)

- = 0.85 for air-spaced dielectric
- = 0.67 for solid polyethylene dielectric (ei. RG-8/U, RG-58/U, RG-59/U)
- = 0.695 for solid teflon dielectric

**EXAMPLE: Use 9.15 feet of .RG-8/U for 5 degrees delay at 1000 kHz**

The 'extra' cable should be installed in a protected location where temperature extremes are minimized.

### 3 -4.2 Non-Directional Voltage Limit

In a DA-D or DA-N system, it is important to determine the sampling line voltage from both the powered and unpowered towers during Non-Directional operation. To avoid damage in cases where the specified voltage limit is exceeded, a coaxial relay can be utilized to transfer the sampling lines from each overloaded input receptacle to a dissipating resistance during Non-Directional operation. The relay coils can be energized by a Phasor contactor utilizing either the 24 volt supply in the monitor (pins 23 and 24 of J1) or an external power source.


### 3.4.3 Input Module Connections

The coaxial cables from the antenna sampling loops are connected to UHF receptacles on the rear of the AM-19. Each coaxial receptacle is mounted on an input module which contains the switching relays and critical RF circuits repeated for each tower. The input modules are assembled across the rear of the monitor with one module provided for each antenna tower up to a maximum of 12.

Two types of input modules are utilized in the AM-1.9. These are designated either as reference tower input modules or as non-reference tower input modules.

In a monitor equipped for a single pattern system, that is for a DA-1

**FIGURE 4**  
**WIP TOWER IMPEDANCE MEASUREMENTS COMPARED TO**  
**METHOD OF MOMENTS MODEL**  
**REVISED JUNE 4, 2010**

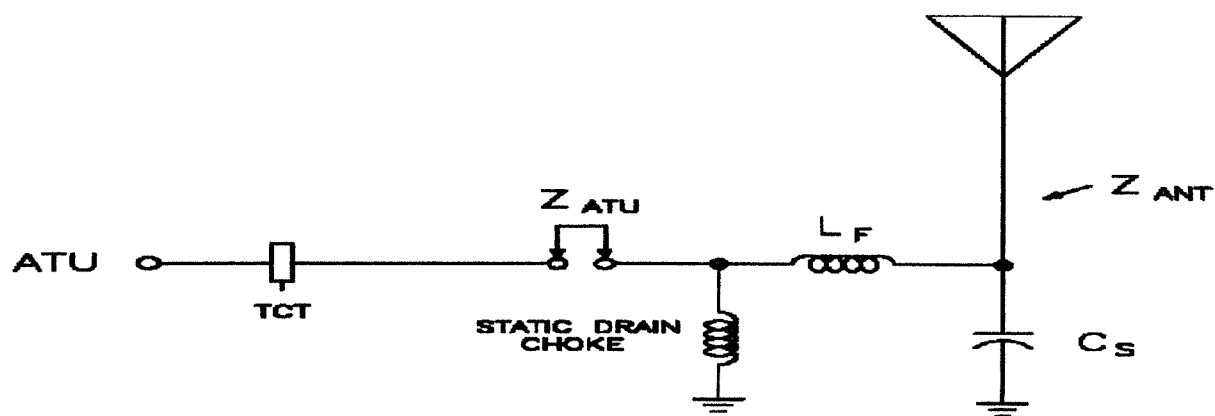

TOWER	Specified $C_s$ (pf)	Measured $L_F$ ( $\mu$ H)	Measured $X_F$ ( $\Omega$ )	Modeled $Z_{ANT}$ ( $\Omega$ )	Modeled $Z_{ATU}$ ( $\Omega$ )	Measured $Z_{ATU}$ ( $\Omega$ )
1	40	5.22	+20.0	15.8 -j68.8	15.6 -j48.2	15.0 -j45.1
2	40	6.65	+25.5	15.6 -j70.0	15.4 -j43.8	14.5 -j41.5

Above "measured" impedance values were measured with Delta Electronics OIB-3 Operating Impedance Bridge with other Tower open circuited.

**FIGURE 5**  
**WIP MOMENT MODEL PARAMETERS**  
**REVISED JUNE 4, 2010**

<u>Tower #</u>	<u>Wire #</u>	<u># of Segments</u>	<u>Base Node</u>	<u>Radius (m)</u>	<u>Tower Model Length (°)</u>	<u>Tower Physical Length (°)</u>
1	1	3	1	2.4061	68.2	61.4
1	2	3	-	2.0051	-	-
1	3	3	-	1.6041	-	-
1	4	3	-	1.203	-	-
1	5	3	-	.8521	-	-
1	6	3	-	.6391	-	-
1	7	2	-	.08	-	-
1	8	2	-	.08	-	-
1	9	2	-	.08	-	-
2	10	3	25	2.4061	67.8	61.4
2	11	3	-	2.0051	-	-
2	12	3	-	1.6041	-	-
2	13	3	-	1.203	-	-
2	14	3	-	.8521	-	-
2	15	3	-	.6391	-	-
2	16	2	-	.08	-	-
2	17	2	-	.08	-	-
2	18	2	-	.08	-	-

**Note:** Wires 7 – 9 and 16 – 18 represent Top Hat Top Loading and lengths are equal to physical Radius.

Both Towers are four (4) sided, tapered, self-supporting, with a 15.5 ft. base and 31.0 inch top face widths. Each Tower has four (4) Base Insulators at an approximate capacitance of 10pf each. The Output of each Antenna Tuning Unit has a Phasetek Inc. P600-161-2 Static Drain Choke which measures +j32,000 ohms (8,349.1uH) @ 610kHz.

See Figure 5A for wire diameter as compared to Tower Face Width for all wires.

**FIGURE 5A**  
**WIRE RADIUS VS. TOWER FACE WIDTH**

<u>WIRE</u>	<u>WIRE RADIUS METERS</u>	<u>RATIO OF EFFECTIVE HEIGHT</u>	<u>ACTUAL TOWER FACE WIDTH (INCHES)</u>	<u>EQUIVALENT RADIUS (METERS)</u>	<u>PERCENTAGE OF EQUIVALENT RADIUS</u>
1 Bottom	2.4061	0.0000	186.0	3.0076	80.0
1 Top	2.4061	.1994	155.1	2.5080	95.9
2 Bottom	2.0051	.1994	155.1	2.5080	80.0
2 Top	2.0051	.4003	124.0	2.0051	100.0
3 Bottom	1.6041	.4003	124.0	2.0051	80.0
3 Top	1.6041	.5997	93.0	1.5038	106.7
4 Bottom	1.2030	.5997	93.0	1.5038	80.0
4 Top	1.2030	.7991	62.1	1.0042	119.8
5 Bottom	.8521	.7991	62.1	1.0042	84.9
5 Top	.8521	.9047	45.8	.7406	115.1
6 Bottom	.6391	.9047	45.8	.7406	86.3
6 Top	.6391	1.000	31.0	.5013	127.5
10 Bottom	2.4061	0.0000	186.0	3.0076	80.0
10 Top	2.4061	.2006	154.9	2.5048	96.1
11 Bottom	2.0051	.2006	154.9	2.5048	80.1
11 Top	2.0051	.4027	123.6	1.9986	100.3
12 Bottom	1.6041	.4027	123.6	1.9986	80.3
12 Top	1.6041	.6032	92.5	1.4957	107.3
13 Bottom	1.2030	.6032	92.5	1.4957	80.4
13 Top	1.2030	.8038	61.4	.9928	121.2
14 Bottom	.8521	.8038	61.4	.9928	85.8
14 Top	.8521	.9041	45.9	.7422	114.8
15 Bottom	.6391	.9041	45.9	.7422	86.1
15 Top	.6391	1.000	31.0	.5013	127.5

# FIGURE 6A

## WIP MOMENT MODEL SUMMARY FOR INDIVIDUAL TOWERS TOWER 1

### WIP REVISED TOWER 1 INDIVIDUAL

#### GEOMETRY

Wire coordinates in degrees; other dimensions in meters

Environment: perfect ground

wire	caps	Radius	Angle	Z	radius	segs
1	none	0	0	0	2.4061	3
		0	0	13.6		
2	none	0	0	13.6	2.0051	3
		0	0	27.3		
3	none	0	0	27.3	1.6041	3
		0	0	40.9		
4	none	0	0	40.9	1.203	3
		0	0	54.5		
5	none	0	0	54.5	.8521	3
		0	0	61.7		
6	none	0	0	61.7	.6391	3
		0	0	68.2		
7	none	0	0	68.2	.08	2
		3.35	0	68.2		
8	none	0	0	68.2	.08	2
		3.35	120.	68.2		
9	none	0	0	68.2	.08	2
		3.35	240.	68.2		
10	none	181.	50.	0	2.4061	3
		181.	50.	13.6		
11	none	181.	50.	13.6	2.0051	3
		181.	50.	27.3		
12	none	181.	50.	27.3	1.6041	3
		181.	50.	40.9		
13	none	181.	50.	40.9	1.203	3
		181.	50.	54.5		
14	none	181.	50.	54.5	.8521	3
		181.	50.	61.3		
15	none	181.	50.	61.3	.6391	3
		181.	50.	67.8		
16	none	181.	50.	67.8	.08	2
		183.17	49.2	67.8		
17	none	181.	50.	67.8	.08	2
		177.7	49.8	67.8		
18	none	181.	50.	67.8	.08	2
		182.17	51.	67.8		

Number of wires = 18  
current nodes = 48

	minimum		maximum	
	wire	value	wire	value
Individual wires	2	4.56667	16	1.67125
segment length	7	.08	1	2.4061
radius				

#### ELECTRICAL DESCRIPTION

Frequencies ( MHz)

frequency			no. of steps	segment length (wavelengths)	
no.	lowest	step		minimum	maximum
1	.61	0	1	4.64E-03	.0126852

#### Sources

source	node	sector	magnitude	phase	type
1	1	1	1.	0	voltage

**FIGURE 6A**  
**WIP MOMENT MODEL SUMMARY FOR INDIVIDUAL TOWERS**  
**TOWER 1**  
**CONTINUED**

**WIP REVISED TOWER 1 INDIVIDUAL Cont'd**

**Lumped loads**

load	node	resistance (ohms)	reactance (ohms)	inductance (mH)	capacitance (uF)	passive circuit
1	25	0	-6,522.7	0	0	0

**IMPEDANCE**

normalization = 50.

freq (MHz)	resist (ohms)	react (ohms)	imped (ohms)	phase (deg)	VSWR dB	S11 dB	S12 dB
source = 1; node 1, sector 1							
.61	15.834	-68.836	70.633	-77.05	9.3525	-1.8646	-14.28

**CURRENT rms**

Frequency = .61 MHz

Input power = .00158687 watts

Efficiency = 100. %

current no.	X	Y	Z	mag (amps)	phase (deg)	real (amps)	imaginary (amps)
GND	0	0	0	.0100109	77.05	2.24E-03	9.76E-03
2	0	0	4.53333	9.06E-03	75.73	2.23E-03	8.78E-03
3	0	0	9.06667	8.54E-03	75.08	2.2E-03	8.25E-03
END	0	0	13.6	8.01E-03	74.51	2.14E-03	7.71E-03
2J1	0	0	13.6	8.01E-03	74.51	2.14E-03	7.71E-03
5	0	0	18.1667	7.53E-03	74.06	2.07E-03	7.24E-03
6	0	0	22.7333	7.E-03	73.64	1.97E-03	6.72E-03
END	0	0	27.3	6.41E-03	73.22	1.85E-03	6.14E-03
2J2	0	0	27.3	6.41E-03	73.22	1.85E-03	6.14E-03
8	0	0	31.8333	5.88E-03	72.89	1.73E-03	5.62E-03
9	0	0	36.3667	5.28E-03	72.55	1.58E-03	5.04E-03
END	0	0	40.9	4.62E-03	72.21	1.41E-03	4.4E-03
2J3	0	0	40.9	4.62E-03	72.21	1.41E-03	4.4E-03
11	0	0	45.4333	4.04E-03	71.93	1.25E-03	3.84E-03
12	0	0	49.9667	3.39E-03	71.65	1.07E-03	3.21E-03
END	0	0	54.5	2.66E-03	71.36	8.51E-04	2.52E-03
2J4	0	0	54.5	2.66E-03	71.36	8.51E-04	2.52E-03
14	0	0	56.9	2.35E-03	71.24	7.55E-04	2.22E-03
15	0	0	59.3	2.E-03	71.11	6.48E-04	1.89E-03
END	0	0	61.7	1.63E-03	70.98	5.3E-04	1.54E-03
2J5	0	0	61.7	1.63E-03	70.98	5.3E-04	1.54E-03
17	0	0	63.8667	1.34E-03	70.88	4.38E-04	1.26E-03
18	0	0	66.0333	1.03E-03	70.8	3.38E-04	9.7E-04
END	0	0	68.2	7.42E-04	70.75	2.45E-04	7.01E-04
2J6	0	0	68.2	2.47E-04	70.75	8.16E-05	2.34E-04
20	1.675	0	68.2	1.6E-04	70.78	5.25E-05	1.51E-04
END	3.35	0	68.2	0	0	0	0
2J6	0	0	68.2	2.47E-04	70.75	8.16E-05	2.34E-04
22	-.8375	1.45059	68.2	1.6E-04	70.78	5.25E-05	1.51E-04
END	-1.675	2.90119	68.2	0	0	0	0
2J6	0	0	68.2	2.47E-04	70.75	8.16E-05	2.34E-04
24	-.8375	-1.45059	68.2	1.6E-04	70.78	5.25E-05	1.51E-04
END	-1.675	-2.90119	68.2	0	0	0	0
GND	116.345	138.654	0	1.03E-05	-132.08	-6.91E-06	-7.65E-06
26	116.345	138.654	4.53333	1.22E-04	-132.1	-8.15E-05	-9.02E-05
27	116.345	138.654	9.06667	1.51E-04	-132.14	-1.01E-04	-1.12E-04
END	116.345	138.654	13.6	1.77E-04	-132.19	-1.19E-04	-1.31E-04
2J10	116.345	138.654	13.6	1.77E-04	-132.19	-1.19E-04	-1.31E-04
29	116.345	138.654	18.1667	1.92E-04	-132.25	-1.29E-04	-1.42E-04
30	116.345	138.654	22.7333	2.E-04	-132.32	-1.35E-04	-1.48E-04
END	116.345	138.654	27.3	2.04E-04	-132.4	-1.37E-04	-1.5E-04
2J11	116.345	138.654	27.3	2.04E-04	-132.4	-1.37E-04	-1.5E-04

**FIGURE 6A**  
**WIP MOMENT MODEL SUMMARY FOR INDIVIDUAL TOWERS**  
**TOWER 1**  
**CONTINUED**

**WIP REVISED TOWER 1 INDIVIDUAL Cont'd**

current no.	X	Y	Z	mag (amps)	phase (deg)	real (amps)	imaginary (amps)
32	116.345	138.654	31.8333	2.01E-04	-132.48	-1.36E-04	-1.48E-04
33	116.345	138.654	36.3667	1.94E-04	-132.57	-1.31E-04	-1.43E-04
END	116.345	138.654	40.9	1.81E-04	-132.67	-1.23E-04	-1.33E-04
2J12	116.345	138.654	40.9	1.81E-04	-132.67	-1.23E-04	-1.33E-04
35	116.345	138.654	45.4333	1.66E-04	-132.77	-1.13E-04	-1.22E-04
36	116.345	138.654	49.9667	1.46E-04	-132.88	-9.93E-05	-1.07E-04
END	116.345	138.654	54.5	1.2E-04	-133.	-8.16E-05	-8.75E-05
2J13	116.345	138.654	54.5	1.2E-04	-133.	-8.16E-05	-8.75E-05
38	116.345	138.654	56.7667	1.08E-04	-133.06	-7.38E-05	-7.89E-05
39	116.345	138.654	59.0333	9.46E-05	-133.12	-6.46E-05	-6.9E-05
END	116.345	138.654	61.3	7.91E-05	-133.18	-5.41E-05	-5.77E-05
2J14	116.345	138.654	61.3	7.91E-05	-133.18	-5.41E-05	-5.77E-05
41	116.345	138.654	63.4667	6.61E-05	-133.23	-4.52E-05	-4.81E-05
42	116.345	138.654	65.6333	5.15E-05	-133.28	-3.53E-05	-3.75E-05
END	116.345	138.654	67.8	3.75E-05	-133.3	-2.57E-05	-2.73E-05
2J15	116.345	138.654	67.8	1.22E-05	-132.64	-8.29E-06	-9.E-06
44	118.016	138.656	67.8	7.84E-06	-132.49	-5.3E-06	-5.78E-06
END	119.687	138.659	67.8	0	0	0	0
2J15	116.345	138.654	67.8	1.27E-05	-134.27	-8.9E-06	-9.13E-06
46	115.521	137.19	67.8	8.22E-06	-134.45	-5.75E-06	-5.87E-06
END	114.698	135.727	67.8	0	0	0	0
2J15	116.345	138.654	67.8	1.25E-05	-132.95	-8.51E-06	-9.14E-06
48	115.494	140.113	67.8	8.E-06	-132.87	-5.44E-06	-5.86E-06
END	114.643	141.573	67.8	0	0	0	0

# **FIGURE 6B** **WIP MOMENT MODEL SUMMARY FOR INDIVIDUAL TOWERS** **TOWER 2**

## **WIP REVISED - TOWER 2 INDIVIDUAL**

### **GEOMETRY**

Wire coordinates in degrees; other dimensions in meters

Environment: perfect ground

wire	caps	Radius	Angle	Z	radius	segs
1	none	0	0	0	2.4061	3
		0	0	13.6		
2	none	0	0	13.6	2.0051	3
		0	0	27.3		
3	none	0	0	27.3	1.6041	3
		0	0	40.9		
4	none	0	0	40.9	1.203	3
		0	0	54.5		
5	none	0	0	54.5	.8521	3
		0	0	61.7		
6	none	0	0	61.7	.6391	3
		0	0	68.2		
7	none	0	0	68.2	.08	2
		3.35	0	68.2		
8	none	0	0	68.2	.08	2
		3.35	120.	68.2		
9	none	0	0	68.2	.08	2
		3.35	240.	68.2		
10	none	181.	50.	0	2.4061	3
		181.	50.	13.6		
11	none	181.	50.	13.6	2.0051	3
		181.	50.	27.3		
12	none	181.	50.	27.3	1.6041	3
		181.	50.	40.9		
13	none	181.	50.	40.9	1.203	3
		181.	50.	54.5		
14	none	181.	50.	54.5	.8521	3
		181.	50.	61.3		
15	none	181.	50.	61.3	.6391	3
		181.	50.	67.8		
16	none	181.	50.	67.8	.08	2
		183.17	49.2	67.8		
17	none	181.	50.	67.8	.08	2
		177.7	49.8	67.8		
18	none	181.	50.	67.8	.08	2
		182.17	51.	67.8		

Number of wires = 18  
current nodes = 48

	minimum	maximum
Individual wires	wire value	wire value
segment length	2 4.56667	16 1.67125
radius	7 .08	1 2.4061

### **ELECTRICAL DESCRIPTION**

Frequencies ( MHz)

frequency	no. of	segment length (wavelengths)
no. lowest	steps	minimum maximum
1 .61	1	4.64E-03 .0126852

### **Sources**

source node	sector	magnitude	phase	type
1 25	1	1.	0	voltage



**FIGURE 6B**  
**WIP MOMENT MODEL SUMMARY FOR INDIVIDUAL TOWERS**  
**TOWER 2**  
**CONTINUED**

**WIP REVISED - TOWER 2 INDIVIDUAL Con'td**

**Lumped loads**

load	node	resistance (ohms)	reactance (ohms)	inductance (mH)	capacitance (uF)	passive circuit
1	1	0	-6,522.7	0	0	0

**IMPEDANCE**

normalization = 50.

freq (MHz)	resist (ohms)	react (ohms)	imped (ohms)	phase (deg)	VSWR dB	S11 dB	S12 dB
source = .61	1; node 15.574	25, sector 1 -69.983	71.695	-77.45	9.7087	-1.7957	-14.574

**CURRENT rms**

Frequency = .61 MHz

Input power = .00151489 watts

Efficiency = 100. %

current no.	X	Y	Z	mag (amps)	phase (deg)	real (amps)	imaginary (amps)
GND	0	0	0	1.02E-05	-131.68	-6.75E-06	-7.59E-06
2	0	0	4.53333	1.2E-04	-131.7	-7.97E-05	-8.95E-05
3	0	0	9.06667	1.49E-04	-131.73	-9.92E-05	-1.11E-04
END	0	0	13.6	1.75E-04	-131.79	-1.16E-04	-1.3E-04
2J1	0	0	13.6	1.75E-04	-131.79	-1.16E-04	-1.3E-04
5	0	0	18.1667	1.89E-04	-131.85	-1.26E-04	-1.41E-04
6	0	0	22.7333	1.98E-04	-131.91	-1.32E-04	-1.47E-04
END	0	0	27.3	2.01E-04	-132.	-1.35E-04	-1.49E-04
2J2	0	0	27.3	2.01E-04	-132.	-1.35E-04	-1.49E-04
8	0	0	31.8333	1.99E-04	-132.08	-1.33E-04	-1.48E-04
9	0	0	36.3667	1.92E-04	-132.17	-1.29E-04	-1.42E-04
END	0	0	40.9	1.8E-04	-132.27	-1.21E-04	-1.33E-04
2J3	0	0	40.9	1.8E-04	-132.27	-1.21E-04	-1.33E-04
11	0	0	45.4333	1.65E-04	-132.37	-1.11E-04	-1.22E-04
12	0	0	49.9667	1.46E-04	-132.48	-9.83E-05	-1.07E-04
END	0	0	54.5	1.2E-04	-132.6	-8.13E-05	-8.84E-05
2J4	0	0	54.5	1.2E-04	-132.6	-8.13E-05	-8.84E-05
14	0	0	56.9	1.08E-04	-132.66	-7.32E-05	-7.94E-05
15	0	0	59.3	9.4E-05	-132.72	-6.38E-05	-6.9E-05
END	0	0	61.7	7.79E-05	-132.79	-5.29E-05	-5.71E-05
2J5	0	0	61.7	7.79E-05	-132.79	-5.29E-05	-5.71E-05
17	0	0	63.8667	6.5E-05	-132.84	-4.42E-05	-4.76E-05
18	0	0	66.0333	5.06E-05	-132.89	-3.44E-05	-3.71E-05
END	0	0	68.2	3.68E-05	-132.91	-2.5E-05	-2.69E-05
2J6	0	0	68.2	1.24E-05	-133.55	-8.56E-06	-9.E-06
20	1.675	0	68.2	8.E-06	-133.66	-5.52E-06	-5.79E-06
END	3.35	0	68.2	0	0	0	0
2J6	0	0	68.2	1.23E-05	-133.25	-8.46E-06	-8.99E-06
22	-.8375	1.45059	68.2	7.94E-06	-133.3	-5.44E-06	-5.78E-06
END	-1.675	2.90119	68.2	0	0	0	0
2J6	0	0	68.2	1.2E-05	-131.9	-8.02E-06	-8.94E-06
24	-.8375	-1.45059	68.2	7.68E-06	-131.67	-5.11E-06	-5.74E-06
END	-1.675	-2.90119	68.2	0	0	0	0
GND	116.345	138.654	0	9.86E-03	77.45	2.14E-03	9.63E-03
26	116.345	138.654	4.53333	8.91E-03	76.16	2.13E-03	8.65E-03
27	116.345	138.654	9.06667	8.39E-03	75.52	2.1E-03	8.12E-03
END	116.345	138.654	13.6	7.86E-03	74.95	2.04E-03	7.59E-03
2J10	116.345	138.654	13.6	7.86E-03	74.95	2.04E-03	7.59E-03
29	116.345	138.654	18.1667	7.38E-03	74.51	1.97E-03	7.12E-03
30	116.345	138.654	22.7333	6.86E-03	74.09	1.88E-03	6.6E-03
END	116.345	138.654	27.3	6.27E-03	73.68	1.76E-03	6.02E-03

**FIGURE 6B**  
**WIP MOMENT MODEL SUMMARY FOR INDIVIDUAL TOWERS**  
**TOWER 2**  
**CONTINUED**

WIP REVISED - TOWER 2 INDIVIDUAL Con'td

current no.	X	Y	Z	mag (amps)	phase (deg)	real (amps)	imaginary (amps)
2J11	116.345	138.654	27.3	6.27E-03	73.68	1.76E-03	6.02E-03
32	116.345	138.654	31.8333	5.75E-03	73.35	1.65E-03	5.5E-03
33	116.345	138.654	36.3667	5.16E-03	73.02	1.51E-03	4.93E-03
END	116.345	138.654	40.9	4.5E-03	72.68	1.34E-03	4.3E-03
2J12	116.345	138.654	40.9	4.5E-03	72.68	1.34E-03	4.3E-03
35	116.345	138.654	45.4333	3.92E-03	72.4	1.19E-03	3.74E-03
36	116.345	138.654	49.9667	3.28E-03	72.12	1.01E-03	3.12E-03
END	116.345	138.654	54.5	2.56E-03	71.83	7.99E-04	2.43E-03
2J13	116.345	138.654	54.5	2.56E-03	71.83	7.99E-04	2.43E-03
38	116.345	138.654	56.7667	2.27E-03	71.72	7.12E-04	2.16E-03
39	116.345	138.654	59.0333	1.95E-03	71.6	6.16E-04	1.85E-03
END	116.345	138.654	61.3	1.6E-03	71.48	5.08E-04	1.52E-03
2J14	116.345	138.654	61.3	1.6E-03	71.48	5.08E-04	1.52E-03
41	116.345	138.654	63.4667	1.32E-03	71.38	4.2E-04	1.25E-03
42	116.345	138.654	65.6333	1.01E-03	71.29	3.25E-04	9.59E-04
END	116.345	138.654	67.8	7.32E-04	71.25	2.35E-04	6.94E-04
2J15	116.345	138.654	67.8	2.42E-04	71.25	7.79E-05	2.3E-04
44	118.016	138.656	67.8	1.56E-04	71.28	5.02E-05	1.48E-04
END	119.687	138.659	67.8	0	0	0	0
2J15	116.345	138.654	67.8	2.44E-04	71.25	7.84E-05	2.31E-04
46	115.521	137.19	67.8	1.57E-04	71.28	5.05E-05	1.49E-04
END	114.698	135.727	67.8	0	0	0	0
2J15	116.345	138.654	67.8	2.46E-04	71.25	7.9E-05	2.33E-04
48	115.494	140.113	67.8	1.58E-04	71.28	5.08E-05	1.5E-04
END	114.643	141.573	67.8	0	0	0	0

**FIGURE 7**  
**WIP DERIVED DIRECTIONAL PARAMETERS**  
**REVISED JUNE 4, 2010**

<u>Tower</u>	<b>Normalized Base Current Moment</b>		<b>Base Network Input/Output</b>		<b>Normalized TCT Value</b>	
	<u>Ratio</u>	<u>Phase</u>	<u>Ratio</u>	<u>Phase</u>	<u>Ratio</u>	<u>Phase</u>
1	1.000	0.0°	1.0095	+0.1°	1.000	0.0°
2	.668	-0.6°	1.0105	+0.1°	.669	-0.6°

**FIGURE 8**  
**WIP MOMENT MODEL ARRAY SYNTHESIS**  
**REVISED JUNE 4, 2010**

**MEDIUM WAVE ARRAY SYNTHESIS FROM FIELD RATIOS**

Frequency = .61 MHz

	field ratio	
tower	magnitude	phase (deg)
1	1.54	0
2	1.	0

**VOLTAGES AND CURRENTS - rms**

source voltage			current	
node	magnitude	phase (deg)	magnitude	phase (deg)
1	1,224.32	-76.61	16.8406	3.05
25	880.552	-80.04	11.263	2.43

Sum of square of source currents = 820.924

Total power = 5,000. watts

**TOWER ADMITTANCE MATRIX**

admittance	real (mhos)	imaginary (mhos)
Y(1, 1)	.00330537	.0140497
Y(1, 2)	-.00111717	-.000788729
Y(2, 1)	-.00111717	-.000788727
Y(2, 2)	.00315957	.0138685

**TOWER IMPEDANCE MATRIX**

impedance	real (ohms)	imaginary (ohms)
Z(1, 1)	15.2703	-67.6512
Z(1, 2)	-3.25541	-5.8192
Z(2, 1)	-3.2554	-5.81921
Z(2, 2)	15.0101	-68.7549

# **FIGURE 9** **WIP MOMENT MODEL SUMMARY FOR DIRECTIONAL MODE**

## WIP REVISED DIRECTIONAL

### GEOMETRY

Wire coordinates in degrees; other dimensions in meters  
 Environment: perfect ground

wire	caps	Radius	Angle	Z	radius	segs
1	none	0	0	0	2.4061	3
		0	0	13.6		
2	none	0	0	13.6	2.0051	3
		0	0	27.3		
3	none	0	0	27.3	1.6041	3
		0	0	40.9		
4	none	0	0	40.9	1.203	3
		0	0	54.5		
5	none	0	0	54.5	.8521	3
		0	0	61.7		
6	none	0	0	61.7	.6391	3
		0	0	68.2		
7	none	0	0	68.2	.08	2
		3.35	0	68.2		
8	none	0	0	68.2	.08	2
		3.35	120.	68.2		
9	none	0	0	68.2	.08	2
		3.35	240.	68.2		
10	none	181.	50.	0	2.4061	3
		181.	50.	13.6		
11	none	181.	50.	13.6	2.0051	3
		181.	50.	27.3		
12	none	181.	50.	27.3	1.6041	3
		181.	50.	40.9		
13	none	181.	50.	40.9	1.203	3
		181.	50.	54.5		
14	none	181.	50.	54.5	.8521	3
		181.	50.	61.3		
15	none	181.	50.	61.3	.6391	3
		181.	50.	67.8		
16	none	181.	50.	67.8	.08	2
		183.17	49.2	67.8		
17	none	181.	50.	67.8	.08	2
		177.7	49.8	67.8		
18	none	181.	50.	67.8	.08	2
		182.17	51.	67.8		

Number of wires = 18  
 current nodes = 48

	minimum		maximum	
Individual wires	wire	value	wire	value
segment length	2	4.56667	16	1.67125
radius	7	.08	1	2.4061

### ELECTRICAL DESCRIPTION

Frequencies ( MHz)

frequency		no. of steps	segment length (wavelengths)	
no.	lowest		minimum	maximum
1	.61	0	4.64E-03	.0126852

### Sources

source	node	sector	magnitude	phase	type
1	1	1	1,731.45	-76.61	voltage
2	25	1	1,245.29	-80.04	voltage

### IMPEDANCE

normalization = 50.

# **FIGURE 9** **WIP MOMENT MODEL SUMMARY FOR DIRECTIONAL MODE** **CONTINUED**

## **WIP REVISED DIRECTIONAL Cont'd**

freq (MHz)	resist (ohms)	react (ohms)	imped (ohms)	phase (deg)	VSWR dB	S11 dB	S12 dB
source = 1; node 1, sector 1							
.61	13.556	-72.87	74.12	-79.46	11.709	-1.4873	-16.061
source = 2; node 25, sector 1							
.61	10.666	-79.118	79.834	-82.32	16.579	-1.0491	-18.879
Parallel combination of all sources.							
.61	6.12113	-37.9572	38.4476	-80.84	12.921	-1.3472	-16.853

## **CURRENT rms**

Frequency = .61 MHz

Input power = 5,000. watts

Efficiency = 100. %


current				mag (amps)	phase (deg)	real (amps)	imaginary (amps)
no.	X	Y	Z				
GND	0	0	0	16.5244	2.85	16.5039	.822979
2	0	0	4.53333	14.8603	1.73	14.8535	.447615
3	0	0	9.06667	13.9644	1.16	13.9615	.282916
END	0	0	13.6	13.0625	.66	13.0617	.150189
2J1	0	0	13.6	13.0625	.66	13.0617	.150189
5	0	0	18.1667	12.2572	.27	12.2571	.0575911
6	0	0	22.7333	11.3752	-.11	11.3752	-.0208714
END	0	0	27.3	10.3963	-.47	10.3959	-.0857159
2J2	0	0	27.3	10.3963	-.47	10.3959	-.0857159
8	0	0	31.8333	9.51737	-.77	9.51651	-.127499
9	0	0	36.3667	8.54265	-1.06	8.54118	-.158667
END	0	0	40.9	7.45719	-1.37	7.45507	-.177799
2J3	0	0	40.9	7.45719	-1.37	7.45507	-.177799
11	0	0	45.4333	6.50535	-1.61	6.50278	-.182858
12	0	0	49.9667	5.45265	-1.86	5.44977	-.177203
END	0	0	54.5	4.27701	-2.12	4.27408	-.158517
2J4	0	0	54.5	4.27701	-2.12	4.27408	-.158517
14	0	0	56.9	3.77134	-2.23	3.76848	-.146638
15	0	0	59.3	3.21523	-2.34	3.21255	-.131408
END	0	0	61.7	2.60817	-2.46	2.60577	-.111951
2J5	0	0	61.7	2.60817	-2.46	2.60577	-.111951
17	0	0	63.8667	2.14479	-2.54	2.14267	-.0951885
18	0	0	66.0333	1.64719	-2.62	1.64546	-.0753649
END	0	0	68.2	1.18977	-2.66	1.18849	-.0552544
2J6	0	0	68.2	.396491	-2.63	.396073	-.018204
20	1.675	0	68.2	.255686	-2.6	.255423	-.0115959
END	3.35	0	68.2	0	0	0	0
2J6	0	0	68.2	.396539	-2.65	.396117	-.0183053
22	-.8375	1.45059	68.2	.255724	-2.62	.255457	-.0116743
END	-1.675	2.90119	68.2	0	0	0	0
2J6	0	0	68.2	.39674	-2.71	.396297	-.018745
24	-.8375	-1.45059	68.2	.255877	-2.69	.255595	-.0120126
END	-1.675	-2.90119	68.2	0	0	0	0
GND	116.345	138.654	0	11.034	2.28	11.0253	.438993
26	116.345	138.654	4.53333	9.83169	1.38	9.82882	.237505
27	116.345	138.654	9.06667	9.19488	.93	9.19366	.149246
END	116.345	138.654	13.6	8.56318	.52	8.56282	.0782764
2J10	116.345	138.654	13.6	8.56318	.52	8.56282	.0782764
29	116.345	138.654	18.1667	8.00673	.21	8.00668	.0289075
30	116.345	138.654	22.7333	7.40393	-.1	7.40392	-.0127743
END	116.345	138.654	27.3	6.74145	-.4	6.74129	-.0470456
2J11	116.345	138.654	27.3	6.74145	-.4	6.74129	-.0470456
32	116.345	138.654	31.8333	6.15153	-.64	6.15114	-.0689698

**FIGURE 9**  
**WIP MOMENT MODEL SUMMARY FOR DIRECTIONAL MODE**  
**CONTINUED**

**WIP REVISED DIRECTIONAL Cont'd**

current no.	X	Y	Z	mag (amps)	phase (deg)	real (amps)	imaginary (amps)
33	116.345	138.654	36.3667	5.50177	-.89	5.50111	-.0851366
END	116.345	138.654	40.9	4.78273	-1.14	4.78179	-.0947945
2J12	116.345	138.654	40.9	4.78273	-1.14	4.78179	-.0947945
35	116.345	138.654	45.4333	4.15561	-1.34	4.15448	-.097005
36	116.345	138.654	49.9667	3.46524	-1.55	3.46398	-.0934618
END	116.345	138.654	54.5	2.69694	-1.76	2.69567	-.0829331
2J13	116.345	138.654	54.5	2.69694	-1.76	2.69567	-.0829331
38	116.345	138.654	56.7667	2.38774	-1.84	2.38651	-.0767754
39	116.345	138.654	59.0333	2.04805	-1.93	2.04689	-.0690206
END	116.345	138.654	61.3	1.67799	-2.02	1.67695	-.0592355
2J14	116.345	138.654	61.3	1.67799	-2.02	1.67695	-.0592355
41	116.345	138.654	63.4667	1.3795	-2.09	1.37858	-.0503622
42	116.345	138.654	65.6333	1.05949	-2.16	1.05873	-.0398781
END	116.345	138.654	67.8	.765997	-2.19	.765437	-.0292677
2J15	116.345	138.654	67.8	.253739	-2.26	.253542	-.0100188
44	118.016	138.656	67.8	.163792	-2.26	.163665	-6.45E-03
END	119.687	138.659	67.8	0	0	0	0
2J15	116.345	138.654	67.8	.254972	-2.08	.254804	-9.25E-03
46	115.521	137.19	67.8	.164404	-2.03	.1643	-5.84E-03
END	114.698	135.727	67.8	0	0	0	0
2J15	116.345	138.654	67.8	.257286	-2.23	.257091	-.0100038
48	115.494	140.113	67.8	.165752	-2.21	.165628	-6.4E-03
END	114.643	141.573	67.8	0	0	0	0

**FIGURE 10**  
**WIP TOWER BASE CIRCUIT ANALYSIS MODEL**

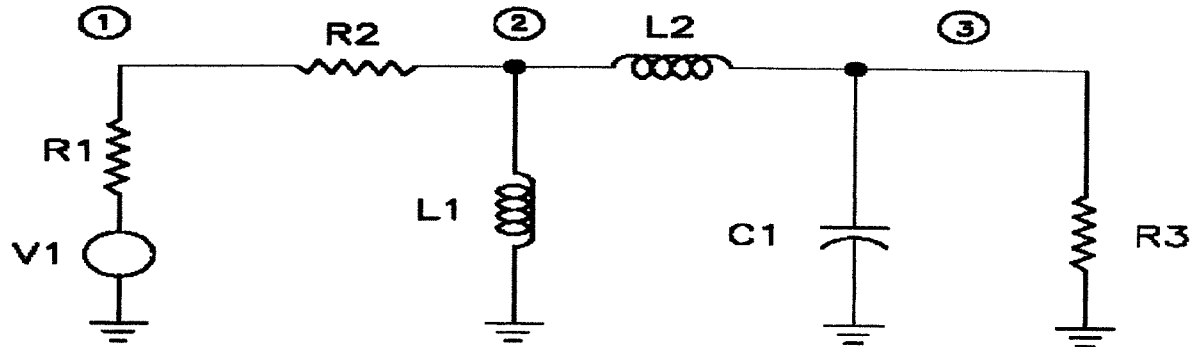

The above circuit was analyzed with the Engineering Circuit Analysis program (ECA) for each Tower. Resistors R1 (100k  $\Omega$ ) and R2 (0.1  $\Omega$ ) were located in the circuit for measurement locations of impedance and current.

For each of the individual Tower impedance calculations, the complex value of R3 was that obtained from the program Expert Mininec Broadcast Professional Version 6.0 for that specific Tower. The input impedance to the circuit was calculated to represent the value at the test jack located at the Antenna Tuning Unit (ATU) output.

In the case of the Directional Array, the complex value of R3 for each Tower was set to the Expert Mininec Broadcast Professional Version 6.0 calculated impedance at each source location. The current magnitude and phase variation was calculated for each Tower from the input to the output of each circuit. These values, once normalized, were used to modify the calculated source current magnitude and phase to determine the sampling TCT values.



# **FIGURE 11A** **WIP CIRCUIT ANALYSIS FOR INDIVIDUAL TOWERS**

## **WIP REVISED TOWER 1 (OTHER OPEN)**

BRANCH	LABEL	NODES		VALUE	
1	V1	0	0	100.	
2	R1	1	0	100.K	
3	R2	1	2	0.1	
4	L1	2	0	0.0083491	
5	L2	2	3	5.22u	
6	C1	3	0	40.p	
7	R3	3	0	15.8	J-68.8

FREQ.	PROBE	VALUE	dB	PHASE	PHASE DELAY
610.K	V:1	0.0506375	-25.911	-72.010	327.916n
610.K	V:2	0.0506068	-25.916	-72.118	328.406n
610.K	V:3	0.0699482	-23.104	-77.148	351.312n
610.K	Z:R1	50.6375	17.045	-72.010	327.916n

$$Z \text{ (IN)} = 15.6 -j 48.2$$

# **FIGURE 11B** **WIP CIRCUIT ANALYSIS FOR INDIVIDUAL TOWERS**

## WIP REVISED TOWER 2 (OTHER OPEN)

BRANCH	LABEL	NODES		VALUE	
1	V1	0	0	100.	
2	R1	1	0	100.K	
3	R2	1	2	0.1	
4	L1	2	0	0.0083491	
5	L2	2	3	6.65u	
6	C1	3	0	40.p	
7	R3	3	0	15.6	J-70.

FREQ.	PROBE	VALUE	dB	PHASE	PHASE DELAY
610.K	V:1	0.04648	-26.655	-70.613	321.551n
610.K	V:2	0.0464469	-26.661	-70.729	322.081n
610.K	V:3	0.0710419	-22.970	-77.520	353.004n
610.K	Z:R1	46.48	16.673	-70.613	321.551n

$$Z \text{ (IN)} = 15.4 -j 43.8$$

**FIGURE 12A**  
**WIP CIRCUIT ANALYSIS FOR DIRECTIONAL MODE**

**WIP REVISED TOWER 1 DIRECTIONAL**

BRANCH	LABEL	NODES	VALUE	
1	V1	0 0	100.	
2	R1	1 0	100.K	
3	R2	1 2	0.1	
4	L1	2 0	0.0083491	
5	L2	2 3	5.22u	
6	C1	3 0	40.p	
7	R3	3 0	13.6	J-72.9

FREQ.	PROBE	VALUE	dB	PHASE	PHASE DELAY
610.K	V:1	0.0538907	-25.370	-75.526	343.924n
610.K	V:2	0.0538658	-25.374	-75.629	344.393n
610.K	V:3	0.0734477	-22.680	-79.497	362.008n
610.K	Z:R1	53.8907	17.315	-75.526	343.924n
610.K	I:R2	999.865u	-60.001	0.030	-136.161p
610.K	I:R3	990.425u	-60.084	-0.064	293.199p

Z (IN) = 13.5 -J 52.2

I (IN/OUT) = 1.0095, 0.1 DEG.

# **FIGURE 12B** **WIP CIRCUIT ANALYSIS FOR DIRECTIONAL MODE**

## WIP REVISED TOWER 2 DIRECTIONAL

BRANCH	LABEL	NODES	VALUE	
1	V1	0 0	100.	
2	R1	1 0	100.K	
3	R2	1 2	0.1	
4	L1	2 0	0.0083491	
5	L2	2 3	6.65u	
6	C1	3 0	40.p	
7	R3	3 0	10.7	J-79.1

FREQ.	PROBE	VALUE	dB	PHASE	PHASE DELAY
610.K	V:1	0.0538094	-25.383	-78.632	358.07n
610.K	V:2	0.0537898	-25.386	-78.736	358.545n
610.K	V:3	0.0789856	-22.049	-82.340	374.955n
610.K	Z:R1	53.8094	17.309	-78.632	358.07n
610.K	I:R2	999.894u	-60.001	0.030	-137.654p
610.K	I:R3	989.542u	-60.091	-0.044	199.913p

Z (IN) = 10.6 -J 52.8

I (IN/OUT) = 1.0105, 0.1 DEG.

**FIGURE 13**  
**WIP REFERENCE FIELD INTENSITY MEASUREMENTS**

**WIP REFERENCE POINT MEASUREMENTS – FEBRUARY 3, 2010**

**CO-ORD NAD27**

<u>Radial</u>		<u>Dist</u> <u>km</u>	<u>mV/m</u>	<u>Time</u>	<u>CO-ORD NAD27</u>			<u>Description</u>
<u>N 44</u>					<u>Deg</u>	<u>Min</u>	<u>Sec</u>	
<u>E</u>	1	2.82	56.5	1145	N 39	53	1.2	NJ 168 behind Midas Muffler shop -- on edge
					W 75	5	11.2	of grass in line with home plate of softball
	2	3.16	67.0	1153	N 39	53	8.6	Near int of Lake + Maple on sidewalk next to
					W 75	5	0.2	creek at end of guard rail
	3	3.83	41.5	1200	N 39	53	25.1	N side of Cedarcroft @ Audubon -- on sidewalk
					W 75	4	41.9	in front of house #125
<u>N 56</u>								
<u>E</u>	1	2.92	52.0	1223	N 39	52	48.3	Wayne + St. Martins -- NE corner @ street sign
					W 75	4	51.4	
	2	3.99	39.0	1216	N 39	53	8.5	Walnut S of Wyoming -- E sidewalk in front of
					W 75	4	14.6	wooden garage building
	3	4.61	35.8	1209	N 39	53	19.3	On sidewalk in front of 23 W. Vassar
					W 75	3	52.4	
<u>N 140</u>								
<u>E</u>	1	3.55	213.0	1249	N 39	50	27.9	At driveway 932 Evesham
					W 75	4	57.0	
	2	4.35	180.0	1255	N 39	50	7.8	Ridge + Front @ street sign + pole 5176
					W 75	4	35.8	
	3	5.04	163.0	1303	N 39	49	50.6	Cemetery entrance off Lower Landing Rd --
					W 75	4	17.3	at drain inside gate

**FIGURE 13**  
**WIP REFERENCE FIELD INTENSITY MEASUREMENTS**  
**CONTINUED**

**WIP REFERENCE POINT MEASUREMENTS – FEBRUARY 3, 2010**

<u>Radial</u>		<u>Dist km</u>	<u>mV/m</u>	<u>Time</u>	<u>CO-ORD NAD27</u>			<u>Description</u>
					<u>Deg</u>	<u>Min</u>	<u>Sec</u>	
<b>N 218 E</b>	1	4.49	43.0	1328	N 39	50	0.9	Between 510 + 532 Cooper -- 15' W of pole # 61965WB on sidewalk
					W 75	8	29.5	
	2	5.41	38.7	1340	N 39	49	37.4	On sidewalk in front of house "33 Andy Snyder" (at corner of Elm)
					W 75	8	53.5	
	3	6.21	39.0	1347	N 39	49	16.6	At driveway of 425 Holly
					W 75	9	13.3	
<b>N 242 E</b>	1	3.99	41.5	1429	N 39	50	54.7	On sidewalk in front of 107 Hess
					W 75	9	1.6	
	2	4.68	49.0	1423	N 39	50	44.5	On sidewalk in front of 20 Lynn
					W 75	9	27.8	
	3	5.58	29.5	1403	N 39	50	30.7	Childs N of Delaware -- on E sidewalk at first tree past speed limit sign
					W 75	10	0.9	
<b>N 320 E</b>	1	6.15	144.0	1506	N 39	54	27.9	Packer Ave @ produce market (terminal) entrance @ stop sign
					W 75	9	19.9	
	2	7.34	85.0	1516	N 39	54	56.8	10th + Oregon on S sidewalk 20' E of 10th
					W 75	9	53.2	
	3	8.10	99.0	1525	N 39	55	14.6	Broad + Ritner NW corner
					W 75	10	15.5	