

SECTION III-D - DTV Engineering	
<b>TECHNICAL SPECIFICATIONS</b>	
Ensure that the specifications below are accurate. Contradicting data found elsewhere in this application will be disregarded. All items must be completed. The response "on file" is not acceptable.	
<b>TECH BOX</b>	
1.	Channel Number:  DTV 7 Analog TV, if any 7
2.	Zone: <input type="radio"/> I <input checked="" type="radio"/> II <input type="radio"/> III
3.	Antenna Location Coordinates: (NAD 27) Latitude: Degrees 18 Minutes 27 Seconds 21 <input checked="" type="radio"/> North <input type="radio"/> South  Longitude: Degrees 66 Minutes 45 Seconds 16 <input checked="" type="radio"/> West <input type="radio"/> East
4.	Antenna Structure Registration Number: 1011025 <input type="checkbox"/> Not Applicable <input type="checkbox"/> Notification filed with FAA
5.	Antenna Location Site Elevation Above Mean Sea Level: 64 meters
6.	Overall Tower Height Above Ground Level: 91.1 meters
7.	Height of Radiation Center Above Ground Level: 85 meters
8.	Height of Radiation Center Above Average Terrain : 65 meters
9.	Maximum Effective Radiated Power (average power): 0.012 kW
10.	<p>Antenna Specifications:</p> <p>a. Manufacturer ADC Model T7H1.3MS2S (Composite)</p> <p>b. Electrical Beam Tilt: degrees <input checked="" type="checkbox"/> Not Applicable</p> <p>c. Mechanical Beam Tilt: degrees toward azimuth degrees True <input checked="" type="checkbox"/> Not Applicable Attach as an Exhibit all data specified in 47 C.F.R. Section 73.625(c). [Exhibit 42]</p> <p>d. Polarization: <input checked="" type="radio"/> Horizontal <input type="radio"/> Circular <input type="radio"/> Elliptical</p> <p>e. Directional Antenna Relative Field Values: <input type="checkbox"/> Not applicable (Nondirectional)</p> <p>[For a composite directional (not off-the-shelf) antenna, press the following button to fill in the relative field values subform.] [Relative Field Values]</p> <p style="text-align: center;"><b>10e. Directional Antenna Relative Field Values</b></p>

[Fill in this subform for a composite directional (not off-the-shelf) antenna, only.]

e. Directional Antenna Relative Field Values:

Rotation (Degrees): ☒ No Rotation

Degrees	Value	Degrees	Value	Degrees	Value	Degrees	Value	Degrees	Value	Degrees	Value
0	1	10	0.87	20	0.7	30	0.79	40	0.94	50	0.97
60	0.92	70	0.82	80	0.68	90	0.45	100	0.25	110	0.24
120	0.12	130	0.11	140	0.17	150	0.16	160	0.11	170	0.15
180	0.21	190	0.24	200	0.12	210	0.14	220	0.22	230	0.1
240	0.1	250	0.28	260	0.41	270	0.54	280	0.62	290	0.67
300	0.8	310	0.93	320	0.96	330	0.78	340	0.72	350	0.89

Additional  
Azimuths

[Relative Field Polar Plot](#)

If a directional antenna is proposed, the requirements of 47 C.F.R. Sections 73.625(c) must be satisfied. **Exhibit required.** [Exhibit 43]

11. Does the proposed facility satisfy the pre-transition interference protection provisions of 47 C.F.R. Section 73.623(a) (Applicable only if **Certification Checklist** Items 1(a), (b), or (c) are answered "No.") and/or the post-transition interference protection provisions of 47 C.F.R. Section 73.616? ☐ Yes ☐ No [Exhibit 44]

If "No," attach as an Exhibit justification therefor, including a summary of any related previously granted waivers.

12. If the proposed facility will not satisfy the coverage requirement of 47 C.F.R. Section 73.625, attach as an Exhibit justification therefore. (Applicable only if **Certification Checklist** item 3 is answered "No.") [Exhibit 45]

13. **Environmental Protection Act. Submit in an Exhibit** the following: [Exhibit 46]

If **Certification Checklist** Item 2 is answered "Yes," a brief explanation of why an Environmental Assessment is not required. Also describe in the Exhibit the steps that will be taken to limit RF radiation exposure to the public and to persons authorized access to the tower site.

By checking "Yes" to **Certification Checklist** Item 2, the applicant also certifies that it, in coordination with other users of the site, will reduce power or cease operation as necessary to protect persons having access to the site, tower or antenna from radiofrequency electromagnetic exposure in excess of FCC guidelines.

If **Certification Checklist** Item 2 is answered "No," an Environmental Assessment as required by 47 C.F.R Section 1.1311.


**PREPARERS CERTIFICATION ON SECTION III MUST BE COMPLETED AND SIGNED.**

# DA Inquiry

du Treil, Lundin, &amp; Rackley, Inc., Sarasota, Florida



**Antenna Pattern:** Antenna ID: 16286

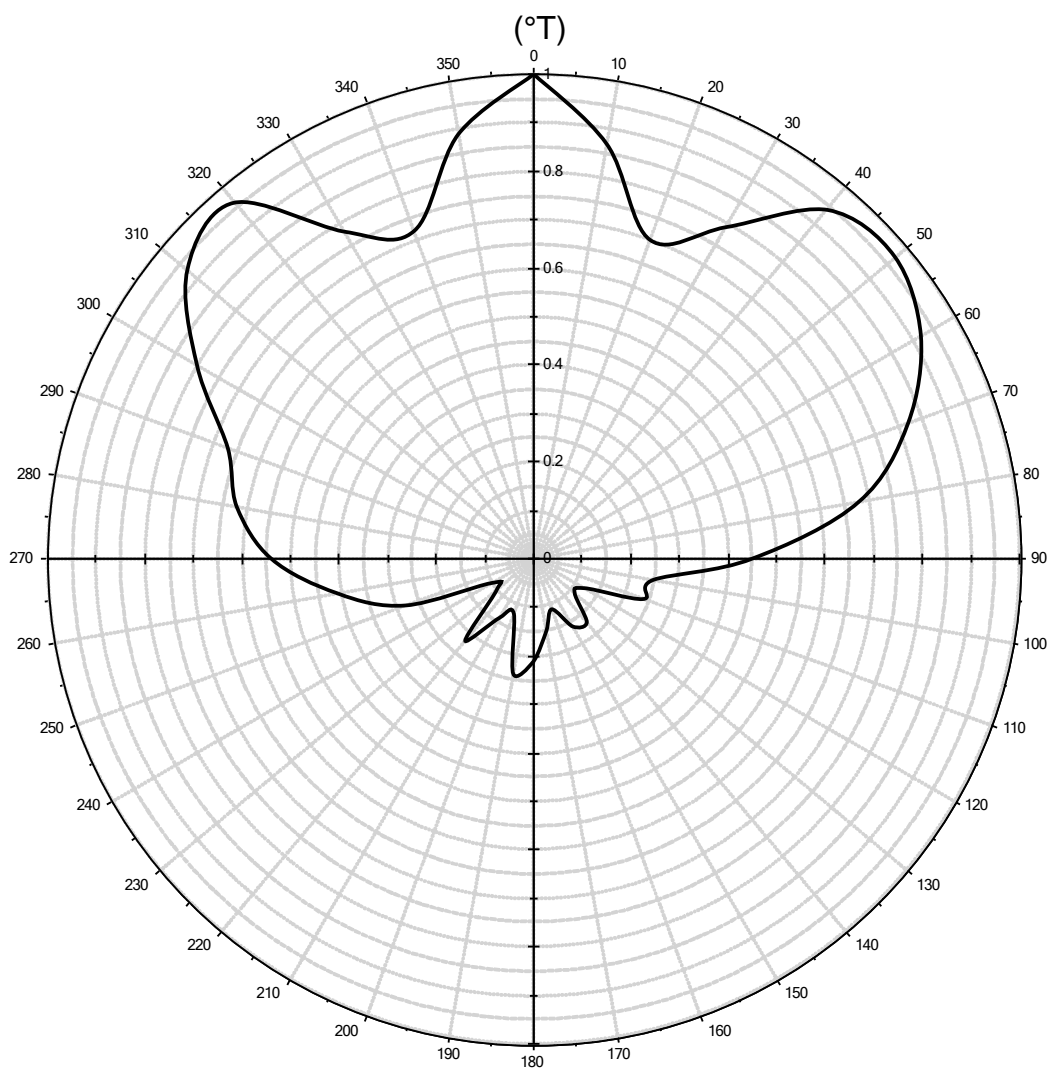

**Note:** display reflects rotation of 0.00°

**Antenna Details:**

0°	1.000	60°	0.920	120°	0.120	180°	0.210	240°	0.100	300°	0.800
10°	0.870	70°	0.820	130°	0.110	190°	0.240	250°	0.280	310°	0.930
20°	0.700	80°	0.680	140°	0.170	200°	0.120	260°	0.410	320°	0.960
30°	0.790	90°	0.450	150°	0.160	210°	0.140	270°	0.540	330°	0.780
40°	0.940	100°	0.250	160°	0.110	220°	0.220	280°	0.620	340°	0.720
50°	0.970	110°	0.240	170°	0.150	230°	0.100	290°	0.670	350°	0.890

**Antenna Make:** ADC

**Standard Pattern:**

**Antenna Model:** ODD900531IC

**Last Change Date:**



## PREDICTED FCC COVERAGE CONTOURS

STATION WSTE-DT - DTS3  
ARECIBO, PUERTO RICO  
CHANNEL 7

TECHNICAL EXHIBIT  
CONCERNING HUMAN EXPOSURE TO RF ELECTROMAGNETIC ENERGY  
PREPARED FOR  
STATION WSTE-DT  
DTS3 FACILITY  
ARECIBO, PUERTO RICO  
CH 7 0.0125 KW (MAX-DA) 65 M

Technical Statement

The proposed facilities were evaluated in terms of potential radio frequency (RF) energy exposure at ground level to workers and the general public. The radiation center for the proposed DTV antenna is located 85 meters above ground level. The maximum DTV ERP is 0.0125 kW (horizontal polarization). A “worst-case” vertical plane relative field value of 1.0 (for angles below 60 degrees downward) is assumed for the antenna's downward radiation. The calculated power density at a point 2 meters above ground level is  $0.00006 \text{ mW/cm}^2$ . This is 0.03% of the FCC's recommended limit of  $0.2 \text{ mW/cm}^2$  for channel 7 for an “uncontrolled” environment. Therefore, the proposal will comply with the RF emission rules.

Access to the transmitting site will be restricted and appropriately marked with RFR warning signs. Furthermore, in the event that workers or other authorized personnel enter the restricted area or climb the tower, appropriate measures will be taken to assure worker safety with respect to radio frequency radiation exposure. Such measures include reducing the average exposure by spreading out the work over a longer period of time, wearing “accepted” RFR protective clothing and/or RFR exposure monitors.

Finally, it is noted that this technical exhibit only addresses the potential for radio frequency electromagnetic field exposure. All other aspects of the

environmental processing analysis will be or already has been provided to the FCC by the tower owner as part of the tower registration process.



W. Jeffrey Reynolds

du Treil, Lundin & Rackley, Inc.  
201 Fletcher Avenue  
Sarasota, Florida 34237-6019  
(941) 329-6000  
[JEFF@DLR.COM](mailto:JEFF@DLR.COM)

May 14, 2008