

EXHIBIT 15.12

TABULATION OF PROPOSED PROTECTIONS TO NIGHTTIME STATIONS PROTECTING WTIC (non-directional)

	Freq. kHz	Power (kW)	Pat-Mult (mV/m)	Theo-RMS (mV/m)	Standard RMS-mV/m	Pat-RSS (mV/m)	Q Factor
	1080	0.650	519.63	231.39	243.78	761.23	19.0306

Twr No.	Field Ratio	Phase Deg.	Spacing Deg.	Orient Deg.	Twr Ref	TL/ Sec	Elec-Ht in Deg.	TL(B) Deg.	TL(C) Deg.	TL(D) Deg.
1	0.388	-155.0	0.0	0.0	0	0	77.4	0.0	0.0	0.0
2	1.000	0.0	70.0	170.0	1	0	77.4	0.0	0.0	0.0
3	0.943	154.5	70.0	170.0	1	0	77.4	0.0	0.0	0.0
4	0.326	-51.0	70.0	170.0	1	0	77.4	0.0	0.0	0.0

Towards	Azimuth Deg-Tru	Kilo- meters	**SWF** Field	Crit. LO	Angle HI	-----Radiations at:----- HO Angle	LO Angle	HI Angle	RSS Limit	Max. Rad. Allowed	Perm. Limit	Prop. Limit
* WTSO	318.2	203.5	0.28115	34.8	49.1	408.59	218.06	107.92	9.85	438.0	24.63	12.26
WVCG	157.5	1883.5	0.01504	0.1	3.0	43.70	43.70	43.28	10.51	873.7	2.63	0.13
KRLD	222.1	1255.9	0.02857	3.7	7.9	23.70	23.63	23.39	5.89	257.6	1.47	0.14
XEDY1	256.2	2598.3	0.00511	0.0	0.0	21.86	21.86	21.86	14.44	7,059.7	7.22	0.02
KSCO	271.4	2979.2	0.00466	0.0	0.0	32.75	32.75	32.75	14.17	3,798.6	3.54	0.03
WRYT	212.4	383.0	0.15700	19.7	31.1	22.13	21.22	19.38	11.81	94.0	2.95	0.67
WKJK	156.8	401.8	0.14826	18.8	29.8	43.01	29.53	18.97	15.80	133.2	3.95	0.88
WTIC-N	84.4	1230.3	0.02330	3.9	8.2	21.94	21.87	21.64	9.21	489.8	2.28	0.10
KOTK	290.8	2815.9	0.00361	0.0	0.0	154.93	154.93	154.93	6.41	2,218.8	1.60	0.11
KVNI	296.1	2378.5	0.00490	0.0	0.4	202.56	202.56	202.55	6.80	1,735.3	1.70	0.20
CKSA	315.4	2102.8	0.00904	0.5	0.5	384.59	384.55	384.55	4.01	1,020.4	1.84	0.70
* KAAY	208.5	879.2	0.05056	7.3	13.2	21.48	21.30	20.95	3.94	973.2	9.84	0.22

* indicates an ADJACENT CHANNEL whose allowable contribution to the RSS Limit is 20 dB less than the Permissible Limit shown.

A complete nighttime study has been conducted on all co- and 1st adjacent channel stations. Analysis of the complete study has concluded the proposed operation will not interfere with any protected operation. In response to FCC attempts to streamline the application process, 1st adjacent channel and foreign nighttime protections in which the proposed operation will have a negligible effect have been omitted to reduce paperwork. A complete list of all protections will be supplied upon request. **Bold-Italicized** stations have individual nighttime point studies included in this application.

EXHIBIT 15.12
TABULATION OF PROPOSED PROTECTIONS TO NIGHTTIME STATIONS
PROTECTING WTIC (non-directional)

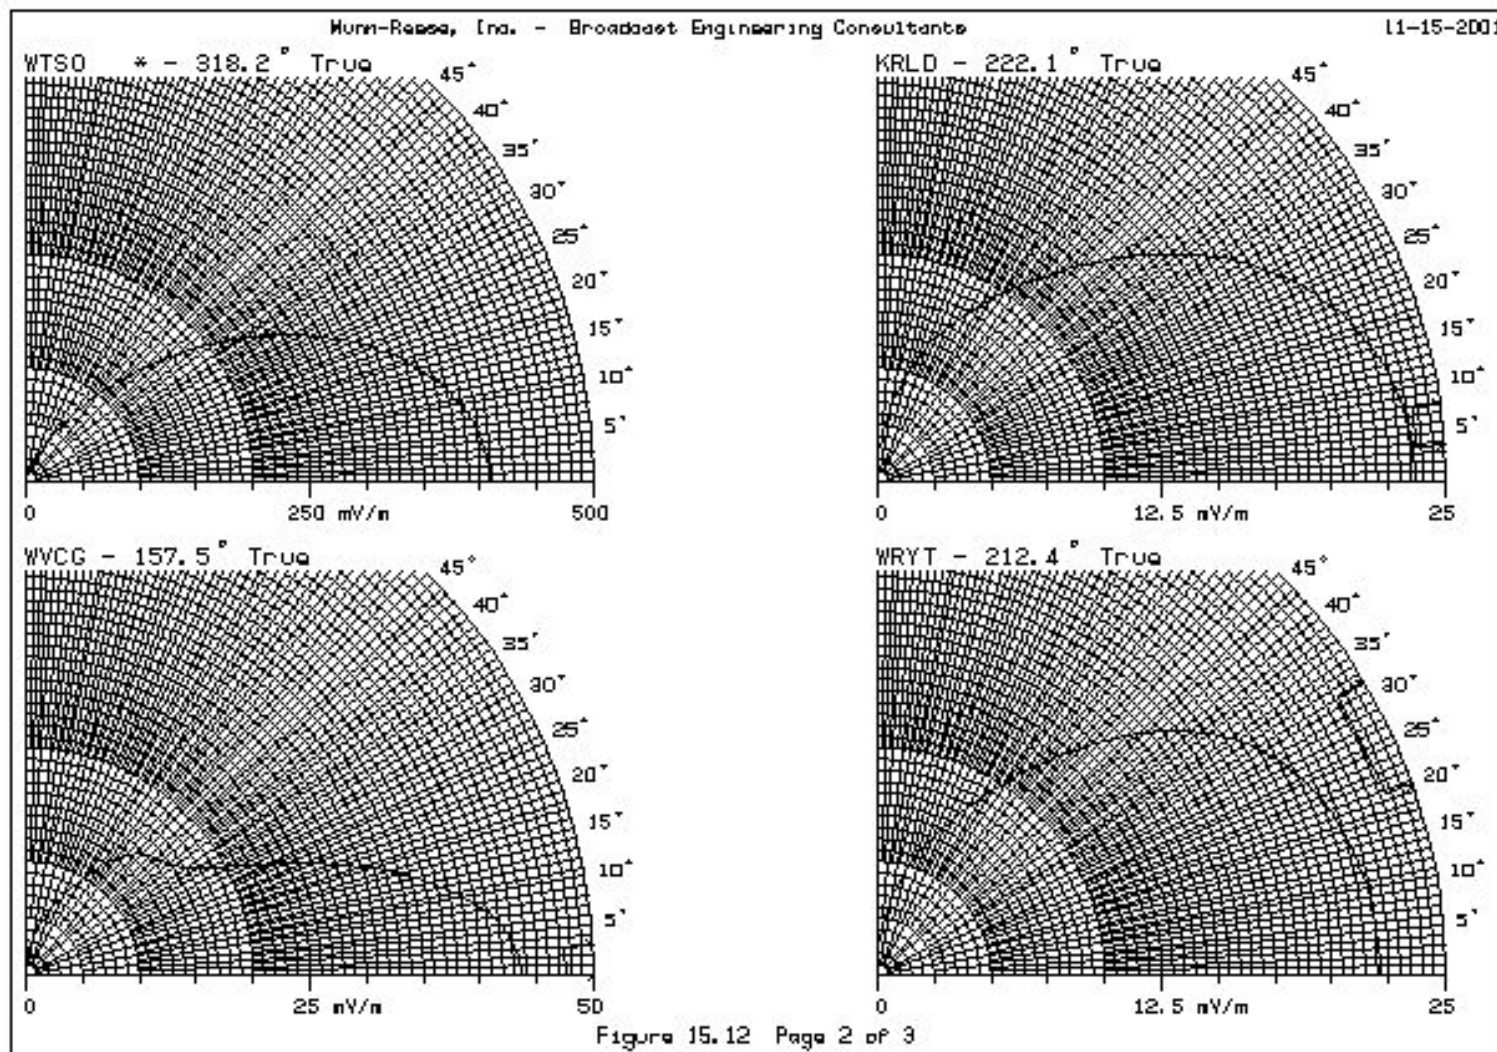


EXHIBIT 15.12
TABULATION OF PROPOSED PROTECTIONS TO NIGHTTIME STATIONS
PROTECTING WTIC (non-directional)

