


RF HAZARD STATEMENT  
CLASS A STATION KBTR-CA  
BATON ROUGE, LOUISIANA  
CH 41 18.9 KW (DA) 106 M (RCMSL)

The proposed KBTR-CA facilities were evaluated in terms of potential radiofrequency radiation exposure at ground level in accordance with FCC Bulletin OET-65 (Edition 97-01). Based on a conservative relative field factor of 0.15 (for angles below 60 degrees downward), a visual effective radiated power of 18.9 kilowatts and 10 percent aural power, the calculated power density at 2 meters above ground at the tower base will be 0.0009 mW/cm<sup>2</sup>. This is 0.21% of the recommended limit of 0.42 mW/cm<sup>2</sup> for channel 41, applicable to general population/uncontrolled exposure areas. Therefore, based on the responsibility threshold of 5%, the proposal will comply with the FCC's RF emission rules.

Access to the transmitting site will be restricted and appropriately marked with warning signs. Furthermore, an agreement will be in effect in the event that workers or other authorized personnel enter the restricted area or climb the tower to ensure that appropriate measures will be taken to assure worker safety with respect to radio frequency radiation exposure. Such measures include reducing the average exposure by spreading out the work over a longer period of time, wearing "accepted" RFR protective clothing and/or RFR exposure monitors or scheduling work when the stations are at reduced power or shut down.

Finally, it is noted that this technical exhibit only addresses the potential for radiofrequency electromagnetic field exposure. All other aspects of the environmental processing analysis will be or already has been provided to the FCC by the tower owner as part of the tower registration process.

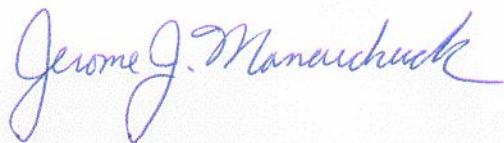

Jerome J. Manarchuck

du Treil, Lundin & Rackley, Inc.  
201 Fletcher Avenue  
Sarasota, Florida 34237

July 28, 2009