

Compliance with Mexican Spacing Requirements

The facility contemplated herein is located within 320 kilometers of the border between the United States and Mexico. Internationally, the proposed facility is considered to be class "B1". Under the terms of the 1992 Mexico-United States FM Broadcasting Agreement ("Agreement"), Class B1 facilities must be separated from other stations which are separated by 0, 200, 400, or 600 kHz, and those separated by 10.6 or 10.8 mHz as follows:

Relation	Co-channel [KM]	200 kHz [KM]	400 or 600 KHz [KM]	10.6/10.8mHz (IF) [KM]
B1 to B	211	145	71	17
B1 to C	259	193	96	31

The proposed facility is located approximately 186.7 kilometers from the Mexican border. The Mexican stations or allocations within 320 kilometers of the proposed operation are as follows:

Type	Ch/Class	City	Distance between sites	Distance Req'd by Agreement
Allocation	204C	Sabinas Hidalgo, NL	298.78 km	259 km
Allocation	205B	Nuevo Laredo	189.24 km	145 km


The allocation for Sabinas Hidalgo, NL is short spaced to the proposed facility by 22.22 kilometers, however as shown in Exhibit 21-A, the proposed facility's 40 dBu F(50,10) interfering contour does not overlap the 60 dBu F(50,50) protected contour of the allocation at any location.

The allocation for Nuevo Laredo is short spaced to the proposed facility by 130.76 kilometers, however as shown in Exhibit 21-B, the proposed facility's 48 dBu F(50,10) interfering contour does not overlap the 54 dBu F(50,50) protected contour of the allocation at any location.

FMCommander Single Allocation Study
05-29-2008

KKLM CH 204 C3
2.7 kW 277 M COR
Prot. = 60 dBu
Intef. = 40 dBu

AL9232 CH 204 C
100.0 kW, 1202.8 M COR
Prot. = 60 dBu
Intef. = 37 dBu

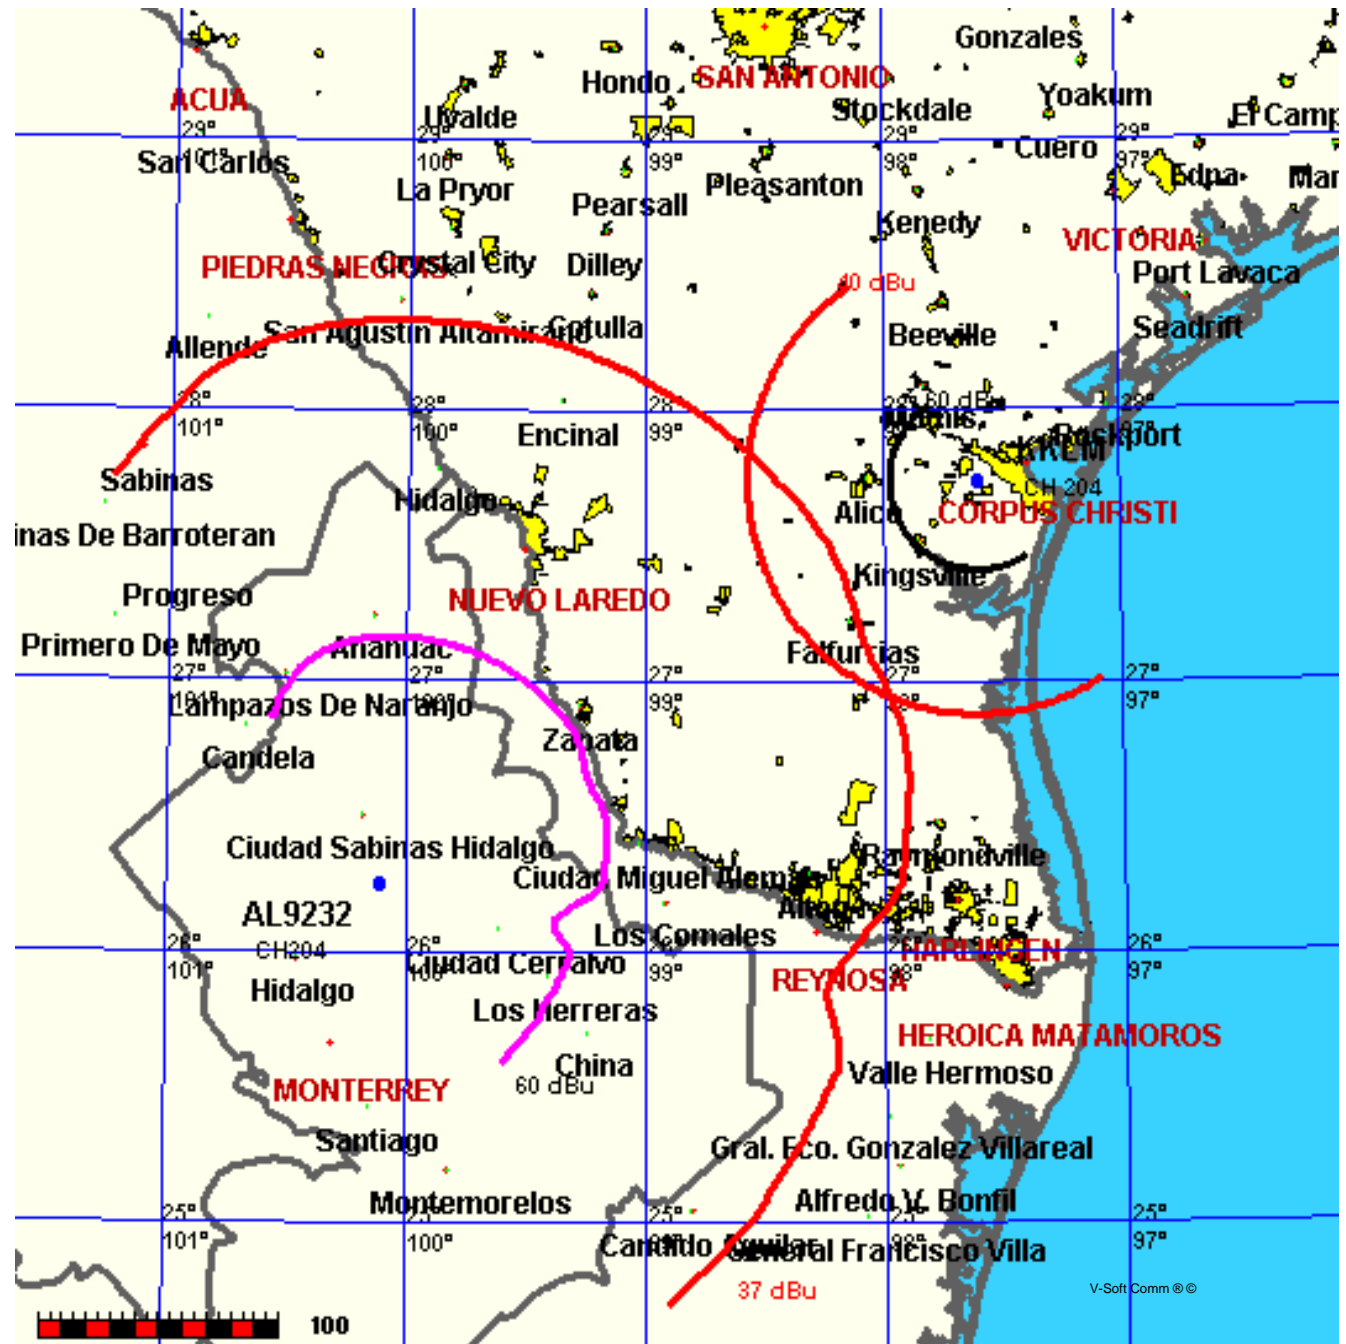

FMCommander Single Allocation Study
05-29-2008

KKLM CH 204 C3
2.7 kW 277 M COR
Prot. = 60 dBu
Intef. = 48 dBu

AL8364 CH 205 B
50.0 kW, 289.4 M COR
Prot. = 54 dBu
Intef. = 51 dBu

