

EXHIBIT 30
(Page 1 of 3)

NONIONIZING RADIATION COMPLIANCE

Monterey Licenses, LLC
Gulfport, MS


The proposed WUJM facilities will fully comply with the current FCC standard with regard to human exposure to nonionizing radiation. The proposed WUJM facilities will be combined into a common antenna that will also be utilized by WXYK(FM) - Gulfport, Mississippi. This antenna will be a Jampro JMPC-2 two bay circularly polarized antenna which will be mounted at the 118.9 meter level on an existing 123.4 meter tower. This tower also serves as Tower #8 of the directional antenna system of WROA(AM) - Gulfport, Mississippi, which operates on 1390 kHz. There are no other non-excluded RF sources located within 315 meters of this site.

The power density levels at two meters above ground level for the proposed WUJM facilities were calculated using the FCC's "FM Model" computer program. The results of these calculations are shown in Figure 30.0. As can be seen from an examination of this figure, the maximum predicted power density for the proposed WUJM facilities at two meters above ground level will be $3.92 \mu\text{W}/\text{cm}^2$, which will occur at a horizontal distance of 66 meters from the base of this tower. Since the permitted power density for uncontrolled exposure in the FM band is $200 \mu\text{W}/\text{cm}^2$, this amounts to only 1.96% of the permitted level. Thus, the implementation of the proposed WUJM facilities at this site will not expose members of the general public to levels of nonionizing radiation that are in excess of the permitted level for uncontrolled exposure.

WUJM, in conjunction with these other co-located facilities, will also take the necessary steps to insure that workers that must be inside the tower fence or on this tower will not be exposed to levels of nonionizing radiation that are in excess of the permitted

EXHIBIT 30
(Page 2 of 3)

level for controlled exposure. These steps will include the cessation of operation or a reduction in power, as appropriate, by WROA when work becomes necessary inside the tower fence. These steps will also include the cessation of operation by WROA or operation by WROA in a mode that does not employ this tower when work becomes necessary on this tower and a cessation of operation or a reduction in power by WUJM and/or WXYK when work becomes necessary on this tower in areas where the total FM power density levels exceed of the permitted level for controlled exposure.

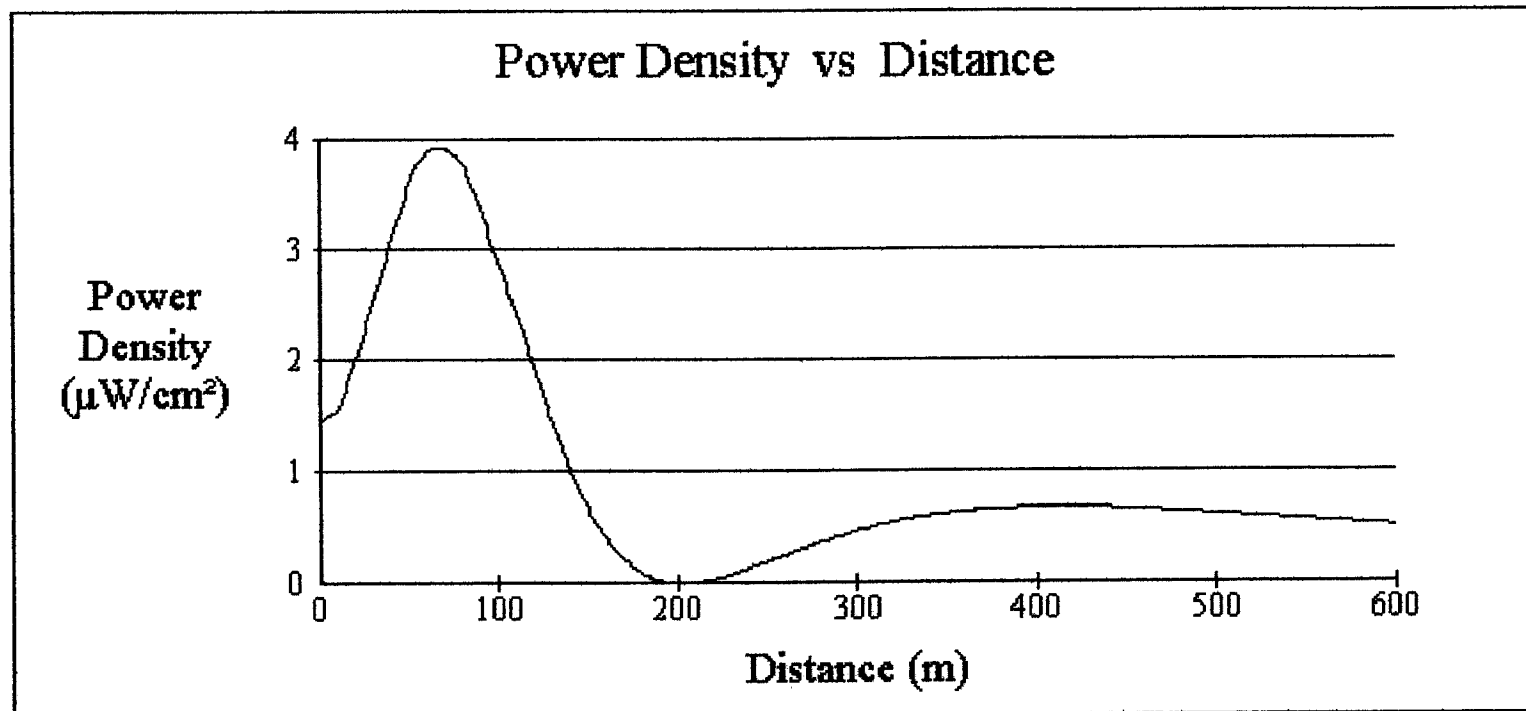

Office of Engineering and Technology

| | | | |
|---------------------|-------|---------------------|-------------------------|
| Distance (m): | 600 | Antenna Type: | Jampro "Double V" (EPA) |
| Horizontal ERP (W): | 4270 | Number of Elements: | 2 |
| Vertical ERP (W): | 4270 | Element Spacing: | 1 |
| Antenna Height (m): | 118.9 | | |

FIG. 30.0

WUJM POWER DENSITY CALCULATIONS

Monterey Licenses, LLC
Gulfport, MS