

# EXHIBIT 24.1

## COMPLIANCE WITH RADIOFREQUENCY RADIATION GUIDELINES

The potential for human exposure to non-ionizing radiofrequency radiation at the proposed transmission site has been evaluated. In addition to the proposed FM operation of KJTY (FM) on Channel 201C1, the transmitter site is also shared by one (1) other FM facility, KKSX (FM).

The proposed KJTY (FM) facility will operate on Channel 201C1 with a maximum effective radiated power (ERP) of 100.0 kW (H)&(V). The antenna will be a full-wave eight (8) bay ERI SHP-8AC mounted to be centered at 163.3 meters Above Ground Level.

KKSX (FM) operates on Channel 290C1 with a maximum effective radiated power (ERP) of 100 kW (H)&(V). The antenna utilized is a full-wave ERI SHPX-10C with ten (10) bays mounted to be centered at 200 meters Above Ground Level.

There are no other known broadcast facilities within 315 meters of the shared transmitter site.

The site has been evaluated for compliance with the FCC guidelines concerning human exposure to radiofrequency radiation. The standards employed are detailed in OET Bulletin No. 65 (Edition 97-01). The "RF Haz<sup>TM</sup>" software program version 2.45 from V-Soft Communications<sup>TM</sup> was utilized to determine the individual contribution of the proposed KJTY (FM) as well as the existing KKSX (FM) Station. This software program combines formulas from the OET Bulletin No. 65 (Edition 97-01) with EPA researched element and array patterns as published in PB85-2458-68, "Engineering Assessment of the Potential Impact of Federal Radiation Protection Guidance on the AM, FM and TV Broadcast Services." FM radiofrequency radiation levels were predicted using calculations, which were based on the number of bays of the antenna, wavelength spacing between the bays, the effective radiated power of the antennas and the heights above ground level (AGL) of the radiation center of the proposed and existing antennas. The "Dist to COR" value shown on all tabulations represents the height of the antenna center of radiation above an observer on the ground who is assumed to be 2 meters in height.

The result of the evaluations for the stations is shown in both graphical and tabular forms at the end of this report. The tabulation lists the portion of the tabular output for the stations showing the region of maximum radio frequency radiation. The FM graphical displays have been scaled to show the best definition of the data curve.

To evaluate the total exposure to non-ionizing radiofrequency radiation it is necessary to sum the individual contributions as a decimal fraction of the maximum permissible limit. If the resulting sum is less than or equal to 100%, the exposure is concluded to be within the guidelines of OET Bulletin No. 65 (Edition 97-01). To simplify the calculations and produce a "worst case" study, the maximum exposure level produced by each station has been selected without regard to the location of that exposure. The following table is based on the uncontrolled limits set forth in OET Bulletin No. 65 (Edition 97-01).


<u>Contributing Station</u>	<u>Maximum Contribution</u>	<u>Uncontrolled Limit</u>	<u>% of Limit</u>
KJTY (FM)	14.98 $\mu\text{W}/\text{cm}^2$	200 $\mu\text{W}/\text{cm}^2$	7.49%
KKSX (FM)	8.77 $\mu\text{W}/\text{cm}^2$	200 $\mu\text{W}/\text{cm}^2$	4.38%
		<b>Total % of Limit</b>	<b>11.87%</b>

Since the Total % of the Limit is less than 100% of the more stringent uncontrolled environment guidelines, the proposed installation will comply with the current guidelines.


In addition to the protection afforded by the proposed antenna heights above ground, the facility is properly marked with signs, and entry to the facility is restricted by means of fencing with locked doors and/or gates. Any other means that may be required to protect employees and the general public will be employed.

In the event work is required in proximity to the antenna(s) such that the person or persons working in the area will be potential exposed to fields in excess of the current guidelines, an agreement signed by all broadcast parties at the site will be in effect for the offending transmitter(s) to reduced power, or cease operation during the critical period.

## RFHAZ v2.45 Calculation for Proposed KJTY

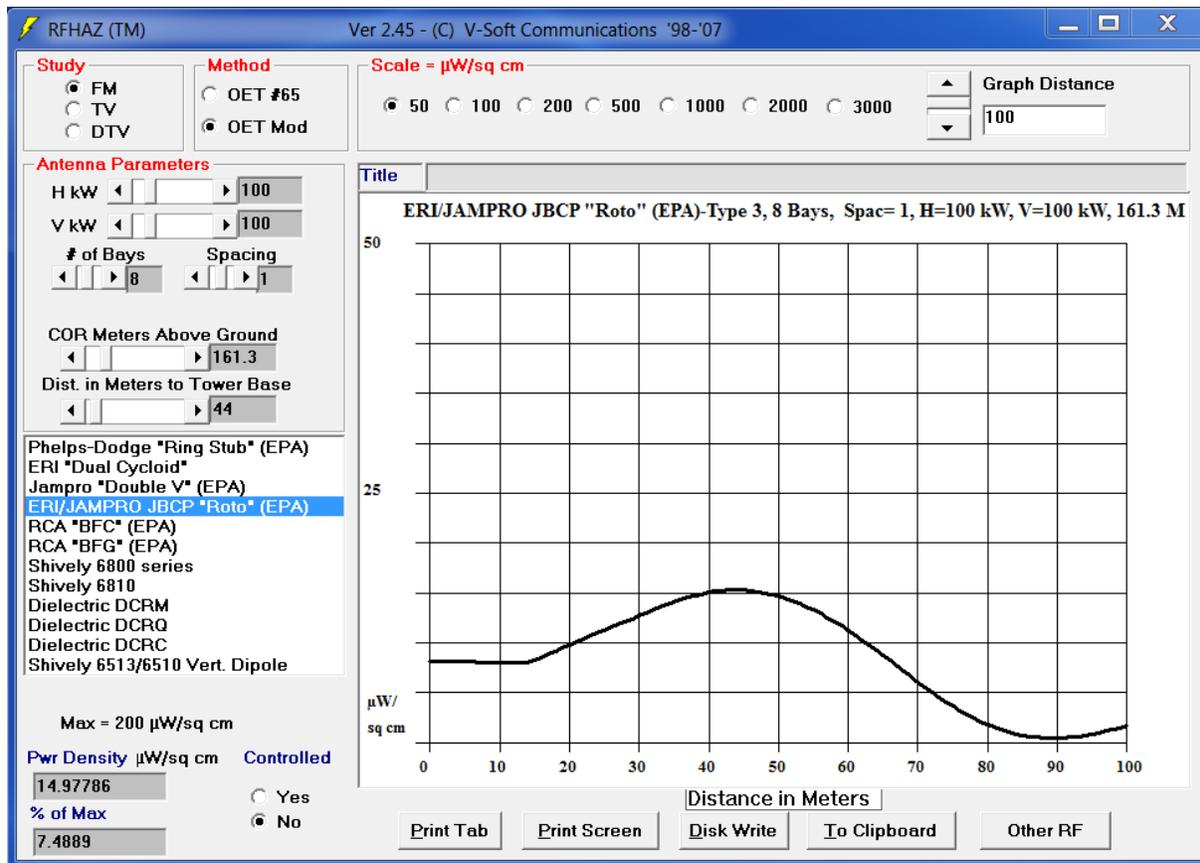


# RFHAZ v2.45 Calculation for Existing KKS

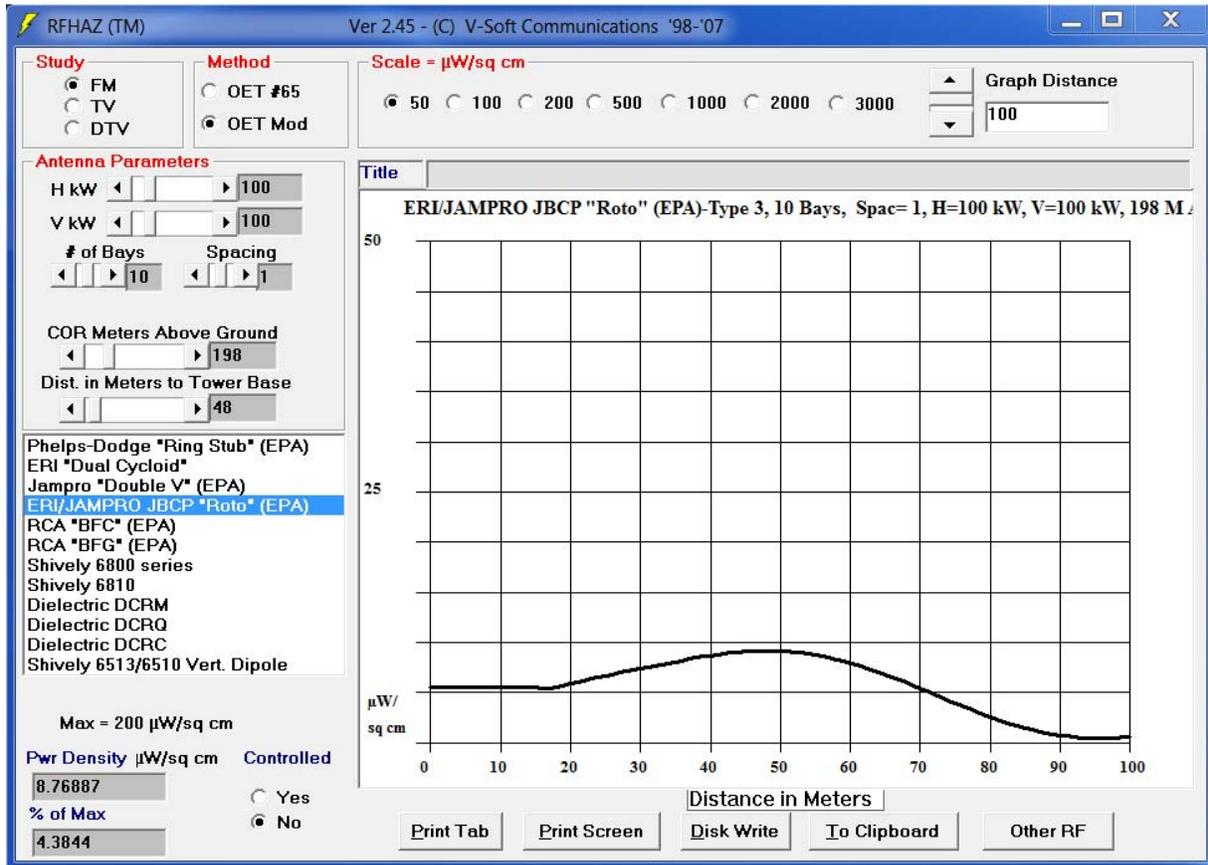

# Proposed KJTY

Environment = Uncontrolled, Maximum = 200  $\mu\text{W}/\text{sq cm}$

ERI/JAMPRO JBCP "Roto" (EPA)-Type 3, 8 Bays, Spac= 1, H=100 kW, V=100 kW, 161.3 M

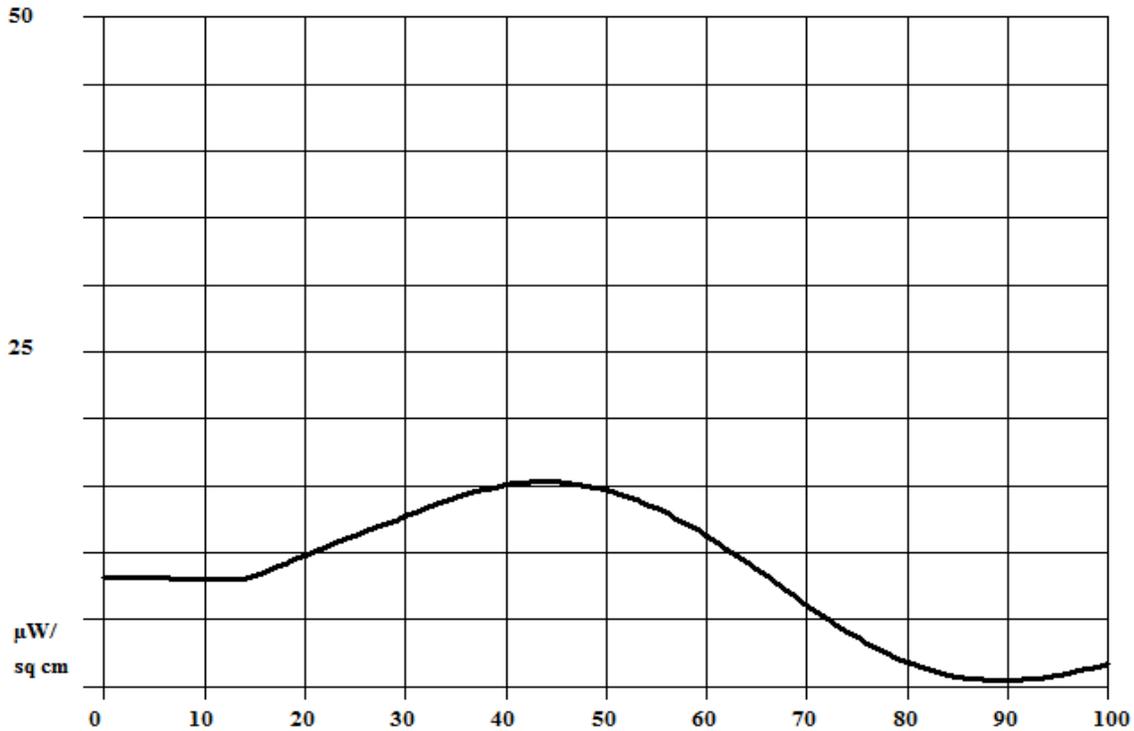

HORZ. DISTANCE FROM FM RADIATOR VS POWER DENSITY (Microwatt/Square cm)  
 Dist(Meters) PD (H) PD (V) Total( $\mu\text{W}/\text{cm}^2$ ) Percent Max.


Dist(Meters)	PD (H)	PD (V)	Total( $\mu\text{W}/\text{cm}^2$ )	Percent Max.
0	3.85	3.85	7.70	3.9
1	3.85	3.85	7.70	3.9
2	3.85	3.85	7.70	3.9
3	3.85	3.85	7.70	3.9
4	3.85	3.85	7.70	3.8
5	3.85	3.85	7.70	3.8
6	3.85	3.85	7.69	3.8
7	3.84	3.84	7.69	3.8
8	3.84	3.84	7.68	3.8
9	3.84	3.84	7.68	3.8
10	3.83	3.83	7.67	3.8
11	3.83	3.83	7.66	3.8
12	3.82	3.82	7.65	3.8
13	3.82	3.82	7.64	3.8
14	3.81	3.81	7.62	3.8
15	3.94	3.94	7.89	3.9
16	4.10	4.10	8.19	4.1
17	4.25	4.25	8.49	4.2
18	4.40	4.40	8.80	4.4
19	4.55	4.55	9.10	4.6
20	4.71	4.71	9.41	4.7
21	4.86	4.86	9.72	4.9
22	5.01	5.01	10.02	5.0
23	5.16	5.16	10.32	5.2
24	5.31	5.31	10.62	5.3
25	5.45	5.45	10.91	5.5

Dist(Meters)	PD (H)	PD (V)	Total(uW/cm2)	Percent Max.
26	5.60	5.60	11.20	5.6
27	5.74	5.74	11.48	5.7
28	5.88	5.88	11.75	5.9
29	6.06	5.99	12.05	6.0
30	6.28	6.08	12.37	6.2
31	6.50	6.17	12.67	6.3
32	6.72	6.25	12.97	6.5
33	6.93	6.32	13.25	6.6
34	7.13	6.39	13.51	6.8
35	7.32	6.44	13.76	6.9
36	7.50	6.49	13.99	7.0
37	7.67	6.53	14.20	7.1
38	7.83	6.56	14.39	7.2
39	7.97	6.58	14.56	7.3
40	8.11	6.60	14.70	7.4
41	8.22	6.59	14.82	7.4
42	8.32	6.58	14.91	7.5
43	8.41	6.56	14.97	7.5
44	8.39	6.59	14.98	7.5
45	8.33	6.63	14.95	7.5
46	8.25	6.65	14.90	7.4
47	8.16	6.65	14.81	7.4
48	8.05	6.64	14.69	7.3
49	7.93	6.61	14.54	7.3
50	7.79	6.57	14.35	7.2
51	7.63	6.50	14.13	7.1
52	7.46	6.42	13.89	6.9
53	7.28	6.33	13.61	6.8
54	7.08	6.22	13.29	6.6
55	6.87	6.09	12.95	6.5
56	6.64	5.94	12.59	6.3
57	6.40	5.79	12.19	6.1
58	6.16	5.61	11.77	5.9
59	5.90	5.42	11.33	5.7
60	5.65	5.23	10.88	5.4
61	5.39	5.02	10.41	5.2
62	5.12	4.80	9.92	5.0
63	4.85	4.56	9.41	4.7
64	4.57	4.33	8.90	4.4
65	4.29	4.08	8.37	4.2
66	4.00	3.83	7.84	3.9
67	3.72	3.58	7.30	3.6
68	3.44	3.32	6.76	3.4
69	3.16	3.07	6.22	3.1
70	2.88	2.81	5.69	2.8
71	2.61	2.56	5.17	2.6
72	2.35	2.31	4.66	2.3
73	2.09	2.07	4.17	2.1
74	1.85	1.84	3.69	1.8
75	1.62	1.62	3.24	1.6
76	1.41	1.40	2.81	1.4
77	1.21	1.20	2.41	1.2

Dist(Meters)	PD (H)	PD (V)	Total(uW/cm2)	Percent Max.
78	1.03	1.01	2.04	1.0
79	0.85	0.84	1.69	0.8
80	0.70	0.68	1.37	0.7
81	0.55	0.53	1.09	0.5
82	0.43	0.41	0.84	0.4
83	0.31	0.30	0.62	0.3
84	0.22	0.21	0.43	0.2
85	0.14	0.14	0.28	0.1
86	0.08	0.08	0.16	0.1
87	0.04	0.04	0.08	0.0
88	0.01	0.01	0.02	0.0
89	0.00	0.00	0.00	0.0
90	0.00	0.00	0.01	0.0
91	0.02	0.02	0.04	0.0
92	0.05	0.05	0.10	0.1
93	0.10	0.09	0.19	0.1
94	0.15	0.14	0.29	0.1
95	0.22	0.20	0.41	0.2
96	0.29	0.26	0.55	0.3
97	0.37	0.33	0.70	0.4
98	0.46	0.41	0.87	0.4
99	0.54	0.49	1.03	0.5
100	0.64	0.57	1.21	0.6

# Existing KKS

Environment = Uncontrolled, Maximum = 200  $\mu\text{W}/\text{sq cm}$   
 ERI/JAMPRO JBCP "Roto" (EPA)-Type 3, 10 Bays, Spac= 1, H=100 kW, V=100 kW, 198 M

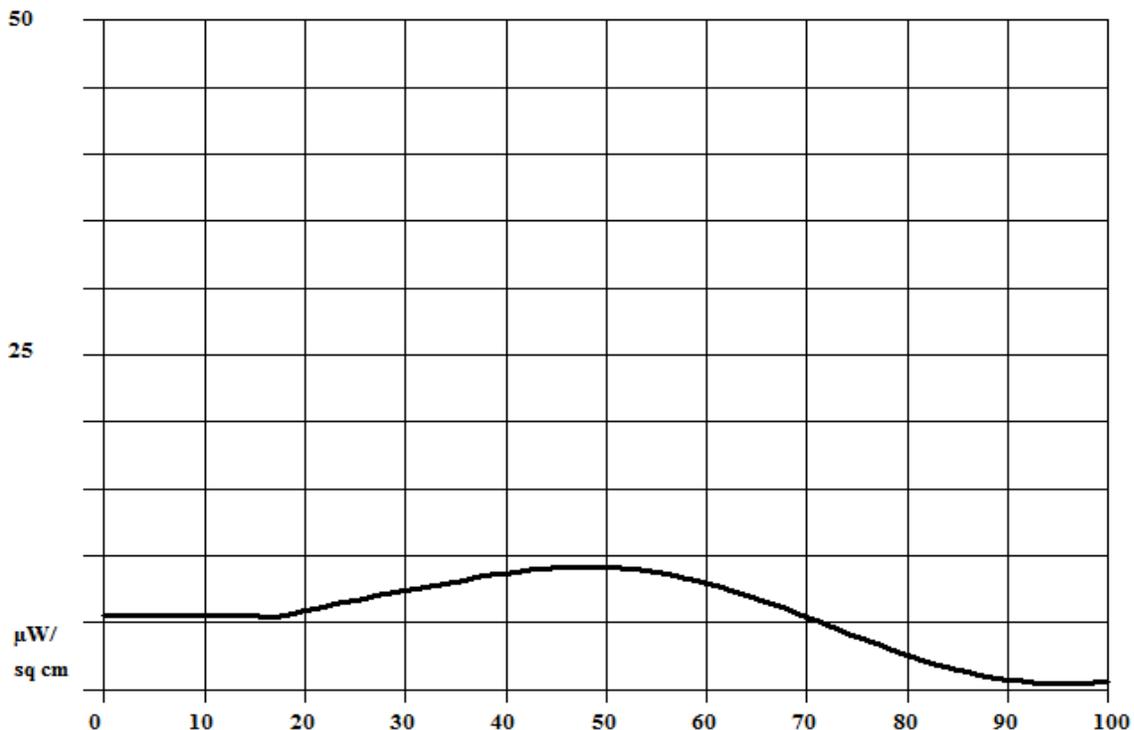

HORZ. DISTANCE FROM FM RADIATOR VS POWER DENSITY (Microwatt/Square cm)  
 Dist(Meters) PD (H) PD (V) Total(uW/cm2) Percent Max.

Dist(Meters)	PD (H)	PD (V)	Total(uW/cm2)	Percent Max.
0	2.56	2.56	5.11	2.6
1	2.56	2.56	5.11	2.6
2	2.56	2.56	5.11	2.6
3	2.56	2.56	5.11	2.6
4	2.56	2.56	5.11	2.6
5	2.55	2.55	5.11	2.6
6	2.55	2.55	5.11	2.6
7	2.55	2.55	5.11	2.6
8	2.55	2.55	5.10	2.6
9	2.55	2.55	5.10	2.6
10	2.55	2.55	5.10	2.5
11	2.55	2.55	5.09	2.5
12	2.54	2.54	5.09	2.5
13	2.54	2.54	5.08	2.5
14	2.54	2.54	5.08	2.5
15	2.54	2.54	5.07	2.5
16	2.53	2.53	5.06	2.5
17	2.53	2.53	5.05	2.5
18	2.58	2.58	5.16	2.6
19	2.66	2.66	5.32	2.7
20	2.74	2.74	5.48	2.7
21	2.82	2.82	5.64	2.8
22	2.90	2.90	5.80	2.9
23	2.98	2.98	5.96	3.0
24	3.06	3.06	6.12	3.1
25	3.14	3.14	6.27	3.1

Dist(Meters)	PD (H)	PD (V)	Total(uW/cm2)	Percent Max.
26	3.21	3.21	6.43	3.2
27	3.29	3.29	6.58	3.3
28	3.37	3.37	6.73	3.4
29	3.44	3.44	6.88	3.4
30	3.51	3.51	7.02	3.5
31	3.58	3.58	7.16	3.6
32	3.65	3.65	7.30	3.6
33	3.71	3.71	7.43	3.7
34	3.78	3.78	7.55	3.8
35	3.84	3.83	7.67	3.8
36	3.95	3.87	7.82	3.9
37	4.05	3.91	7.95	4.0
38	4.15	3.93	8.08	4.0
39	4.24	3.96	8.20	4.1
40	4.33	3.98	8.31	4.2
41	4.41	4.00	8.41	4.2
42	4.49	4.01	8.50	4.2
43	4.56	4.02	8.58	4.3
44	4.63	4.02	8.64	4.3
45	4.68	4.01	8.69	4.3
46	4.73	4.00	8.73	4.4
47	4.77	3.98	8.76	4.4
48	4.81	3.96	8.77	4.4
49	4.83	3.93	8.76	4.4
50	4.84	3.90	8.74	4.4
51	4.85	3.86	8.71	4.4
52	4.84	3.81	8.65	4.3
53	4.83	3.76	8.58	4.3
54	4.75	3.73	8.49	4.2
55	4.67	3.71	8.37	4.2
56	4.57	3.67	8.24	4.1
57	4.47	3.62	8.10	4.0
58	4.37	3.57	7.94	4.0
59	4.25	3.51	7.76	3.9
60	4.13	3.44	7.57	3.8
61	4.00	3.36	7.36	3.7
62	3.86	3.28	7.14	3.6
63	3.72	3.18	6.91	3.5
64	3.58	3.09	6.66	3.3
65	3.43	2.98	6.41	3.2
66	3.27	2.87	6.14	3.1
67	3.12	2.75	5.87	2.9
68	2.95	2.63	5.58	2.8
69	2.79	2.50	5.30	2.6
70	2.63	2.37	5.00	2.5
71	2.46	2.24	4.71	2.4
72	2.30	2.11	4.41	2.2
73	2.14	1.97	4.11	2.1
74	1.98	1.84	3.82	1.9
75	1.83	1.70	3.52	1.8
76	1.67	1.56	3.23	1.6
77	1.52	1.43	2.95	1.5

Dist(Meters)	PD (H)	PD (V)	Total(uW/cm2)	Percent Max.
78	1.37	1.30	2.67	1.3
79	1.23	1.17	2.40	1.2
80	1.10	1.04	2.14	1.1
81	0.96	0.92	1.89	0.9
82	0.84	0.81	1.65	0.8
83	0.72	0.70	1.42	0.7
84	0.62	0.60	1.21	0.6
85	0.52	0.50	1.02	0.5
86	0.42	0.41	0.84	0.4
87	0.34	0.33	0.67	0.3
88	0.27	0.26	0.53	0.3
89	0.20	0.20	0.40	0.2
90	0.15	0.14	0.29	0.1
91	0.10	0.10	0.20	0.1
92	0.06	0.06	0.12	0.1
93	0.03	0.03	0.07	0.0
94	0.01	0.01	0.03	0.0
95	0.00	0.00	0.01	0.0
96	0.00	0.00	0.00	0.0
97	0.00	0.00	0.01	0.0
98	0.02	0.02	0.03	0.0
99	0.04	0.03	0.07	0.0
100	0.06	0.06	0.12	0.1