

**August 2011  
KWLZ-FM Channel 242C3  
West Linn, Oregon  
RF Exposure Study**

**Facilities Proposed**

The proposed operation will be on Channel 242C3 (96.3 MHz) with a maximum lobe effective radiated power of 4.1 kilowatts. Operation is proposed with a 2-element circularly-polarized half-wave-spaced directional antenna. The antenna will be mounted on a 40 foot extension to an existing tower located in the Healy Heights area of Portland, Oregon.

The FCC Antenna Structure Registration Number for the tower is 1034279. This tower is owned by American Tower. American Tower will be filing notice of the proposed tower modification with the Federal Aviation Administration on FAA Form 7460-1. Upon receipt of the FAA's Determination of No Hazard, FCC Antenna Structure Registration modification for the tower will be filed on Form 854.

**RF Exposure Calculations**

OET Bulletin 65 Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields (Edition 97-01) states in part that:

When performing an evaluation for compliance with the FCC's RF guidelines all significant contributors to the ambient RF environment should be considered. . . For purposes of such consideration, significance can be taken to mean any transmitter producing more than 5% of the applicable exposure limit (in terms of power density or the square of the electric or magnetic field strength) at accessible locations.

As will be demonstrated below, the proposed operation of KWLZ-FM will produce less than 5% of the applicable exposure limit for both controlled and uncontrolled environments. Thus, the proposed facility is categorically excluded from the requirement of further study. Therefore, pursuant to §1.1307(b)(3) of the Commission's Rules no calculations are required for the other FM and TV facilities in the vicinity, and precise calculations are made only with regard to the levels from this proposal.

The power density calculations shown below were made using the techniques outlined in OET Bulletin No. 65. "Ground level" calculations in this report have been made at a reference height of 2 meters above ground to provide a worst-case estimate of exposure for persons standing on

Hatfield & Dawson Consulting Engineers

the ground in the vicinity of the tower. The equation shown below was used to calculate the ground level power density figures from each antenna.

$$S(\text{mW} / \text{cm}^2) = \frac{33.40981 \times \text{AdjERP}(\text{Watts})}{D^2}$$

Where: *AdjERP(Watts)* is the maximum lobe effective radiated power times the element pattern factor times the array pattern factor.

*D* is the distance in meters from the center of radiation to the calculation point.


Ground level power densities have been calculated for locations extending from the base of the tower to a distance of 1000 meters. Values past this point are increasingly negligible.

Calculations of the power density produced by the KWLZ-FM antenna system assume a Type 6 element pattern, which is the appropriate element pattern for the Shively 6810 series antenna to be used by KWLZ-FM. The highest calculated ground level power density from KWLZ-FM occurs at a distance of 95 meters from the base of the antenna support structure. At this point the power density is calculated to be 8.5  $\mu\text{W}/\text{cm}^2$ , which is 0.9% of 1000  $\mu\text{W}/\text{cm}^2$  (the FCC standard for controlled environments) and 4.3% of 200  $\mu\text{W}/\text{cm}^2$  (the FCC standard for uncontrolled environments).

These calculations show that the maximum calculated power density produced at two meters above ground level by the proposed operation of KWLZ-FM alone is less than 5% of the applicable FCC exposure limit at all locations between 1 and 1000 meters from the base of the antenna support structure. Section 1.1307(b)(3) of the Commission's Rules excludes applications for new facilities or modifications to existing facilities from the requirement of preparing an environmental assessment when the calculated emissions from the applicants proposed facility are predicted to be less than 5% of the applicable FCC exposure limit. Therefore, the proposed facility is in compliance with Section 1.1301 et seq and no further analysis of RF exposure at this site is required in this application.

The permittee/licensee in coordination with other users of the site must reduce power or cease operation as necessary to protect persons having access to the site, tower or antenna from radiofrequency radiation in excess of FCC guidelines.

Hatfield & Dawson Consulting Engineers

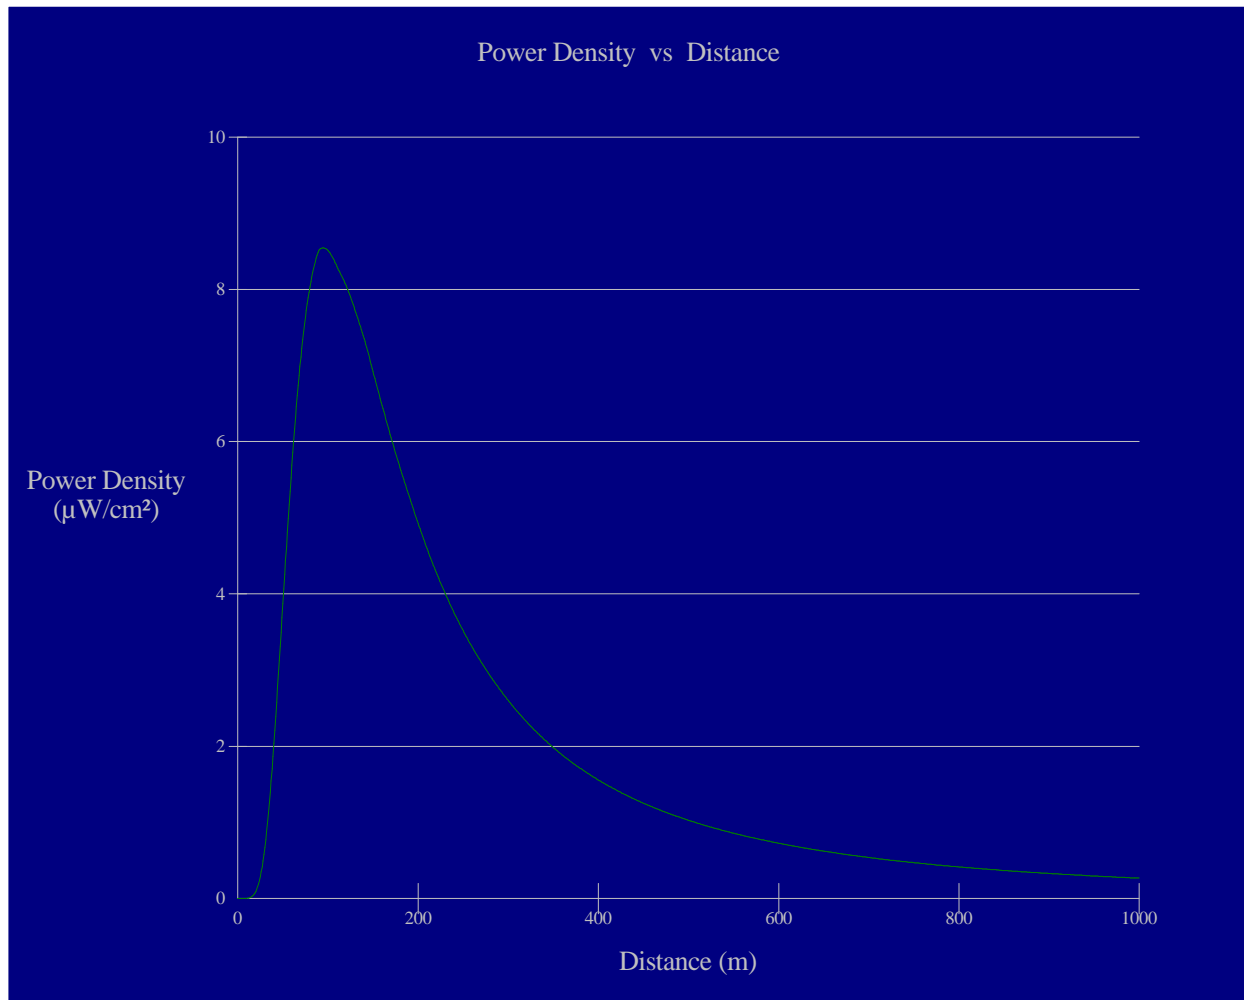

### Ground-Level RF Exposure

### OET FMModel

#### KWLZ-FM 242C3 West Linn

Antenna Type: Shively 6810 series

No. of Elements: 2

Element Spacing: 0.5 wavelength

Distance: 1000 meters

Horizontal ERP: 4.1 kW

Vertical ERP: 4.1 kW

Antenna Height: 54 meters AGL

Maximum Calculated Power Density is 8.5 :  $\text{W}/\text{cm}^2$  at 95 meters from the antenna structure.

Hatfield & Dawson Consulting Engineers