

Exhibit 12—Interference

The proposed facility will operate with an ERP of 0.005kw @ 15m AGL(493.9 meters AMSL). A Contour spacing study was conducted (see Exhibit 12A) and found no expected interference. All stations are clear and applicant expects to give no interference to any co-, first, second, third adjacent , channel 6 or IF stations. Clearance is illustrated in attached Exhibit 12B, Contour Spacing map.

To establish the correct power level, a 12-radial HAAT study was conducted (see Exhibit 12C). The MERP was found to be on the 030 degree radial which yielded a 189.0 meter HAAT. Power was then adjusted to 0.005 kW in accordance with CFR 74.1235(d) which requires a maximum ERP of 10 watts. This was confirmed in a Translator Power Study (see Exhibit 12D).

All the statements, maps and data contained in the following pages are true and correct to the best of my knowledge and belief and were prepared by me or under my supervision. Unless otherwise noted, all data and maps are from *rFinvestigator V.3.524* by *rFsoftware, Inc.* All maps utilize USGS rasterized data and terrain data is based on the USGS 3-second DEM(DMA) terrain database, ver. 2012. Scale is as described on each map and all co-ordinates are NAD 27 datum unless otherwise noted.



Floyd E. Turner CBRE, CBNT
FET Engineering
Haubstadt, IN 47639
8-28-2013

Floyd E. Turner, CBRE, CBNT
1837 E SR68 Haubstadt IN 47639
812.457.9860 eng@thyword.org

Exhibit 12A-Contour Spacing Study

Page 1 of 1
Date: 10/4/2013 11:50:20 AM
rfInvestigator Version 3.5.25
by rfSoftware, Inc.

FET Engineering
Job: Morrill 20030317MMQ.fmj
Master Database: 2013_Sep_30.fmd
Lat: N37:30:10 Lon: W084:13:09 NAD-27
Channel: 290 Class: DX
Status: Licensed, Construction Permit, Application
Channels: Co-Channel, 1st Adj, 2nd Adj, 3rd Adj, IF
Range: 89 km
Comments: No Comments
Description:

Call sign	City	State	Channel	Adjacency	Class	Latitude (NAD27)	Longitude (NAD27)	Status	ERP	HAAT	Distance	Bearing	73 207 Min Sep	73 207 Cleara
20030317MMQ	MORRILL	KY	290 : 105.9 MHz	Co-Chan	DX	N37:30:10	W084:13:09	LIC	0.01	144	0.01	039	0	0.01
WVRB	WILMORE	KY	237 : 95.3 MHz	IF	A	N37:07:37	W084:32:42	LIC	4.10	121	58.34	331	10	48.34
WKYB	SCIENCE HILL	KY	291 : 106.1 MHz	1st Adj	A	N37:07:53	W084:32:21	LIC	1.95	178	50.02	215	0	50.02
WTKB	BURGIN	KY	290 : 105.9 MHz	Co-Chan	A	N37:48:49	W084:39:28	LIC	3.00	141	51.85	312	0	51.85
WRHR-LP	MANCHESTER	KY	289 : 105.7 MHz	1st Adj	C3	N37:08:59	W083:45:08	LIC	5.00	218	56.99	133	0	56.99
W287CA	CORBIN	KY	237 : 95.3 MHz	IF	L1	N36:55:54	W084:05:40	LIC	0.00	5	64.33	170	6	58.33
WWFW	CORBIN	KY	287 : 105.3 MHz	3rd Adj	DX	N36:56:49	W084:05:39	CP	0.02	0	62.67	170	0	62.67
WCDA	MOUNT STERLING	KY	288 : 105.5 MHz	2nd Adj	C3	N38:04:09	W084:18:44	LIC	25.00	100	63.40	353	0	63.40
WNLW-LP	VERSAILLES	KY	292 : 106.3 MHz	2nd Adj	A	N38:02:51	W084:29:57	LIC	3.70	128	65.30	338	0	65.30
	WILLIAMSBURG	KY	236 : 95.1 MHz	IF	L1	N36:44:40	W084:10:25	LIC	0.00	30	84.25	177	6	78.25



Floyd E. Turner, CBRE, CBNT
1837 E SR68 Haubstadt IN 47639
812.457.9860 eng@thyword.org

Exhibit 12B-Contour Spacing Study

Contour Analysis

FET Engineering
Job: Morrill 20030317MMQ.fmj
Master Database: 17M_Sep_30.fmd
Lat: N37:30:10 Lon: W084:13:09 NAD-27
Scale: 1:1000000
Channel: 290 Class: DX
Status: Licensed, Construction Permit, Application
Channels: Co-Channel, 1st Adj, 2nd Adj, 3rd Adj, IF
Range: 89 km, Clearance: FCC
Comments: No Comments
Description: Proposed 20030317MMQ Translator

rfInvestigator Version 3.5.25
by rfSoftware, Inc.
Date: 10/4/2013 11:51:29 AM
Key:

City Grade
Protected
Co-Channel
1st Adj
2nd/3rd Adj

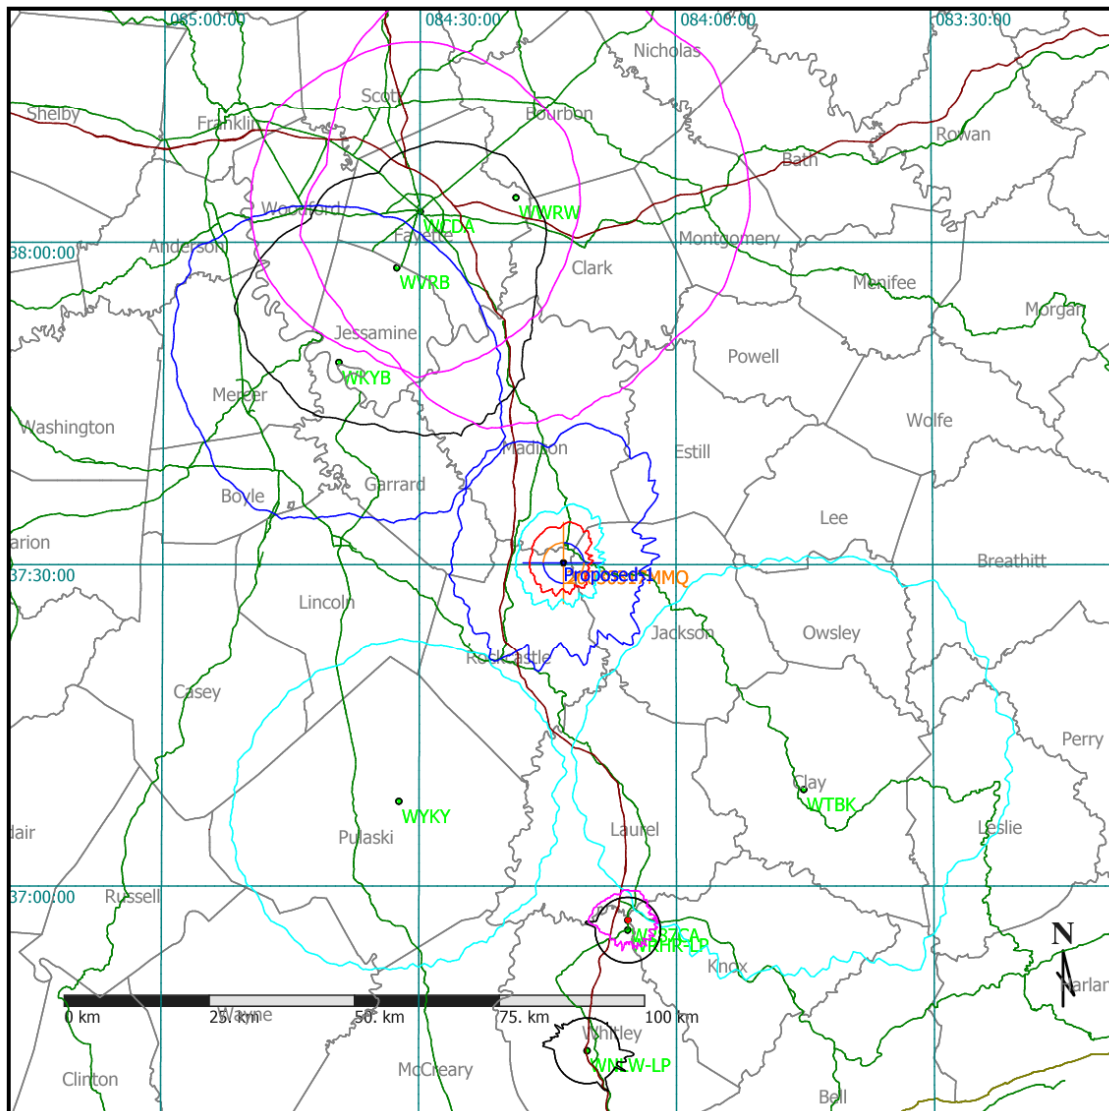


Exhibit 12C-HAAT Radial Study

12 Radial Average Terrain Report

FET Engineering

Job: Morrill 20030317MMQ.fmj:*Proposed-1
N37:30:10 W084:13:09 NAD-27
Channel: 290 Class: DX
Description:

Site Elevation: 361.4 meters AMSL Rad Center: 493.9 meters AMSL

rfInvestigator Version 3.5.25
by rfSoftware, Inc.
Date: 10/4/2013 11:44:03 AM
USGS 3-Sec DEM(DMA)

Radial Details

Bearing Degrees True	Average Height 3.0 to 16.0 km meters (feet)	Antenna Height HAAT meters (feet)	Min Height AMSL meters (feet)	Max Height AMSL meters (feet)
000	308.0 (1,010)	185.9 (610)	268.4 (881)	457.0 (1,499)
030	304.8 (1,000)	189.0 (620)	228.9 (751)	455.4 (1,494)
060	388.9 (1,276)	105.0 (344)	244.0 (801)	464.7 (1,525)
090	397.3 (1,303)	96.6 (317)	305.6 (1,003)	465.8 (1,528)
120	409.4 (1,343)	84.5 (277)	336.5 (1,104)	457.8 (1,502)
150	397.8 (1,305)	96.1 (315)	305.4 (1,002)	457.0 (1,499)
180	404.0 (1,326)	89.9 (295)	335.0 (1,099)	457.2 (1,500)
210	359.9 (1,181)	134.0 (440)	284.2 (932)	446.3 (1,464)
240	356.0 (1,168)	137.9 (452)	298.7 (980)	426.9 (1,401)
270	351.1 (1,152)	142.8 (468)	305.0 (1,001)	427.0 (1,401)
300	341.5 (1,120)	152.4 (500)	268.9 (882)	457.1 (1,500)
330	317.9 (1,043)	176.0 (578)	274.8 (901)	457.1 (1,500)

Average of -N- Radials

8 Radials	358.1 (1,175)	135.8 (446)
12 Radials	361.4 (1,186)	132.5 (435)
72 Radials	362.7 (1,190)	131.2 (430)
360 Radials	359.4 (1,179)	134.5 (441)

Exhibit 12D-Translator Power Study pg.1

ERP							
'ID'	'Key'	'Site Latitu	'Site Longi	'Site AMSL	'Radials U:	'Antenna'	'Antenna /
*Proposed	-999	37.50286	-84.2191	361.3214	360	Omni	506.9431
'Bearing'	'Ant Gain'	'HAT (met	'HAAT (met	'erp (kW)'	'Max East	'Max Other (kW)'	
0	1	307.696	199.247	0.01	0.01	0.062	
5	1	286.183	220.76	0.01	0.01	0.062	
10	1	274.622	232.321	0.01	0.01	0.062	
15	1	281.443	225.5	0.01	0.01	0.062	
20	1	284.068	222.876	0.01	0.01	0.062	
25	1	284.493	222.45	0.01	0.01	0.062	
30	1	304.824	202.119	0.01	0.01	0.062	
35	1	302.309	204.634	0.01	0.01	0.062	
40	1	296.251	210.692	0.01	0.01	0.062	
45	1	332.487	174.457	0.01	0.01	0.062	
50	1	343.046	163.897	0.01	0.013	0.205	
55	1	347.087	159.856	0.01	0.013	0.205	
60	1	388.709	118.234	0.01	0.013	0.205	
65	1	420.618	86.325	0.01	0.013	0.205	
70	1	408.291	98.652	0.01	0.013	0.205	
75	1	386.179	120.764	0.01	0.013	0.205	
80	1	411.588	95.356	0.01	0.019	0.205	
85	1	386.548	120.395	0.01	0.019	0.205	
90	1	397.128	109.815	0.01	0.019	0.205	
95	1	417.053	89.89	0.01	0.019	0.205	
100	1	410.069	96.874	0.01	0.019	0.205	
105	1	408.028	98.915	0.01	0.019	0.205	
110	1	410.242	96.702	0.01	0.019	0.25	
115	1	407.739	99.205	0.01	0.019	0.25	
120	1	409.377	97.566	0.01	0.019	0.25	
125	1	399.529	107.414	0.01	0.019	0.25	
130	1	386.039	120.904	0.01	0.019	0.25	
135	1	376.945	129.998	0.01	0.019	0.25	
140	1	363.13	143.813	0.01	0.019	0.205	
145	1	384.129	122.814	0.01	0.019	0.205	
150	1	397.843	109.1	0.01	0.019	0.205	
155	1	409.977	96.966	0.01	0.019	0.205	
160	1	395.226	111.717	0.01	0.019	0.205	
165	1	386.627	120.316	0.01	0.019	0.205	
170	1	376.844	130.1	0.01	0.019	0.25	
175	1	386.873	120.07	0.01	0.019	0.25	
180	1	403.998	102.945	0.01	0.019	0.25	
185	1	401.911	105.033	0.01	0.019	0.25	
190	1	376.08	130.864	0.01	0.019	0.25	
195	1	353.623	153.32	0.01	0.019	0.25	
200	1	372.251	134.693	0.01	0.01	0.115	
205	1	388.905	118.038	0.01	0.01	0.115	
210	1	360.072	146.871	0.01	0.01	0.115	
215	1	333.038	173.905	0.01	0.01	0.115	

Exhibit 12D-Translator Power Study pg.2

220	1	349.229	157.714	0.01	0.01	0.115
225	1	366.509	140.434	0.01	0.01	0.115
230	1	355.707	151.237	0.01	0.01	0.115
235	1	353.114	153.829	0.01	0.01	0.115
240	1	355.965	150.978	0.01	0.01	0.115
245	1	368.248	138.695	0.01	0.01	0.115
250	1	362.538	144.405	0.01	0.01	0.115
255	1	349.217	157.726	0.01	0.01	0.115
260	1	352.242	154.701	0.01	0.01	0.115
265	1	350.279	156.664	0.01	0.01	0.115
270	1	351.18	155.763	0.01	0.01	0.115
275	1	353.927	153.016	0.01	0.01	0.115
280	1	352.579	154.364	0.01	0.01	0.115
285	1	359.05	147.893	0.01	0.01	0.115
290	1	358.687	148.257	0.01	0.01	0.092
295	1	342.311	164.633	0.01	0.01	0.092
300	1	341.552	165.392	0.01	0.01	0.092
305	1	334.341	172.602	0.01	0.01	0.092
310	1	330.554	176.389	0.01	0.01	0.092
315	1	328.848	178.095	0.01	0.01	0.092
320	1	324.238	182.706	0.01	0.01	0.075
325	1	325.269	181.674	0.01	0.01	0.075
330	1	317.651	189.292	0.01	0.01	0.075
335	1	306.684	200.259	0.01	0.01	0.075
340	1	311.037	195.906	0.01	0.01	0.075
345	1	322.286	184.657	0.01	0.01	0.075
350	1	334.584	172.359	0.01	0.01	0.062
355	1	337.69	169.253	0.01	0.01	0.062