

NEW AUXILIARY FM ANTENNA
CUMULUS LICENSING LLC
WYNN-FM RADIO STATION
CH 292A - 106.3 MHZ - 0.394 KW
FLORENCE, SOUTH CAROLINA
June 2018

EXHIBIT B

Radio Frequency Assessment

A study has been made to determine whether this proposal is in compliance with 47 C.F.R. §1.1307 of the Commission's rules and with OET Bulletin #65, dated August 1997 ("Bulletin"), regarding human exposure to radio frequency radiation in the vicinity of broadcast towers. This study considers all nearby contributing stations, specifically the proposed WQPD, WMXT, and WCMG auxiliary antenna systems¹, and utilizes the appropriate formulas contained in the OET Bulletin.

The proposed WYNN-FM auxiliary antenna system will be mounted with its center of radiation 53.3 meters (175 feet) above the ground at the existing tower location and will operate with an effective radiated power of 0.394 kilowatt in the horizontal and vertical planes (circularly polarized). At 2.0 meters above the ground at the base of the tower, the height of an average person, the WYNN-FM auxiliary antenna system will contribute 0.0028 mw/cm².² Based on exposure limitations for a controlled environment, 0.3% of the allowable ANSI limit is reached at 2.0 meters above the ground at the base of the tower. For uncontrolled environments, 1.4% of the ANSI limit is reached at 2.0 meters above the ground at the base of the tower.


-
- 1) Cumulus is also submitting applications for new auxiliary antenna systems for WQPD, WCMG and WMXT. These stations will share the WYNN-FM antenna.
 - 2) This level of field occurs at 52.40 meters out from the base of the tower and is considered worst case.

Since this level for controlled and uncontrolled environments is less than the 5% limit defined by the Commission {§1.1307(b)(3)(i)}, the proposed WYNN-FM auxiliary antenna is believed to be in compliance with the radio frequency radiation exposure limits, as required by the Federal Communications Commission. Further, Cumulus will post warning signs in the vicinity of the tower warning of potential radio frequency radiation hazards at the site. In addition, Cumulus will reduce the power of the facility or cease operation, in cooperation and coordination with other tower users, as necessary, to protect persons having access to the site, tower or antenna from radio frequency radiation in excess of FCC guidelines.

FM Model

The FM Model calculator determines the potential exposure from radiofrequency (RF) electromagnetic fields produced by FM broadcast station antennas at ground level. The FM Model software was originally developed by the FCC in 1997 as a standalone executable program and this improved version provides more precise predictions and runs via a JavaScript enabled web browser. The FM Model is originally based on measured data [published in 1985 by the EPA](http://nepis.epa.gov/Exe/ZyNET.exe/2000ED2W.TXT?ZyActionD=ZyDocument&Client=EPA&Index=1981+Thru+1985&Docs=&Query=&Time=&EndTime=&SearchMethod=1&TocRestrict=n&Toc=&TocEntry=&QField=&QFieldYear=&QFieldMonth=&QFieldDay=&IntQFieldOp=0&ExtQFieldOp=0&XmlQuery=&File=D%3A\zyfiles\Index%20Data\81thru85\Txl\00000003\2000ED2W.txt&User=ANONYMOUS&Password=anonymous&SortMethod=h|-&MaximumDocuments=1&FuzzyDegree=0&ImageQuality=r75g8/r75g8/x150y150g16/i425&Display=p|f&DefSeekPage=x&SearchBack=ZyActionL&Back=ZyActionS&BackDesc=Results%20page&MaximumPages=1&ZyEntry=1&SeekPage=x&ZyPURL)

<http://nepis.epa.gov/Exe/ZyNET.exe/2000ED2W.TXT?ZyActionD=ZyDocument&Client=EPA&Index=1981+Thru+1985&Docs=&Query=&Time=&EndTime=&SearchMethod=1&TocRestrict=n&Toc=&TocEntry=&QField=&QFieldYear=&QFieldMonth=&QFieldDay=&IntQFieldOp=0&ExtQFieldOp=0&XmlQuery=&File=D%3A\zyfiles\Index%20Data\81thru85\Txl\00000003\2000ED2W.txt&User=ANONYMOUS&Password=anonymous&SortMethod=h|-&MaximumDocuments=1&FuzzyDegree=0&ImageQuality=r75g8/r75g8/x150y150g16/i425&Display=p|f&DefSeekPage=x&SearchBack=ZyActionL&Back=ZyActionS&BackDesc=Results%20page&MaximumPages=1&ZyEntry=1&SeekPage=x&ZyPURL>. [▼ Show More....](#)

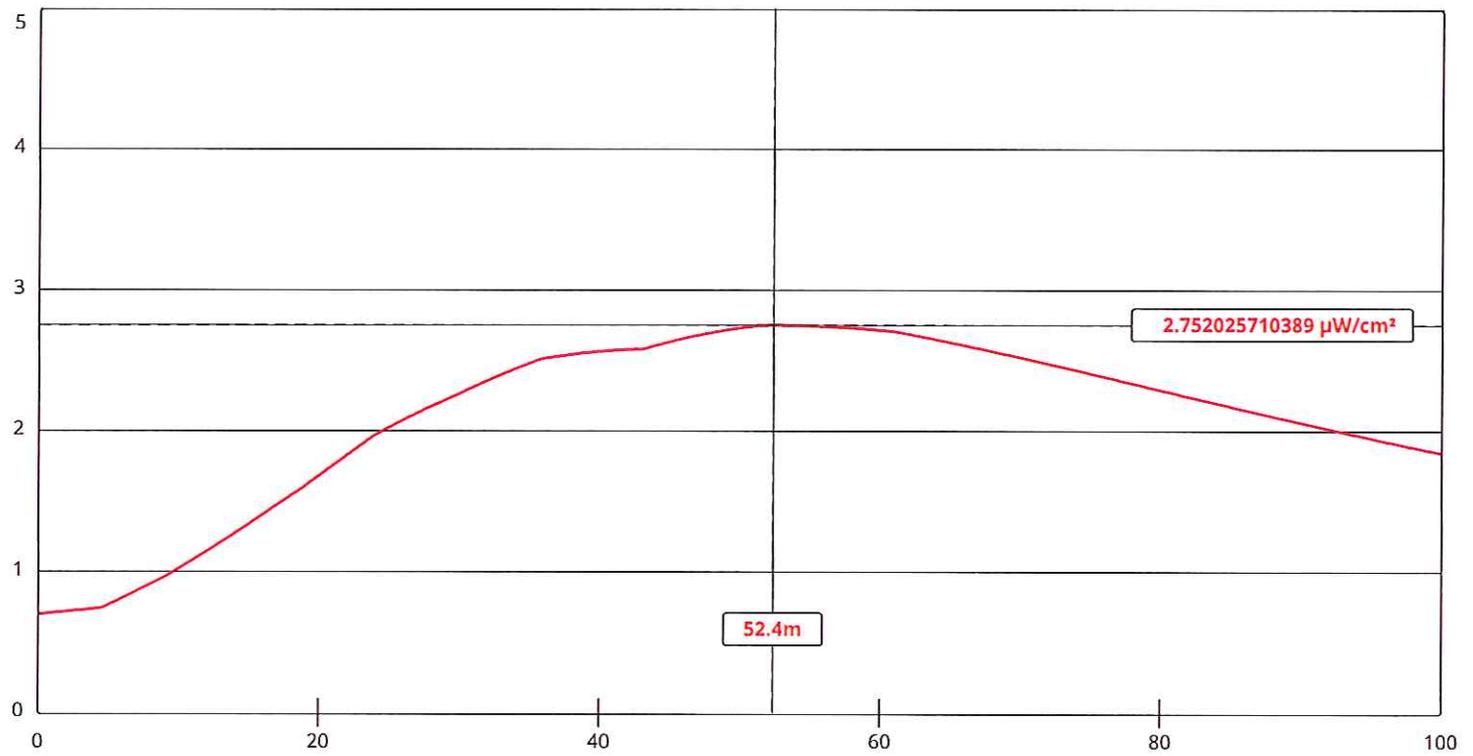

[View Tabular Results +](#)

Channel Selection	Channel 292 (106.3 MHz) ▼		
Antenna Type +	EPA Type 2: Opposed V Dipole ▼		
Height (m)	<input type="text" value="53.3"/>	Distance (m)	<input type="text" value="100"/>
ERP-H (W)	<input type="text" value="394"/>	ERP-V (W)	<input type="text" value="394"/>
Num of Elements	<input type="text" value="1"/>	Element Spacing (λ)	<input type="text" value="1"/>
Num of Points	<input type="text" value="500"/>	Apply	