


**ANDREW®****ELEVATION PATTERN**

Type:	ATW20HS3H	
Directivity:	Numeric	dBd
Main Lobe:	20.00	13.01
Horizontal:	16.67	12.22
Beam Tilt:	0.75	
Polarization:	Horizontal	
Channel:	21	
Location:		
Note:		

Relative Field**EXHIBIT B-1****ANTENNA ELEVATION PATTERN****PROPOSED KPXJ-DT
CHANNEL 21 - MINDEN, LOUISIANA**

SMITH AND FISHER

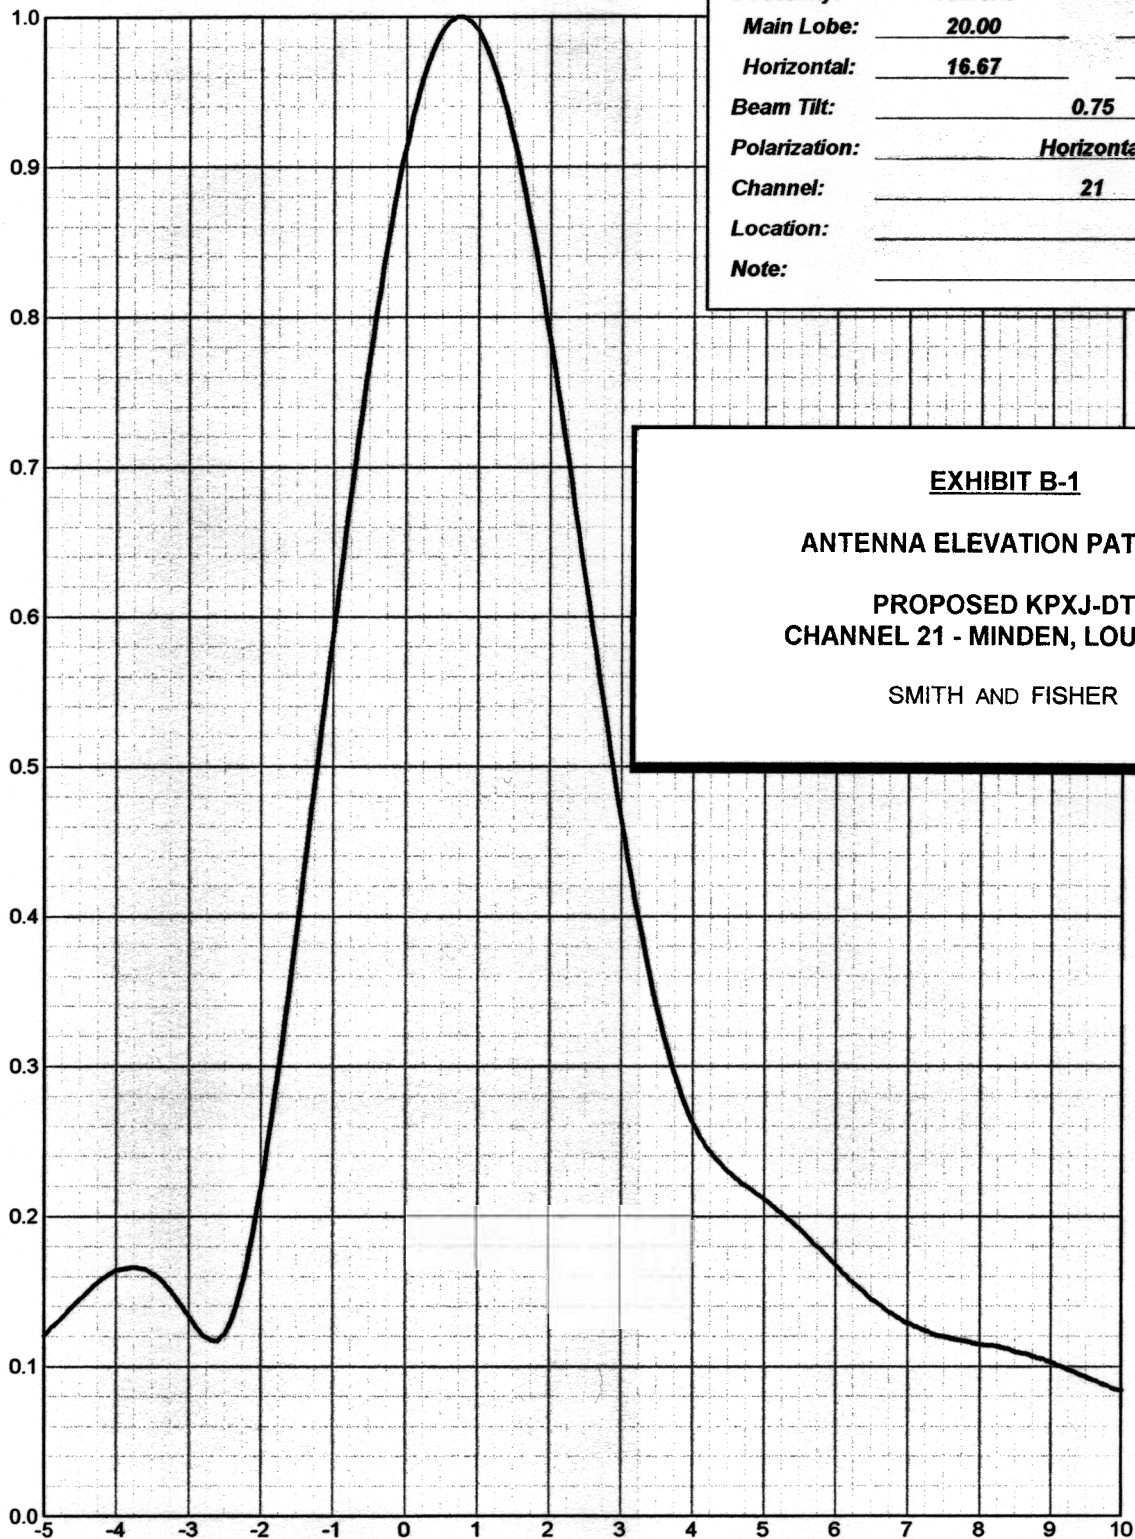

ANDREW CORPORATION
10500 W. 153rd Street
Orland Park, Illinois U.S.A 60462

EXHIBIT B-2

ANTENNA AZIMUTH PATTERN

**PROPOSED KPXJ-DT
CHANNEL 21 - MINDEN, LOUISIANA**


SMITH AND FISHER



ANDREW®

AZIMUTH PATTERN

Type:	ATW-C3	
	Numeric	dBd
Directivity:	2.00	3.01
Peak(s) at:		
Polarization:	Horizontal	
Channel:	21	
Location:		
Note:		

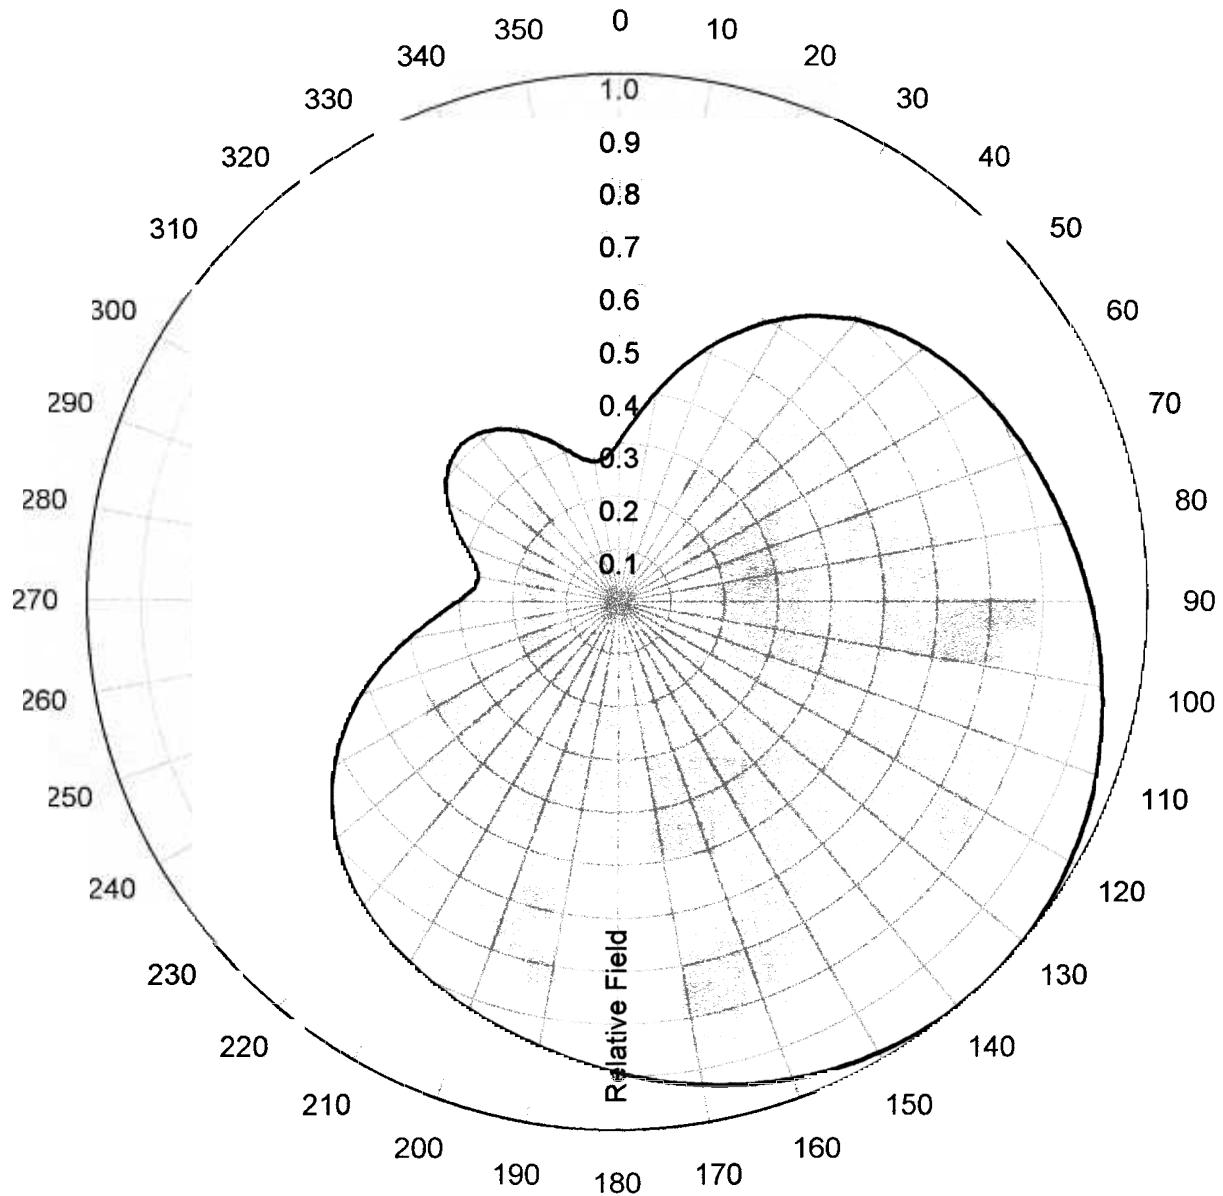

ANDREW CORPORATION
10500 W. 153rd Street
Orland Park, Illinois U.S.A 60462

EXHIBIT B-3**RELATIVE FIELD VALUES****PROPOSED KPXJ-DT
CHANNEL 21 - MINDEN, LOUISIANA****SMITH AND FISHER****ANDREW.****AZIMUTH PATTERN
FCC FILING FORMAT**Type: ATW-C3Polarization: Horizontal

<i>Angle</i>	<i>Field</i>	<i>ERP (kW)</i>	<i>ERP (dBk)</i>
0	0.303	91.808	19.629
10	0.402	161.603	22.084
20	0.517	267.287	24.270
30	0.618	381.921	25.820
40	0.696	484.412	26.852
50	0.748	559.499	27.478
60	0.787	619.364	27.919
70	0.820	672.394	28.276
80	0.854	729.310	28.629
90	0.891	793.874	28.998
100	0.927	859.321	29.342
110	0.961	923.513	29.654
120	0.985	970.216	29.869
130	0.998	995.995	29.983
140	0.998	995.995	29.983
150	0.985	970.216	29.869
160	0.961	923.513	29.654
170	0.928	861.176	29.351
180	0.891	793.874	28.998
190	0.854	729.310	28.629
200	0.820	672.394	28.276
210	0.787	619.364	27.919
220	0.749	560.996	27.490
230	0.696	484.412	26.852
240	0.618	381.921	25.820
250	0.517	267.287	24.270
260	0.403	162.408	22.106
270	0.303	91.808	19.629
280	0.270	72.899	18.627
290	0.311	96.720	19.855
300	0.373	139.128	21.434
310	0.414	171.394	22.340
320	0.414	171.394	22.340
330	0.374	139.875	21.457
340	0.311	96.720	19.855
350	0.270	72.899	18.627

ANDREW CORPORATION
10500 W. 153rd Street
Orland Park, Illinois U.S.A 60462