

## **Non-Interference Compliance**

Regarding Facility id 148943

Channel 275

### **Description of Exhibit 12 Contents**

This exhibit demonstrates that the proposed facility complies with contour overlap and interference protection provisions in all of the applicable rule sections and that this application for a construction permit is in full compliance with 47 C.F.R. § 74.1204.

**Let it be noted that should any actual real world interference occur, the applicant acknowledges that it will promptly suspend operation of this translator in accordance with 47 C.F.R. § 74.1203.**

Page 2 of this exhibit is an explanation of the method used to demonstrate compliance with contour overlap and interference provisions based on 47 C.F.R. § 74.1204(d), which states:

*[A]n application otherwise precluded by this section will be accepted if it can be demonstrated that no actual interference will occur due to intervening terrain, lack of population or such other factors as may be applicable.*

Page 3 contains a tabulation of the vertical radiation pattern of the proposed antenna and the minimum ground clearance of the interfering contour based on this pattern.

Pages 4 through 6 include a plot and a tabulation of the vertical radiation pattern for the proposed antenna provided by the antenna manufacturer.

Page 7 of this exhibit contains the tabulated data from the interference analysis, which shows all stations whose protected contours come within 50 km of the 34 dBμ F(50,10) contour of the proposed translator. These tabulated values were calculated using data from the FCC's CDBS files and 30 arc second terrain data. The column labeled "Adj" shows the number of channels difference between the entry and the proposed translator. The column labeled "Dist" shows the distance in km. The column labeled "Overlap" shows the area of contour overlap in square kilometers.

Page 8 of this exhibit is a portion of a USGS 1:24,000 scale 7.5 minute quadrangle at full scale with the calculated area of interference overlaid. The sheet includes the quadrangle name and measurement scale at the bottom-left corner (note: "Mt" refers to meters). The area of interference was calculated using the free space equation and 120 radials.

### Compliance with 47 C.F.R. § 74.1204(d)

All authorized second and third adjacent stations with which the proposed translator has contour overlap are tabulated below. Column four show the station's signal level at the proposed translator's tower site, and column five gives the minimum value within the entire standard interfering contour of the proposed translator (100 dBμ for most classes, 94 for class B, 97 for class B1). The minimum second or third adjacent F(50,50) contour within the proposed translator's standard interfering contour was used to calculate the proposed translator's actual "worst-case" interfering contour.


<b>Application_id</b>	<b>File Number</b>	<b>Callsign</b>	<b>Contour at Tower</b>	<b>Min. Contour</b>
123130	BLH19890126KE	WHPT	67.3	67.1
220750	BLH19960222KB	WFUS	76.9	76.7
Minimum F(50,50) Contour of Adjacent Station within Proposed Translator's Standard Interfering Contour				<b>67.1</b>

FCC 02-244 at Section II.A.5 states that "when demonstrating that 'no actual interference will occur due to . . . other factors,' pursuant to Section 74.1204(d), an applicant may use the undesired-to-desired signal ratio method." The undesired-to-desired ratio for second and third adjacent stations required by § 74.1204(a) is 40 dB. Since the minimum protected contour strength within the proposed translator's standard interference contour is **67.1 dBμ**, this makes the proposed translator's worst-case interfering contour **107.1 dBμ**. By the free-space equation, this contour is calculated to extend a maximum of **148.5 m** from the transmit antenna.

The maximum horizontal plane of the interfering contour was calculated for 120 radials and plotted on the pertinent portion of a USGS quadrangle (page 8 of this exhibit). However, the field strength of the proposed translator's antenna varies with angle of depression from horizontal. The antenna relative fields are tabulated on the following page at 5 degree increments, starting at 5 degrees below horizontal. Antenna relative field strength data was provided and certified by the manufacturer of the proposed antenna. Using a free-space calculation that neglects any loss due to reflection, the vertical ground clearance of the proposed translator's interference contour has been tabulated. As shown on the following page, the area of interference clears the tower ground level (TGL) by **7.4 m** at the lowest point. The applicant has taken into account USGS quadrangles and relevant aerial photography in stating that no structures, except possibly tower support structures, puncture the area of interference. Hence, in accordance with 47 C.F.R. § 74.1204(d) and the clarification provided by the FCC in the decision *Re: Living Way Ministries* (FCC 02-244), a lack of population has been demonstrated within the area of interference and this application is therefore in full compliance with 47 C.F.R. § 74.1204.

<b>Antenna Manufacturer:</b>	<b>SCA</b>
<b>Antenna Model:</b>	<b>GP-FM</b>
<b>CORAGL:</b>	<b>77 m</b>
<b>Maximum ERP:</b>	<b>0.023 kW</b>
<b>Interfering Contour:</b>	<b>107.1 dBμ</b>
<b>Max Int. Contour Distance:</b>	<b>148.5 m</b>
<b>Min Ground Clearance:</b>	<b>7.4 m</b>

Depression Angle Below Horizontal	Antenna Relative Field	ERP (watts)	Distance to Interfering Contour from Antenna (m)	Horizontal Distance of Interfering Contour from Tower (m)	Vertical Clearance of Interfering Contour above TGL (m)
45	.663	10.1	98.5	69.6	7.4
10	.976	21.9	145.0	142.8	51.8
20	.920	19.5	136.7	128.4	30.3
25	.881	17.9	130.9	118.6	21.7
30	.835	16.0	124.0	107.4	15.0
35	.783	14.1	116.3	95.3	10.3
40	.725	12.1	107.7	82.5	7.8
15	.952	20.8	141.4	136.6	40.4
50	.597	8.2	88.7	57.0	9.1
55	.527	6.4	78.3	44.9	12.9
60	.456	4.8	67.7	33.9	18.3
65	.382	3.4	56.7	24.0	25.6
70	.307	2.2	45.6	15.6	34.1
75	.231	1.2	34.3	8.9	43.9
80	.154	0.5	22.9	4.0	54.5
90	.010	0.0	1.5	0.0	75.5
5	.992	22.6	147.4	146.8	64.2
85	.077	0.1	11.4	1.0	65.6
Minimum Clearance above TGL:					<b>7.4 m</b>

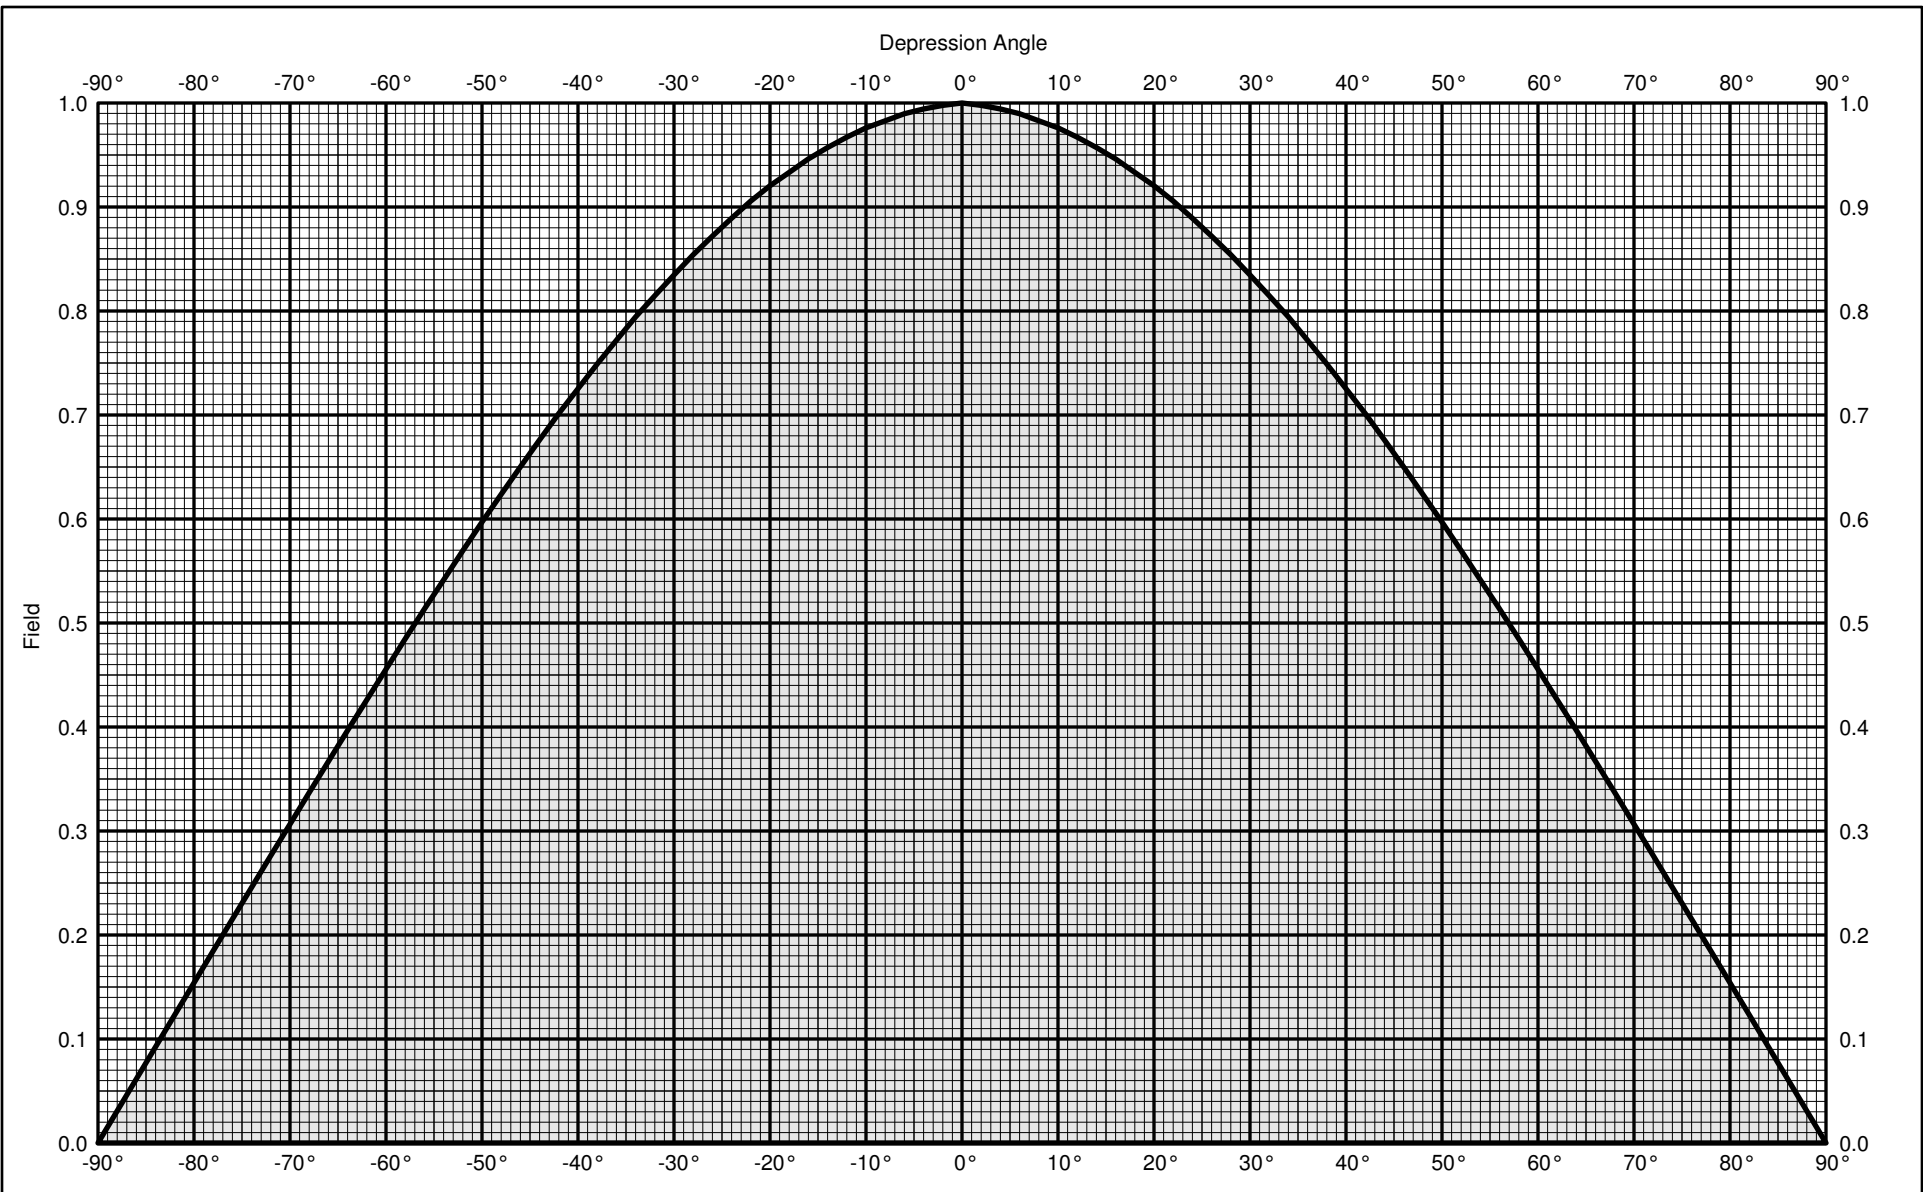

GP-FM Groundplane

Vertical radiation pattern

FM

0.0 dBd (2.15 dBi)

Vertical polarization



**KATHREIN**  
**SCALA DIVISION**  
 Post Office Box 4580 Phone:(541)779-6500  
 Medford, OR 97501 (USA) Fax:(541)779-3991  
<http://www.kathrein-scala.com>



GP-FM Groundplane

Vertical radiation pattern

FM

0.0 dBd (2.15 dBi )

Vertical polarization

Angle	Field	Rel.dB	dBd	PwrMult	Angle	Field	Rel.dB	dBd	PwrMult
-90	0.010	-40.00	-40.00	0.00	-45	0.663	-3.57	-3.57	0.44
-89	0.015	-36.24	-36.24	0.00	-44	0.676	-3.40	-3.40	0.46
-88	0.031	-30.22	-30.22	0.00	-43	0.689	-3.24	-3.24	0.47
-87	0.046	-26.70	-26.70	0.00	-42	0.701	-3.08	-3.08	0.49
-86	0.062	-24.20	-24.20	0.00	-41	0.713	-2.93	-2.93	0.51
-85	0.077	-22.26	-22.26	0.01	-40	0.725	-2.79	-2.79	0.53
-84	0.092	-20.68	-20.68	0.01	-39	0.737	-2.65	-2.65	0.54
-83	0.108	-19.34	-19.34	0.01	-38	0.749	-2.51	-2.51	0.56
-82	0.123	-18.18	-18.18	0.02	-37	0.760	-2.38	-2.38	0.58
-81	0.139	-17.16	-17.16	0.02	-36	0.772	-2.25	-2.25	0.60
-80	0.154	-16.25	-16.25	0.02	-35	0.783	-2.12	-2.12	0.61
-79	0.169	-15.42	-15.42	0.03	-34	0.794	-2.00	-2.00	0.63
-78	0.185	-14.67	-14.67	0.03	-33	0.805	-1.89	-1.89	0.65
-77	0.200	-13.98	-13.98	0.04	-32	0.815	-1.78	-1.78	0.66
-76	0.215	-13.34	-13.34	0.05	-31	0.825	-1.67	-1.67	0.68
-75	0.231	-12.75	-12.75	0.05	-30	0.835	-1.57	-1.57	0.70
-74	0.246	-12.19	-12.19	0.06	-29	0.844	-1.47	-1.47	0.71
-73	0.261	-11.67	-11.67	0.07	-28	0.854	-1.37	-1.37	0.73
-72	0.276	-11.17	-11.17	0.08	-27	0.863	-1.28	-1.28	0.74
-71	0.291	-10.71	-10.71	0.08	-26	0.872	-1.19	-1.19	0.76
-70	0.307	-10.27	-10.27	0.09	-25	0.881	-1.10	-1.10	0.78
-69	0.322	-9.85	-9.85	0.10	-24	0.889	-1.02	-1.02	0.79
-68	0.337	-9.45	-9.45	0.11	-23	0.897	-0.94	-0.94	0.81
-67	0.352	-9.07	-9.07	0.12	-22	0.906	-0.86	-0.86	0.82
-66	0.367	-8.71	-8.71	0.13	-21	0.913	-0.79	-0.79	0.83
-65	0.382	-8.36	-8.36	0.15	-20	0.920	-0.72	-0.72	0.85
-64	0.397	-8.03	-8.03	0.16	-19	0.927	-0.66	-0.66	0.86
-63	0.411	-7.71	-7.71	0.17	-18	0.933	-0.60	-0.60	0.87
-62	0.426	-7.41	-7.41	0.18	-17	0.940	-0.54	-0.54	0.88
-61	0.441	-7.12	-7.12	0.19	-16	0.946	-0.48	-0.48	0.90
-60	0.456	-6.83	-6.83	0.21	-15	0.952	-0.43	-0.43	0.91
-59	0.470	-6.56	-6.56	0.22	-14	0.957	-0.38	-0.38	0.92
-58	0.485	-6.29	-6.29	0.23	-13	0.962	-0.33	-0.33	0.93
-57	0.499	-6.04	-6.04	0.25	-12	0.967	-0.29	-0.29	0.94
-56	0.513	-5.79	-5.79	0.26	-11	0.972	-0.25	-0.25	0.94
-55	0.527	-5.56	-5.56	0.28	-10	0.976	-0.21	-0.21	0.95
-54	0.541	-5.33	-5.33	0.29	-9	0.979	-0.18	-0.18	0.96
-53	0.555	-5.11	-5.11	0.31	-8	0.983	-0.15	-0.15	0.97
-52	0.570	-4.89	-4.89	0.32	-7	0.986	-0.12	-0.12	0.97
-51	0.583	-4.68	-4.68	0.34	-6	0.990	-0.09	-0.09	0.98
-50	0.597	-4.48	-4.48	0.36	-5	0.992	-0.07	-0.07	0.98
-49	0.610	-4.29	-4.29	0.37	-4	0.994	-0.05	-0.05	0.99
-48	0.624	-4.10	-4.10	0.39	-3	0.996	-0.03	-0.03	0.99
-47	0.637	-3.92	-3.92	0.41	-2	0.998	-0.02	-0.02	1.00
-46	0.650	-3.74	-3.74	0.42	-1	0.999	-0.01	-0.01	1.00
					0	1.000	0.00	0.00	1.00



GP-FM Groundplane  
FM

0.0 dBd (2.15 dBi )

Vertical polarization

Vertical radiation pattern


Angle	Field	Rel.dB	dBd	PwrMult	Angle	Field	Rel.dB	dBd	PwrMult
0	1.000	0.00	0.00	1.00	45	0.663	-3.57	-3.57	0.44
1	0.999	-0.01	-0.01	1.00	46	0.650	-3.74	-3.74	0.42
2	0.998	-0.02	-0.02	1.00	47	0.637	-3.92	-3.92	0.41
3	0.996	-0.03	-0.03	0.99	48	0.624	-4.10	-4.10	0.39
4	0.994	-0.05	-0.05	0.99	49	0.610	-4.29	-4.29	0.37
5	0.992	-0.07	-0.07	0.98	50	0.597	-4.48	-4.48	0.36
6	0.990	-0.09	-0.09	0.98	51	0.583	-4.68	-4.68	0.34
7	0.986	-0.12	-0.12	0.97	52	0.570	-4.89	-4.89	0.32
8	0.983	-0.15	-0.15	0.97	53	0.555	-5.11	-5.11	0.31
9	0.979	-0.18	-0.18	0.96	54	0.541	-5.33	-5.33	0.29
10	0.976	-0.21	-0.21	0.95	55	0.527	-5.56	-5.56	0.28
11	0.972	-0.25	-0.25	0.94	56	0.513	-5.79	-5.79	0.26
12	0.967	-0.29	-0.29	0.94	57	0.499	-6.04	-6.04	0.25
13	0.962	-0.33	-0.33	0.93	58	0.485	-6.29	-6.29	0.23
14	0.957	-0.38	-0.38	0.92	59	0.470	-6.56	-6.56	0.22
15	0.952	-0.43	-0.43	0.91	60	0.456	-6.83	-6.83	0.21
16	0.946	-0.48	-0.48	0.90	61	0.441	-7.12	-7.12	0.19
17	0.940	-0.54	-0.54	0.88	62	0.426	-7.41	-7.41	0.18
18	0.933	-0.60	-0.60	0.87	63	0.411	-7.71	-7.71	0.17
19	0.927	-0.66	-0.66	0.86	64	0.397	-8.03	-8.03	0.16
20	0.920	-0.72	-0.72	0.85	65	0.382	-8.36	-8.36	0.15
21	0.913	-0.79	-0.79	0.83	66	0.367	-8.71	-8.71	0.13
22	0.906	-0.86	-0.86	0.82	67	0.352	-9.07	-9.07	0.12
23	0.897	-0.94	-0.94	0.81	68	0.337	-9.45	-9.45	0.11
24	0.889	-1.02	-1.02	0.79	69	0.322	-9.85	-9.85	0.10
25	0.881	-1.10	-1.10	0.78	70	0.307	-10.27	-10.27	0.09
26	0.872	-1.19	-1.19	0.76	71	0.291	-10.71	-10.71	0.08
27	0.863	-1.28	-1.28	0.74	72	0.276	-11.17	-11.17	0.08
28	0.854	-1.37	-1.37	0.73	73	0.261	-11.67	-11.67	0.07
29	0.844	-1.47	-1.47	0.71	74	0.246	-12.19	-12.19	0.06
30	0.835	-1.57	-1.57	0.70	75	0.231	-12.75	-12.75	0.05
31	0.825	-1.67	-1.67	0.68	76	0.215	-13.34	-13.34	0.05
32	0.815	-1.78	-1.78	0.66	77	0.200	-13.98	-13.98	0.04
33	0.805	-1.89	-1.89	0.65	78	0.185	-14.67	-14.67	0.03
34	0.794	-2.00	-2.00	0.63	79	0.169	-15.42	-15.42	0.03
35	0.783	-2.12	-2.12	0.61	80	0.154	-16.25	-16.25	0.02
36	0.772	-2.25	-2.25	0.60	81	0.139	-17.16	-17.16	0.02
37	0.760	-2.38	-2.38	0.58	82	0.123	-18.18	-18.18	0.02
38	0.749	-2.51	-2.51	0.56	83	0.108	-19.34	-19.34	0.01
39	0.737	-2.65	-2.65	0.54	84	0.092	-20.68	-20.68	0.01
40	0.725	-2.79	-2.79	0.53	85	0.077	-22.26	-22.26	0.01
41	0.713	-2.93	-2.93	0.51	86	0.062	-24.20	-24.20	0.00
42	0.701	-3.08	-3.08	0.49	87	0.046	-26.70	-26.70	0.00
43	0.689	-3.24	-3.24	0.47	88	0.031	-30.22	-30.22	0.00
44	0.676	-3.40	-3.40	0.46	89	0.015	-36.24	-36.24	0.00
					90	0.010	-40.00	-40.00	0.00

# **Adjacent Channel Study** **For Station NEW, Facility\_id: 148943**

## **Co-channel through third adjacent:**

Application_id	Facility_id	Prefix	ARN	Call	Licensee	Class	City	State	Status	ERP	RCAMSL	Channel	Adj	Dist	Overlap
220750	63984	BLH	19960222KB	WFUS	JACOR BROADCASTING OF TAMPA BAY, INC	C	BRADENTON	FL	LIC	99	434	278	3	42.2	0.1372
123130	51986	BLH	19890126KE	WHPT	CXR HOLDINGS, INC.	C	SARASOTA	FL	LIC	100	520	273	2	68.5	0.1372
683386	149147	BNPFT	20030828AYB	W276BS	RADIO ASSIST MINISTRY, INC.	D	WAUCHULA	FL	CP	0.019	119	276	1	33.6	0
680288	142441	BNPFT	20030829AUB	W274BB	CENTRAL FLORIDA EDUCATIONAL FOUNDATION,	D	HAINES CITY	FL	CP	0.12	66	274	1	35	0
641789	148951	BNPFT	20030317HGR	NEW	RADIO ASSIST MINISTRY, INC.	D	PLANT CITY	FL	APP	0.019	118.3	275	0	35.8	0
641966	149128	BNPFT	20030317DDP	NEW	RADIO ASSIST MINISTRY, INC.	D	GREATER SUN CENTEF	FL	APP	0.01	143.3	276	1	51	0
649862	156572	BNPFT	20030317HPR	NEW	RADIO TRAINING NETWORK, INC.	D	APOLLO BEACH	FL	APP	0.01	113	276	1	54	0
635722	143511	BNPFT	20030313BLO	NEW	HISPANIC BROADCAST SYSTEM, INC.	D	KISSIMMEE	FL	APP	0.25	45	272	3	55.1	0
641783	148945	BNPFT	20030317HER	NEW	RADIO ASSIST MINISTRY, INC.	D	GREATER SUN CENTEF	FL	APP	0.013	129.7	275	0	59.5	0
635728	143517	BNPFT	20030313BLQ	NEW	HISPANIC BROADCAST SYSTEM, INC.	D	ST. CLOUD	FL	APP	0.25	44	272	3	62.4	0
683032	148955	BNPFT	20030828BBA	W275AZ	RADIO ASSIST MINISTRY, INC.	D	WESLEY CHAPEL SOUT	FL	CP	0.027	105	275	0	63.3	0
641982	149144	BNPFT	20030317DHU	NEW	RADIO ASSIST MINISTRY, INC.	D	TAMPA	FL	APP	0.027	94	276	1	63.9	0
641792	148954	BNPFT	20030317HHH	NEW	RADIO ASSIST MINISTRY, INC.	D	TAMPA	FL	APP	0.027	94	275	0	63.9	0
1027833	157099	BLFT	20041112ACA	W274AX	CENTRAL FLORIDA EDUCATIONAL FOUNDATION,	D	GROVELAND	FL	LIC	0.17	60	274	1	73.6	0
207911	25403	BLH	19950405KA	WLOQ	GROSS COMMUNICATIONS CORPORATION	C3	WINTER PARK	FL	LIC	14	164	276	1	80.3	0
641977	149139	BNPFT	20030317DHI	NEW	RADIO ASSIST MINISTRY, INC.	D	ST. PETERSBURG	FL	APP	0.019	101.9	276	1	82.4	0
641790	148952	BNPFT	20030317HHF	NEW	RADIO ASSIST MINISTRY, INC.	D	ST. PETERSBURG	FL	APP	0.019	101.9	275	0	82.4	0
641963	149125	BNPFT	20030317DCC	NEW	RADIO ASSIST MINISTRY, INC.	D	BRADENTON	FL	APP	0.01	180	276	1	82.6	0



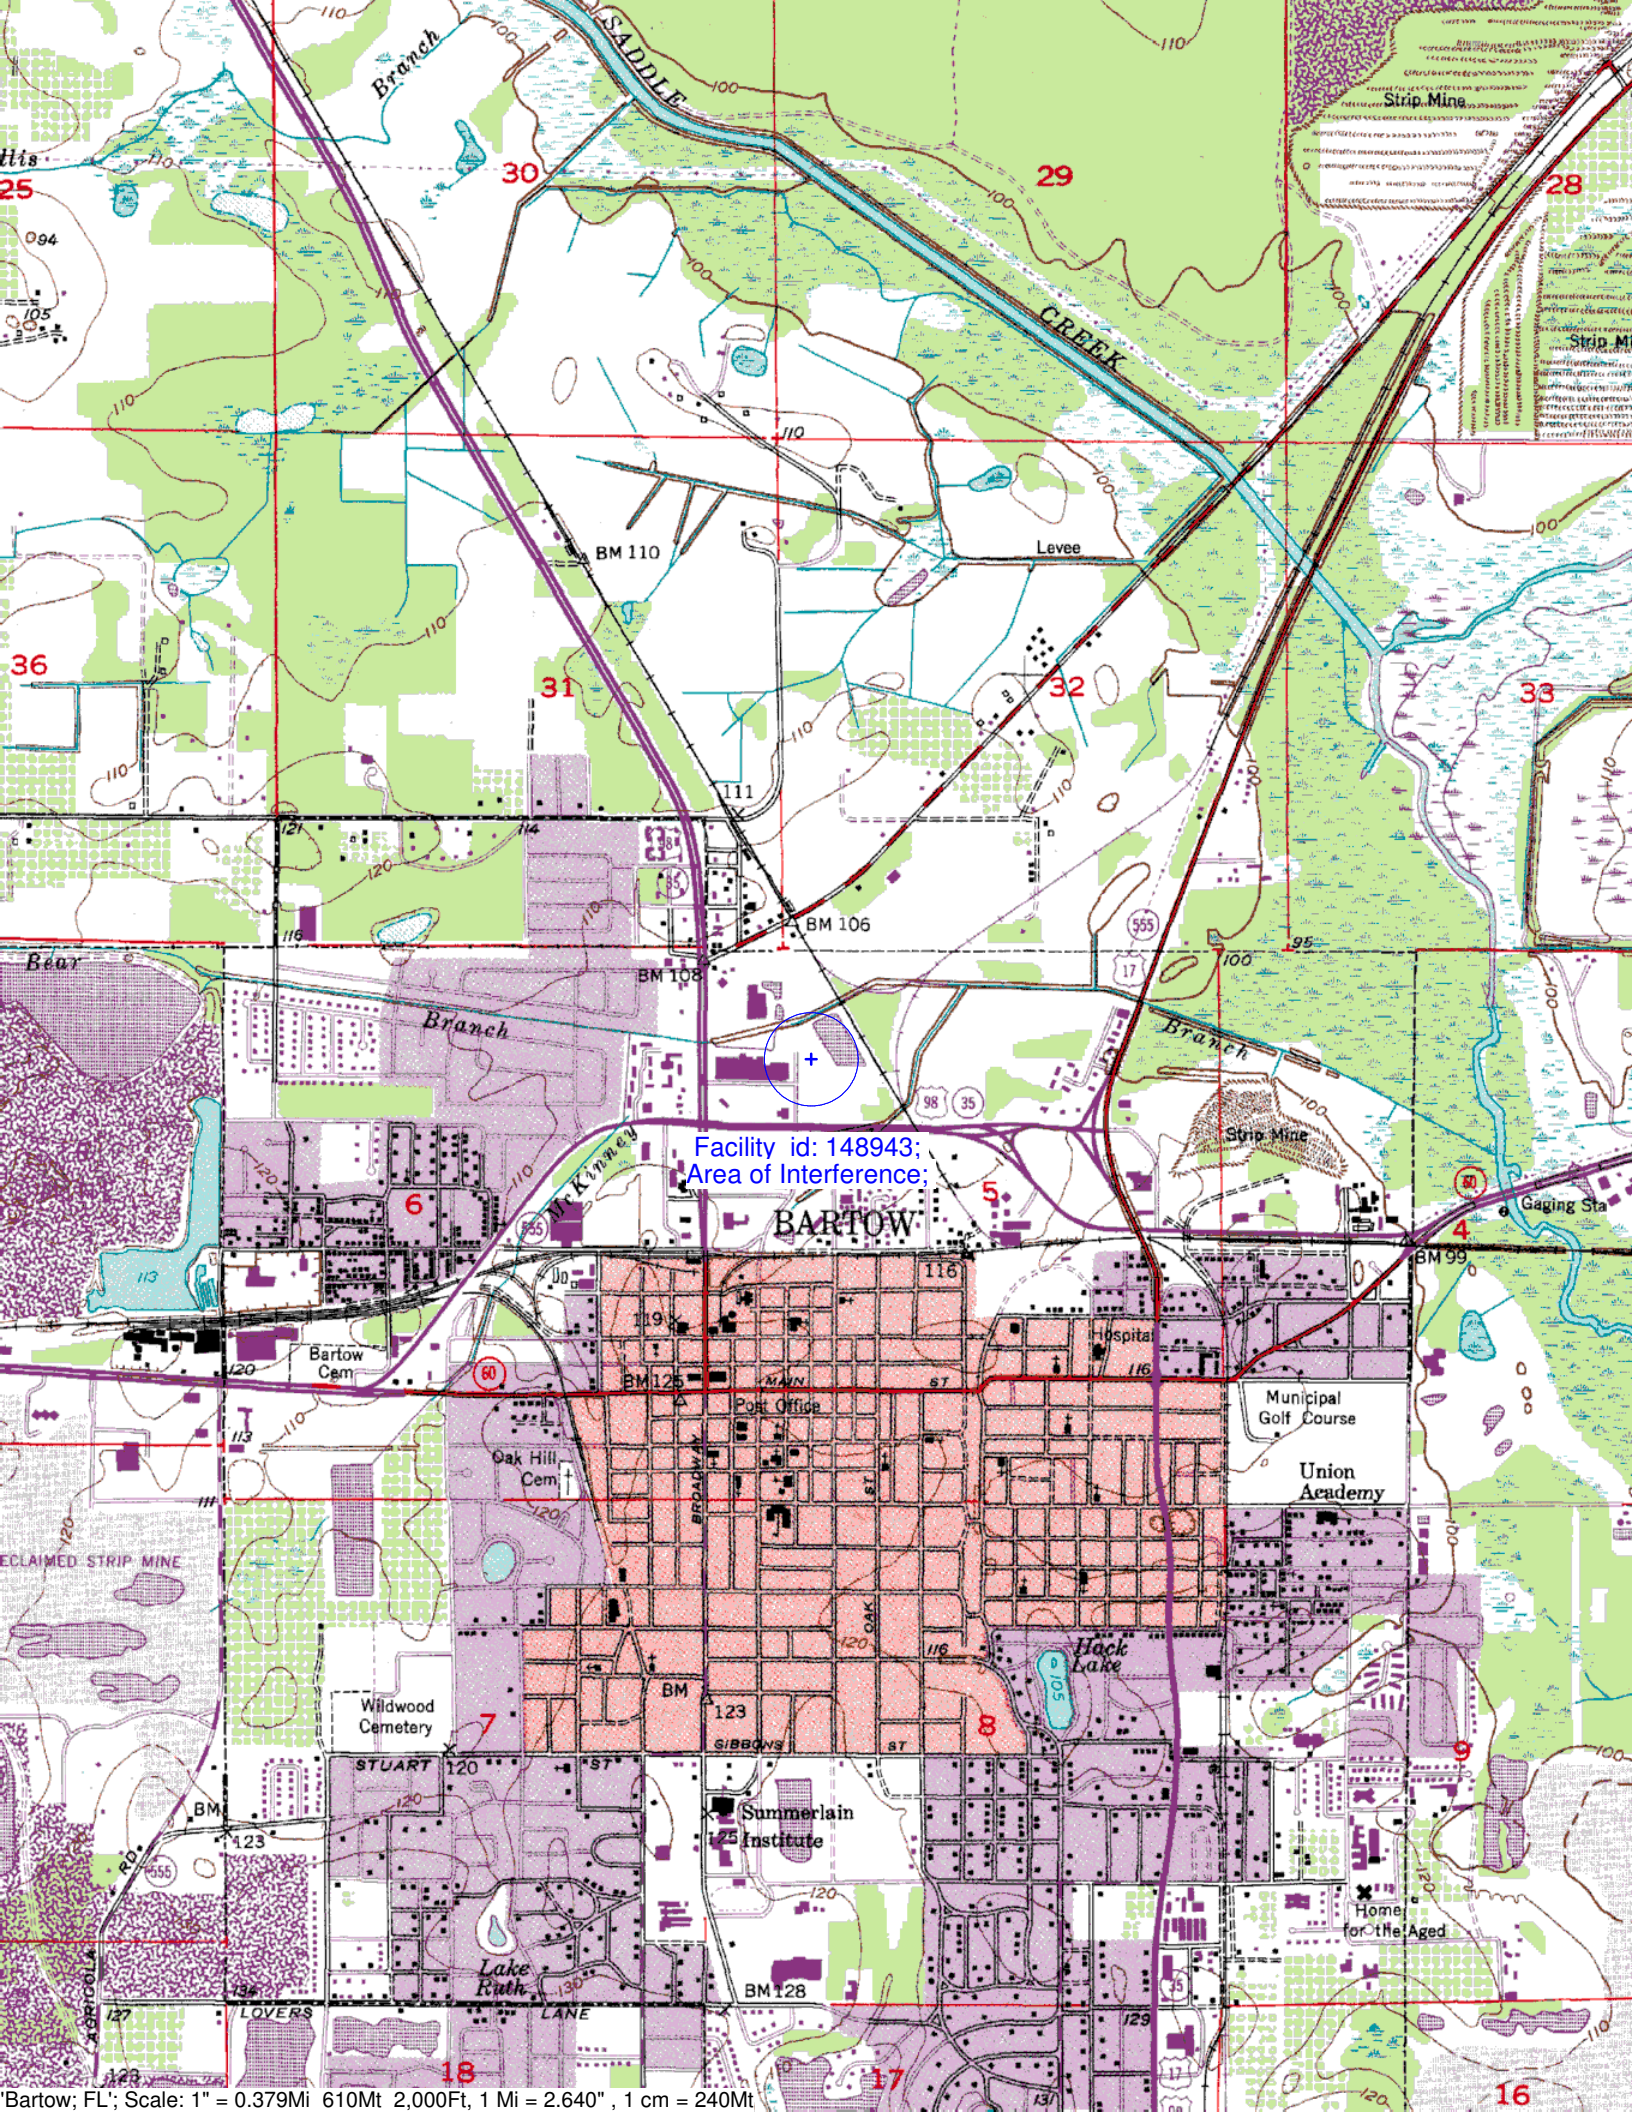

Facility id: 148943;  
Area of Interference;

BARTOW