

TECHNICAL EXHIBIT
CONCERNING HUMAN EXPOSURE TO RF ELECTROMAGNETIC ENERGY
PREPARED FOR
STATION WMBB-DT
PANAMA CITY, FLORIDA
CH 13 42 KW (MAX-DA) 434 M

Technical Statement

The proposed facilities were evaluated in terms of potential radio frequency (RF) energy exposure at ground level to workers and the general public. The radiation center for the proposed DTV antenna is located 438 meters above ground level. The maximum DTV ERP is 434 kW (horizontal polarization). A “worst-case” vertical plane relative field value of 0.1 (for angles below 60 degrees downward) is assumed for the antenna's downward radiation (see Figure 2 attached). The calculated power density at a point 2 meters above ground level is less than 0.0001 mW/cm^2 . This is less than 0.1% of the FCC's recommended limit of 0.2 mW/cm^2 for channel 13 for an “uncontrolled” environment. Therefore, based on the responsibility threshold of 5%, the proposal will comply with the RF emission rules.

Access to the transmitting site is restricted by fencing and appropriately marked with RFR warning signs. Furthermore, as this is a multi-user site, a protocol is in effect with the other stations in the event that workers or other authorized personnel enter the restricted area or climb the tower to ensure that appropriate measures will be taken to assure worker safety with respect to radio frequency radiation exposure. Such measures include reducing the average exposure by spreading out the work over a longer period of time, wearing “accepted” RFR protective clothing and/or RFR exposure.

Finally, it is noted that this technical exhibit only addresses the potential for radio frequency electromagnetic field exposure. All other aspects of the

environmental processing analysis have already has been provided to the FCC by the tower owner as part of the tower registration process.

A handwritten signature in black ink, appearing to read 'T. Howell', with a stylized flourish at the end.

Thomas J. Howell

du Treil, Lundin & Rackley, Inc.

201 Fletcher Avenue

Sarasota, FL 34237-6019

(941) 329-6000

TOM@DLR.COM


March 21, 2008

Dielectric

Proposal Number	C-01661	
Date	18-Jul-07	
Call Letters	WMBB-DT	Channel 13
Location	Panama City, FL	
Customer		
Antenna Type	THV-10A13 C170	

ELEVATION PATTERN

RMS Gain at Main Lobe	10.00 (10.00 dB)	Beam Tilt	0.75 deg
RMS Gain at Horizontal	9.50 (9.78 dB)	Frequency	213.00 MHz
Calculated / Measured	Calculated	Drawing #	10V100075-90

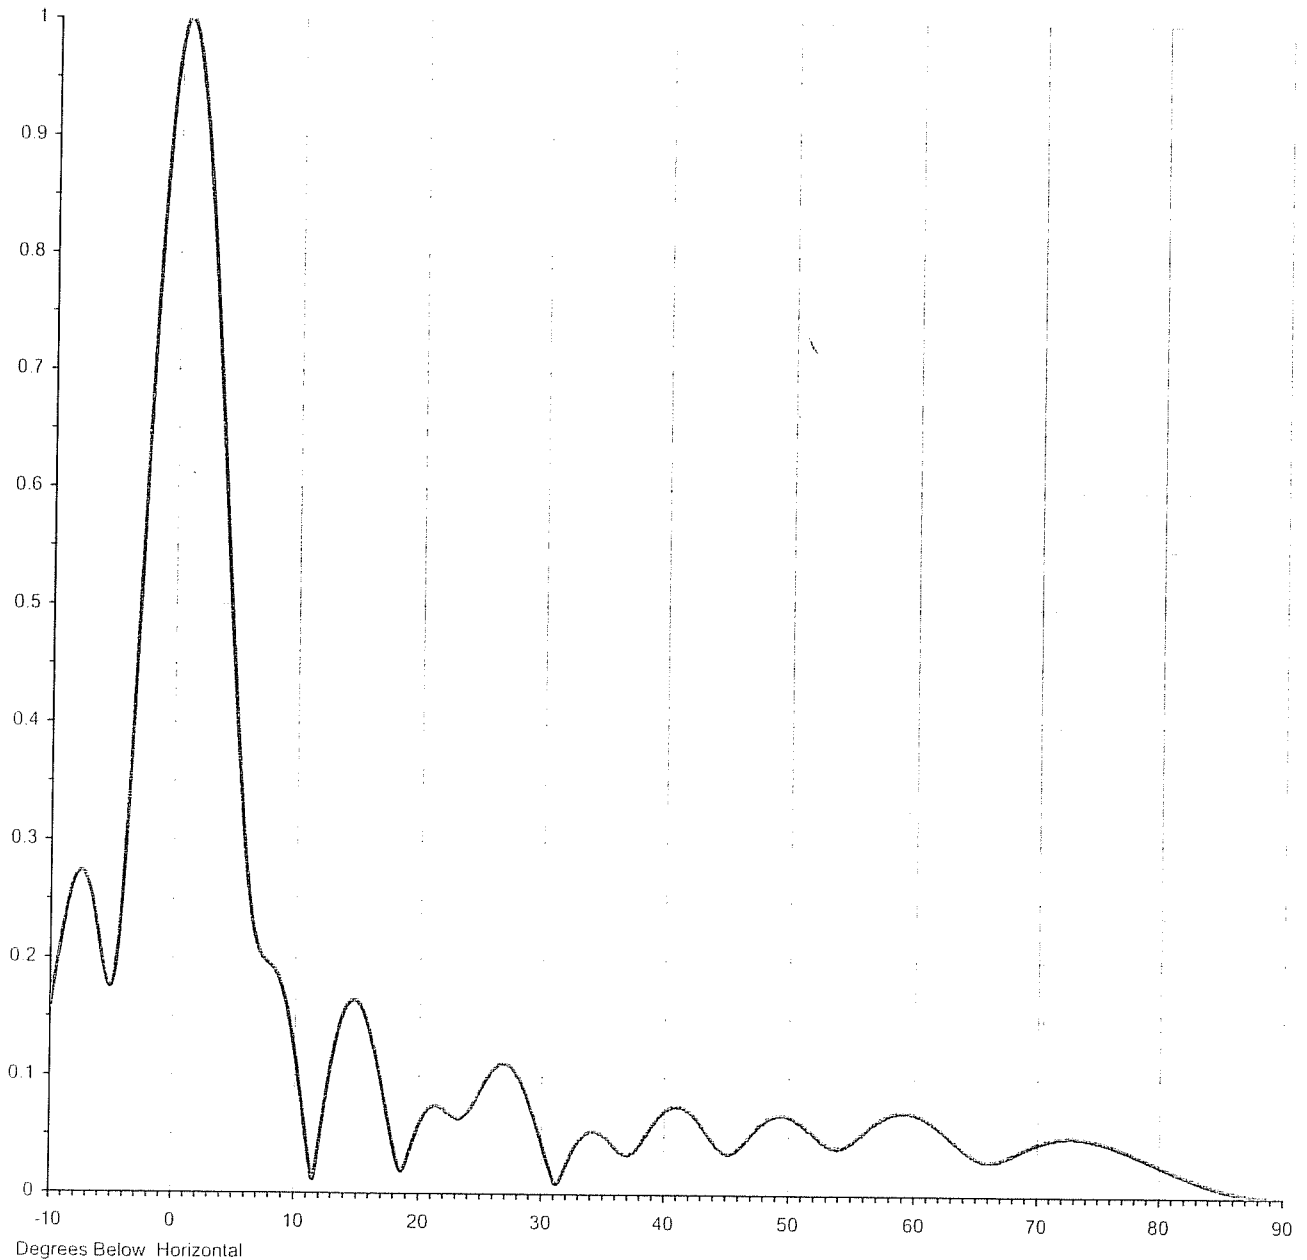

This document contains proprietary and confidential information of Dielectric Communications and SPX Corporation. It is to be used solely for the purpose for which it is provided. No disclosure, reproduction, or use of this document or any part of it may be made without the written permission of Dielectric Communications or SPX Corporation.