

Measured Conductivity Exhibit

KMBZ-AM
Kansas City, MO

The following pages document the measured ground conductivity data used in this application.
This data was obtained from the following sources:

KMBZ Proposed Operation (Measurements of KCCV)

All radials measured by Matthew Follkert of Du Treil, Lundin & Rackley, Inc. Consulting Engineers

KRMO

All radials measured by Matthew Follkert of Du Treil, Lundin & Rackley, Inc. Consulting Engineers

KCFO


Measurements taken from Minor Change application File No. BP-20121022AAU

Radio Station: KCCV

100 Degree Radial - Day

Point Designation	Distance (km)	Date	Time (local)	Field Strength (mV/m)
1	0.94	1/20/14	816	120
2	1.25	1/20/14	822	115
3	1.54	1/20/14	825	76.0
4	1.74	1/20/14	828	96.0
5	2.00	1/20/14	831	88.0
6	2.66	1/20/14	835	31.0
7	2.90	1/20/14	840	50.0
8	3.40	1/20/14	844	38.0
9	5.38	1/20/14	849	13.2
10	6.20	1/20/14	853	14.3
11	10.66	1/20/14	910	12.5
12	16.46	1/21/14	1314	6.60
13	18.39	1/21/14	1324	9.00
14	19.89	1/21/14	1331	4.70
15	20.79	1/21/14	1335	3.90
16	22.43	1/21/14	1345	4.00
17	27.31	1/21/14	1355	5.80
18	33.34	1/21/14	1412	4.60
19	39.82	1/21/14	1435	2.90
20	54.60	1/21/14	1502	1.02
21	68.04	1/21/14	1516	0.900
22	82.82	1/21/14	1531	0.510
23	94.55	1/22/14	930	0.360
24	100.78	1/22/14	944	0.170
25	112.69	1/22/14	958	0.170
26	118.37	1/22/14	1051	0.140
27	120.80	1/22/14	1100	0.135

KILOMETERS FROM ANTENNA

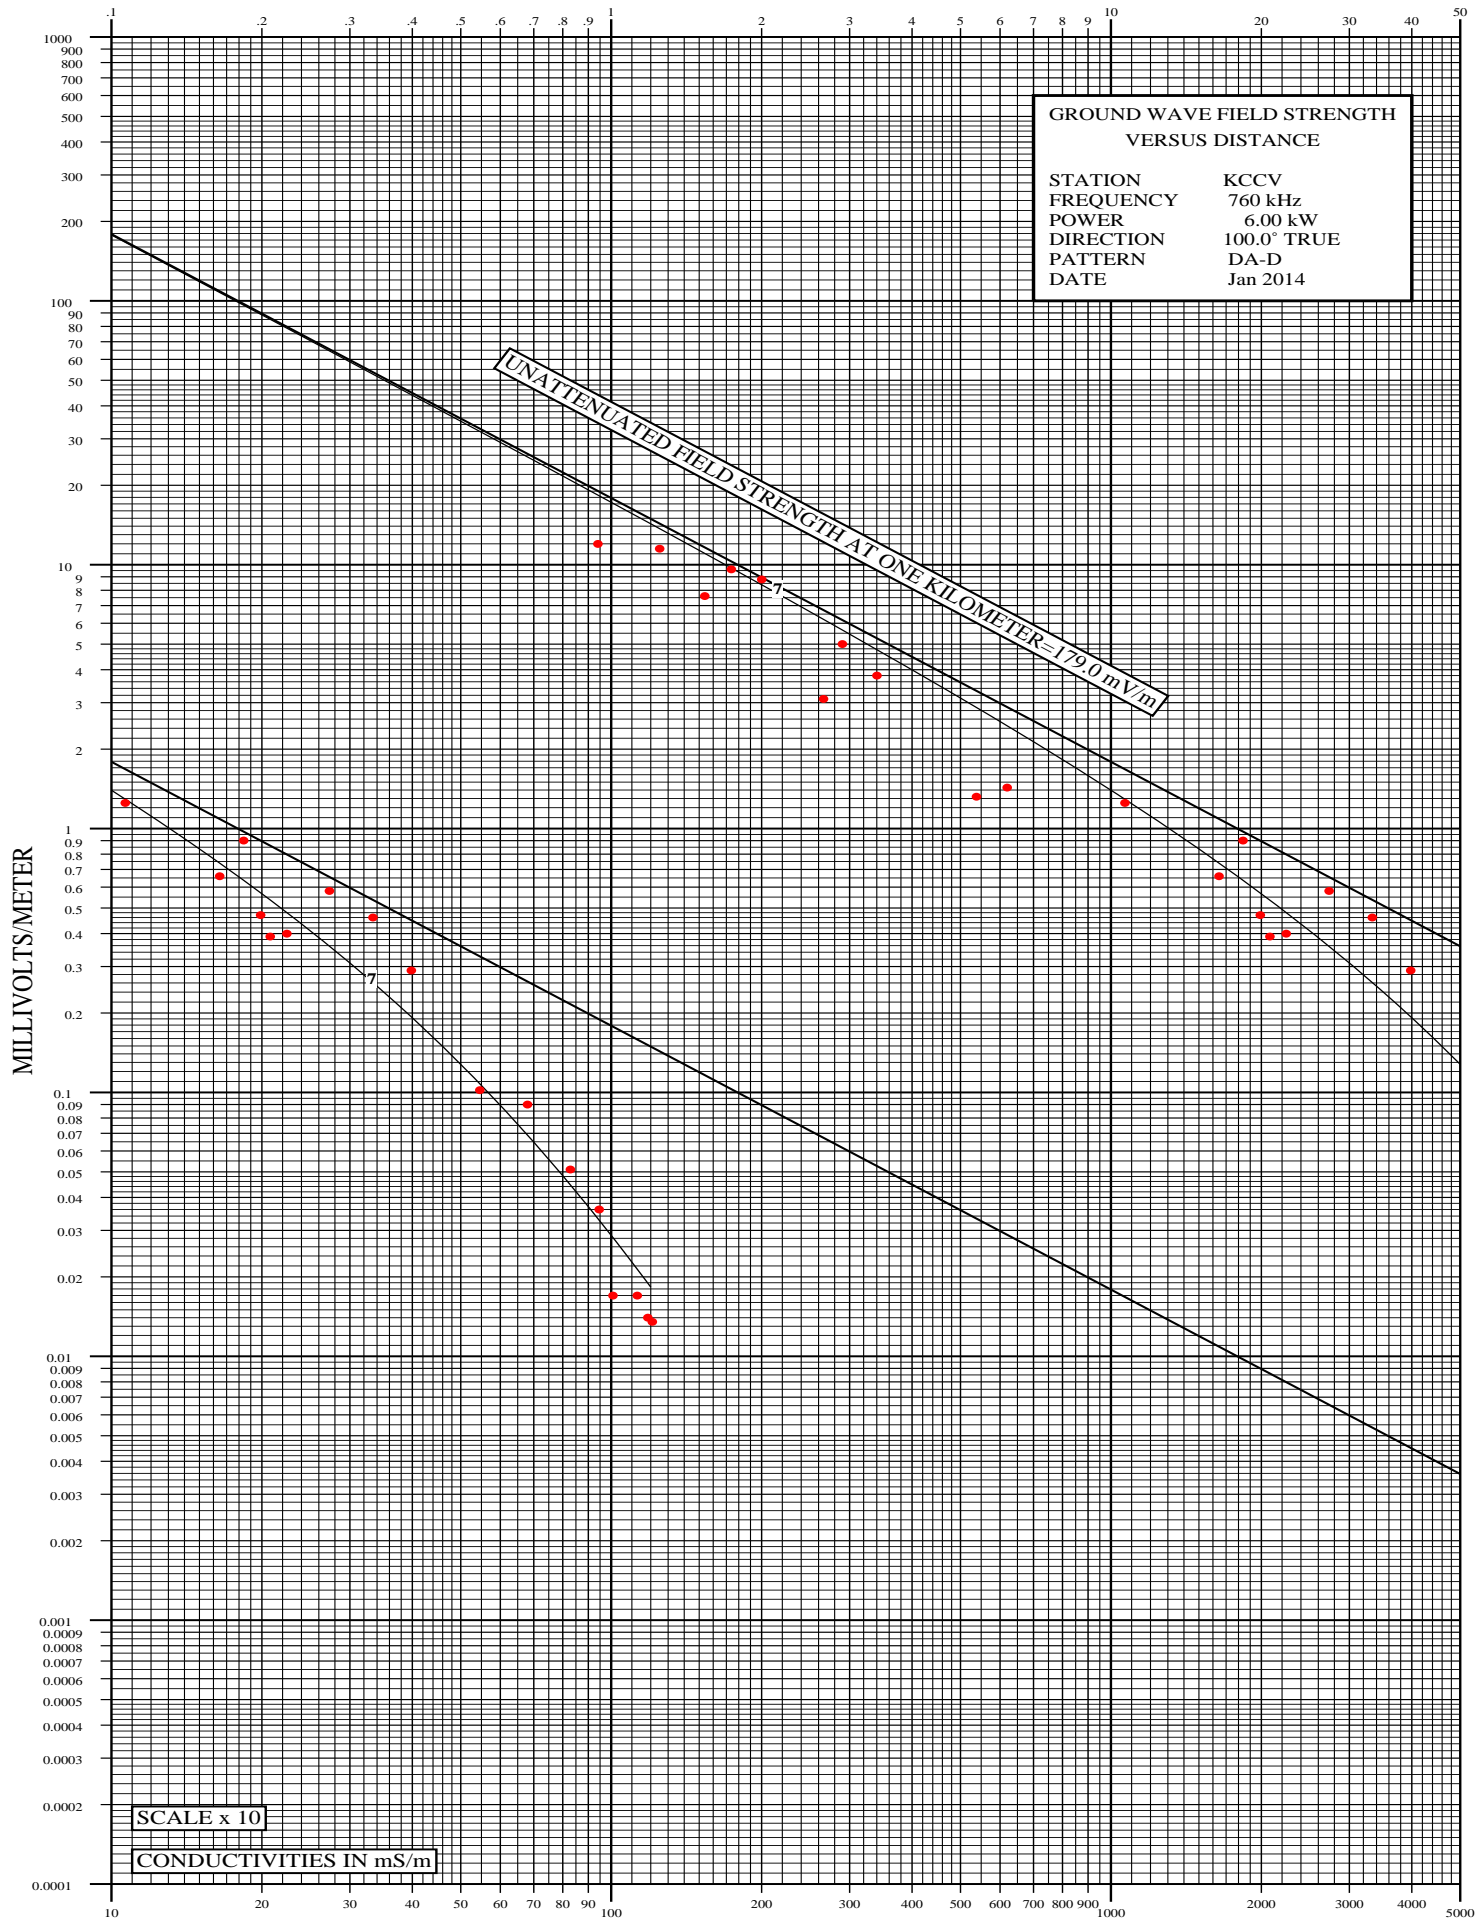


Radio Station: KCCV

120 Degree Radial - Day

Point Designation	Distance (km)	Date	Time (local)	Field Strength (mV/m)
1	0.54	1/20/14	1020	240
2	0.88	1/20/14	1018	52.0
3	1.05	1/20/14	1014	45.0
4	1.74	1/20/14	1010	40.0
5	2.11	1/20/14	1006	22.0
6	2.54	1/20/14	1003	19.0
7	3.16	1/20/14	958	15.0
8	3.84	1/20/14	954	10.2
9	5.21	1/20/14	946	15.0
10	6.51	1/20/14	941	10.1
11	9.41	1/20/14	935	10.0
12	12.08	1/20/14	920	5.80
13	13.20	1/20/14	926	3.20
14	16.53	1/23/14	1239	6.40
15	20.62	1/23/14	1227	4.20
16	23.49	1/23/14	1220	5.20
17	28.70	1/23/14	1207	4.70
18	37.62	1/23/14	1154	2.25
19	51.68	1/23/14	1128	1.21
20	67.02	1/18/14	1514	0.52
21	71.70	1/18/14	1500	0.55
22	77.71	1/22/14	1520	0.62
23	92.24	1/22/14	1458	0.35
24	111.00	1/22/14	1435	0.23
25	117.53	1/22/14	1423	0.22
26	124.23	1/22/14	1141	0.22
27	127.46	1/22/14	1150	0.17
28	127.81	1/22/14	1411	0.205
29	134.31	1/22/14	1201	0.172
30	134.32	1/22/14	1356	0.190
31	142.43	1/22/14	1217	0.162
32	148.94	1/22/14	1321	0.105

KILOMETERS FROM ANTENNA

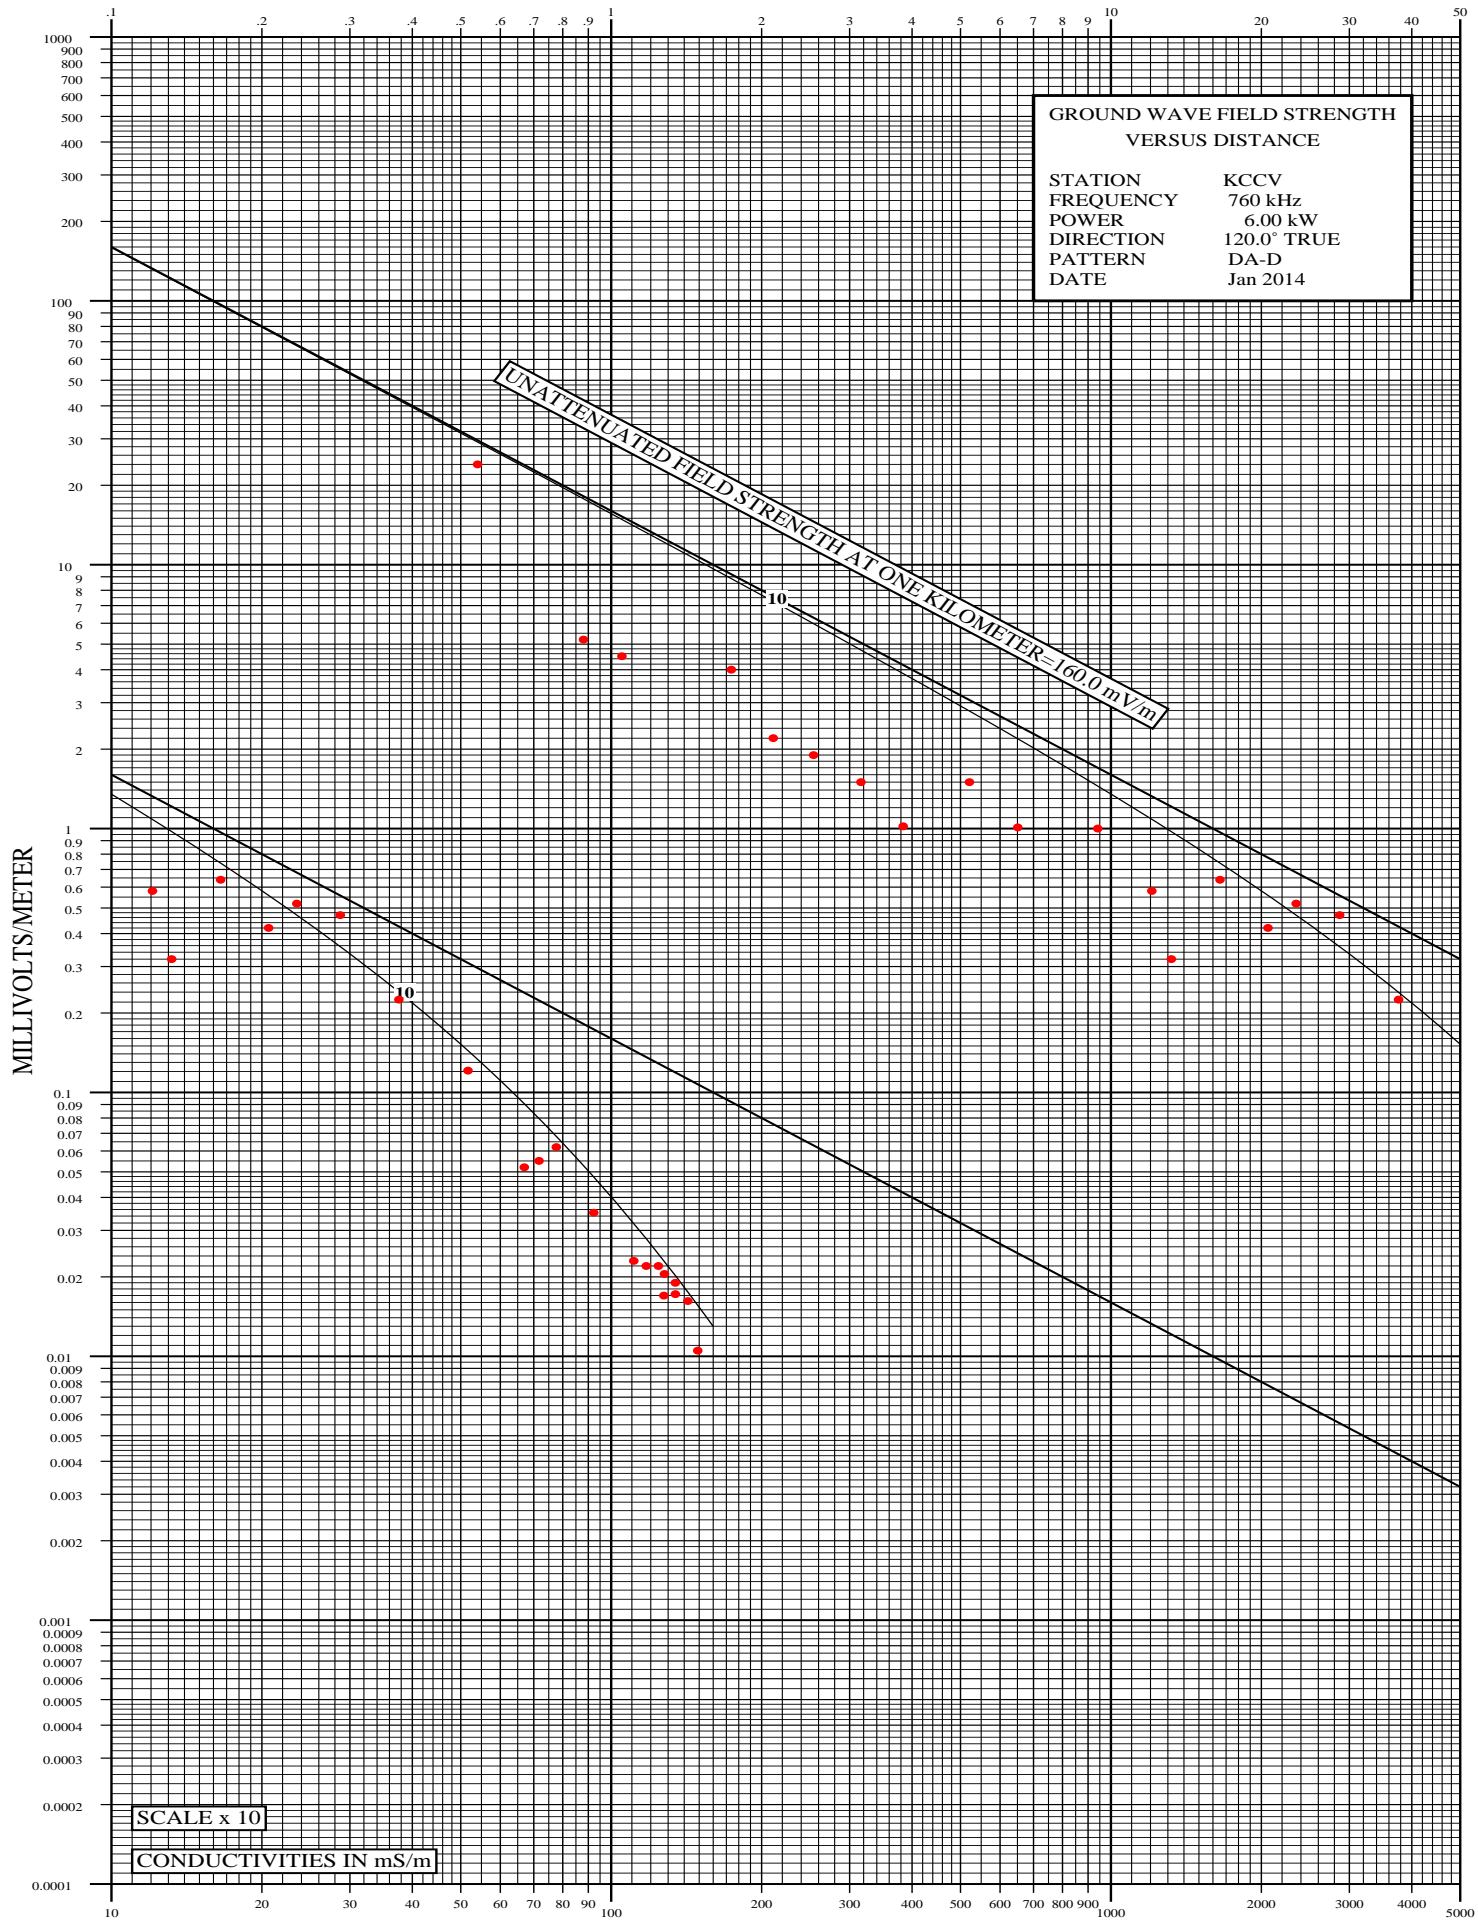


Radio Station: KCCV

140 Degree Radial - Day

Point Designation	Distance (km)	Date	Time (local)	Field Strength (mV/m)
1	0.80	8/13/13	840	132
2	0.95	8/13/13	844	114
3	1.40	8/13/13	834	43.0
4	1.53	8/13/13	1404	47.5
5	1.73	8/13/13	1400	71.0
6	2.38	8/13/13	1355	37.5
7	2.61	8/13/13	1351	44.0
8	3.00	8/13/13	1348	31.0
9	3.19	8/13/13	1345	26.5
10	3.84	8/16/13	1609	35.0
11	4.98	8/16/13	1603	9.80
12	5.90	8/16/13	1559	10.5
13	7.89	8/16/13	1551	4.00
14	10.98	8/16/13	1543	3.45
15	13.95	8/16/13	1535	4.50
16	19.92	8/16/13	1525	4.20
17	25.42	8/16/13	1516	1.98
18	29.84	8/16/13	1507	1.49
19	33.30	8/16/13	1458	1.70
20	39.08	8/16/13	1413	1.01
21	46.11	8/16/13	1402	0.980
22	51.56	8/16/13	1350	0.890
23	54.64	8/16/13	1342	0.990
24	59.13	8/16/13	1330	0.760
25	66.96	8/16/13	1319	0.720
26	70.90	8/16/13	1312	0.540
27	83.79	8/16/13	1252	0.315
28	87.88	8/16/13	1245	0.190
29	102.20	8/16/13	1224	0.170
30	118.80	8/16/13	1204	0.112
31	140.97	8/16/13	1125	0.042
32	157.83	8/16/13	1049	0.035
33	182.30	8/16/13	1020	0.023
34	194.76	8/16/13	958	0.020

KILOMETERS FROM ANTENNA

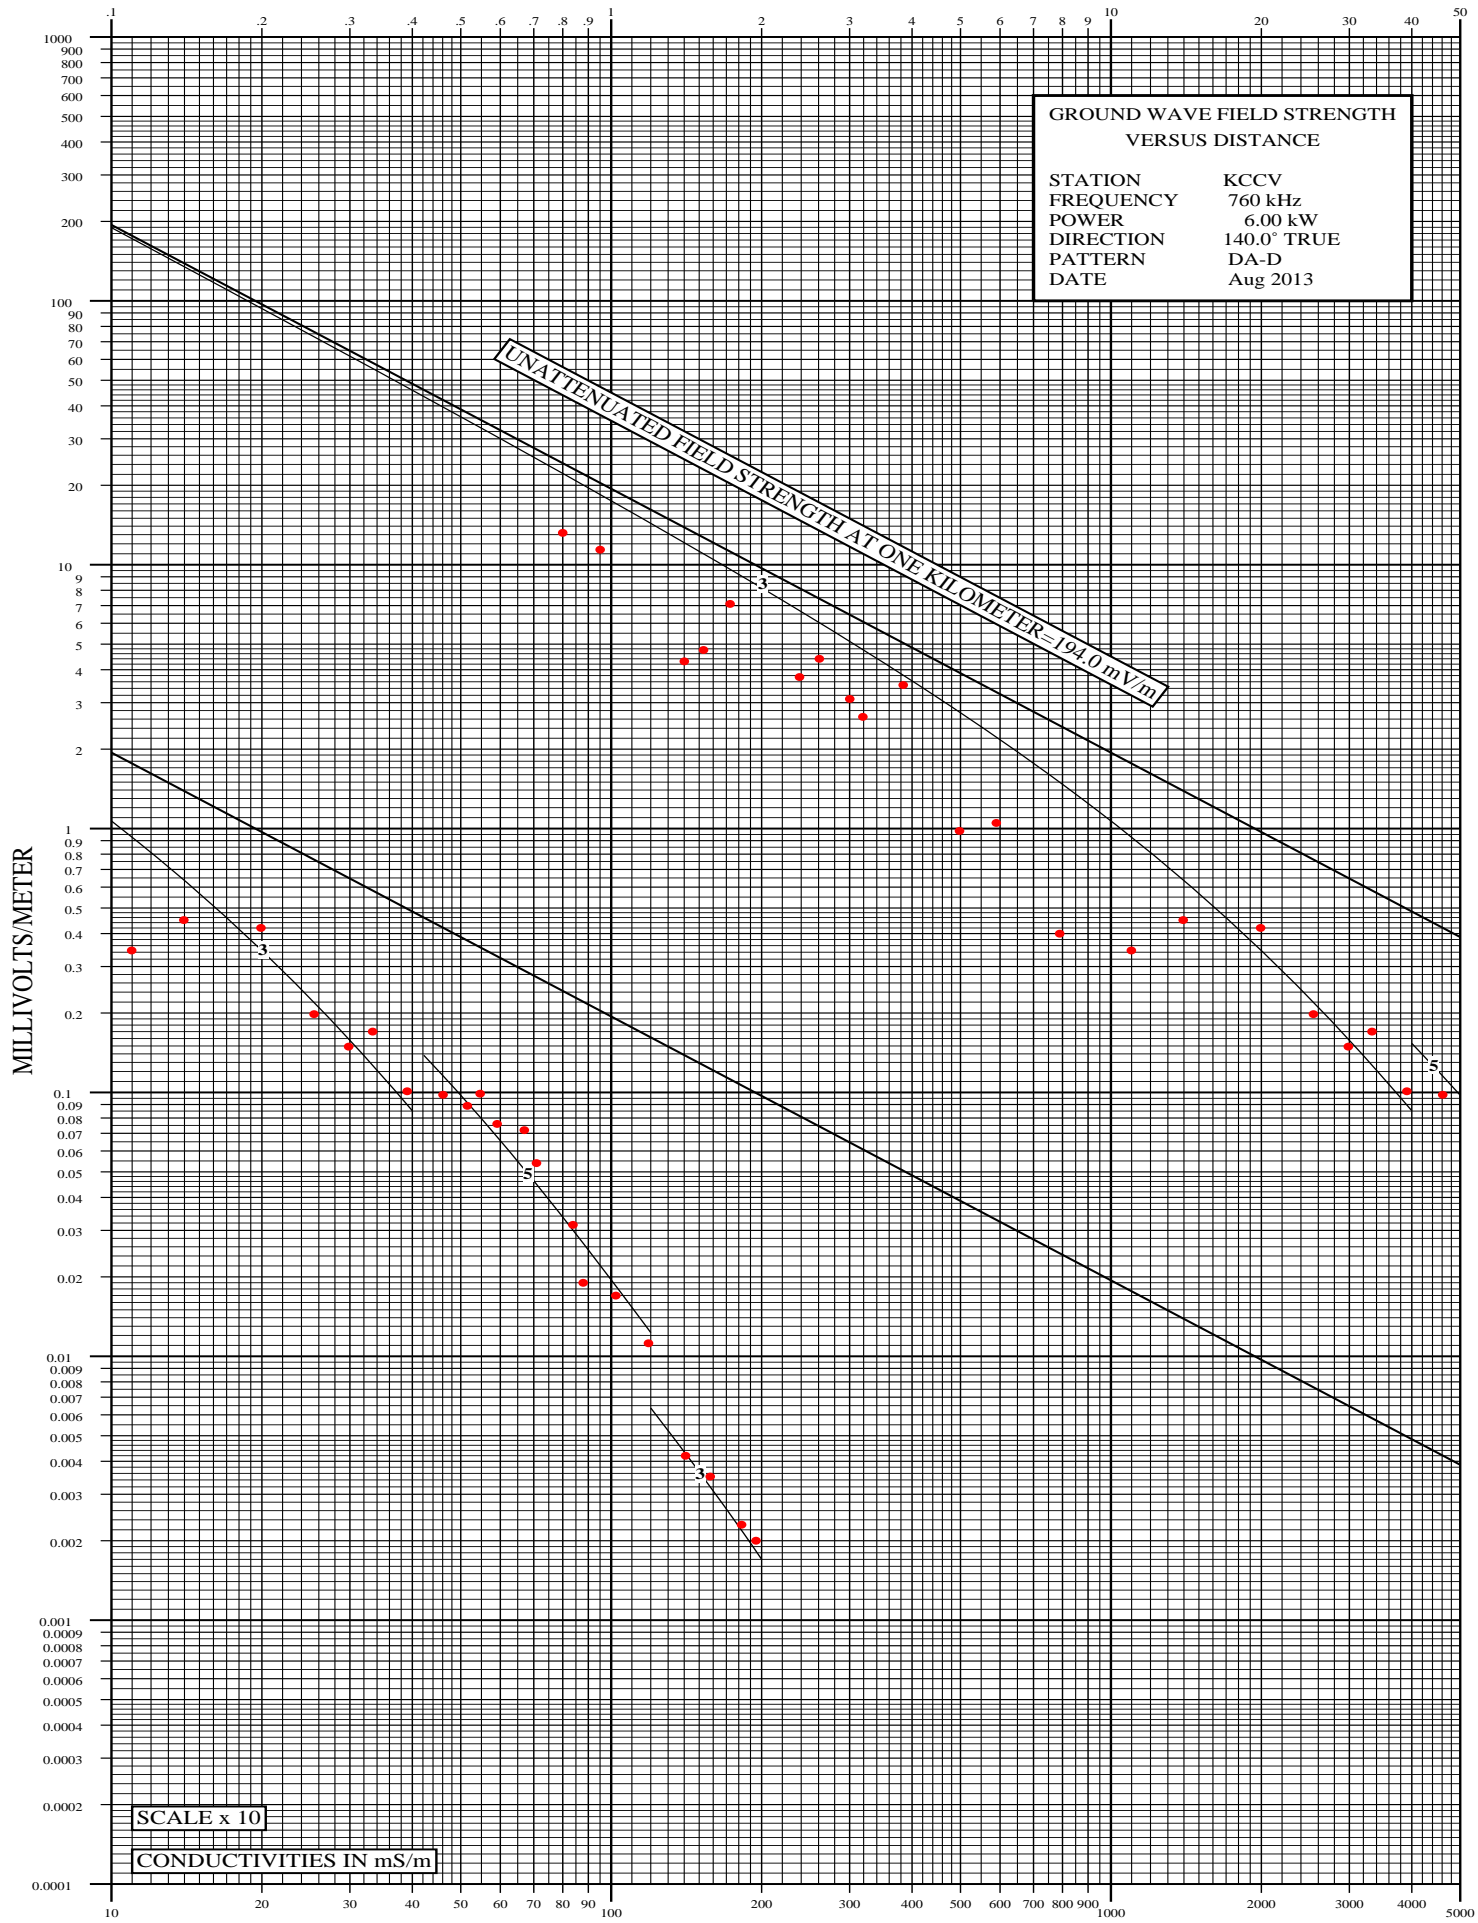


Radio Station: KCCV

160 Degree Radial - Day

Point Designation	Distance (km)	Date	Time (local)	Field Strength (mV/m)
1	0.69	8/13/13	848	350
2	0.89	8/13/13	855	330
3	1.21	8/13/13	1147	318
4	1.28	8/13/13	1130	245
5	1.40	8/13/13	1135	172
6	1.57	8/13/13	1142	185
7	1.69	8/13/13	1138	160
8	1.89	8/13/13	1125	105
9	3.56	8/16/13	1617	63.0
10	5.39	8/16/13	1625	44.0
11	6.67	8/16/13	1631	47.0
12	8.03	8/16/13	1639	46.0
13	10.64	8/16/13	1648	54.0
14	14.88	8/16/13	1700	15.9
15	20.38	8/16/13	1712	11.2
16	25.53	8/16/13	1724	9.20
17	30.79	8/16/13	1735	7.10
18	36.92	8/16/13	1744	6.10
19	40.42	8/16/13	1756	5.20
20	45.52	8/16/13	1809	3.05
21	50.98	8/17/13	805	3.35
22	55.33	8/17/13	820	3.41
23	60.57	8/17/13	831	2.60
24	64.88	8/17/13	839	2.42
25	71.59	8/17/13	856	2.00
26	79.53	8/17/13	911	1.25
27	90.36	8/17/13	929	1.00
28	99.44	8/17/13	945	0.900
29	130.19	8/17/13	1021	0.300
30	139.45	8/17/13	1037	0.260
31	168.92	8/17/13	1121	0.110
32	175.53	8/17/13	1136	0.100

KILOMETERS FROM ANTENNA

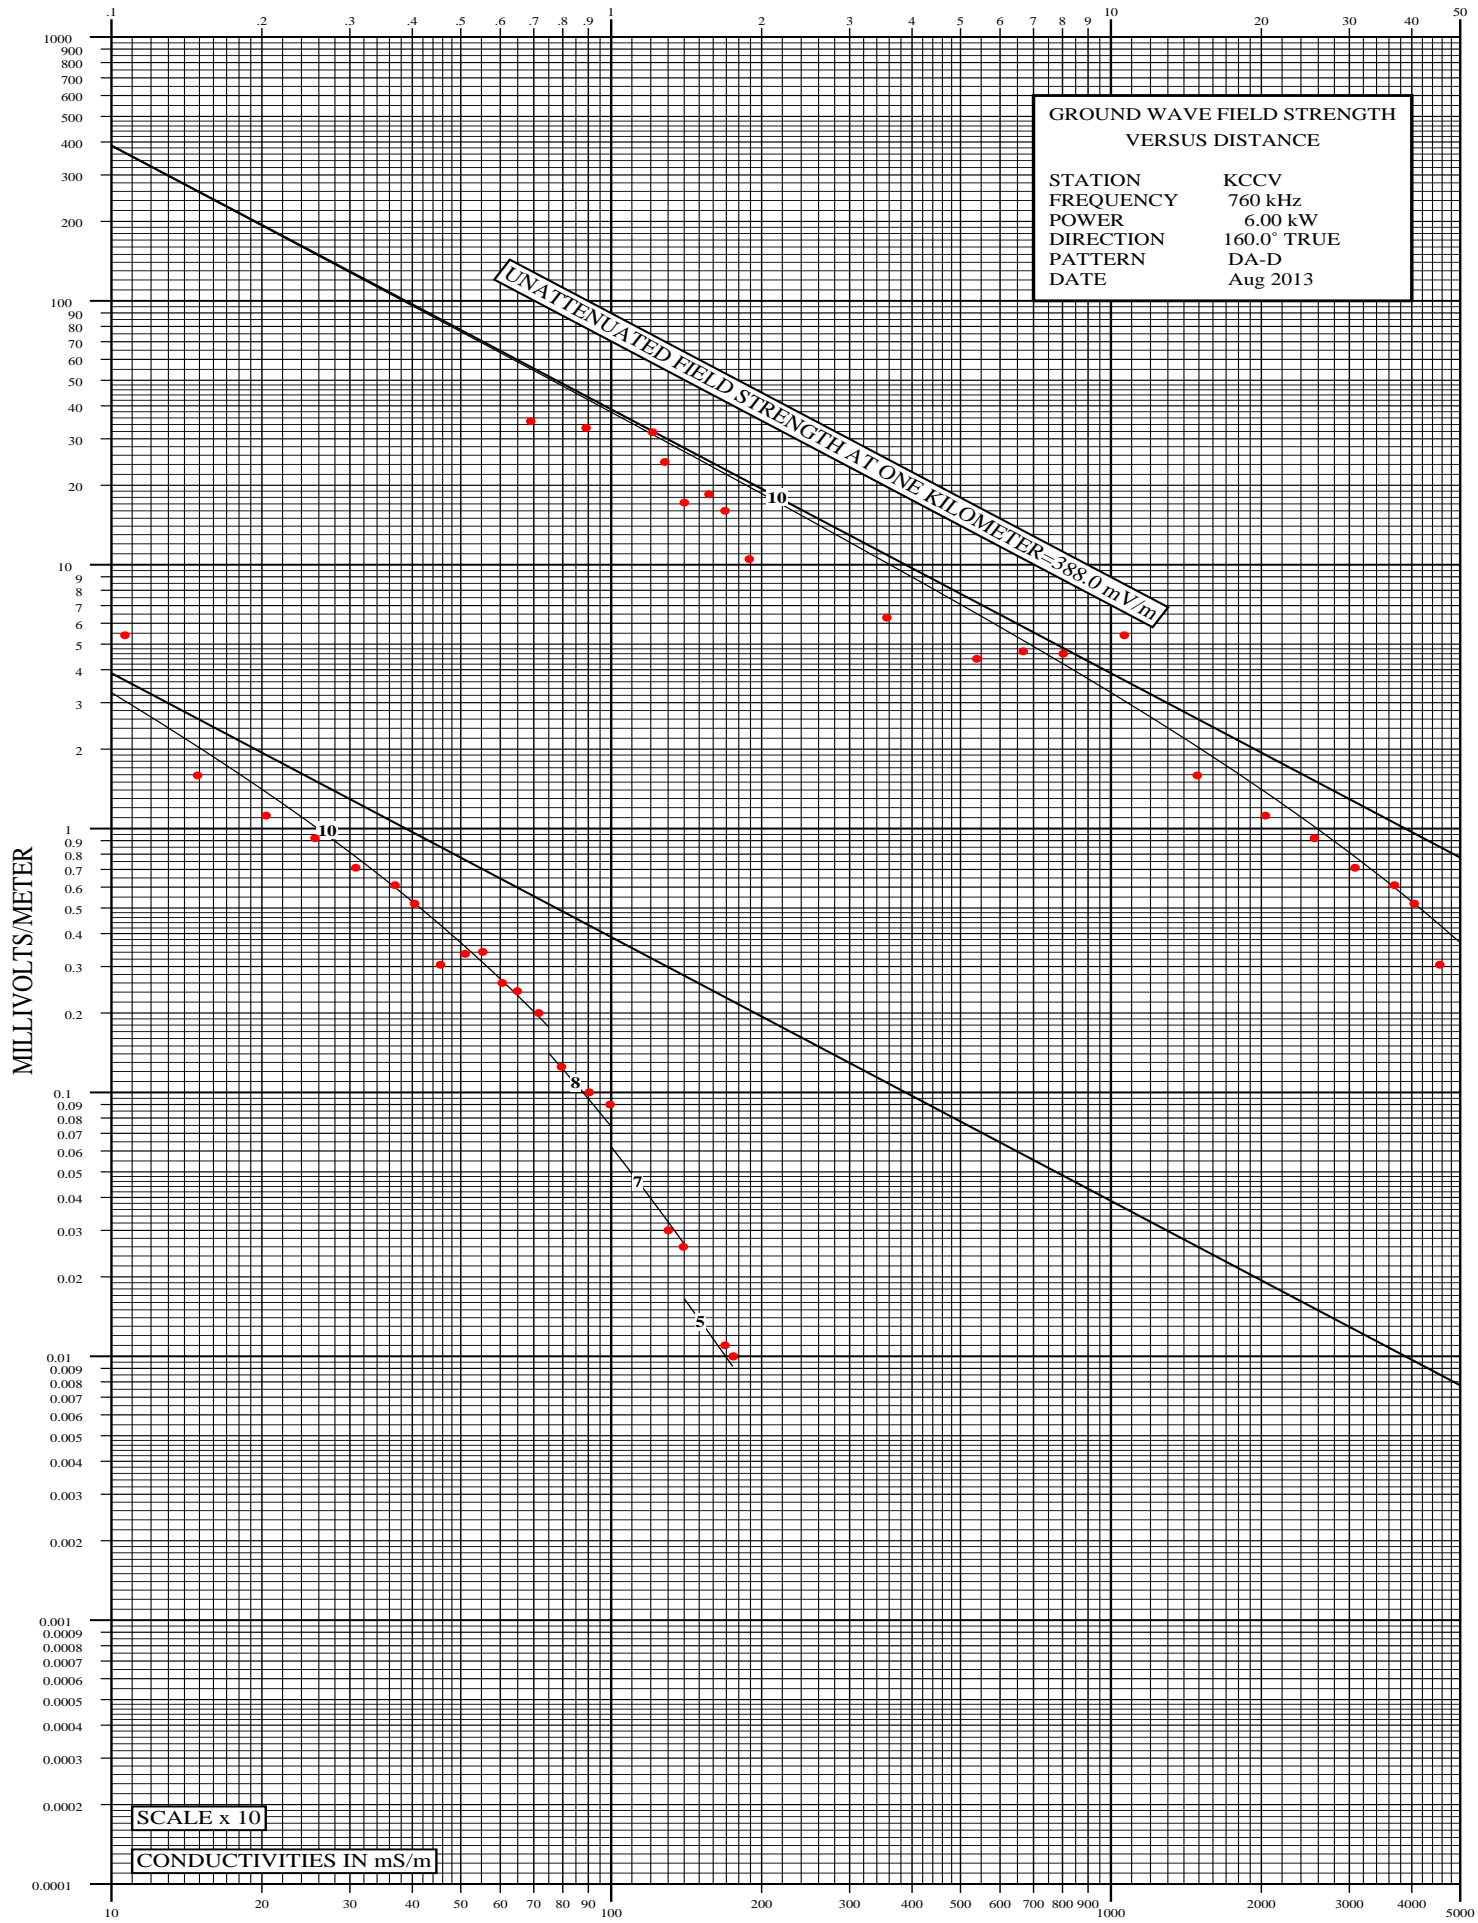


Radio Station: KCCV

180 Degree Radial - Day

Point Designation	Distance (km)	Date	Time (local)	Field Strength (mV/m)
1	0.75	8/13/13	904	1200
2	0.96	8/13/13	859	640
3	1.18	8/13/13	1301	580
4	1.55	8/13/13	1305	520
5	1.83	8/13/13	1309	360
6	1.92	8/13/13	1312	410
7	2.32	8/13/13	1316	290
8	3.09	8/13/13	1048	75.0
9	4.08	8/13/13	1424	72.0
10	5.19	8/13/13	1431	78.0
11	6.28	8/13/13	1442	61.0
12	8.16	8/13/13	1451	55.0
13	10.54	8/13/13	1500	41.0
14	15.57	8/13/13	1520	24.2
15	20.42	8/13/13	1532	11.8
16	25.55	8/13/13	1545	9.90
17	30.12	8/13/13	1558	8.80
18	34.94	8/13/13	1612	7.80
19	41.02	8/13/13	1638	4.40
20	45.68	8/13/13	1652	2.90
21	50.32	8/13/13	1701	2.70
22	55.23	8/13/13	1710	2.60
23	61.22	8/13/13	1718	2.10
24	65.08	8/13/13	1730	2.30
25	69.90	8/13/13	1742	1.73
26	79.53	8/13/13	1758	1.00
27	85.99	8/14/13	834	1.25
28	99.64	8/14/13	857	0.910
29	120.55	8/14/13	930	0.540
30	141.42	8/14/13	956	0.390
31	160.91	8/14/13	1026	0.330
32	181.97	8/14/13	1051	0.230
33	199.79	8/14/13	1112	0.125

KILOMETERS FROM ANTENNA

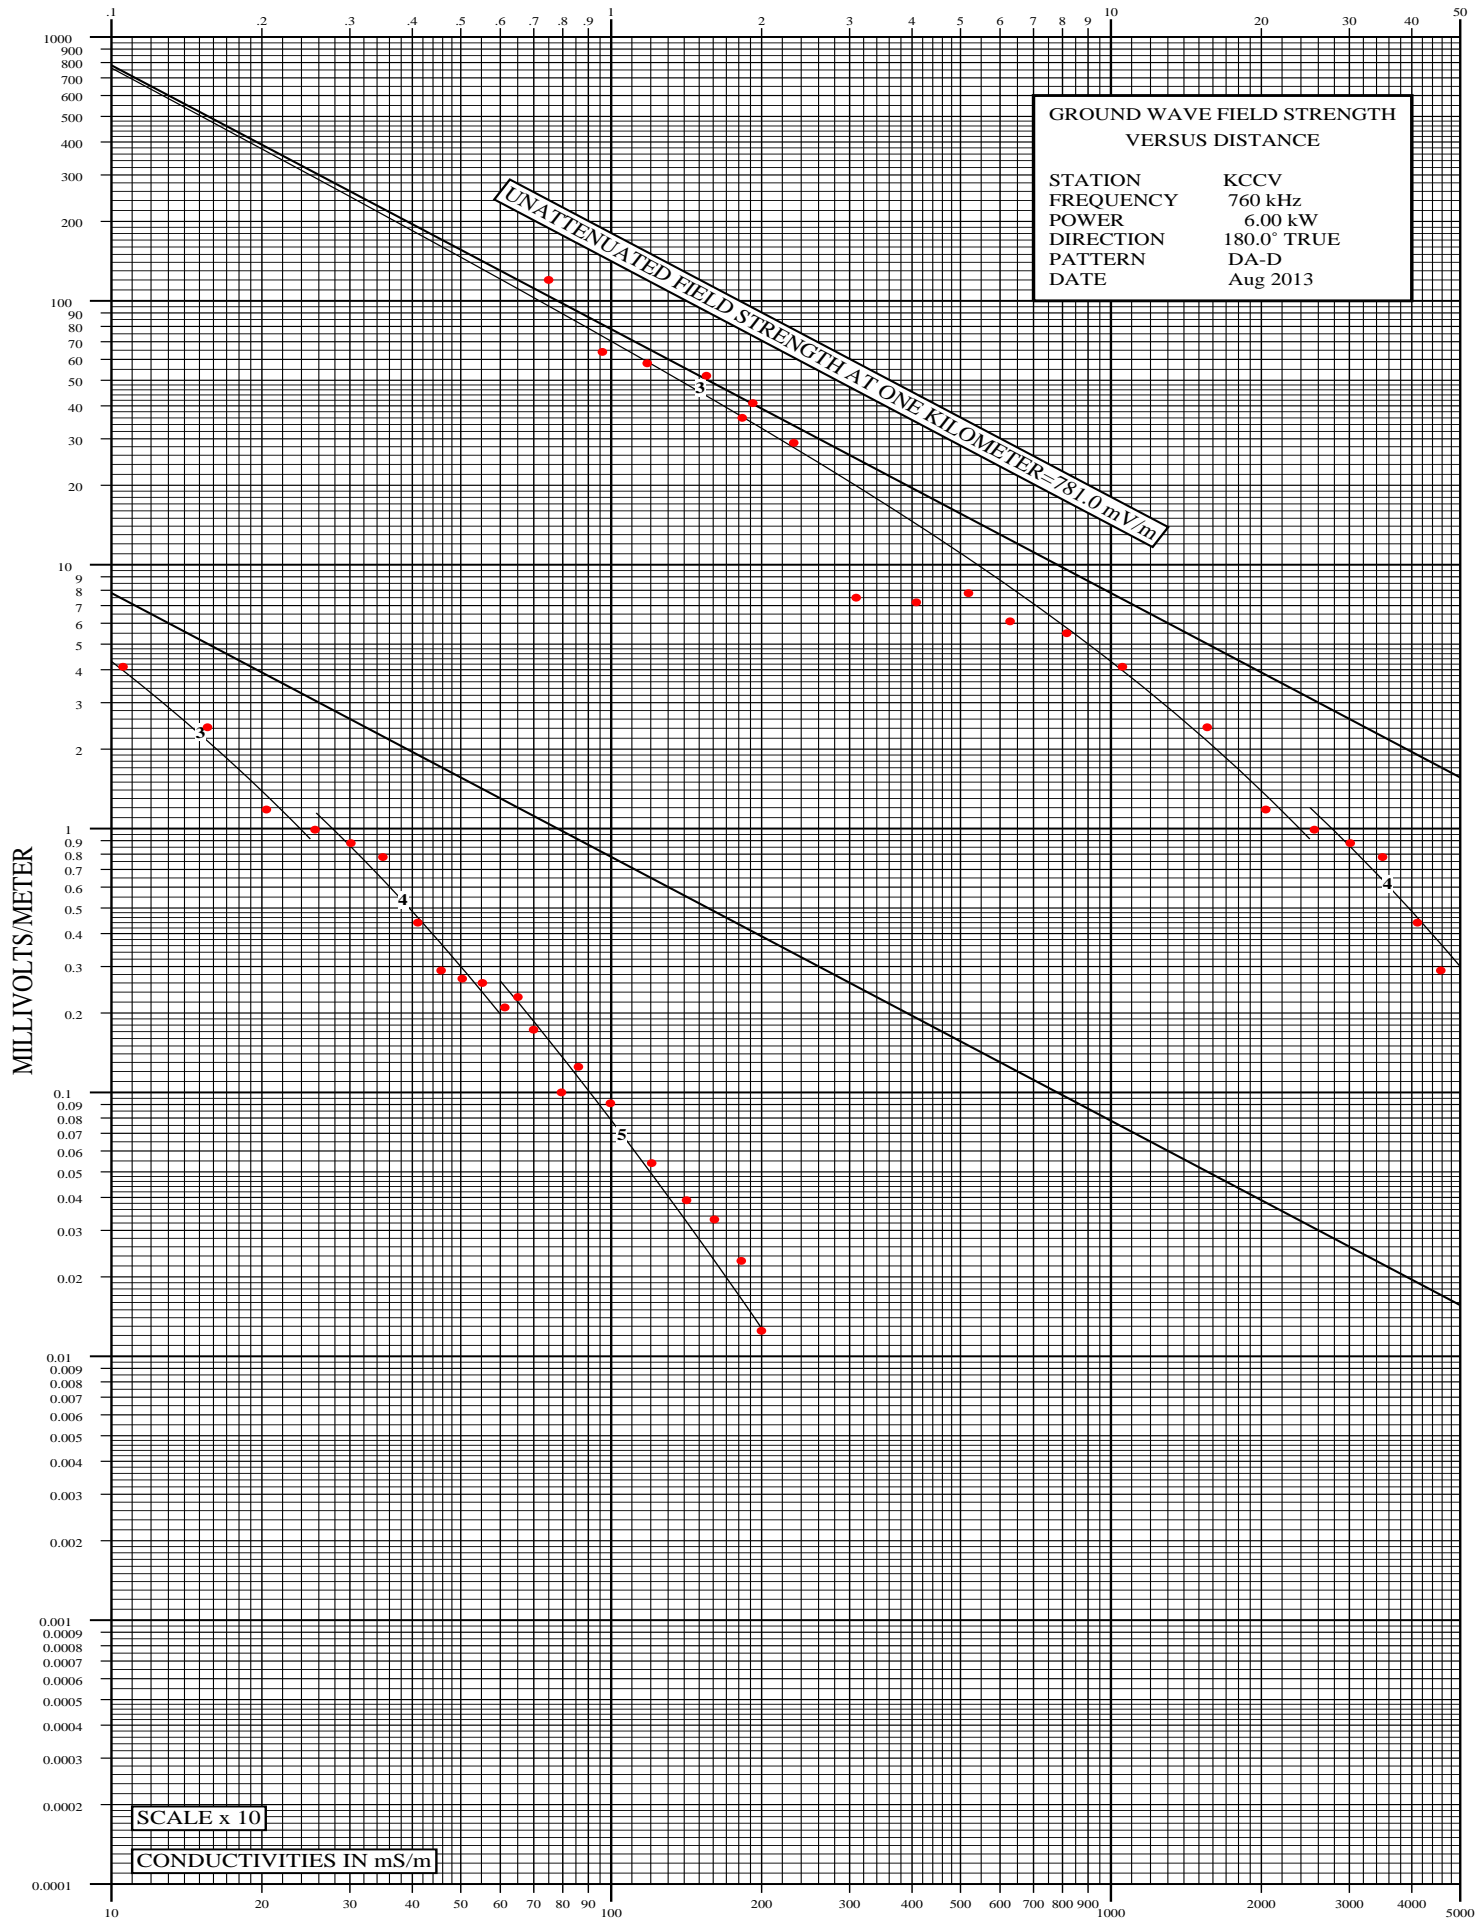


Radio Station: KCCV

200 Degree Radial - Day

Point Designation	Distance (km)	Date	Time (local)	Field Strength (mV/m)
1	0.52	8/13/13	1329	1650
2	0.95	8/13/13	1323	700
3	1.28	8/13/13	1119	680
4	1.96	8/13/13	1057	340
5	2.12	8/13/13	1102	375
6	2.63	8/13/13	1030	330
7	3.10	8/13/13	1036	225
8	4.54	8/13/13	1910	172
9	5.25	8/17/13	1902	138
10	6.20	8/17/13	1857	115
11	8.51	8/17/13	1849	56.0
12	9.82	8/17/13	1840	37.0
13	14.88	8/17/13	1832	27.5
14	19.68	8/17/13	1813	11.0
15	25.89	8/17/13	1800	10.0
16	30.62	8/17/13	1752	7.50
17	35.27	8/17/13	1743	7.70
18	40.17	8/17/13	1735	6.00
19	45.34	8/17/13	1728	5.40
20	49.61	8/17/13	1718	4.40
21	54.73	8/17/13	1709	3.55
22	59.91	8/17/13	1659	2.62
23	66.17	8/17/13	1648	2.29
24	68.45	8/17/13	1643	2.38
25	82.07	8/17/13	1621	1.34
26	91.10	8/17/13	1604	1.15
27	100.59	8/17/13	1552	0.850
28	111.77	8/17/13	1521	0.740
29	135.81	8/17/13	1455	0.470
30	156.18	8/17/13	1427	0.305
31	181.01	8/17/13	1408	0.245
32	195.38	8/17/13	1331	0.225
33	200.09	8/17/13	1344	0.222

KILOMETERS FROM ANTENNA

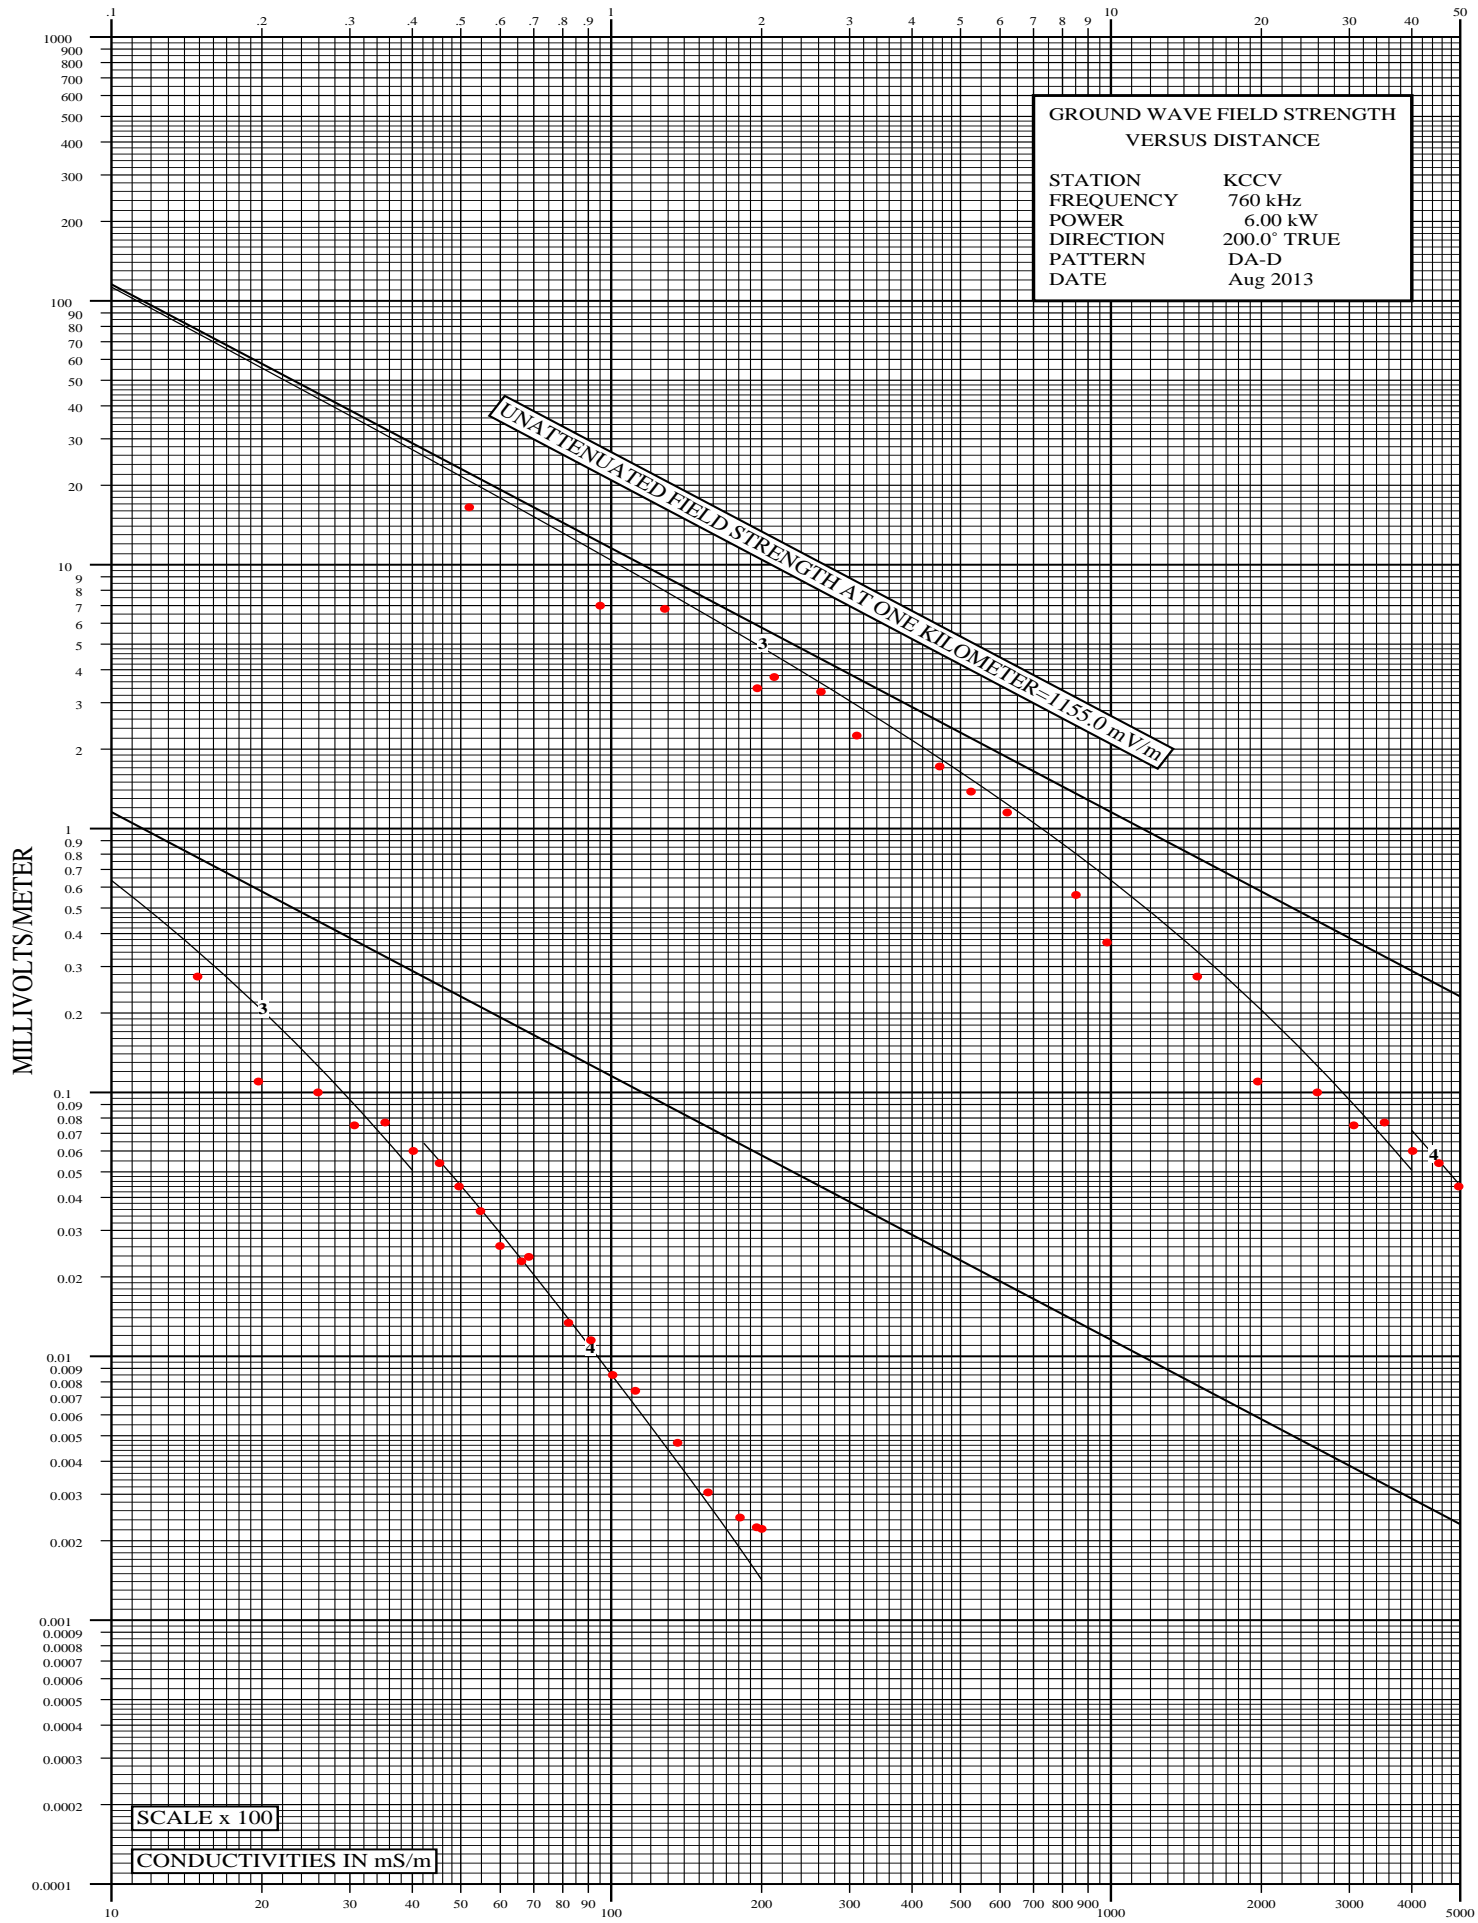


Radio Station: KCCV

220 Degree Radial - Day

Point Designation	Distance (km)	Date	Time (local)	Field Strength (mV/m)
1	0.89	8/13/13	1334	780
2	1.64	8/13/13	1111	400
3	1.98	8/13/13	1108	345
4	2.30	8/13/13	1023	440
5	2.56	8/13/13	1014	288
6	3.06	8/13/13	1010	310
7	3.23	8/13/13	1008	210
8	3.46	8/13/13	1003	252
9	4.48	9/19/13	937	202
10	5.21	9/19/13	942	132
11	6.37	9/19/13	948	94.0
12	8.22	9/19/13	954	100
13	10.73	9/19/13	1002	60.0
14	14.80	9/19/13	1015	37.5
15	20.65	9/19/13	1034	30.0
16	24.84	9/19/13	1050	18.0
17	28.95	9/19/13	1100	15.0
18	35.48	9/19/13	1111	10.5
19	39.55	9/19/13	1123	9.90
20	46.01	9/19/13	1134	7.20
21	50.33	9/19/13	1144	6.00
22	58.61	9/19/13	1155	4.30
23	56.84	9/19/13	1201	4.50
24	65.33	9/19/13	1210	2.60
25	70.12	9/19/13	1221	2.50
26	82.31	9/19/13	1235	2.20
27	87.80	9/19/13	1252	1.61
28	99.66	9/19/13	1306	1.27
29	119.57	9/19/13	1410	0.880
30	138.49	9/19/13	1436	0.800
31	167.62	9/19/13	1510	0.485
32	178.62	9/19/13	1525	0.275
33	196.69	9/19/13	1600	0.242
34	204.86	9/19/13	1618	0.161

KILOMETERS FROM ANTENNA

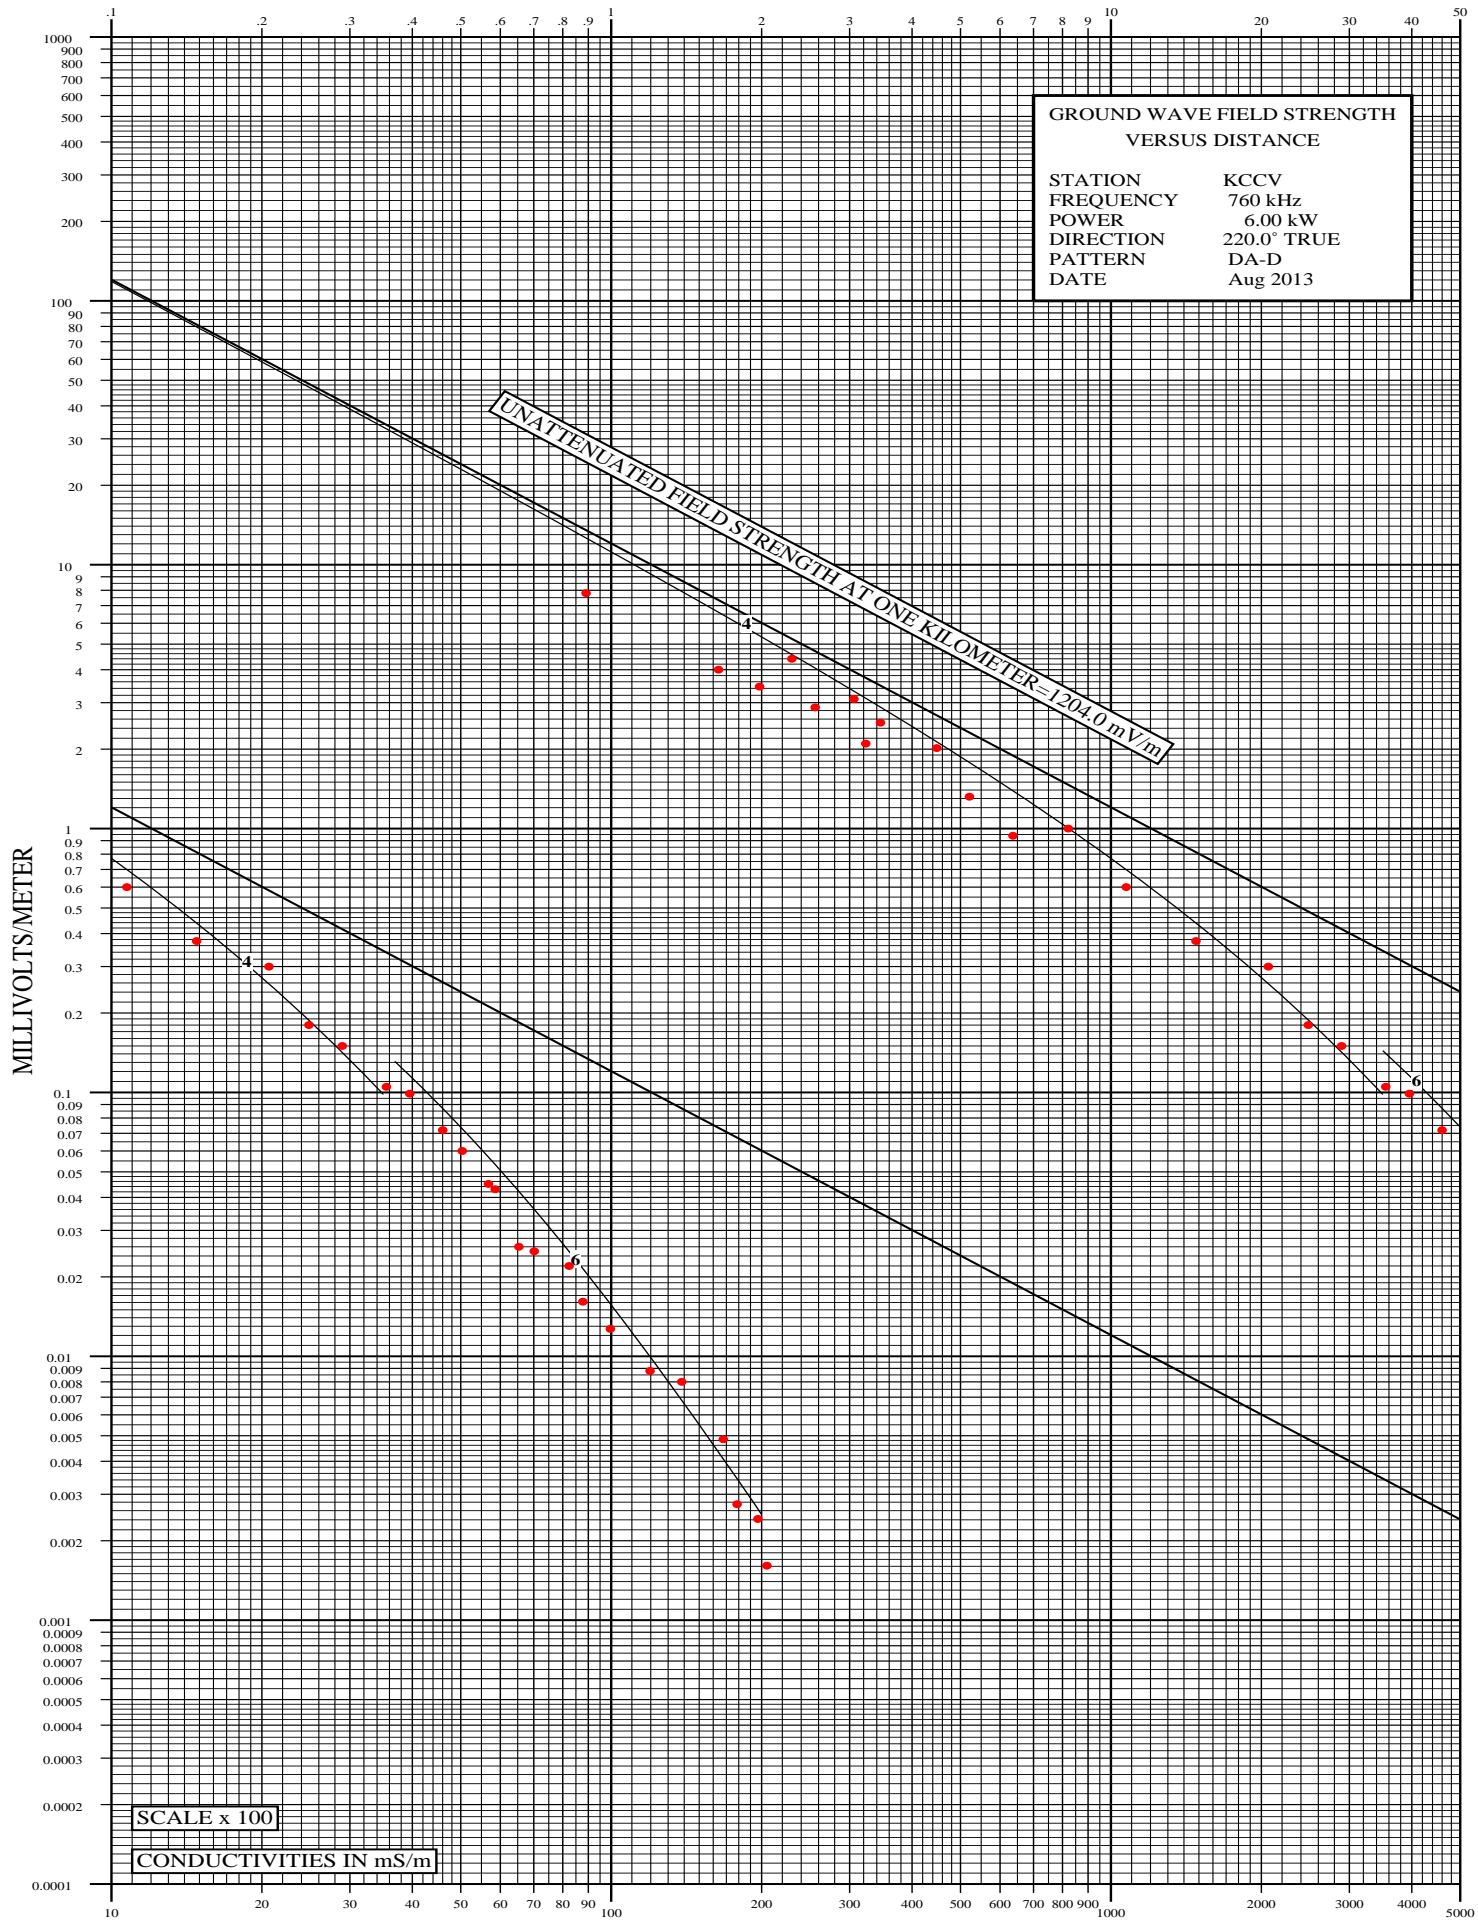


Radio Station: KCCV

240 Degree Radial - Day

Point Designation	Distance (km)	Date	Time (local)	Field Strength (mV/m)
1	1.35	8/13/13	921	400
2	1.73	8/13/13	933	335
3	2.04	8/13/13	941	315
4	2.44	8/13/13	945	238
5	2.67	8/13/13	848	220
6	2.92	8/13/13	952	230
7	3.15	8/13/13	957	198
8	4.35	8/20/13	1400	110
9	5.03	8/20/13	1356	130
10	6.01	8/20/13	1351	125
11	7.93	8/20/13	1343	79.0
12	10.56	8/20/13	1332	39.5
13	15.71	8/20/13	1320	25.8
14	20.94	8/20/13	1224	19.2
15	25.03	8/20/13	1210	12.6
16	30.57	8/20/13	1156	10.0
17	34.67	8/20/13	1146	6.20
18	39.92	8/20/13	1137	6.90
19	44.37	8/20/13	1126	4.40
20	50.87	8/20/13	1116	4.50
21	54.69	8/20/13	1106	4.30
22	60.32	8/20/13	1057	3.10
23	65.89	8/20/13	1046	2.42
24	69.94	8/20/13	1038	2.05
25	79.66	8/20/13	1010	1.49
26	90.87	8/20/13	954	1.10
27	100.61	8/20/13	934	0.900
28	119.74	8/20/13	909	0.710
29	139.76	8/20/13	848	0.780
30	161.58	8/19/13	1820	0.455
31	176.98	8/19/13	1800	0.390
32	186.52	8/19/13	1739	0.385
33	215.28	8/20/13	736	0.240

KILOMETERS FROM ANTENNA

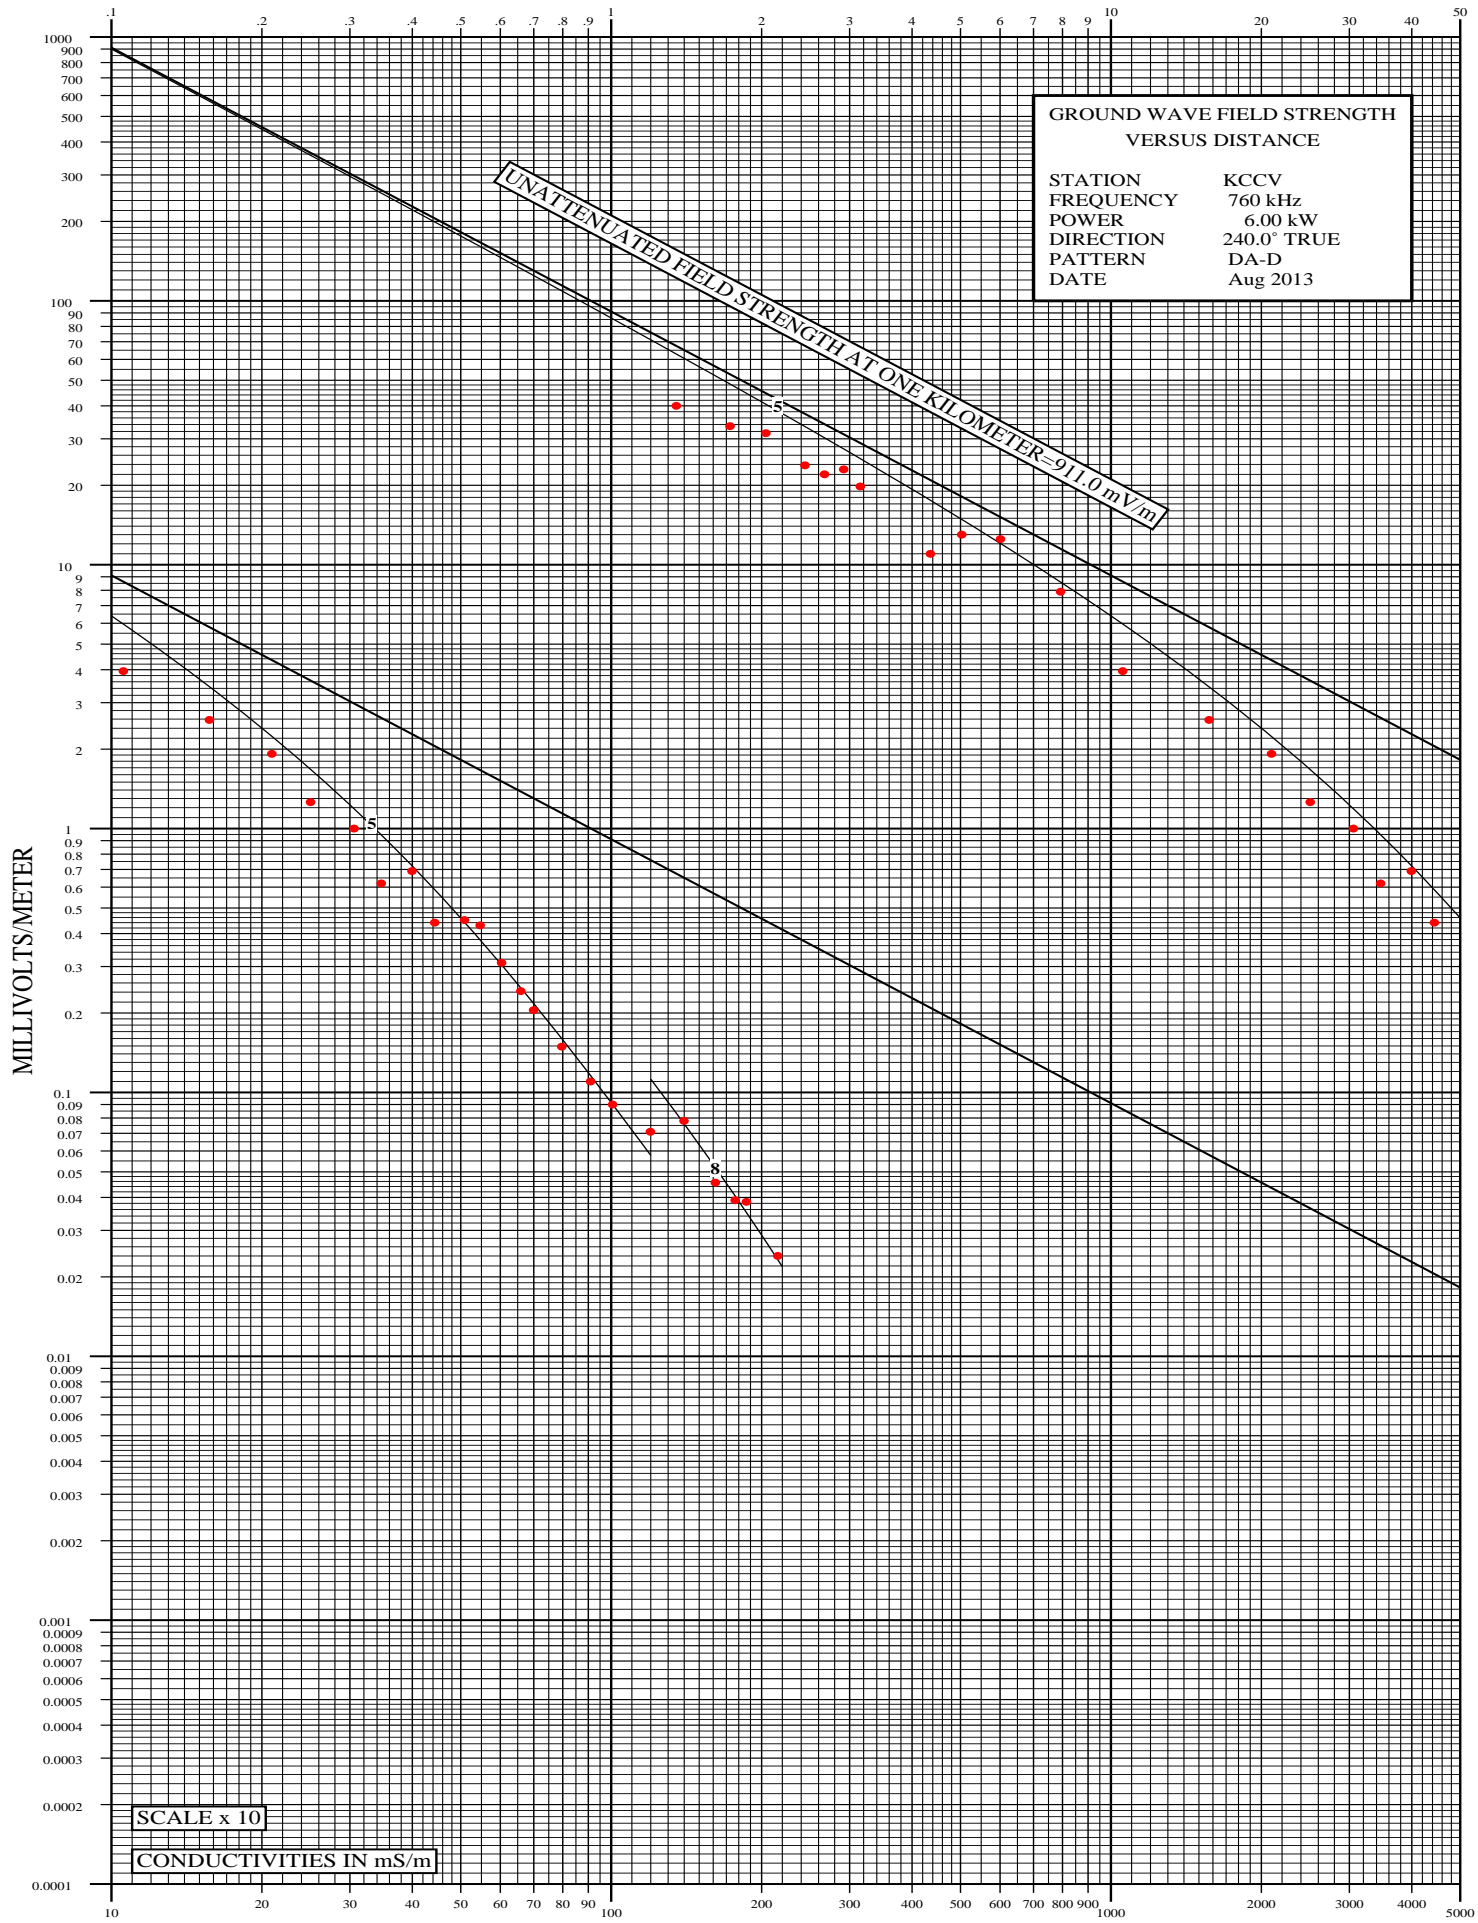


Radio Station: KCCV

265 Degree Radial - Day

Point Designation	Distance (km)	Date	Time (local)	Field Strength (mV/m)
1	1.64	1/20/14	1035	155
2	1.71	1/20/14	1047	140
3	1.87	1/20/14	1038	150
4	1.99	1/20/14	1050	125
5	2.66	1/20/14	1055	82.0
6	2.85	1/20/14	1058	100
7	3.14	1/20/14	1102	110
8	6.32	1/20/14	1111	59.0
9	7.15	1/20/14	1124	38.0
10	9.31	1/20/14	1136	15.0
11	11.29	1/20/14	1142	17.2
12	13.72	1/20/14	1217	12.3
13	17.78	1/20/14	1229	8.50
14	23.47	1/20/14	1242	6.40
15	29.88	1/20/14	1255	3.70
16	37.93	1/20/14	1311	2.65
17	46.63	1/20/14	1324	2.05
18	50.76	1/20/14	1332	1.10
19	62.95	1/20/14	1344	0.911
20	66.84	1/20/14	1400	0.810
21	75.04	1/20/14	1414	0.700
22	83.35	1/20/14	1423	0.630
23	97.71	1/20/14	1440	0.440
24	113.75	1/20/14	1509	0.370
25	137.20	1/21/14	1100	0.450
26	154.10	1/21/14	1034	0.370
27	175.10	1/21/14	909	0.260
28	181.50	1/21/14	919	0.270
29	191.30	1/21/14	935	0.170
30	198.90	1/21/14	947	0.180

KILOMETERS FROM ANTENNA

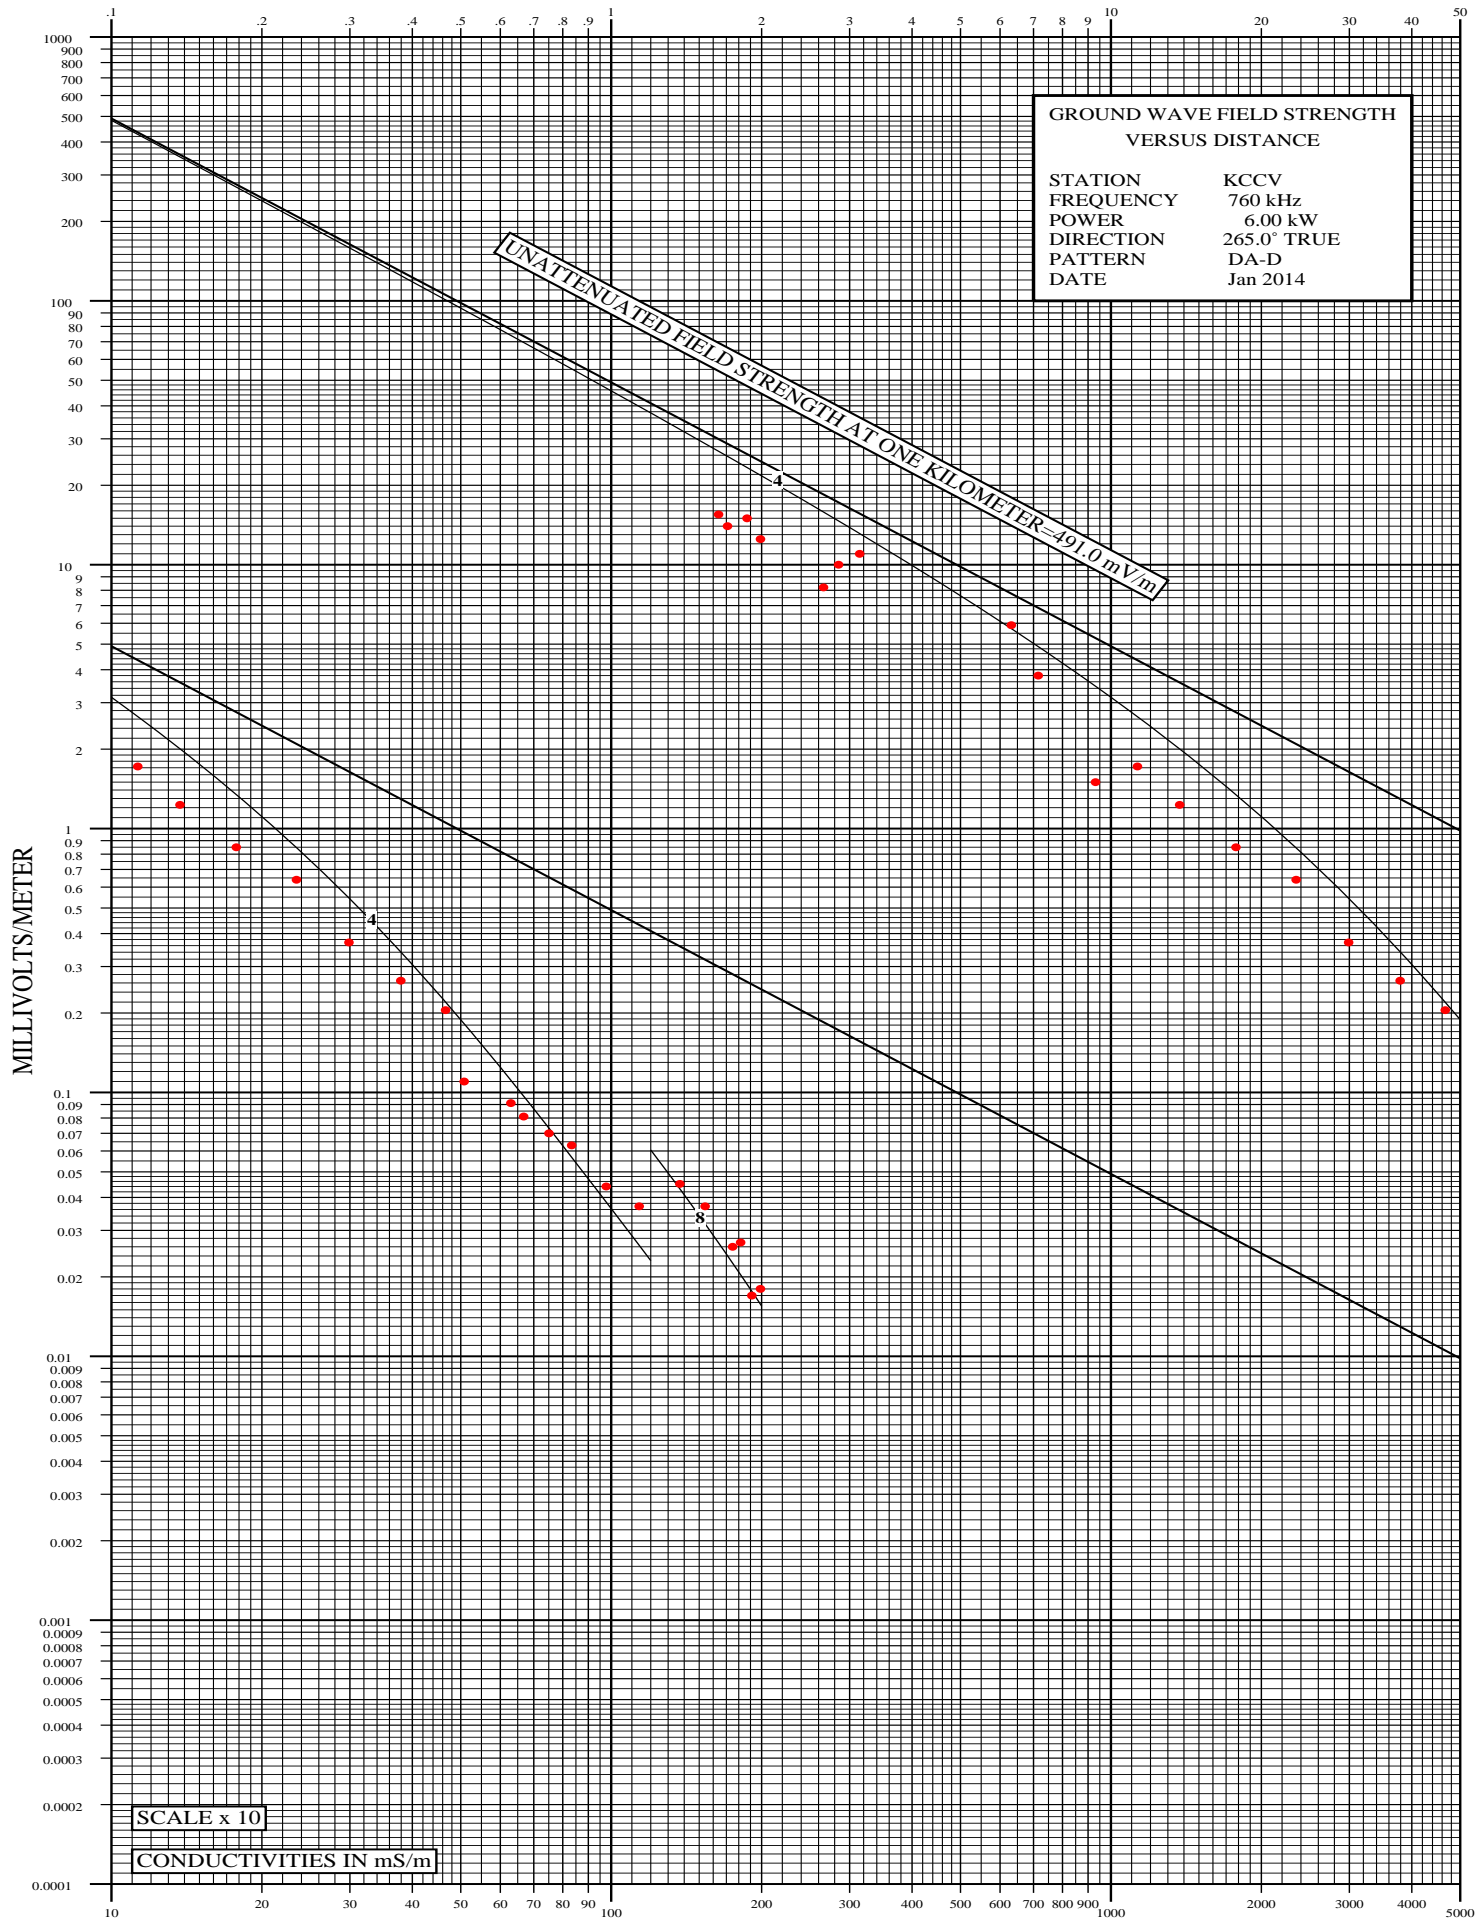


Radio Station: KRMO

10 Degree Radial - Day

Point Designation	Distance (km)	Date	Time (local)	Field Strength (mV/m)
1	0.08	1/18/14	901	4100
2	0.17	1/18/14	917	2500
3	0.23	1/18/14	915	1900
4	0.38	1/18/14	911	1100
5	0.48	1/18/14	929	910
6	0.56	1/18/14	935	820
7	1.80	1/18/14	941	210
8	2.25	1/18/14	951	175
9	3.85	1/18/14	955	90.0
10	7.11	1/18/14	1001	43.0
11	8.76	1/18/14	1009	36.0
12	12.00	1/18/14	1017	22.1
13	14.30	1/18/14	1022	17.5
14	19.63	1/18/14	1040	9.90
15	28.34	1/18/14	1105	6.50
16	33.31	1/18/14	1115	4.50
17	37.37	1/18/14	1124	3.40
18	45.97	1/18/14	1134	2.30
19	54.44	1/18/14	1148	1.25
20	86.00	1/18/14	1233	0.520
21	92.60	1/18/14	1250	0.440
22	95.02	1/18/14	1258	0.320
23	98.41	1/18/14	1308	0.250
24	106.00	1/18/14	1322	0.185
25	108.90	1/18/14	1328	0.172
26	123.80	1/18/14	1347	0.150

KILOMETERS FROM ANTENNA

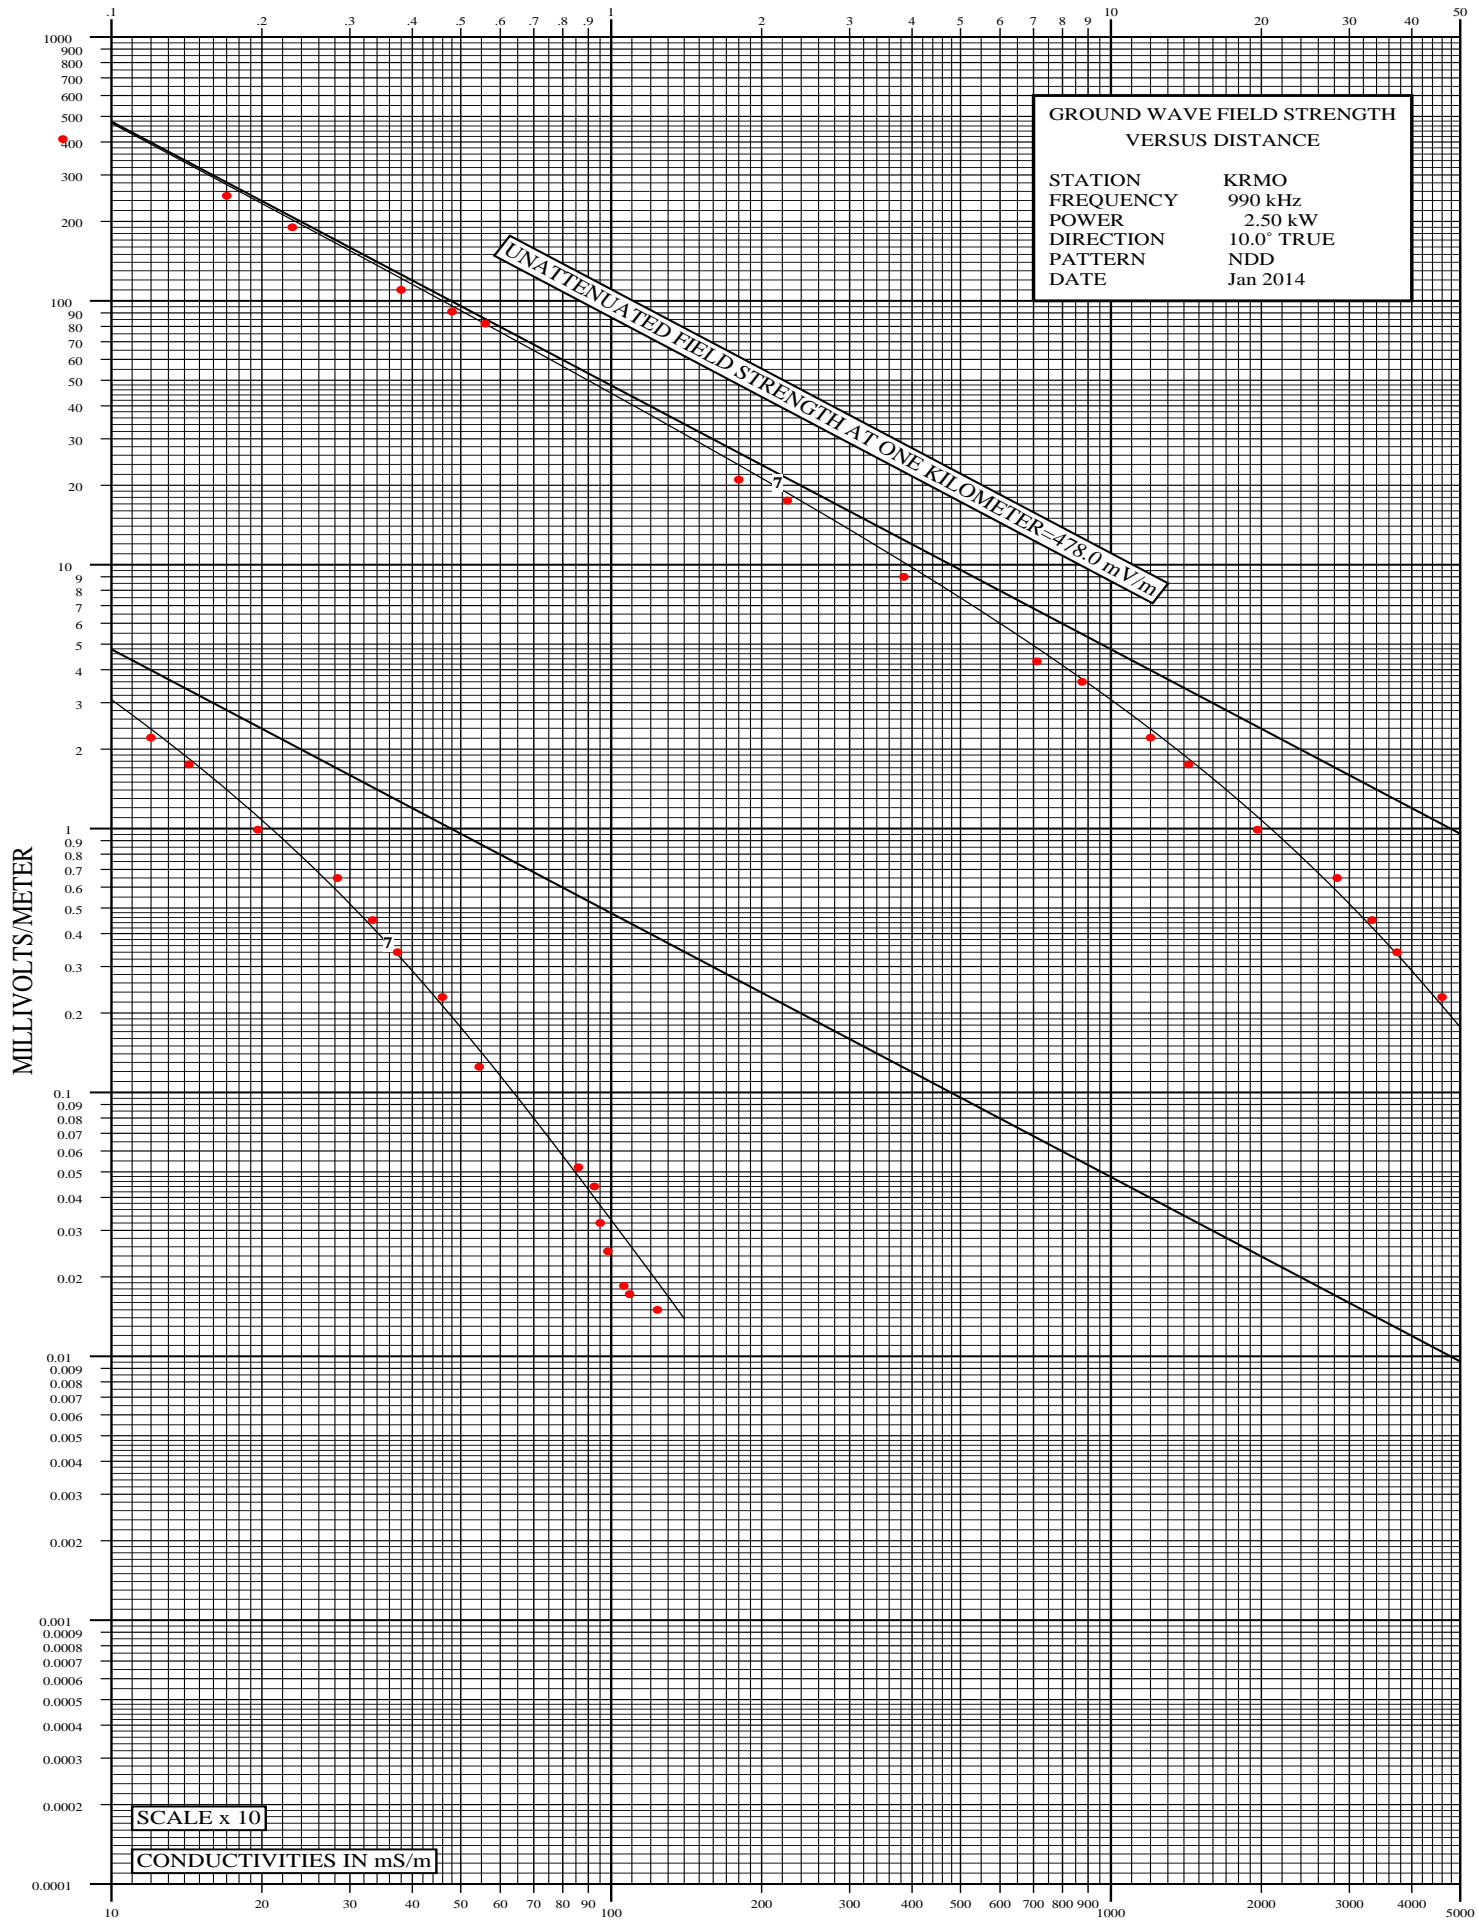


Radio Station: KRMO

330 Degree Radial - Day

Point Designation	Distance (km)	Date	Time (local)	Field Strength (mV/m)
1	0.15	8/14/13	1310	3300
2	0.23	8/14/13	1314	2100
3	0.30	8/14/13	1322	1500
4	0.36	8/14/13	1330	1150
5	0.44	8/14/13	1328	1100
6	0.72	8/14/13	1350	620
7	1.80	8/14/13	1354	162
8	2.57	8/14/13	1403	142
9	4.11	8/14/13	1412	62.0
10	4.87	8/14/13	1416	59.0
11	6.34	8/14/13	1422	50.0
12	8.11	8/14/13	1428	23.2
13	10.16	8/14/13	1436	22.5
14	14.90	8/14/13	1449	9.60
15	20.27	8/14/13	1503	6.10
16	25.46	8/14/13	1514	4.70
17	33.02	8/14/13	1535	2.20
18	35.81	8/14/13	1547	2.10
19	40.69	8/14/13	1557	2.02
20	44.91	8/14/13	1605	1.55
21	51.40	8/14/13	1616	1.25
22	55.22	8/14/13	1632	1.16
23	60.92	8/14/13	1645	1.02
24	65.92	8/14/13	1657	0.780
25	71.51	8/14/13	1706	0.630
26	80.23	8/14/13	1722	0.550
27	90.20	8/14/13	1746	0.330
28	102.95	8/14/13	1818	0.320
29	116.63	8/15/13	1847	0.275
30	138.19	8/15/13	837	0.220
31	140.55	8/15/13	830	0.175

KILOMETERS FROM ANTENNA

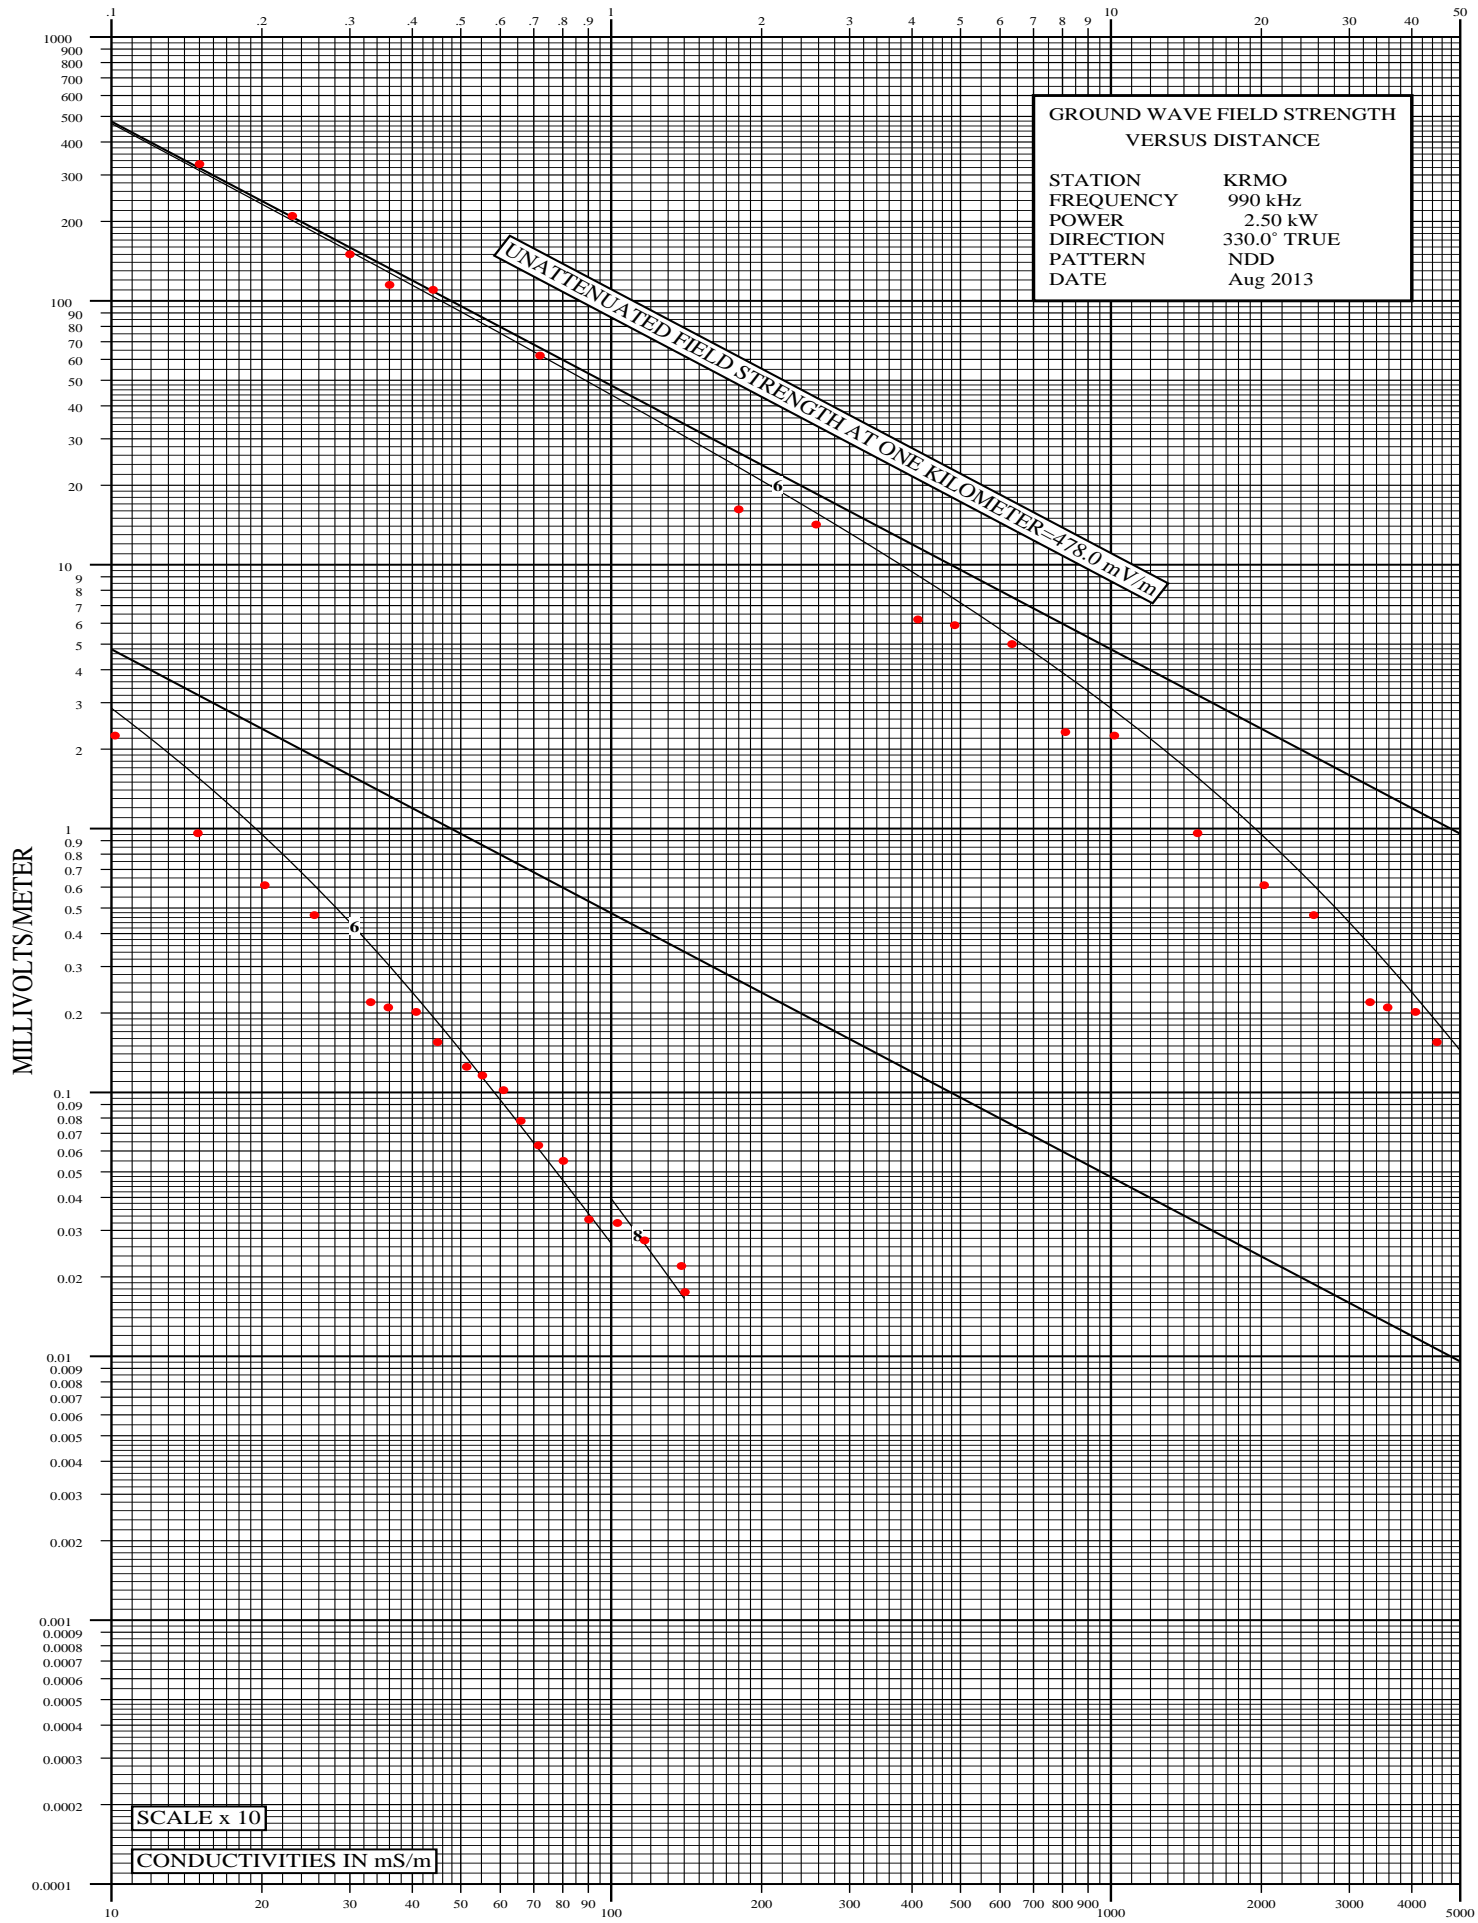


Radio Station: KRMO

350 Degree Radial - Day

Point Designation	Distance (km)	Date	Time (local)	Field Strength (mV/m)
1	0.15	8/14/13	1309	3700
2	0.21	8/14/13	1317	2270
3	0.27	8/14/13	1320	1800
4	0.43	8/14/13	1335	1150
5	0.65	8/14/13	1345	720
6	0.87	8/14/13	1339	390
7	2.28	8/14/13	1358	160
8	3.93	8/15/13	1443	74.0
9	4.88	8/15/13	1440	54.0
10	7.23	8/15/13	1434	33.5
11	8.87	8/15/13	1429	28.5
12	10.56	8/15/13	1420	22.0
13	17.10	8/15/13	1406	12.5
14	20.39	8/15/13	1358	10.5
15	25.32	8/15/13	1346	5.00
16	30.34	8/15/13	1334	3.65
17	35.12	8/15/13	1325	2.60
18	39.64	8/15/13	1315	2.21
19	44.63	8/15/13	1307	1.61
20	51.11	8/15/13	1257	1.27
21	56.09	8/15/13	1250	1.25
22	59.46	8/15/13	1239	1.08
23	66.04	8/15/13	1223	0.950
24	72.74	8/15/13	1209	0.630
25	80.93	8/15/13	1153	0.330
26	88.98	8/15/13	1134	0.270
27	101.90	8/15/13	1047	0.135
28	116.42	8/15/13	1029	0.210
29	132.08	8/15/13	1001	0.152
30	144.57	8/15/13	941	0.115

KILOMETERS FROM ANTENNA

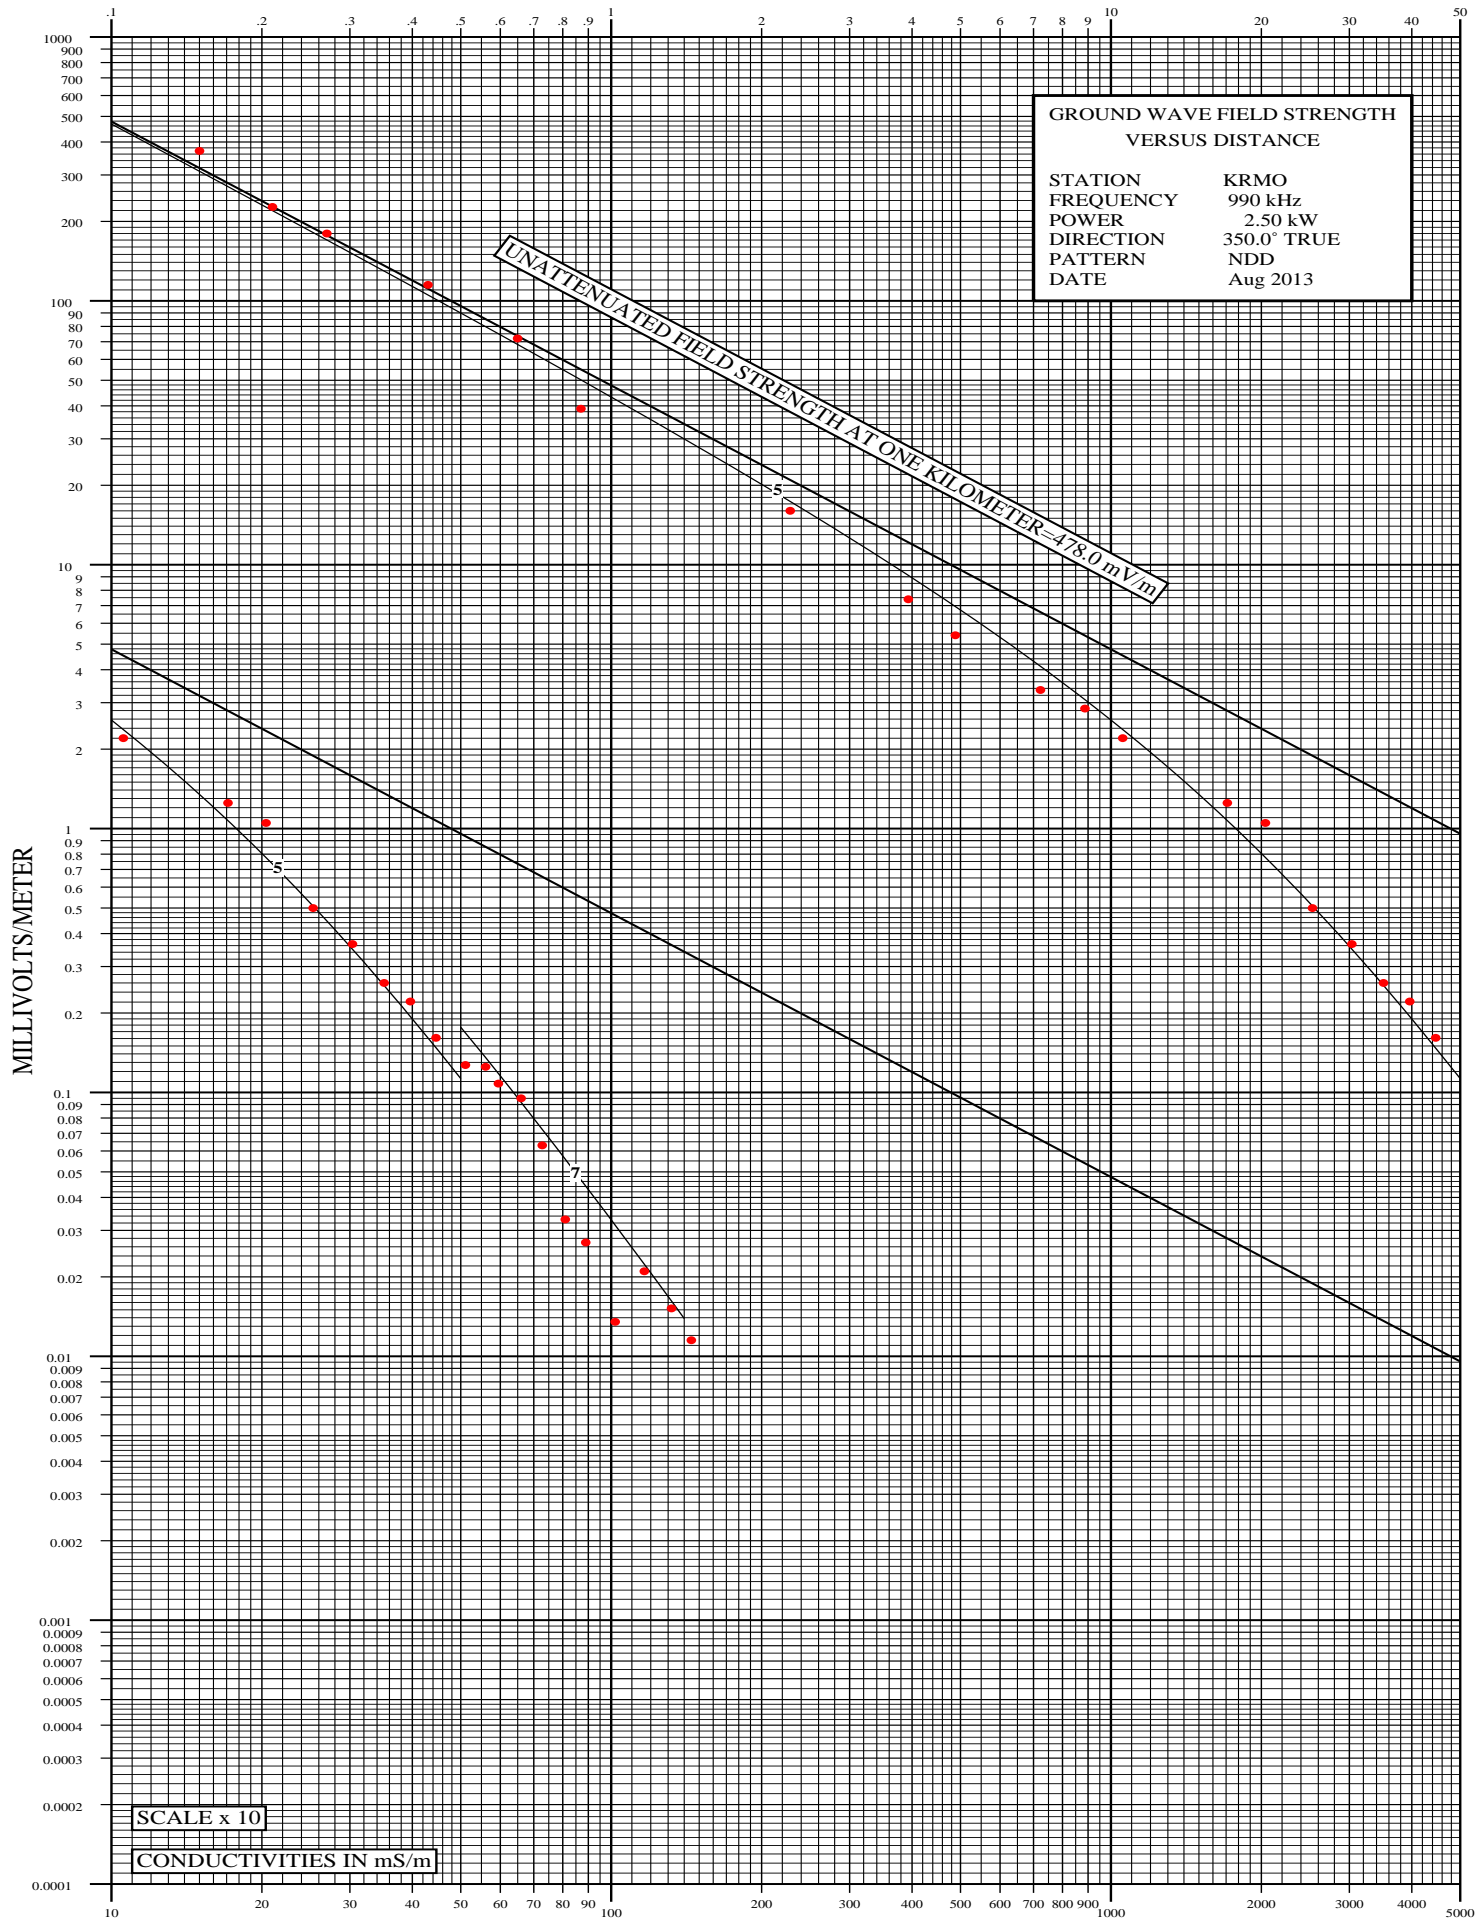

Results of Field Intensity Measurement Program

Radio Station KCCV
Overland Park, Kansas
760 kHz 6 kW DA

and

Radio Station KRMO
Cassville, Missouri
990 kHz 2.5 kW ND

Per the authorization of Mr. Ken Wolf, DOE of Entercom KC, the following statement of work was performed during the period, August 13- 20, 2013.

We will need the following measurements performed---

From KCCV to KCFO Tulsa OK, we'll need 3 radials: the 200, 220 and 240 degree radials. Go out 200km on each.


From KCCV to KRMO, Cassville MO, we'll need 3 radials: the 140, 160 and 180 degree radials. Go out 200km on each.

From KRMO, 2 radials: the 330 and 350 degree radials. Take measurements out to the first few points where the readings are consistently below 0.25mV or just short of 200km.

Measurements are to be done when stations are operating with their day facilities, and not during critical hours. Need the minimum of 7 close-in measurements done on all radials.

See the attached tabulation showing the results of the measurements with the date and time information provided for FCC filing. Maps and original field strength data sheets which include geographic coordinates for each measurement point can be provided if desired. An Excel spreadsheet with all data can be provided to assist for further analysis as well.

The Potomac Instruments FIM-41 field strength meter used for the measurements, serial number 383, was checked and found to be in agreement with Potomac Instruments FIM-41 field strength meter serial number 1924 which was most recently calibrated by its manufacturer on May 21, 2012.

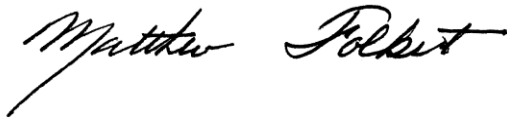A handwritten signature in black ink, reading "Matthew Folkert". The signature is written in a cursive style with a large, stylized 'M' and 'F'.

Matthew Folkert
August 23, 2013

P/N: 3817C.15941

Results of Field Intensity Measurement Program

Radio Station KCCV
Overland Park, Kansas
760 kHz 6 kW DA

and

Radio Station KRMO
Cassville, Missouri
990 kHz 2.5 kW ND

Per the authorization of Mr. Ken Wolf, DOE of Entercom KC, the following statement of work was performed during the period, January 18- 23, 2014.

We will need the following measurements performed---


From KCCV 3 radials: the 100 , 120 and 265 degree radials. Take measurements out to 200km.

From KRMO on the 10 degree radial. Take measurements out to the first few points where the readings are consistently below 0.25mV or just short of 200km.

Measurements are to be done when stations are operating with their day facilities, and not during critical hours. Need a minimum of 7 measurements within the 3Km on all radials.


See the attached tabulation showing the results of the measurements with the date and time information provided for FCC filing. Maps and original field strength data sheets which include geographic coordinates for each measurement point can be provided if desired. An Excel spreadsheet with all data can be provided to assist for further analysis as well.


The Potomac Instruments FIM-41 field strength meter used for the measurements, serial number 383, was checked and found to be in agreement with Potomac Instruments FIM-41 field strength meter serial number 1924 which was most recently calibrated by its manufacturer on May 21, 2012.

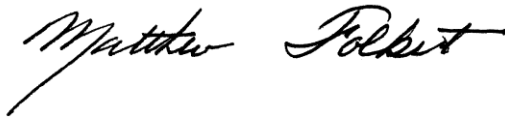
A handwritten signature in black ink, reading "Matthew Folkert". The signature is written in a cursive style with a long, sweeping underline.


Matthew Folkert
January 29, 2014


P/N: 3817C.16248

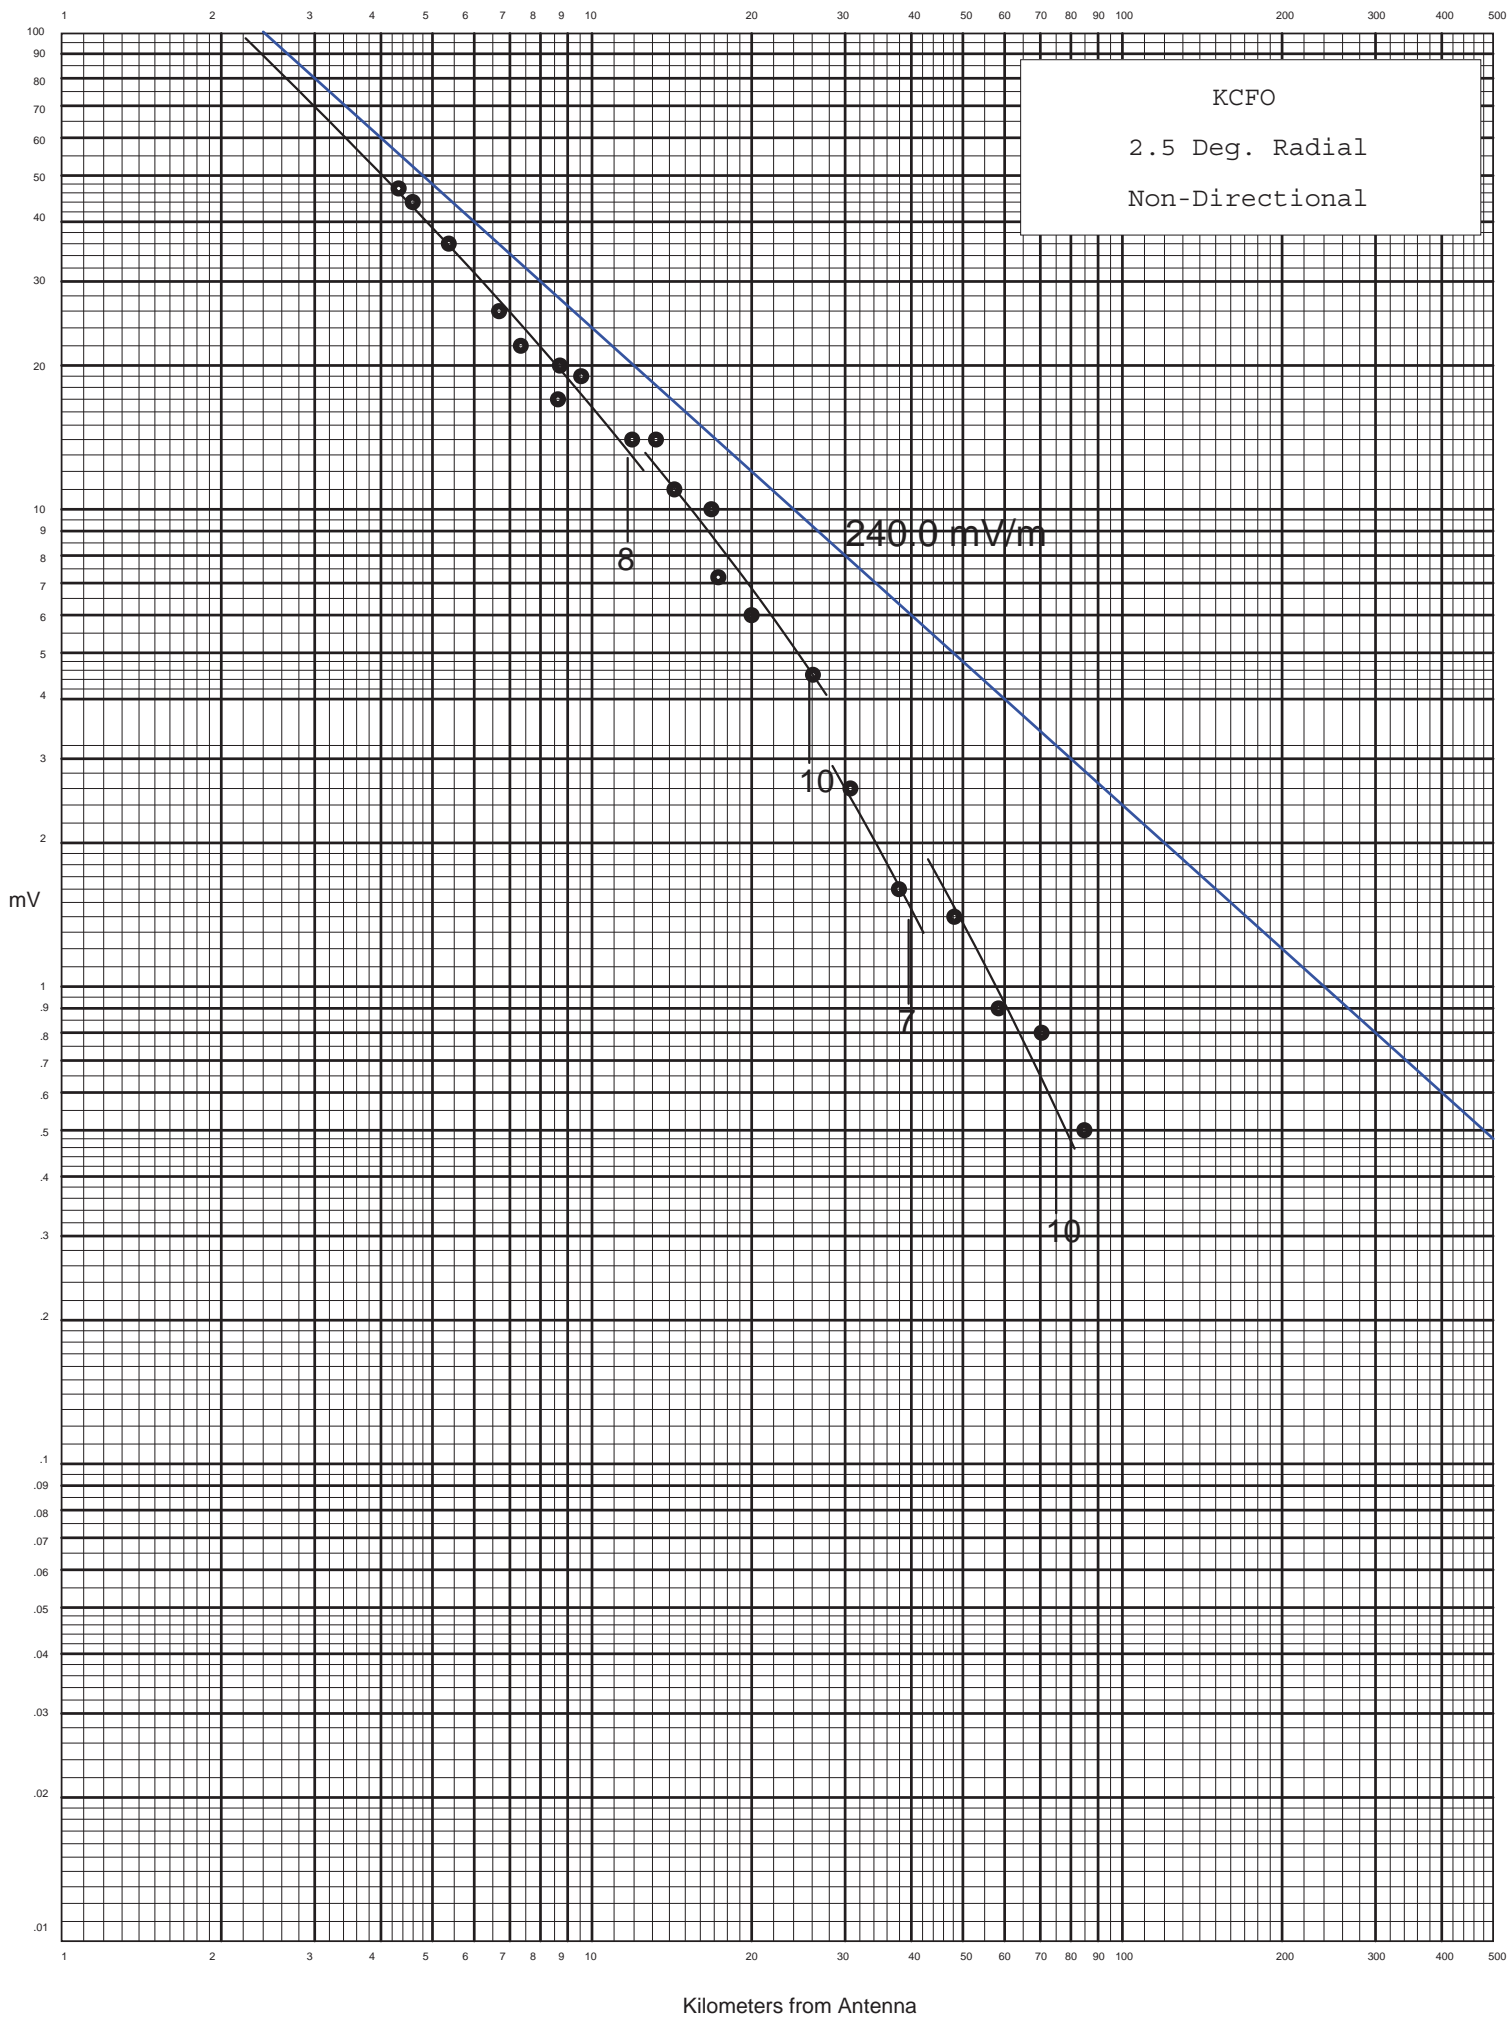

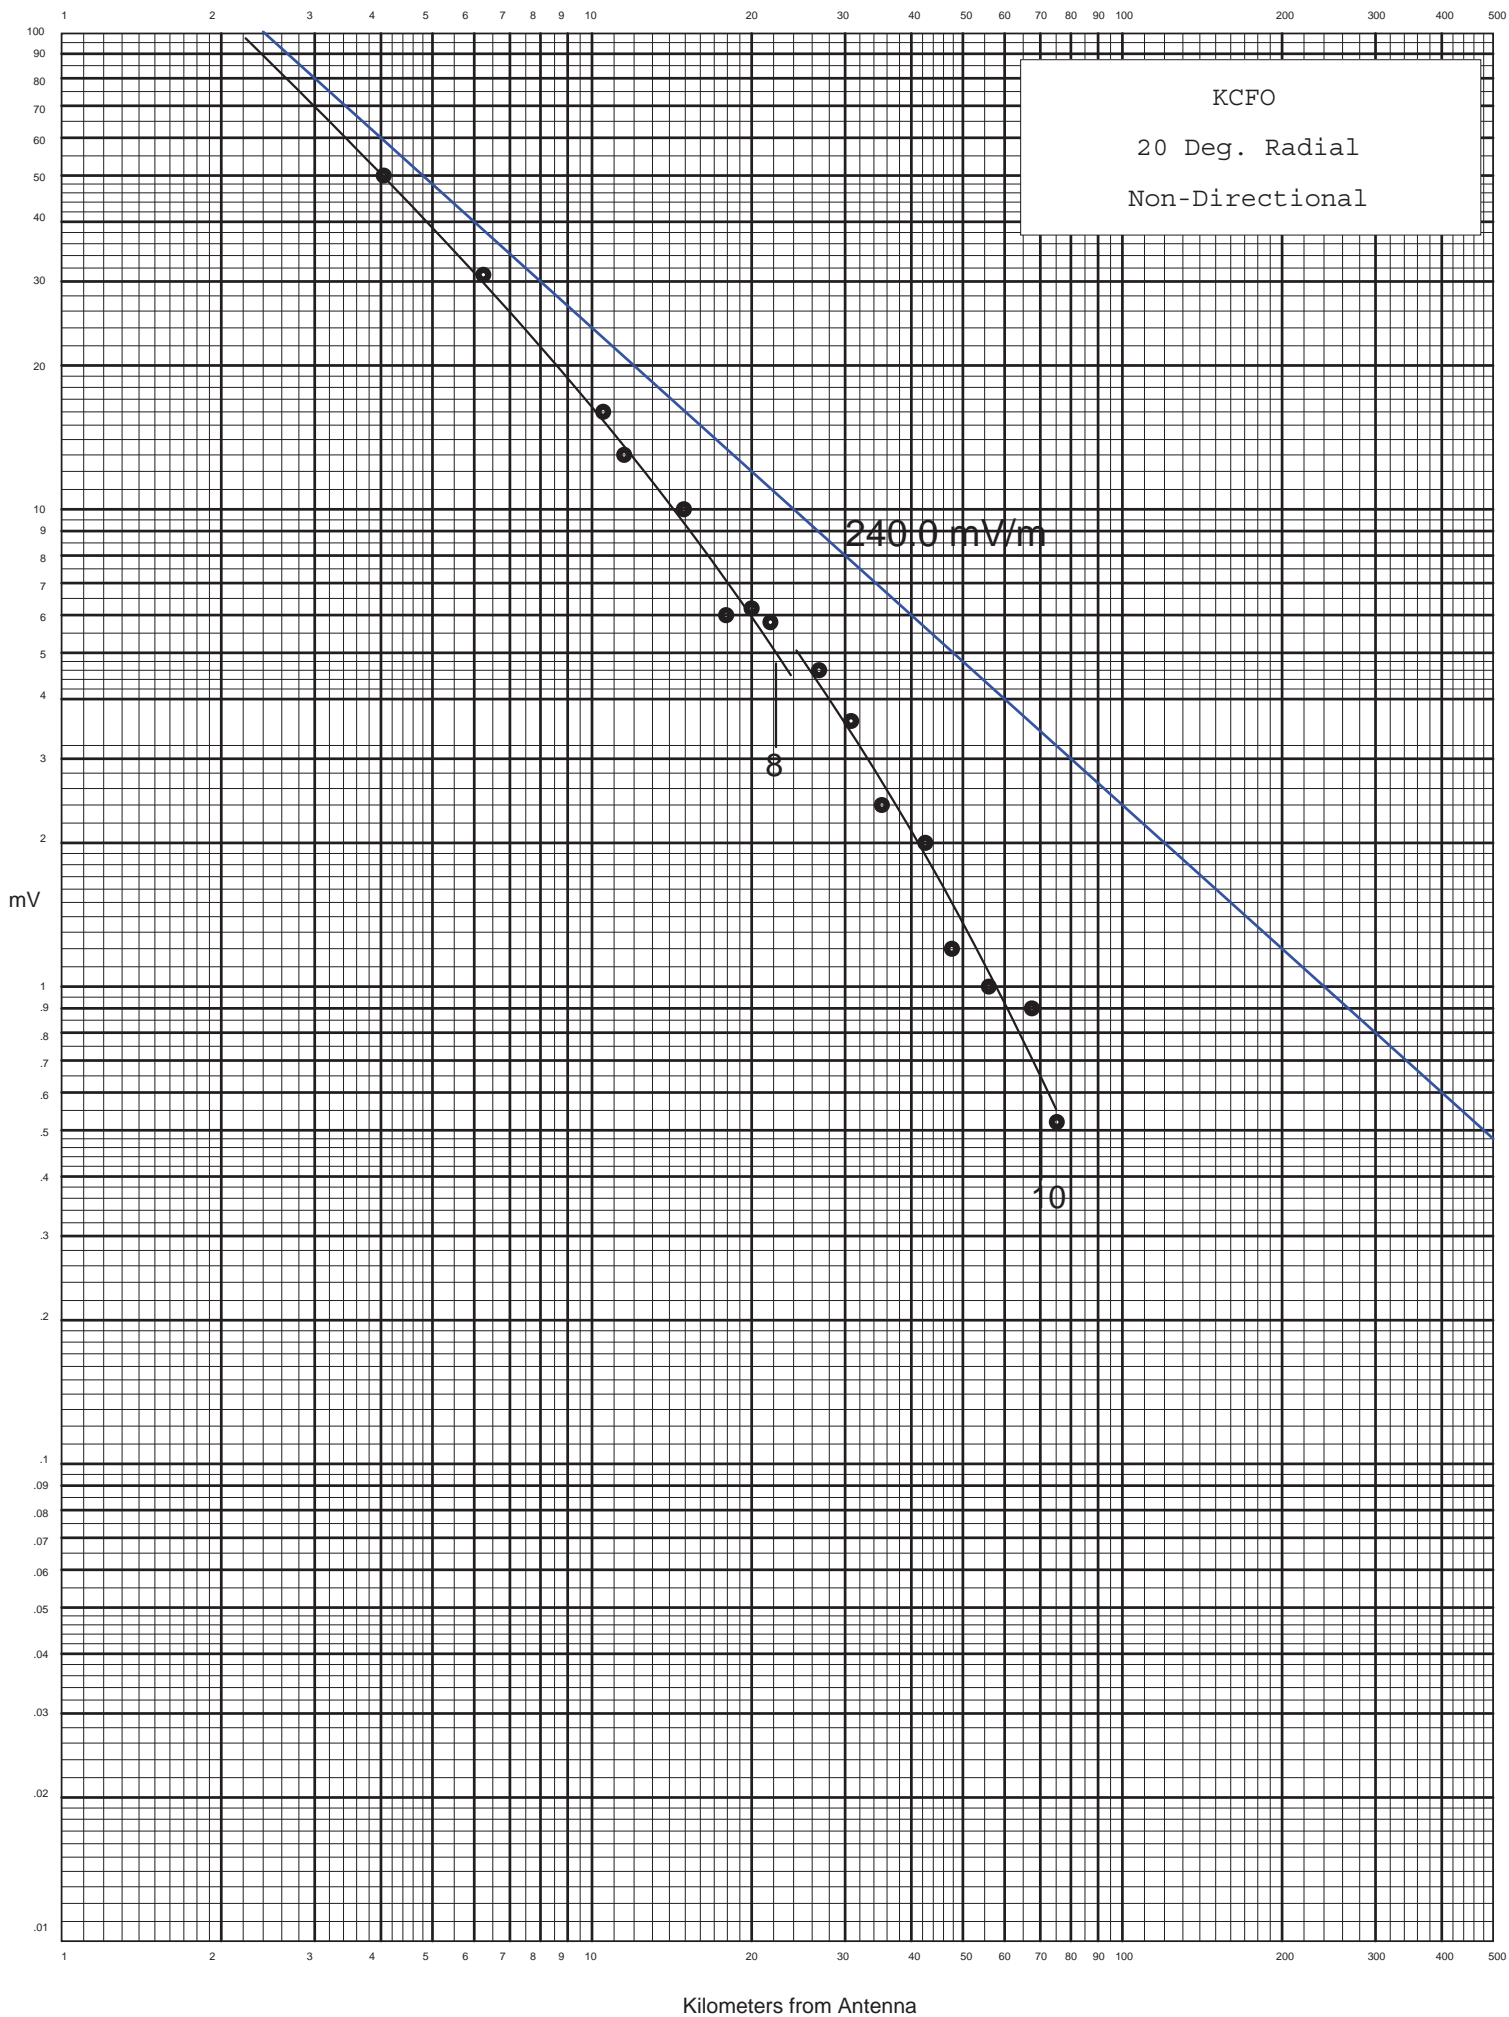

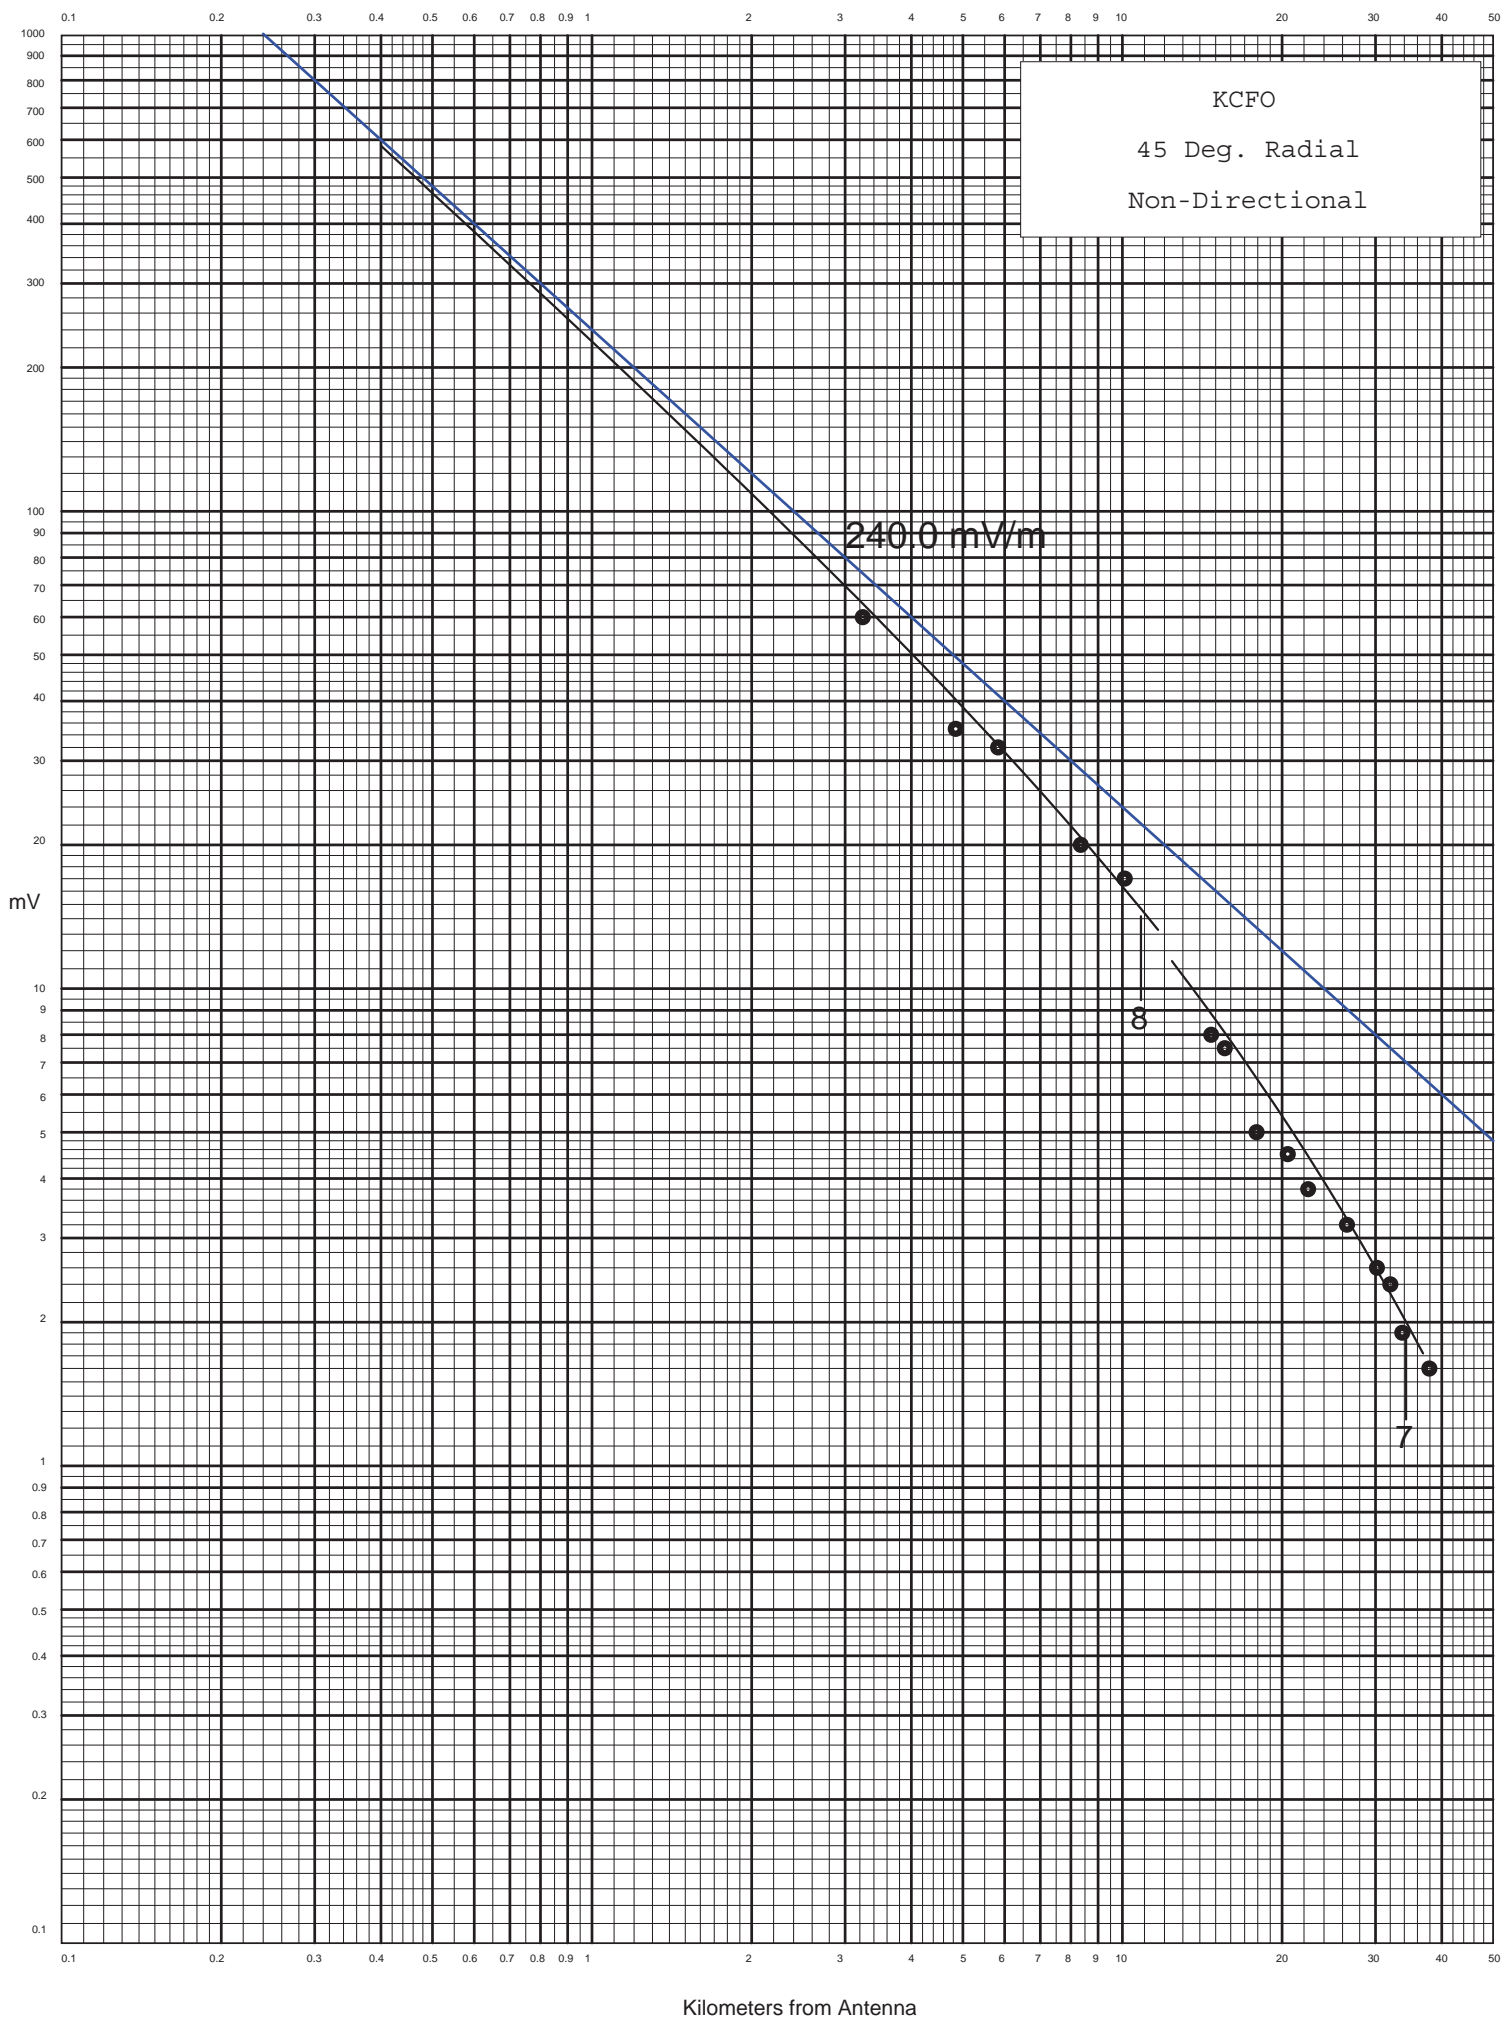

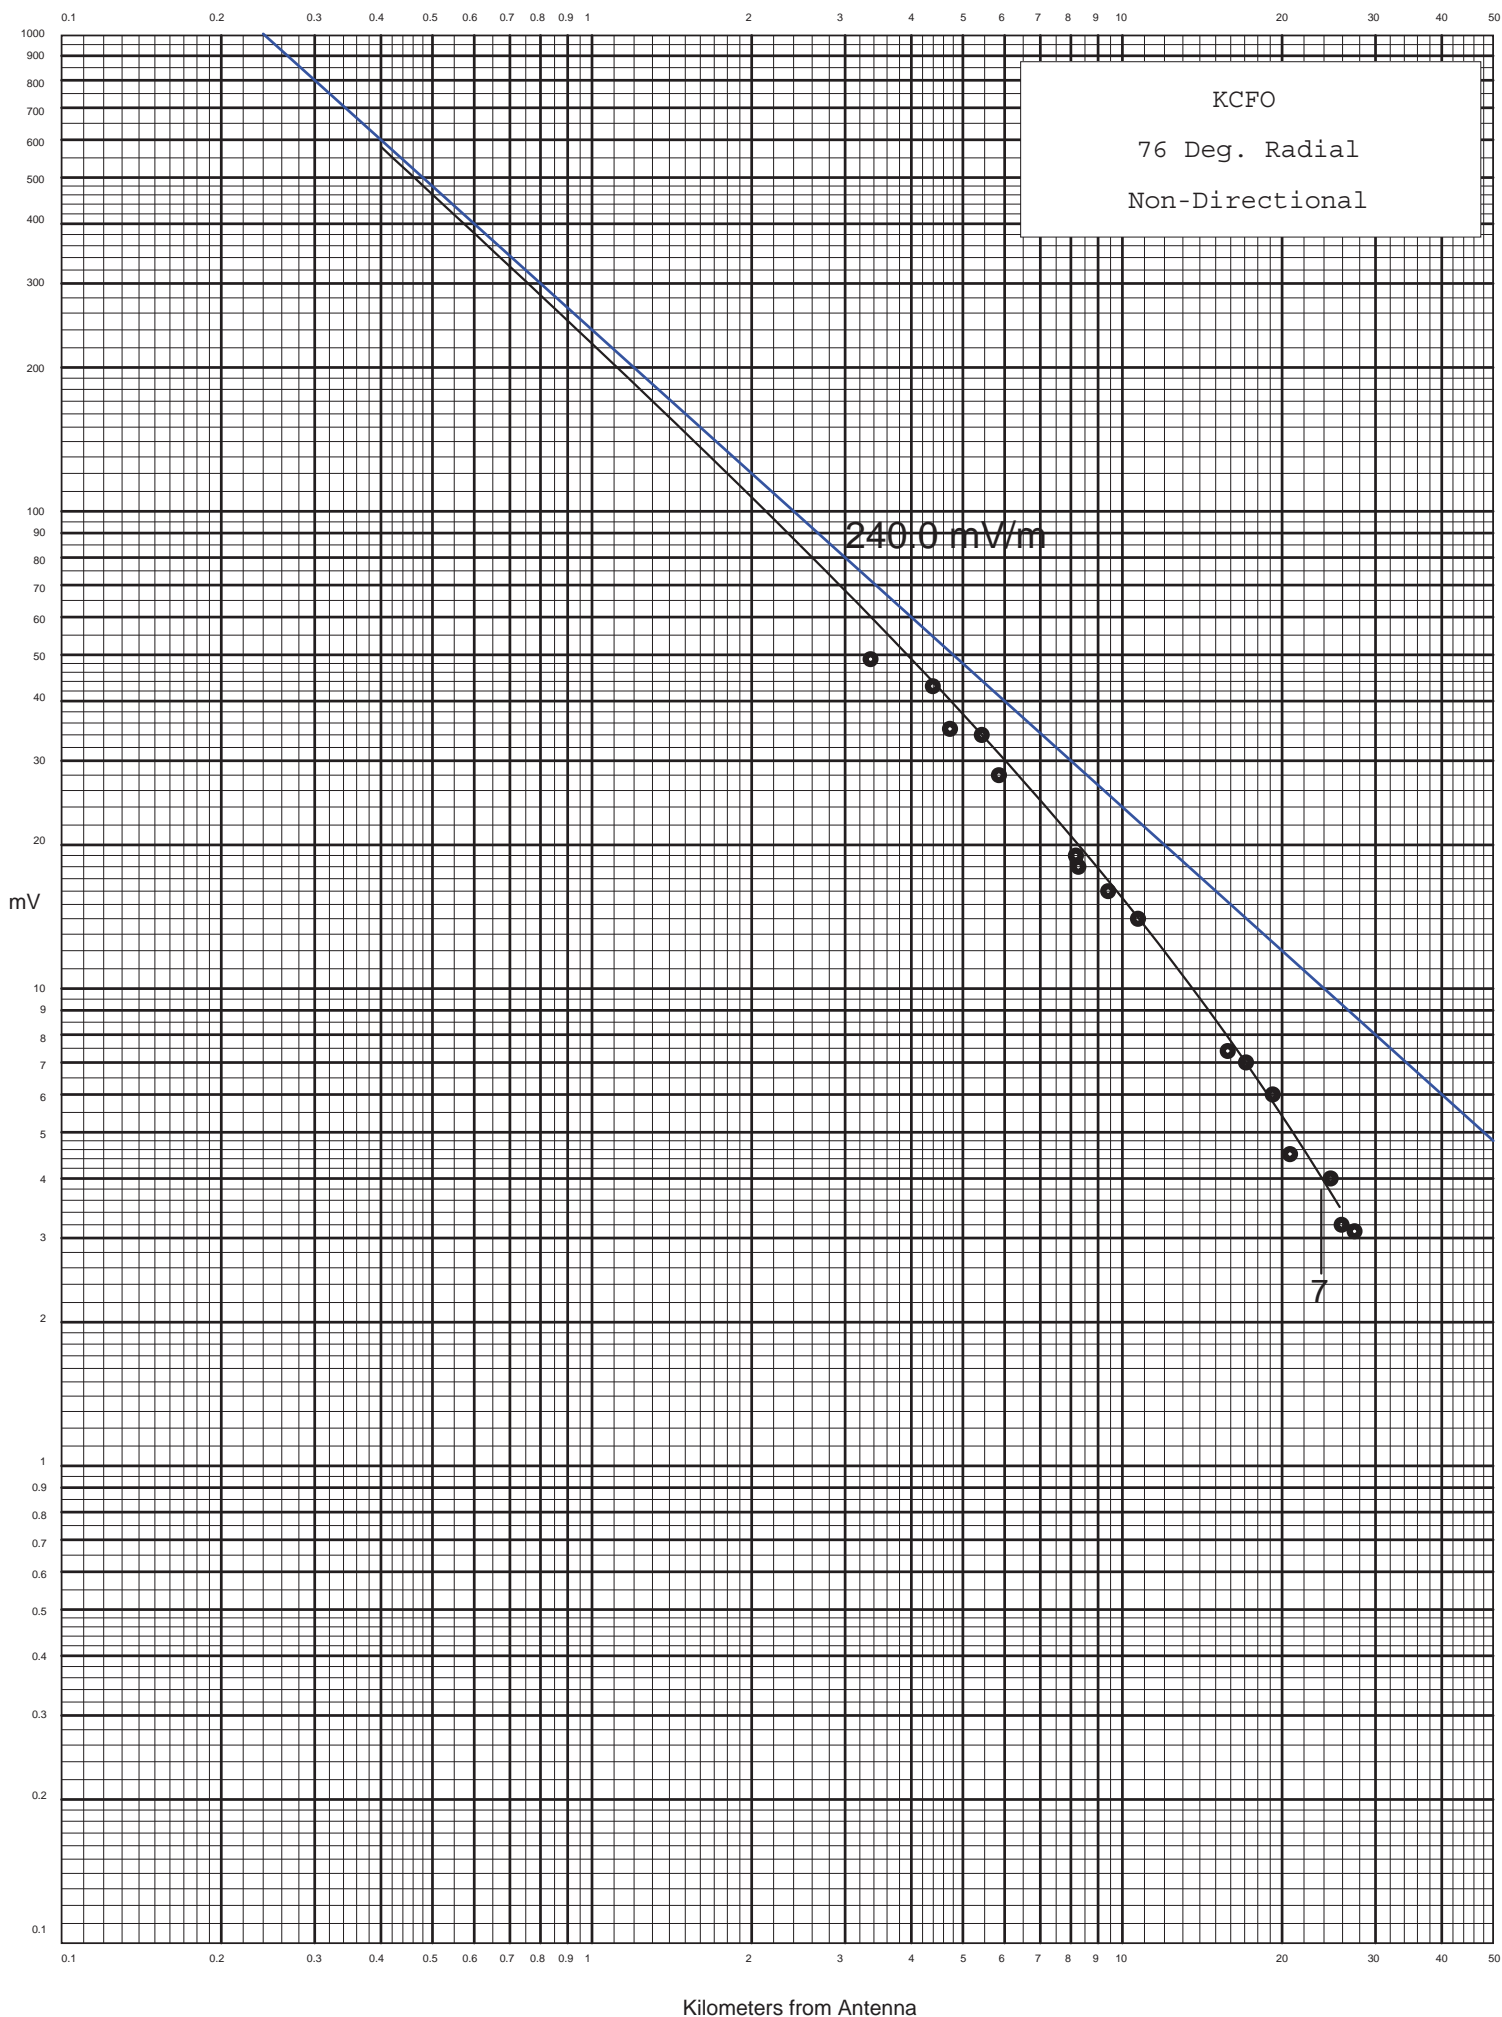

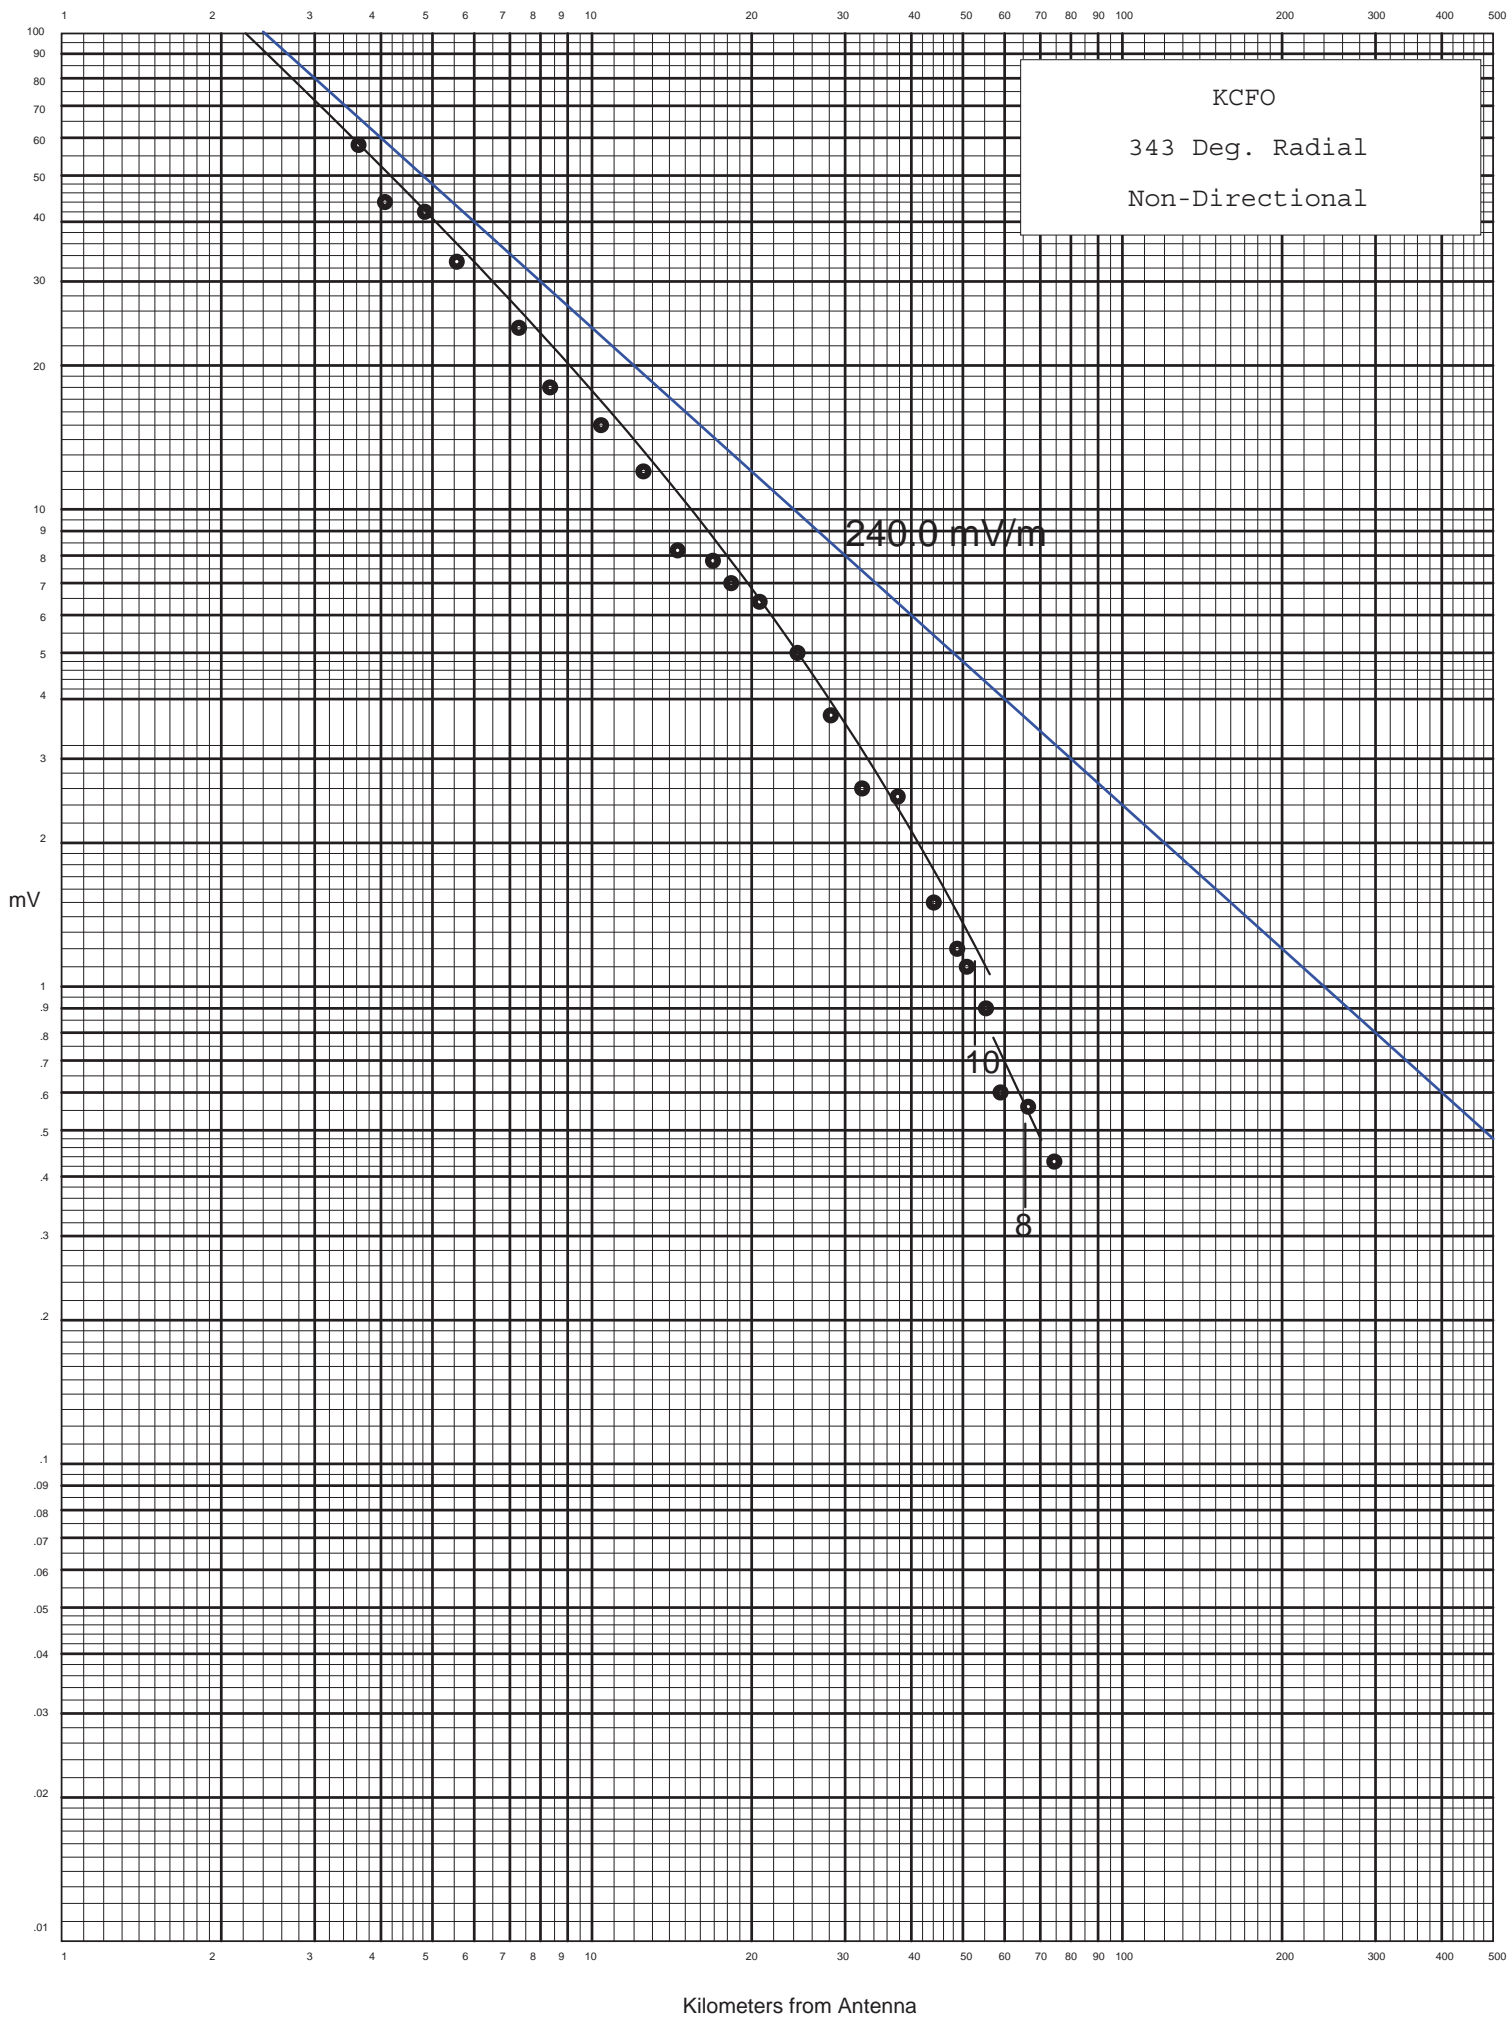

KMBZ - Proposed
Latitude: 39-02-25 N
Longitude: 094-30-30 W

Conductivity Database Used: M3 (USA)

Ground Conductivity Data: Region conductivity in mS/m followed by distance in km Azimuth to the end of region. E - map data; M - measurement data.									
Azimuth									
0.0	15.0E	417.5	30.0E	558.5	8.0E	629.8	4.0E	953.8	8.0E 1071.4
	20.0E	1118.2	2.0E	1300.0					
5.0	15.0E	481.2	30.0E	534.0	15.0E	612.9	4.0E	832.8	8.0E 1070.2
	20.0E	1093.1	2.0E	1291.7	2.0E	1300.0			
10.0	15.0E	629.7	4.0E	779.9	8.0E	1053.5	2.0E	1285.4	2.0E 1300.0
15.0	15.0E	570.0	8.0E	642.4	4.0E	840.3	8.0E	1057.2	2.0E 1293.8
	2.0E	1300.0							
20.0	15.0E	457.9	8.0E	645.5	4.0E	898.9	8.0E	1071.8	2.0E 1300.0
25.0	15.0E	414.1	8.0E	545.4	4.0E	988.1	8.0E	1223.7	2.0E 1300.0
30.0	15.0E	412.7	8.0E	491.3	4.0E	1026.7	8.0E	1232.9	2.0E 1300.0
35.0	15.0E	360.1	8.0E	481.5	4.0E	788.5	8.0E	1258.5	2.0E 1300.0
40.0	15.0E	329.0	8.0E	749.2	15.0E	808.3	8.0E	1177.6	2.0E 1186.3
	8.0E	1195.8	2.0E	1300.0					
45.0	15.0E	323.2	8.0E	721.3	15.0E	773.2	8.0E	923.9	2.0E 946.9
	8.0E	1185.9	10.0E	1208.1	2.0E	1300.0			
50.0	15.0E	334.2	8.0E	680.2	15.0E	707.2	8.0E	837.3	2.0E 962.6
	8.0E	1190.3	10.0E	1245.0	4.0E	1279.9	10.0E	1287.7	4.0E 1295.6
	10.0E	1300.0							
55.0	15.0E	344.6	8.0E	652.1	15.0E	668.7	8.0E	821.6	2.0E 863.1
	8.0E	1180.5	10.0E	1264.0	4.0E	1282.7	10.0E	1289.6	4.0E 1291.2
	10.0E	1300.0							
60.0	15.0E	349.4	8.0E	611.0	15.0E	641.3	8.0E	771.9	2.0E 867.5
	8.0E	1046.5	15.0E	1111.2	8.0E	1147.4	10.0E	1183.4	6.0E 1281.9
	4.0E	1300.0							
65.0	15.0E	346.9	8.0E	501.4	15.0E	609.7	8.0E	753.3	2.0E 831.5
	4.0E	936.7	8.0E	1043.4	15.0E	1050.3	20.0E	1212.7	4.0E 1272.0
	20.0E	1300.0							
70.0	15.0E	299.5	8.0E	415.9	15.0E	566.3	8.0E	965.3	15.0E 1009.1
	8.0E	1049.9	10.0E	1076.3	8.0E	1232.5	4.0E	1300.0	
75.0	15.0E	239.5	8.0E	381.8	15.0E	535.8	8.0E	736.9	15.0E 894.5
	8.0E	928.0	15.0E	1008.7	8.0E	1247.1	4.0E	1261.9	2.0E 1300.0
80.0	15.0E	225.9	8.0E	356.8	15.0E	514.3	8.0E	1117.0	4.0E 1300.0
85.0	15.0E	212.6	8.0E	340.0	15.0E	493.9	8.0E	963.6	2.0E 1206.8
	4.0E	1300.0							
90.0	7.0M	120.0	15.0E	198.2	8.0E	327.1	15.0E	470.0	8.0E 942.4
	2.0E	1300.0							
95.0	7.0M	120.0	15.0E	184.7	8.0E	320.5	15.0E	447.7	8.0E 704.4
	4.0E	882.5	8.0E	948.5	2.0E	1300.0			
100.0	7.0M	120.0	15.0E	173.1	8.0E	326.3	15.0E	425.4	8.0E 695.4
	4.0E	879.7	2.0E	1042.0	4.0E	1143.0	2.0E	1300.0	
105.0	7.0M	120.0	15.0E	162.6	8.0E	370.6	15.0E	403.1	8.0E 681.8
	4.0E	880.0	2.0E	1278.9	4.0E	1300.0			
110.0	7.0M	120.0	15.0E	154.4	8.0E	656.5	4.0E	896.6	2.0E 1203.7
	4.0E	1300.0							
115.0	10.0M	150.0	8.0E	527.0	4.0E	864.3	2.0E	935.8	4.0E 1007.7
	2.0E	1123.7	4.0E	1267.9	2.0E	1300.0			
120.0	10.0M	150.0	8.0E	542.0	4.0E	849.0	2.0E	936.6	4.0E 984.6
	2.0E	1081.8	1.0E	1128.1	4.0E	1300.0			
125.0	10.0M	150.0	8.0E	568.5	4.0E	843.3	2.0E	928.9	4.0E 974.5
	2.0E	1115.9	4.0E	1300.0					
130.0	10.0M	150.0	8.0E	625.3	4.0E	1300.0			
135.0	3.0M	40.0	5.0M	120.0	3.0M	200.0	8.0E	714.9	4.0E 720.9
	2.0E	966.2	4.0E	1016.7	8.0E	1125.1	4.0E	1272.8	1.0E 1300.0

140.0	3.0M	40.0	5.0M	120.0	3.0M	200.0	8.0E	750.7	2.0E	1027.1
	8.0E	1095.4	1.0E	1198.5	5000.0E	1210.8	1.0E	1214.5	5000.0E	1300.0
145.0	3.0M	40.0	5.0M	120.0	3.0M	200.0	8.0E	800.5	2.0E	873.8
	4.0E	920.8	2.0E	1098.8	1.0E	1162.4	5000.0E	1300.0		
150.0	3.0M	40.0	5.0M	120.0	3.0M	200.0	8.0E	842.0	4.0E	989.7
	2.0E	1087.0	5000.0E	1300.0						
155.0	5.0M	1.0	10.0M	75.0	8.0M	100.0	7.0M	140.0	5.0M	180.0
	8.0E	486.3	4.0E	646.6	8.0E	920.9	4.0E	1062.3	15.0E	1071.0
	5000.0E	1081.6	2.0E	1093.4	5000.0E	1101.7	15.0E	1101.9	5000.0E	1110.4
	15.0E	1127.3	5000.0E	1133.3	15.0E	1138.2	5000.0E	1168.3	15.0E	1208.8
	5000.0E	1300.0								
160.0	5.0M	1.0	10.0M	75.0	8.0M	100.0	7.0M	140.0	5.0M	180.0
	8.0E	451.5	4.0E	711.1	8.0E	992.7	4.0E	1027.0	15.0E	1138.4
	5000.0E	1139.6	15.0E	1146.6	5000.0E	1300.0				
165.0	5.0M	1.0	10.0M	75.0	8.0M	100.0	7.0M	140.0	5.0M	180.0
	8.0E	424.5	4.0E	871.1	8.0E	1024.0	15.0E	1066.7	5000.0E	1079.0
	15.0E	1079.3	5000.0E	1300.0						
170.0	5.0M	1.0	10.0M	75.0	8.0M	100.0	7.0M	140.0	5.0M	180.0
	15.0E	190.7	8.0E	403.3	15.0E	463.0	4.0E	670.7	15.0E	993.4
	8.0E	993.7	30.0E	1065.2	5000.0E	1300.0				
175.0	3.0M	25.0	5.0M	200.0	8.0E	400.0	15.0E	509.5	4.0E	652.6
	8.0E	695.8	15.0E	716.4	8.0E	1005.4	30.0E	1034.9	5000.0E	1300.0
180.0	3.0M	25.0	5.0M	200.0	15.0E	203.7	8.0E	409.7	15.0E	549.7
	4.0E	639.8	8.0E	805.2	4.0E	849.1	8.0E	990.9	30.0E	1054.0
	5000.0E	1057.8	30.0E	1060.4	5000.0E	1300.0				
185.0	3.0M	25.0	5.0M	200.0	15.0E	251.5	8.0E	405.9	15.0E	546.6
	4.0E	644.0	8.0E	800.5	4.0E	992.5	15.0E	1045.9	30.0E	1058.0
	15.0E	1128.4	30.0E	1141.9	5000.0E	1300.0				
190.0	3.0M	25.0	5.0M	200.0	15.0E	284.8	8.0E	374.8	15.0E	585.1
	30.0E	722.7	8.0E	797.1	4.0E	974.2	15.0E	1069.4	30.0E	1166.1
	5000.0E	1177.9	30.0E	1206.6	5000.0E	1300.0				
195.0	3.0M	40.0	4.0M	200.0	15.0E	618.9	30.0E	788.2	15.0E	886.2
	30.0E	957.5	15.0E	1230.1	30.0E	1300.0				
200.0	3.0M	40.0	4.0M	200.0	15.0E	228.5	30.0E	264.4	15.0E	624.6
	30.0E	677.8	15.0E	919.2	8.0E	1111.6	15.0E	1300.0		
205.0	3.0M	40.0	4.0M	200.0	15.0E	202.7	30.0E	323.5	8.0E	437.8
	15.0E	504.8	30.0E	677.4	15.0E	915.1	8.0E	1170.5	15.0E	1200.0
	8.0E	1300.0								
210.0	3.0M	40.0	4.0M	200.0	30.0E	330.2	8.0E	439.4	15.0E	487.6
	30.0E	709.6	15.0E	904.1	8.0E	1230.7	3.0E	1300.0		
215.0	4.0M	35.0	6.0M	200.0	30.0E	342.0	8.0E	375.2	30.0E	435.2
	15.0E	470.6	30.0E	498.2	15.0E	534.5	30.0E	625.3	15.0E	656.0
	30.0E	803.8	8.0E	1224.3	3.0E	1300.0				
220.0	4.0M	35.0	6.0M	200.0	30.0E	514.0	15.0E	681.3	30.0E	882.8
	15.0E	993.7	8.0E	1300.0						
225.0	4.0M	35.0	6.0M	200.0	30.0E	506.2	15.0E	689.9	30.0E	800.5
	15.0E	1044.4	8.0E	1300.0						
230.0	4.0M	35.0	6.0M	200.0	30.0E	502.2	15.0E	696.6	30.0E	816.3
	15.0E	1058.7	8.0E	1300.0						
235.0	5.0M	120.0	8.0M	220.0	30.0E	503.8	15.0E	700.6	30.0E	886.8
	15.0E	1089.0	8.0E	1300.0						
240.0	5.0M	120.0	8.0M	220.0	30.0E	512.9	15.0E	561.9	30.0E	850.7
	15.0E	1068.2	8.0E	1131.3	4.0E	1300.0				
245.0	5.0M	120.0	8.0M	220.0	30.0E	753.5	15.0E	1012.4	8.0E	1108.5
	15.0E	1254.0	4.0E	1300.0						
250.0	5.0M	120.0	8.0M	220.0	30.0E	691.4	15.0E	1274.0	8.0E	1300.0
255.0	4.0M	110.0	8.0M	200.0	30.0E	567.5	15.0E	977.7	2.0E	1049.9
	4.0E	1098.5	15.0E	1230.6	8.0E	1300.0				
260.0	4.0M	110.0	8.0M	200.0	30.0E	521.8	15.0E	908.9	2.0E	985.5
	4.0E	1005.4	2.0E	1060.8	4.0E	1176.1	15.0E	1290.3	8.0E	1300.0
265.0	4.0M	110.0	8.0M	200.0	30.0E	530.4	15.0E	917.4	8.0E	955.8
	2.0E	960.5	4.0E	1042.6	2.0E	1138.3	4.0E	1260.7	15.0E	1300.0
270.0	4.0M	110.0	8.0M	200.0	30.0E	536.9	15.0E	935.1	8.0E	994.6
	2.0E	1148.0	15.0E	1184.9	4.0E	1300.0				

275.0	4.0M 110.0	8.0M 200.0	30.0E 267.1	15.0E 301.6	30.0E 537.7
	15.0E 942.9	8.0E 1001.3	2.0E 1119.1	8.0E 1191.7	15.0E 1290.5
	8.0E 1290.9	4.0E 1300.0			
280.0	15.0E 86.1	30.0E 227.6	15.0E 346.6	30.0E 542.6	15.0E 897.8
	8.0E 1005.4	2.0E 1120.3	8.0E 1270.9	15.0E 1300.0	
285.0	15.0E 85.9	30.0E 204.1	15.0E 353.6	30.0E 551.8	15.0E 757.1
	8.0E 995.4	2.0E 1118.5	8.0E 1133.5	15.0E 1247.5	8.0E 1300.0
290.0	15.0E 86.4	30.0E 186.2	15.0E 359.4	30.0E 565.7	15.0E 697.8
	8.0E 970.0	15.0E 1032.9	2.0E 1071.4	15.0E 1300.0	
295.0	15.0E 87.6	30.0E 172.4	15.0E 368.3	30.0E 580.8	4.0E 765.0
	8.0E 999.1	15.0E 1293.8	2.0E 1300.0		
300.0	15.0E 89.2	30.0E 163.7	15.0E 381.8	30.0E 559.3	4.0E 782.1
	8.0E 944.4	15.0E 1141.8	8.0E 1300.0		
305.0	15.0E 91.6	30.0E 158.7	15.0E 307.2	30.0E 363.6	15.0E 400.4
	30.0E 536.2	4.0E 801.0	8.0E 819.0	15.0E 891.4	8.0E 994.8
	15.0E 1162.2	8.0E 1300.0			
310.0	15.0E 94.8	30.0E 157.0	15.0E 263.7	30.0E 362.6	15.0E 427.1
	30.0E 488.3	4.0E 734.0	8.0E 865.2	15.0E 921.3	8.0E 1062.9
	15.0E 1097.0	8.0E 1300.0			
315.0	15.0E 98.8	30.0E 162.2	15.0E 253.2	30.0E 356.0	15.0E 442.4
	4.0E 528.1	8.0E 786.0	15.0E 1014.6	8.0E 1300.0	
320.0	15.0E 103.7	30.0E 171.3	15.0E 244.7	30.0E 343.6	15.0E 479.4
	8.0E 558.3	15.0E 864.8	8.0E 1300.0		
325.0	15.0E 110.1	30.0E 184.6	15.0E 247.0	30.0E 296.5	15.0E 526.5
	30.0E 674.4	15.0E 708.8	30.0E 809.7	15.0E 879.3	8.0E 1285.4
	30.0E 1300.0				
330.0	15.0E 118.3	30.0E 206.0	15.0E 492.0	30.0E 1300.0	
335.0	15.0E 128.0	30.0E 227.4	15.0E 462.3	30.0E 1246.6	40.0E 1300.0
340.0	15.0E 140.4	30.0E 239.5	15.0E 471.0	30.0E 530.0	15.0E 830.5
	30.0E 1192.3	40.0E 1300.0			
345.0	15.0E 156.8	30.0E 240.6	15.0E 834.8	30.0E 1153.9	40.0E 1300.0
350.0	15.0E 183.1	30.0E 222.1	15.0E 479.2	30.0E 552.8	15.0E 743.0
	30.0E 946.4	15.0E 1126.8	40.0E 1279.7	20.0E 1300.0	
355.0	15.0E 421.6	30.0E 582.7	8.0E 656.0	4.0E 969.3	8.0E 1111.6
	20.0E 1290.0	2.0E 1300.0			

KRMO

Latitude: 36-56-15 N

Longitude: 093-55-30 W

Conductivity Database Used: M3 (USA)

Ground Conductivity Data: Region conductivity in mS/m followed by distance in km to the end of region. E - map data; M - measurement data.										
Azimuth										
0.0	7.0M	124.0	15.0E	732.5	30.0E	765.1	15.0E	841.5	4.0E	1122.8
	8.0E	1297.6	20.0E	1300.0						
5.0	7.0M	124.0	15.0E	846.1	4.0E	1004.8	8.0E	1268.8	2.0E	1300.0
10.0	7.0M	124.0	15.0E	641.0	8.0E	869.1	4.0E	1068.9	8.0E	1277.9
	2.0E	1300.0								
15.0	7.0M	124.0	8.0E	131.1	15.0E	610.8	8.0E	717.0	4.0E	1122.9
	8.0E	1289.4	2.0E	1300.0						
20.0	7.0M	124.0	8.0E	151.6	15.0E	498.4	8.0E	666.9	4.0E	1256.7
	8.0E	1300.0								
25.0	8.0E	181.3	15.0E	492.7	8.0E	829.9	4.0E	904.1	8.0E	981.9
	4.0E	1194.2	8.0E	1300.0						
30.0	8.0E	227.7	15.0E	485.2	8.0E	890.8	15.0E	974.3	8.0E	1300.0
35.0	8.0E	410.3	15.0E	462.1	8.0E	826.8	15.0E	857.1	8.0E	1065.0
	2.0E	1095.9	8.0E	1300.0						
40.0	8.0E	953.0	2.0E	1034.8	8.0E	1300.0				
45.0	8.0E	436.1	15.0E	722.5	8.0E	883.3	2.0E	949.9	8.0E	1299.1
	10.0E	1300.0								
50.0	8.0E	361.8	15.0E	620.7	8.0E	849.6	2.0E	940.9	4.0E	1013.4
	8.0E	1133.8	15.0E	1200.4	8.0E	1238.9	10.0E	1278.0	6.0E	1300.0
55.0	8.0E	327.1	15.0E	558.0	8.0E	1087.5	20.0E	1285.6	4.0E	1300.0
60.0	8.0E	322.3	15.0E	497.3	8.0E	743.7	15.0E	923.3	8.0E	992.8
	15.0E	1070.9	8.0E	1255.0	4.0E	1300.0				
65.0	8.0E	331.9	15.0E	427.0	8.0E	962.1	15.0E	1007.7	8.0E	1271.1
	4.0E	1295.9	2.0E	1300.0						
70.0	8.0E	1063.8	4.0E	1300.0						
75.0	8.0E	680.1	4.0E	726.3	8.0E	923.4	2.0E	1231.6	4.0E	1300.0
80.0	8.0E	644.5	4.0E	841.5	8.0E	907.5	2.0E	1300.0		
85.0	8.0E	609.8	4.0E	816.9	2.0E	1079.5	4.0E	1094.1	2.0E	1283.8
	4.0E	1300.0								
90.0	8.0E	424.2	4.0E	486.6	8.0E	559.5	4.0E	798.1	2.0E	958.5
	4.0E	1042.5	2.0E	1254.5	4.0E	1300.0				
95.0	8.0E	419.2	4.0E	802.6	2.0E	1189.8	4.0E	1265.4	2.0E	1300.0
100.0	8.0E	419.9	4.0E	748.5	2.0E	1087.8	4.0E	1198.3	2.0E	1285.7
	4.0E	1300.0								
105.0	8.0E	427.4	4.0E	714.9	2.0E	802.2	4.0E	877.7	2.0E	990.5
	4.0E	1144.4	2.0E	1198.3	4.0E	1300.0				
110.0	8.0E	447.1	4.0E	692.2	2.0E	786.0	4.0E	831.8	2.0E	938.3
	1.0E	982.5	4.0E	1150.8	2.0E	1160.2	4.0E	1292.6	8.0E	1300.0
115.0	8.0E	483.6	4.0E	685.4	2.0E	762.1	4.0E	811.7	2.0E	955.0
	4.0E	1298.1	8.0E	1300.0						
120.0	8.0E	520.7	4.0E	560.9	2.0E	686.9	4.0E	1132.0	2.0E	1261.6
	4.0E	1300.0								
125.0	8.0E	540.3	2.0E	766.9	4.0E	845.2	8.0E	921.2	4.0E	1120.2
	2.0E	1261.9	4.0E	1300.0						
130.0	8.0E	553.5	2.0E	806.7	8.0E	944.7	4.0E	995.9	1.0E	1165.3
	5000.0E	1300.0								
135.0	8.0E	576.8	2.0E	836.4	8.0E	862.6	1.0E	990.7	5000.0E	1300.0
140.0	8.0E	294.7	4.0E	334.3	8.0E	619.2	2.0E	634.6	4.0E	723.5
	2.0E	879.8	5000.0E	883.2	2.0E	886.4	5000.0E	894.9	1.0E	944.6
	5000.0E	1300.0								
145.0	8.0E	250.8	4.0E	397.7	8.0E	618.1	4.0E	764.9	2.0E	878.7
	5000.0E	1300.0								
150.0	8.0E	225.4	4.0E	427.2	8.0E	676.8	4.0E	821.6	2.0E	855.6
	5000.0E	1300.0								

Hatfield & Dawson Consulting Engineers

155.0	8.0E	206.1	4.0E	462.5	8.0E	724.3	4.0E	793.6	15.0E	814.2
	5000.0E	835.9	15.0E	907.7	5000.0E	1300.0				
160.0	8.0E	191.2	4.0E	505.9	8.0E	801.0	15.0E	917.2	5000.0E	1300.0
165.0	8.0E	178.7	15.0E	191.9	4.0E	638.2	8.0E	783.5	15.0E	826.6
	5000.0E	1300.0								
170.0	8.0E	168.8	15.0E	211.5	4.0E	437.1	15.0E	750.7	8.0E	777.1
	15.0E	778.0	30.0E	831.8	5000.0E	1300.0				
175.0	8.0E	164.3	15.0E	233.8	4.0E	436.0	15.0E	569.1	8.0E	759.0
	30.0E	798.1	5000.0E	1300.0						
180.0	8.0E	163.0	15.0E	261.8	4.0E	415.5	8.0E	761.1	30.0E	807.3
	5000.0E	1300.0								
185.0	8.0E	164.4	15.0E	307.1	4.0E	410.1	8.0E	575.0	4.0E	617.5
	8.0E	758.9	30.0E	824.7	5000.0E	833.4	30.0E	838.7	5000.0E	1300.0
190.0	8.0E	171.5	15.0E	320.5	4.0E	411.5	8.0E	574.8	4.0E	767.5
	15.0E	808.7	30.0E	853.3	15.0E	904.8	30.0E	918.9	5000.0E	1300.0
195.0	8.0E	180.4	15.0E	323.0	4.0E	421.7	8.0E	578.9	4.0E	779.8
	15.0E	863.8	30.0E	954.2	5000.0E	966.4	30.0E	980.3	5000.0E	1257.3
	30.0E	1258.9	20.0E	1300.0						
200.0	8.0E	188.2	15.0E	348.8	30.0E	455.8	8.0E	584.1	4.0E	729.9
	15.0E	946.4	30.0E	1192.6	15.0E	1233.6	30.0E	1273.8	20.0E	1300.0
205.0	8.0E	192.0	15.0E	379.6	30.0E	586.7	15.0E	679.5	30.0E	783.0
	15.0E	1247.5	3.0E	1300.0						
210.0	8.0E	191.8	15.0E	417.4	30.0E	573.5	15.0E	728.8	8.0E	939.9
	15.0E	1108.1	8.0E	1160.2	3.0E	1300.0				
215.0	8.0E	188.3	15.0E	438.0	30.0E	496.7	15.0E	735.9	8.0E	1107.8
	3.0E	1281.9	1.5E	1300.0						
220.0	8.0E	181.6	15.0E	447.9	30.0E	494.9	15.0E	748.9	8.0E	1066.2
	3.0E	1210.0	1.5E	1300.0						
225.0	8.0E	170.3	15.0E	372.7	30.0E	531.4	15.0E	739.3	8.0E	1081.0
	3.0E	1188.7	1.5E	1300.0						
230.0	8.0E	156.8	15.0E	347.4	30.0E	660.7	8.0E	1251.9	1.5E	1300.0
235.0	8.0E	143.5	15.0E	254.0	8.0E	281.5	15.0E	342.4	30.0E	499.4
	15.0E	525.8	30.0E	764.5	15.0E	925.4	8.0E	1265.9	1.5E	1300.0
240.0	8.0E	130.2	15.0E	226.8	8.0E	304.5	15.0E	361.1	30.0E	460.7
	15.0E	568.5	30.0E	757.7	15.0E	951.4	8.0E	1245.7	4.0E	1300.0
245.0	8.0E	113.3	15.0E	213.4	8.0E	314.4	15.0E	355.8	30.0E	397.1
	15.0E	596.0	30.0E	698.0	15.0E	989.3	8.0E	1277.9	4.0E	1300.0
250.0	8.0E	92.2	15.0E	203.0	8.0E	296.6	30.0E	419.5	15.0E	622.5
	30.0E	805.7	15.0E	1053.8	8.0E	1075.5	4.0E	1300.0		
255.0	8.0E	79.4	15.0E	180.1	30.0E	211.1	8.0E	276.5	30.0E	432.8
	15.0E	646.6	30.0E	829.3	15.0E	1010.3	8.0E	1112.2	4.0E	1120.8
	15.0E	1139.9	4.0E	1300.0						
260.0	8.0E	73.6	15.0E	155.9	30.0E	256.5	8.0E	262.8	30.0E	450.4
	15.0E	554.7	30.0E	770.2	15.0E	993.9	8.0E	1052.1	15.0E	1273.3
	8.0E	1300.0								
265.0	8.0E	70.8	15.0E	141.4	30.0E	476.4	15.0E	540.4	30.0E	730.5
	15.0E	1026.0	2.0E	1074.6	15.0E	1244.0	8.0E	1300.0		
270.0	8.0E	68.8	15.0E	131.6	30.0E	521.8	15.0E	527.9	30.0E	701.7
	15.0E	989.6	2.0E	1066.7	4.0E	1174.2	15.0E	1300.0		
275.0	8.0E	67.3	15.0E	128.7	30.0E	653.9	15.0E	950.5	2.0E	1016.9
	4.0E	1073.8	2.0E	1135.2	4.0E	1300.0				
280.0	8.0E	66.2	15.0E	132.7	30.0E	586.8	15.0E	983.5	8.0E	1028.6
	4.0E	1087.5	2.0E	1219.3	4.0E	1300.0				
285.0	8.0E	65.7	15.0E	138.4	30.0E	586.3	15.0E	1019.8	8.0E	1092.9
	2.0E	1199.7	8.0E	1269.1	15.0E	1300.0				
290.0	8.0E	63.5	15.0E	145.7	30.0E	621.6	15.0E	1071.2	8.0E	1109.6
	2.0E	1235.2	8.0E	1300.0						
295.0	8.0E	61.9	15.0E	153.4	30.0E	646.8	15.0E	925.0	8.0E	1126.2
	2.0E	1245.9	8.0E	1261.1	15.0E	1300.0				
300.0	8.0E	59.8	15.0E	162.2	30.0E	674.4	15.0E	890.6	8.0E	1110.4
	15.0E	1174.3	2.0E	1212.3	15.0E	1300.0				
305.0	8.0E	58.0	15.0E	172.4	30.0E	710.2	15.0E	839.6	8.0E	1161.5
	15.0E	1300.0								

310.0	8.0E	55.7	15.0E	184.7	30.0E	405.3	15.0E	510.8	30.0E	750.9
	4.0E	955.4	8.0E	1122.6	15.0E	1300.0				
315.0	8.0E	53.0	15.0E	200.6	30.0E	388.2	15.0E	543.4	30.0E	739.8
	4.0E	988.1	8.0E	1038.6	15.0E	1082.7	8.0E	1300.0		
320.0	6.0M	100.0	8.0M	140.0	15.0E	221.3	30.0E	378.2	15.0E	588.3
	30.0E	720.8	4.0E	922.6	8.0E	1060.4	15.0E	1300.0		
325.0	6.0M	100.0	8.0M	140.0	15.0E	247.9	30.0E	371.5	15.0E	498.2
	30.0E	571.1	15.0E	655.0	30.0E	657.3	4.0E	747.1	8.0E	881.2
	15.0E	1102.6	8.0E	1300.0						
330.0	6.0M	100.0	8.0M	140.0	15.0E	275.4	30.0E	370.9	15.0E	473.4
	30.0E	570.1	15.0E	706.9	8.0E	753.3	15.0E	830.5	30.0E	876.7
	15.0E	953.9	30.0E	1028.6	15.0E	1103.9	8.0E	1300.0		
335.0	6.0M	100.0	8.0M	140.0	15.0E	303.8	30.0E	387.3	15.0E	470.9
	30.0E	531.5	15.0E	727.9	30.0E	1300.0				
340.0	6.0M	100.0	8.0M	140.0	15.0E	337.4	30.0E	443.8	15.0E	693.6
	30.0E	836.0	15.0E	961.5	30.0E	1300.0				
345.0	5.0M	50.0	7.0M	145.0	15.0E	378.1	30.0E	480.1	15.0E	1086.7
	30.0E	1300.0								
350.0	5.0M	50.0	7.0M	145.0	15.0E	709.0	30.0E	797.8	15.0E	985.5
	30.0E	1049.7	4.0E	1101.7	30.0E	1184.7	15.0E	1300.0		
355.0	5.0M	50.0	7.0M	145.0	15.0E	653.5	30.0E	805.7	8.0E	885.7
	4.0E	1206.5	8.0E	1300.0						

KCFO

Latitude: 36-11-46 N

Longitude: 096-02-22 W

Conductivity Database Used: M3 (USA)

	Ground Conductivity Data: Region conductivity in mS/m followed by distance in km Azimuth to the end of region. E - map data; M - measurement data.									
Azimuth										
0.0	8.0M	12.6	10.0M	28.4	7.0M	43.0	10.0M	84.8	30.0E	405.5
	15.0E	1051.2	4.0E	1277.9	8.0E	1300.0				
5.0	8.0M	12.6	10.0M	28.4	7.0M	43.0	10.0M	84.8	30.0E	543.6
	15.0E	760.1	30.0E	897.2	8.0E	970.3	4.0E	1279.0	8.0E	1300.0
10.0	8.0M	12.6	10.0M	28.4	7.0M	43.0	10.0M	84.8	30.0E	243.0
	15.0E	439.4	30.0E	537.1	15.0E	746.3	30.0E	876.3	15.0E	885.4
	8.0E	924.5	15.0E	938.9	4.0E	1148.5	8.0E	1300.0		
15.0	8.0M	24.3	10.0M	75.2	30.0E	173.7	15.0E	956.1	4.0E	1145.0
	8.0E	1300.0								
20.0	8.0M	24.3	10.0M	75.2	30.0E	143.0	15.0E	819.0	8.0E	992.2
	4.0E	1241.7	8.0E	1300.0						
25.0	8.0M	24.3	10.0M	75.2	30.0E	127.4	15.0E	756.9	8.0E	851.6
	4.0E	1300.0								
30.0	8.0M	24.3	10.0M	75.2	30.0E	115.6	15.0E	672.6	8.0E	823.0
	4.0E	1300.0								
35.0	8.0M	12.4	7.0M	37.9	15.0E	657.7	8.0E	1066.1	15.0E	1145.0
	8.0E	1300.0								
40.0	8.0M	12.4	7.0M	37.9	15.0E	660.8	8.0E	1005.7	15.0E	1034.0
	8.0E	1188.1	2.0E	1295.0	8.0E	1300.0				
45.0	8.0M	12.4	7.0M	37.9	15.0E	493.2	8.0E	1128.9	2.0E	1174.7
	8.0E	1300.0								
50.0	8.0M	12.4	7.0M	37.9	15.0E	235.7	8.0E	649.6	15.0E	883.9
	8.0E	1014.9	2.0E	1177.0	8.0E	1300.0				
55.0	8.0M	12.4	7.0M	37.9	15.0E	145.5	8.0E	560.5	15.0E	788.5
	8.0E	1295.8	20.0E	1300.0						
60.0	15.0E	131.8	8.0E	525.7	15.0E	715.8	8.0E	946.0	15.0E	1127.6
	8.0E	1196.3	15.0E	1273.3	8.0E	1300.0				
65.0	15.0E	103.4	8.0E	539.8	15.0E	620.3	8.0E	1300.0		
70.0	7.0M	27.4	15.0E	88.5	8.0E	1150.0	2.0E	1300.0		
75.0	7.0M	27.4	15.0E	80.4	8.0E	851.4	4.0E	1036.2	8.0E	1114.7
	2.0E	1300.0								
80.0	7.0M	27.4	15.0E	76.5	8.0E	624.1	4.0E	667.8	8.0E	799.0
	4.0E	1016.4	2.0E	1300.0						
85.0	7.0M	27.4	15.0E	73.5	8.0E	608.1	4.0E	989.2	2.0E	1152.9
	4.0E	1236.1	2.0E	1300.0						
90.0	15.0E	72.1	8.0E	602.8	4.0E	955.9	2.0E	1300.0		
95.0	15.0E	71.6	8.0E	612.1	4.0E	891.6	2.0E	980.3	4.0E	1056.4
	2.0E	1210.2	4.0E	1300.0						
100.0	15.0E	71.7	8.0E	640.3	4.0E	849.7	2.0E	949.0	4.0E	999.3
	2.0E	1097.8	1.0E	1141.2	4.0E	1294.9	2.0E	1300.0		
105.0	15.0E	72.4	8.0E	667.4	4.0E	861.3	2.0E	906.8	4.0E	959.9
	2.0E	1103.2	4.0E	1300.0						
110.0	15.0E	73.7	8.0E	278.2	4.0E	412.3	8.0E	672.1	2.0E	868.2
	4.0E	1300.0								
115.0	15.0E	76.9	8.0E	191.4	15.0E	260.4	4.0E	461.4	8.0E	674.7
	2.0E	909.0	4.0E	933.9	8.0E	1046.9	4.0E	1250.4	2.0E	1300.0
120.0	15.0E	81.0	8.0E	176.4	15.0E	259.6	4.0E	486.4	8.0E	692.1
	2.0E	926.8	8.0E	1035.7	1.0E	1278.0	5000.0E	1300.0		
125.0	15.0E	88.5	8.0E	162.7	15.0E	259.6	4.0E	497.8	8.0E	700.1
	4.0E	809.7	2.0E	948.3	1.0E	1038.8	5000.0E	1045.8	1.0E	1047.1
	5000.0E	1054.6	1.0E	1059.5	5000.0E	1300.0				
130.0	15.0E	102.3	8.0E	139.6	15.0E	261.2	4.0E	512.4	8.0E	710.2
	4.0E	833.6	2.0E	960.4	5000.0E	1300.0				

135.0	15.0E	264.1	4.0E	530.3	8.0E	745.2	4.0E	868.5	2.0E	903.7
	5000.0E	1300.0								
140.0	15.0E	271.4	4.0E	566.9	8.0E	770.2	4.0E	821.8	15.0E	846.3
	5000.0E	869.9	15.0E	983.2	5000.0E	1012.7	15.0E	1017.4	5000.0E	1300.0
145.0	15.0E	283.5	4.0E	422.2	15.0E	511.8	4.0E	641.5	8.0E	815.9
	15.0E	920.6	5000.0E	1300.0						
150.0	15.0E	267.7	4.0E	380.9	8.0E	420.2	15.0E	736.3	8.0E	773.5
	15.0E	808.5	5000.0E	813.3	15.0E	821.6	5000.0E	1300.0		
155.0	15.0E	252.5	4.0E	356.6	8.0E	731.2	30.0E	805.9	5000.0E	1300.0
160.0	15.0E	247.6	4.0E	342.8	8.0E	725.0	30.0E	744.5	5000.0E	747.1
	30.0E	757.2	5000.0E	1300.0						
165.0	15.0E	257.1	30.0E	285.7	4.0E	336.7	8.0E	503.4	4.0E	551.1
	8.0E	696.2	30.0E	749.7	5000.0E	1300.0				
170.0	15.0E	262.0	30.0E	320.7	4.0E	329.9	8.0E	490.1	4.0E	561.2
	8.0E	679.3	30.0E	724.5	5000.0E	741.3	30.0E	750.6	5000.0E	759.1
	30.0E	763.6	5000.0E	1300.0						
175.0	15.0E	269.2	30.0E	367.9	8.0E	478.5	4.0E	675.1	15.0E	718.3
	30.0E	811.4	5000.0E	1300.0						
180.0	15.0E	276.5	30.0E	433.3	8.0E	468.7	4.0E	671.0	15.0E	772.9
	30.0E	840.0	5000.0E	1300.0						
185.0	15.0E	285.9	30.0E	458.4	15.0E	532.7	4.0E	600.2	15.0E	750.6
	30.0E	868.2	5000.0E	872.3	30.0E	892.7	5000.0E	1300.0		
190.0	15.0E	37.3	8.0E	47.6	15.0E	286.5	30.0E	445.8	15.0E	532.8
	30.0E	628.5	15.0E	862.7	30.0E	1143.9	20.0E	1227.0	5.0E	1300.0
195.0	15.0E	16.4	8.0E	69.5	15.0E	282.4	30.0E	340.9	15.0E	580.9
	8.0E	728.6	15.0E	1126.2	20.0E	1143.5	3.0E	1300.0		
200.0	15.0E	10.5	8.0E	82.7	15.0E	203.9	30.0E	265.4	15.0E	280.4
	30.0E	320.5	15.0E	573.3	8.0E	787.6	15.0E	1012.3	3.0E	1228.6
	1.5E	1300.0								
205.0	15.0E	7.8	8.0E	90.4	15.0E	168.5	30.0E	332.8	15.0E	571.8
	8.0E	970.1	3.0E	1167.4	1.5E	1300.0				
210.0	15.0E	6.2	8.0E	95.4	15.0E	153.4	30.0E	346.2	15.0E	572.9
	8.0E	901.7	3.0E	1080.5	1.5E	1259.5	4.0E	1300.0		
215.0	15.0E	5.2	8.0E	98.6	15.0E	147.4	30.0E	370.1	15.0E	556.5
	8.0E	877.8	3.0E	1017.9	1.5E	1238.7	4.0E	1300.0		
220.0	15.0E	4.5	8.0E	101.9	15.0E	147.9	30.0E	463.8	8.0E	489.6
	15.0E	539.9	8.0E	906.9	3.0E	1000.8	1.5E	1214.8	4.0E	1300.0
225.0	15.0E	4.0	8.0E	103.5	15.0E	152.6	30.0E	301.8	15.0E	317.2
	30.0E	498.1	8.0E	1058.9	1.5E	1168.2	4.0E	1300.0		
230.0	15.0E	3.6	8.0E	105.2	15.0E	159.5	30.0E	281.2	15.0E	345.9
	30.0E	568.5	15.0E	724.5	8.0E	1071.0	1.5E	1142.6	4.0E	1300.0
235.0	15.0E	3.4	8.0E	106.7	15.0E	158.7	30.0E	169.6	15.0E	365.1
	30.0E	597.5	15.0E	739.9	8.0E	1035.3	1.5E	1072.8	4.0E	1300.0
240.0	15.0E	3.1	8.0E	109.0	15.0E	151.4	30.0E	185.6	15.0E	377.6
	30.0E	486.6	15.0E	763.5	8.0E	1050.5	4.0E	1300.0		
245.0	15.0E	3.0	8.0E	109.1	30.0E	112.9	15.0E	146.2	30.0E	203.9
	15.0E	400.0	30.0E	519.1	15.0E	799.5	8.0E	1073.8	4.0E	1300.0
250.0	15.0E	2.8	8.0E	99.5	30.0E	212.2	15.0E	416.4	30.0E	604.8
	15.0E	855.2	8.0E	856.2	4.0E	1249.4	8.0E	1300.0		
255.0	15.0E	2.7	8.0E	92.1	30.0E	219.3	15.0E	433.6	30.0E	636.1
	15.0E	810.2	8.0E	903.8	4.0E	1163.9	8.0E	1300.0		
260.0	15.0E	2.6	8.0E	86.4	30.0E	228.8	15.0E	449.6	30.0E	596.7
	15.0E	784.9	8.0E	869.5	15.0E	1081.2	8.0E	1156.0	4.0E	1269.6
	8.0E	1300.0								
265.0	15.0E	2.6	8.0E	82.7	30.0E	241.1	15.0E	360.9	30.0E	562.2
	15.0E	1055.0	8.0E	1195.0	15.0E	1255.6	4.0E	1288.6	8.0E	1300.0
270.0	15.0E	2.5	8.0E	80.0	30.0E	256.9	15.0E	349.2	30.0E	540.0
	15.0E	823.0	2.0E	880.8	4.0E	910.5	15.0E	1064.2	8.0E	1219.1
	15.0E	1257.2	8.0E	1284.7	15.0E	1300.0				
275.0	15.0E	2.5	8.0E	78.1	30.0E	279.6	15.0E	351.3	30.0E	525.7
	15.0E	799.4	2.0E	885.7	4.0E	1024.8	15.0E	1158.1	8.0E	1300.0
280.0	15.0E	2.5	8.0E	76.8	30.0E	313.9	15.0E	358.4	30.0E	509.8
	15.0E	770.1	2.0E	839.5	4.0E	899.2	2.0E	968.5	4.0E	1153.0
	15.0E	1300.0								

285.0	15.0E	2.6	8.0E	76.1	30.0E	483.3	15.0E	806.2	8.0E	849.3
	4.0E	924.9	2.0E	1053.1	4.0E	1217.7	15.0E	1300.0		
290.0	15.0E	2.6	8.0E	76.1	30.0E	451.3	15.0E	853.3	8.0E	924.8
	2.0E	1038.2	8.0E	1108.9	15.0E	1215.2	8.0E	1228.8	4.0E	1300.0
295.0	15.0E	2.7	8.0E	77.3	30.0E	425.6	15.0E	890.4	8.0E	955.1
	2.0E	1094.4	8.0E	1234.4	15.0E	1300.0				
300.0	15.0E	2.8	8.0E	67.0	30.0E	439.7	15.0E	901.5	8.0E	991.9
	2.0E	1092.7	8.0E	1140.2	15.0E	1248.5	8.0E	1300.0		
305.0	15.0E	2.9	8.0E	55.3	30.0E	488.7	15.0E	796.9	8.0E	998.7
	15.0E	1008.2	2.0E	1117.5	15.0E	1300.0				
310.0	15.0E	3.0	8.0E	47.3	30.0E	528.1	15.0E	783.3	8.0E	1023.1
	15.0E	1300.0								
315.0	15.0E	3.2	8.0E	40.4	30.0E	571.3	15.0E	763.2	8.0E	1037.9
	15.0E	1228.0	8.0E	1300.0						
320.0	15.0E	3.5	8.0E	35.5	30.0E	627.3	15.0E	748.7	8.0E	753.2
	4.0E	873.1	8.0E	995.6	15.0E	1035.0	8.0E	1060.0	15.0E	1264.4
	8.0E	1300.0								
325.0	15.0E	3.8	8.0E	31.9	30.0E	685.8	4.0E	932.2	8.0E	981.8
	15.0E	1029.5	8.0E	1204.6	15.0E	1246.6	8.0E	1300.0		
330.0	15.0E	4.3	8.0E	29.1	30.0E	689.6	4.0E	899.6	8.0E	1019.2
	15.0E	1168.8	8.0E	1300.0						
335.0	10.0M	57.1	8.0M	74.7	30.0E	369.6	15.0E	489.4	30.0E	689.7
	4.0E	802.6	8.0E	900.7	15.0E	1071.3	8.0E	1300.0		
340.0	10.0M	57.1	8.0M	74.7	30.0E	361.7	15.0E	583.5	30.0E	659.8
	4.0E	728.2	8.0E	801.9	15.0E	968.1	30.0E	1020.3	15.0E	1105.4
	8.0E	1286.5	30.0E	1300.0						
345.0	10.0M	57.1	8.0M	74.7	30.0E	364.4	15.0E	508.0	30.0E	567.6
	15.0E	661.6	4.0E	685.5	15.0E	703.9	8.0E	745.6	15.0E	787.5
	30.0E	1300.0								
350.0	10.0M	57.1	8.0M	74.7	30.0E	372.8	15.0E	489.0	30.0E	583.8
	15.0E	749.0	30.0E	945.6	15.0E	969.5	30.0E	1300.0		
355.0	8.0M	12.6	10.0M	28.4	7.0M	43.0	10.0M	84.8	30.0E	384.6
	15.0E	498.2	30.0E	563.8	15.0E	733.5	30.0E	831.0	15.0E	1123.3
	30.0E	1300.0								