

APPLICATION FOR CONSTRUCTION PERMIT

PROPOSED NEW FM TRANSLATOR STATION
WACO, TEXAS
FACILITY ID: 156281
106.3 MHz / 0.099 kW ERP / ND

WILDCATTER WIRELESS, LLC

AUGUST, 2013

APPLICATION FOR CONSTRUCTION PERMIT

The following engineering statement and attached exhibits have been prepared for **Wildcatter Wireless, LLC** ("Wildcatter"), applicant for a new FM translator station to serve Waco, Texas, and are in support of their application for construction permit.¹

This application is being filed as the long-form application for the original short-form engineering proposal submitted by Wildcatter in 2003 during the Commission's Translator Auction 83 window. The original short-form engineering was assigned FCC File No. BNPFT-20030317HJT. The short-form engineering was eventually assigned to MX Group 471 with two other applications. During the settlement window, Wildcatter submitted an amendment to their short-form proposal, which extricated its application from the MX Group. The technical parameters specified under this long-form application are identical to those submitted in the settlement window.

The proposed facility would operate on channel 292 with an effective radiated power of 99 Watts at a center of radiation of 221.5 meters AMSL.² A non-directional antenna is proposed for use by the facility. Since no change to the original tech-box location is proposed, the original 60 dBu service contour and the contour described under this application would have common overlap. The changes proposed to the original tech-box facility are therefore minor in nature.

¹ The Facility ID for the proposed translator facility is 156281.

² The average terrain for the proposed facility is determined by the 120 degree true radial on which the average elevation is 116.9 meters AMSL. Terrain was sampled from the FCC 30-second terrain database.

JEREMY RUCK & ASSOCIATES, INC.

P.O. Box 415
221 S. 1st Avenue
Canton, IL 61520

Tel: 309.647.1200
Fax: 855.332.9537
jeremyruck.com

The primary station for the proposed translator would be KSUR(FM) at Mart, Texas.³ Exhibit E-1 depicts the predicted 60 dBu service contour of KSUR(FM) along with the 60 dBu service contour for the proposed translator.

The proposed facility would not impact LPFM licensing opportunities within any of the Appendix A markets. The closest three Appendix A markets to the proposed facility are the Dallas-Fort Worth, Tyler-Longview, and Killeen-Temple markets. Exhibit E-2 illustrates the proposed site location along with the grid and grid buffer for each of these three markets. As this exhibit demonstrates, the proposed facility would reside outside the buffer of each.

The proposed facility would be in compliance with the provisions of Section 74.1204 of the Commission's Rules. Exhibit E-3 is a tabular allocation study for the proposed facility. As this study demonstrates, the proposed facility would comply with all of the contour protection requirements to other proposed and authorized facilities of relevance with the exception of the BNPFT-20130820ABE at Waco, Texas application and KIXT(FM) at Hewitt, Texas.⁴ The situation to these two facilities will be studied under Section 74.1204(d). Exhibit E-4 illustrates this tabular allocation study in a graphical contour based format.⁵

Although normally prohibited contour overlap between the proposed facility and the BBN application and between the proposed facility and KIXT(FM) would occur, no populated areas

³ The Facility ID for KSUR(FM) at Mart, TX is 83542.

⁴ The Facility ID for KIXT(FM) at Hewitt, Texas is 170995. App ID 1569337 (BNPFT-20130820ABE) is the long-form application related to App ID 1564124, which is the short-form amendment to the original Bible Broadcasting Network, Inc. ("BBN") application. The two applications are in close proximity to each other; however, the short-form amendment is being ignored as it has clearly been superseded by the long-form application.

⁵ Due to the proximity to the proposed translator, the BBN application has not been illustrated in Exhibit E-4.

JEREMY RUCK & ASSOCIATES, INC.

P.O. Box 415
221 S. 1st Avenue
Canton, IL 61520

Tel: 309.647.1200
Fax: 855.332.9537
jeremyruck.com

would be affected by the predicted interference regions. The situation between the two translator facilities will be examined first. Subsequent to that analysis, the situation with KIXT(FM) will be discussed.

Exhibit E-5 illustrates the vicinity of the Wildcatter and BBN applications. As this map demonstrates, the 79.6 dBu contour from the Wildcatter application intersects the BBN site, and the 85.3 dBu contour from BBN intersects the Wildcatter site. As a result, for Wildcatter to interfere with BBN, the field strength in the vicinity of the site must equal or exceed 125.3 dBu. Conversely, for BBN to interfere with Wildcatter in the vicinity of their site, the BBN field strength must equal or exceed 119.6 dBu.⁶

The power density for the facilities at their respective field strengths to cause interference is determined by the following equation:

$$S = \frac{E^2}{Z_0}$$

In this equation, S represents the calculated power density in Watts per square meter, E is the electric field intensity, and Z_0 is the characteristic impedance of free space of 377 ohms.

The power density is also given by:

$$S = \frac{P}{4\pi R^2}$$

⁶ The specified field strength interference values are predicated on 40 dB ratio for third adjacent facilities.

JEREMY RUCK & ASSOCIATES, INC.

P.O. Box 415
221 S. 1st Avenue
Canton, IL 61520

Tel: 309.647.1200
Fax: 855.332.9537
jeremyruck.com

Where S is the same units, P is the power in Watts, and R is the distance from the antenna. Rearranging the terms in the equation, it can be solved for the distance to the desired power density as follows:

$$R^2 = \frac{P}{4\pi S}$$


The results of these calculations for the proposed facility for depression angles of 0 degrees to 90 degrees are tabulated in Exhibit E-6. In addition to the tabular data in Exhibit E-6, several graphs are included, which graphically illustrate the interference situation for a given azimuth slice. As indicated on the form pages, a Shively 6812B-2 antenna is proposed for use by the facility. The relative field value listed at the various depression angles is based on the published data for this antenna, and was obtained from the Shively web page.

The registered structure on which the antenna would be mounted is a tower mounted to a building. The building itself is 92.4 meters in height, with the remainder of the structure overall height comprising the tower on top of the building. At a center of radiation value of 95 meters AGL, the proposed antenna would be located 3 meters above the roof line of the building. The closest approach to ground level would be at an elevation of 86.0 meters AGL at a distance of approximately 160 feet, or 4.8 meters. The satellite image below illustrates the tower location and a radius of 6 meters. As indicated, this 6 meter radius is confined to the rooftop of the building.

JEREMY RUCK & ASSOCIATES, INC.

P.O. Box 415
221 S. 1st Avenue
Canton, IL 61520

Tel: 309.647.1200
Fax: 855.332.9537
jeremyruck.com

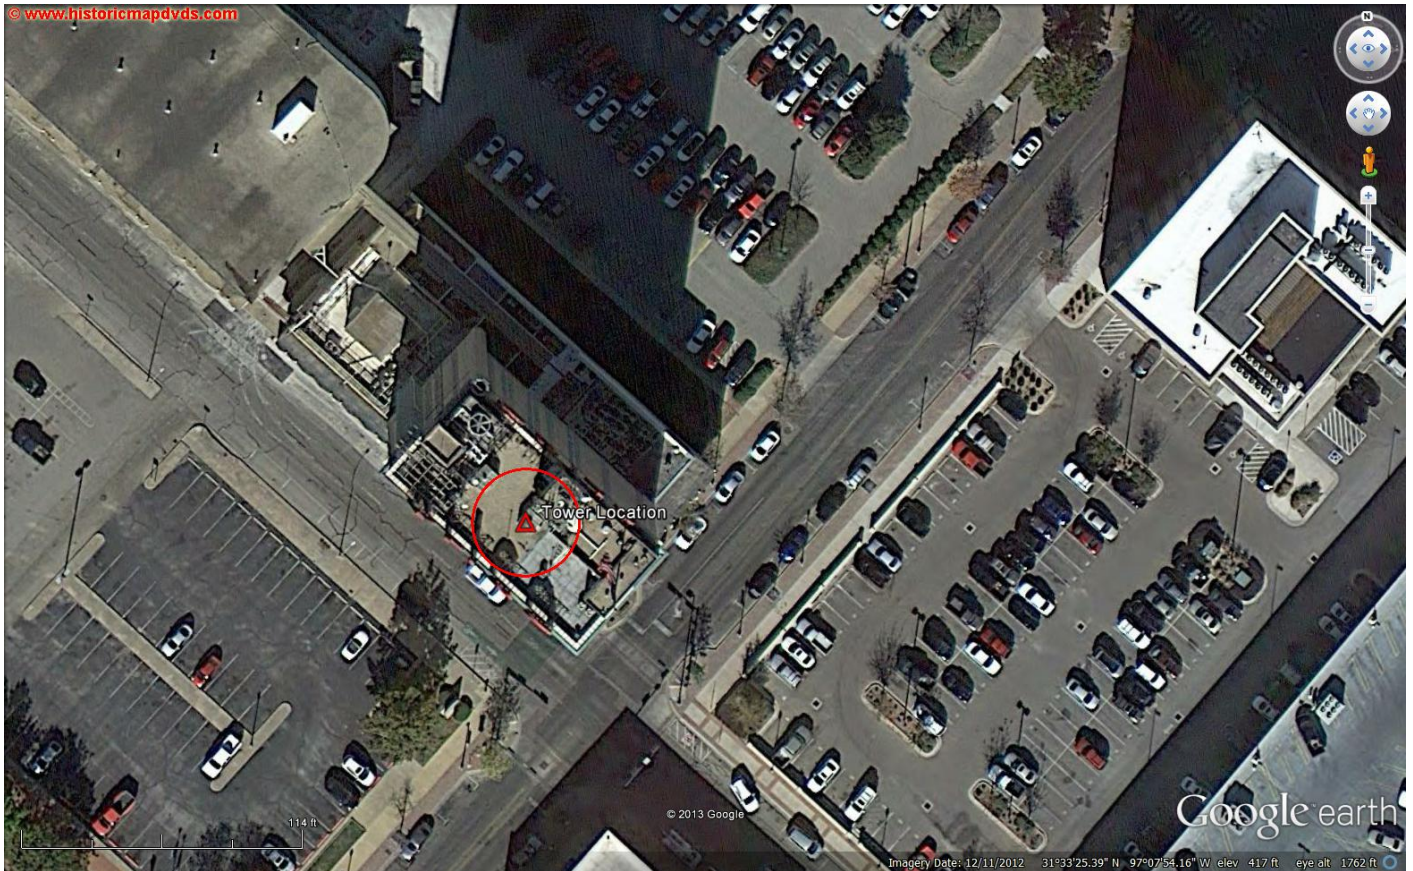

However, based on simple trigonometry, the center of radiation at 3 meters above the rooftop and the distance to the edge of the building of 6 meters, results in a depression angle of at less than 26.5 degrees to leave the rooftop. At depression angles of greater than 26.5 degrees the interference zone would be confined to the rooftop and affect zero population as the roof is of ferrous and concrete material, and will attenuate the signal sufficiently that no interference will result. For the depression angles of less than 26.5 degrees the interference zone will overshoot the rooftop and exist in free space adjacent to the building. It can be reasonably assumed that no persons will be located in, traversing through, or lounging in the vicinity of this region. As a result, any potential interference to the BBN translator from Wildcatter would affect zero population.

For the converse situation the calculations are performed identically. Exhibit E-7 provides the tabulation and graphs of the interference zone in the vicinity of the BBN facility to the Wildcatter

JEREMY RUCK & ASSOCIATES, INC.

P.O. Box 415
221 S. 1st Avenue
Canton, IL 61520

Tel: 309.647.1200
Fax: 855.332.9537
jeremyruck.com

8.29.2013

facility. As this exhibit demonstrates the interference region would be confined to elevations of 86.4 meters or greater above ground. The street level image below demonstrates that no structures of that height are located in the vicinity of the tower, thus zero population would be affected by any potential interference.



As a result of this bi-directional demonstration, it is respectfully submitted that there is no mutual exclusivity between the two proposed facilities. As a result, each should be considered a singleton.

The remaining case to be considered is that between the proposed facility and KIXT(FM). Exhibit E-8 demonstrates that the 68.2 dBu service contour takes in the proposed Wildcatter site. Since KIXT(FM) is second adjacent to the proposed translator, the 40 dB ratio is applied again

JEREMY RUCK & ASSOCIATES, INC.


P.O. Box 415
221 S. 1st Avenue
Canton, IL 61520

Tel: 309.647.1200
Fax: 855.332.9537
jeremyruck.com

8.29.2013

resulting in a necessary field strength of 108.2 dBu from the translator to cause interference to that facility. Exhibit E-9 provides the calculation spreadsheet for this situation.

As this set of calculations demonstrates, the closest approach to ground level occurs at a depression angle of approximately 62 degrees. As was previously discussed, the resulting interference region would be limited to the rooftop. At depression angles of less than 26.5 degrees, the next region of closest approach to ground occurs at 17 to 18 degrees. The horizontal distance for this area of closest approach to ground is 130 meters. Although the elevation of the bottom edge of this interference zone increases with approach to the translator site, the assumption will be made that the interference zone occurs at all points within a 130 meter radius at or above 52.7 meters, or 173 feet above ground level.

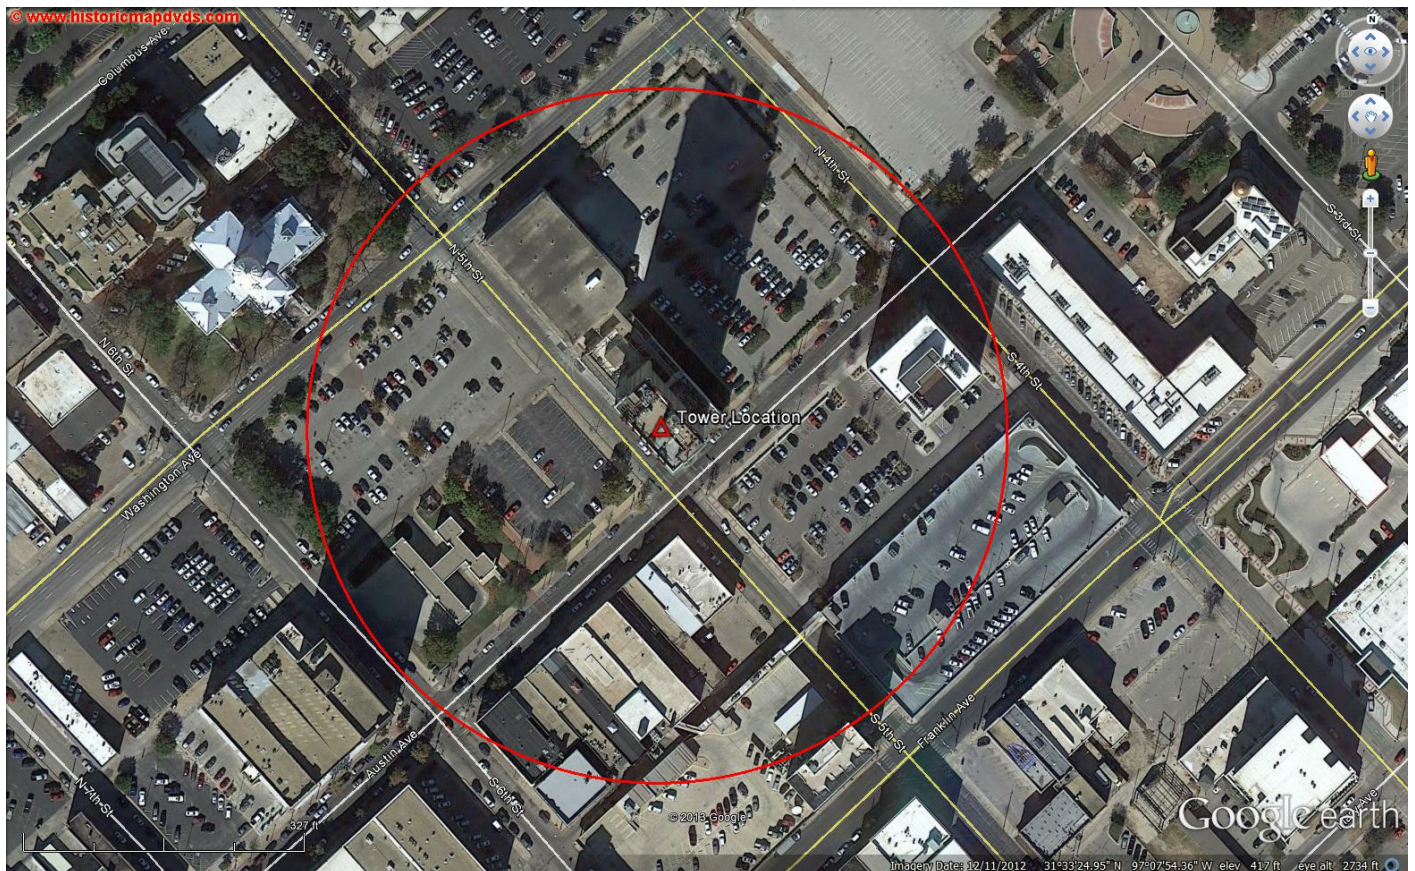

JEREMY RUCK & ASSOCIATES, INC.

P.O. Box 415
221 S. 1st Avenue
Canton, IL 61520

Tel: 309.647.1200
Fax: 855.332.9537
jeremyruck.com

8.29.2013

The preceding satellite image depicts two building that may potentially fall in this interference zone. The first is the building towards the east from the tower location.⁷ The second is the building to the south-southeast near the intersection of Franklin Avenue and South 5th Street. The building to the east is depicted in the next image.



This building is a 12 story structure with standard 12 foot floor heights, plus the oversized height of the top floor of 18 feet. This brings the total building height to 150 feet above ground level. However, as previously stated, the interference zone lies at or above 173 feet above ground level, thus, this building is entirely below the interference zone, thus no population would be affected. The second building under consideration is depicted next.

⁷ Note that north is oriented towards the top of the page, and the streets are not oriented due north and south.

JEREMY RUCK & ASSOCIATES, INC.

P.O. Box 415
221 S. 1st Avenue
Canton, IL 61520

Tel: 309.647.1200
Fax: 855.332.9537
jeremyruck.com

8.29.2013



The building under consideration is the one in the center of the photograph. It is of a similar height as the previously discussed building. As such, the interference zone once again would be at an elevation above the height of this structure. Therefore, no persons in this structure would be predicted to be subject to interference. All other structures in the vicinity of the site are much lower in elevation, and would be unaffected.

The proposed facility would not result in a significant environmental impact, and is exempt from environmental processing. The addition of the translator antenna to the structure would not increase the already existing environmental impact from the existing tower. In addition, the translator would not constitute an RF exposure hazard to persons on the ground in the vicinity of the structure.

JEREMY RUCK & ASSOCIATES, INC.

P.O. Box 415
221 S. 1st Avenue
Canton, IL 61520


Tel: 309.647.1200
Fax: 855.332.9537
jeremyruck.com

8.29.2013

10

The Commission's *FM Model* software package predicts a maximum power density at ground level of $0.100 \mu\text{W}/\text{cm}^2$ at a distance of 60 meters from the building base. At the roof, *FM Model* predicts a maximum power density of $184 \mu\text{W}/\text{cm}^2$. The rooftop is a controlled environment, and thus the higher tier limit is applicable. Wildcatter certifies that it will coordinate with all other users of the site to ensure that workers and other personnel having access to the site are not exposed to levels of radiofrequency radiation in excess of the applicable safety standards. Such coordination will include, but is not necessarily limited to, a reduction in transmitter power or cessation of operation.

The preceding statement and attached exhibits have been prepared by me, or under my direction, and are true and accurate to the best of my belief and knowledge.



Above signature is digitized copy of actual signature
License Expires November 30, 2013

Jeremy D. Ruck, PE
August 29, 2013

JEREMY RUCK & ASSOCIATES, INC.

P.O. Box 415
221 S. 1st Avenue
Canton, IL 61520

Tel: 309.647.1200
Fax: 855.332.9537
jeremyruck.com

8.29.2013

11

KSUR

BLED20070216AAX
Latitude: 31-23-02 N
Longitude: 097-16-38 W
ERP: 100.00 kW
Channel: 205
Frequency: 88.9 MHz
AMSL Height: 378.0 m
Horiz. Pattern: Directional
Vert. Pattern: No
Prop Model: None


1563061.A

BNPFT20030317HJT
Latitude: 31-33-25 N
Longitude: 097-07-54 W
ERP: 0.099 kW
Channel: 292
Frequency: 106.3 MHz
AMSL Height: 221.5 m
Horiz. Pattern: Omni
Vert. Pattern: No
Prop Model: None

Proposed 60 dBu
Service Contour

Jeremy Ruck & Associates, Inc.

KSUR(FM) 60 dBu
Service Contour

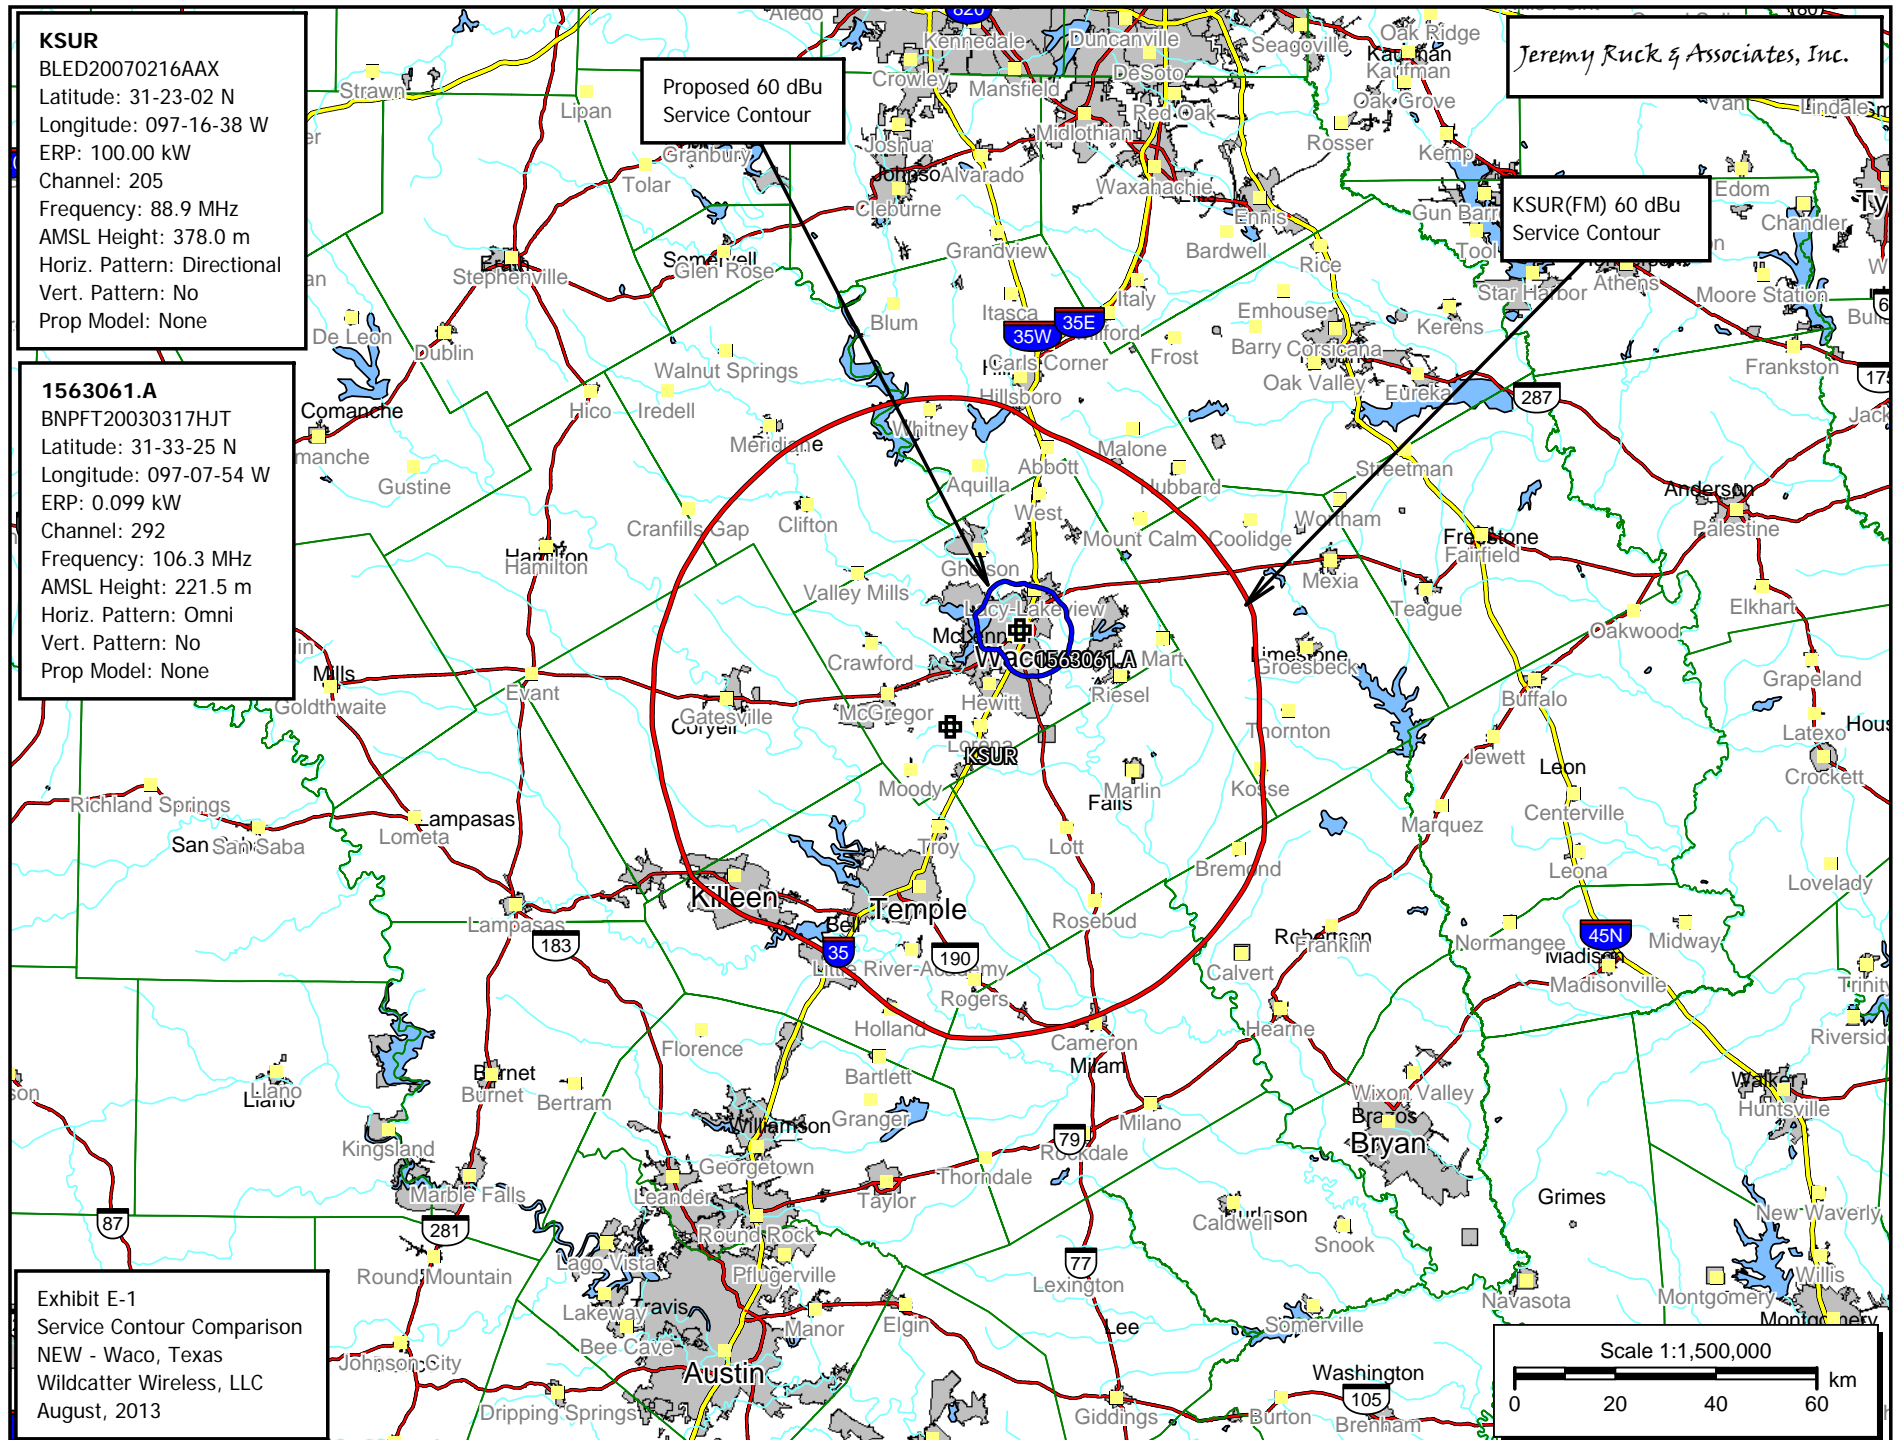**Exhibit E-1**

Service Contour Comparison
NEW - Waco, Texas
Wildcatter Wireless, LLC
August, 2013

1563061.A
BNPFT20030317HJT
Latitude: 31-33-25 N
Longitude: 097-07-54 W
ERP: 0.099 kW
Channel: 292
Frequency: 106.3 MHz
AMSL Height: 221.5 m
Elevation: 126.157 m
Horiz. Pattern: Omni
Vert. Pattern: No
Prop Model: None

Jeremy Ruck & Associates, Inc.

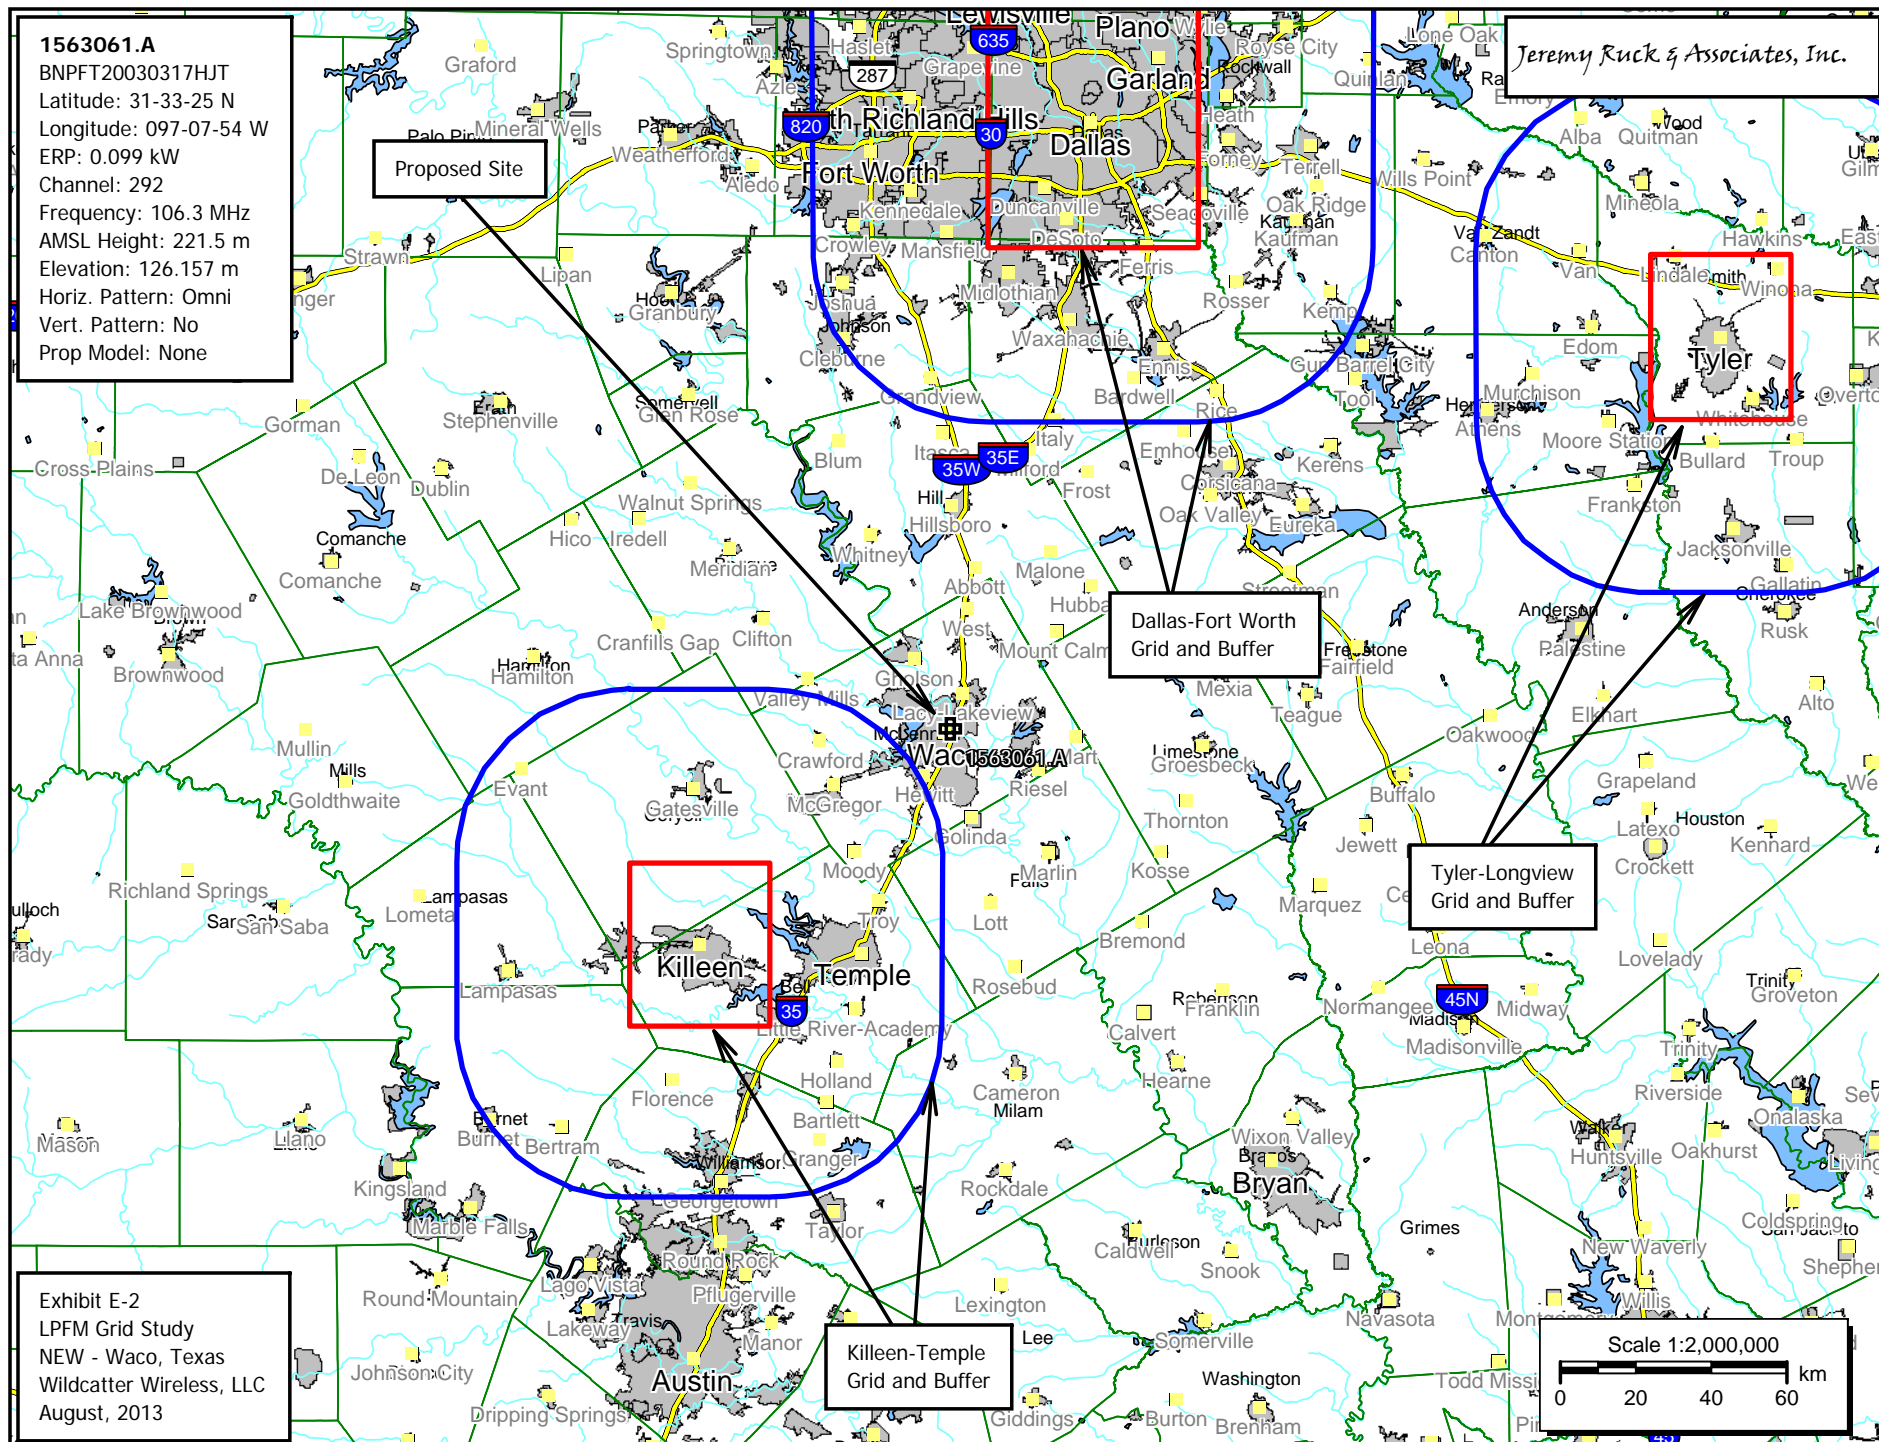


Exhibit E-2
LPFM Grid Study
NEW - Waco, Texas
Wildcatter Wireless, LLC
August, 2013

Jeremy Ruck & Associates, Inc.
Consulting Engineers - Canton, Illinois

Exhibit E-3 - Tabular Allocation Study

NEW - Waco, Texas

REFERENCE CH# 292D - 106.3 MHz, Pwr= 0.099 kW, HAAT= 0.0 M, COR= 222 M
31 33 25.0 N.
97 07 54.0 W.
Average Protected F(50-50)= 5.62 km
Omni-directional

DISPLAY DATES
DATA 08-29-13
SEARCH 08-29-13

CH CITY	CALL	TYPE ANT STATE	AZI <--	DIST FILE #	LAT LNG	PWR(kW) HAAT(M)	INT(km) COR(M)	PRO(km) LICENSEE	*IN* (Overlap in km)	*OUT*
292C3 Belton	K00C	LIC_CN TX	214.8 34.6	66.79 BLH19920811KB	31 03 46.0 97 31 54.0	11.500 149	107.4 356	41.4 Townsquare Media	-47.9*	3.2 Killeen-t
292D Waco	1563061	APP_C_ TX	0.0 0.0	0.00 BNPFT20030317HJT	31 33 25.0 97 07 54.0	0.099	30.5 222	9.2 Wildcatter Wireless, Inc.	-39.7*	-39.7*
291C Denton	KHKS	LIC_C_ TX	7.6 187.7	115.73 BLH20020320AAE	32 35 19.0 96 58 05.0	100.000 508	125.3 698	84.3 Amfm Texas Licenses	-18.9*	18.5 Lic
294C3 Hewitt	KIXT	LIC_NCX TX	203.1 23.0	24.33 BLH20100616AHJ	31 21 20.0 97 13 56.0	10.000 150	3.7 332	37.5 Prophecy Media Group, LLC	12.5	-13.8*
289D Waco	1569337	APP_C_ TX	153.8 333.8	3.16 BNPFT20130820ABE	31 31 53.0 97 07 01.0	0.250	1.1 246	14.3 Bible Broadcasting Network	-8.0*	-11.8*
289D Waco	1564124	APP_C_ TX	144.1 324.1	3.05 BNPFT20030317ADY	31 32 05.0 97 06 46.0	0.170	0.9 244	12.6 Bible Broadcasting Network	-8.2*	-10.3*
293A Hico	AL3962	VAC ____ TX	296.4 115.9	94.96 RM11393	31 56 00.0 98 02 00.0	6.000 100	43.4 447	27.5 Liberman Broadcasting Of D	42.8	54.1
293C Jacksonville	K00I	LIC_CX TX	71.4 252.4	180.65 BLH20060622ABS	32 03 40.0 95 18 50.0	100.000 451	125.3 584	84.3 Access.1 Texas License Com	45.4	82.7

Terrain database is FCC NGDC 30 Sec, R= 73.215 qualifying spacings or FCC minimum Spacings in KM, M= Margin in KM
In & Out distances between contours are shown at closest points. Reference zone= West Zone, Co to 3rd adjacent.
All separation margins (if shown) include rounding
Ant Column: (D= DA Standard, Z= DA 73.215, N= Not DA 73.215, _= Omni), Polarization (C,H,V,E), Beamtilt(Y,N,X)
***affixed to 'IN' or 'OUT' values = site inside protected contour.

1563061.A

BNPFT20030317HJT

Latitude: 31-33-25 N

Longitude: 097-07-54 W

ERP: 0.099 kW

Channel: 292

Frequency: 106.3 MHz

AMSL Height: 221.5 m

Horiz. Pattern: Omni

Vert. Pattern: No

Prop Model: None

Jeremy Ruck & Associates, Inc.

- 60 dBu F(50,50) Service Contour
- 40 dBu F(50,10) Interference Contour
- 54 dBu F(50,10) Interference Contour
- 100 dBu F(50,10) Interference Contour

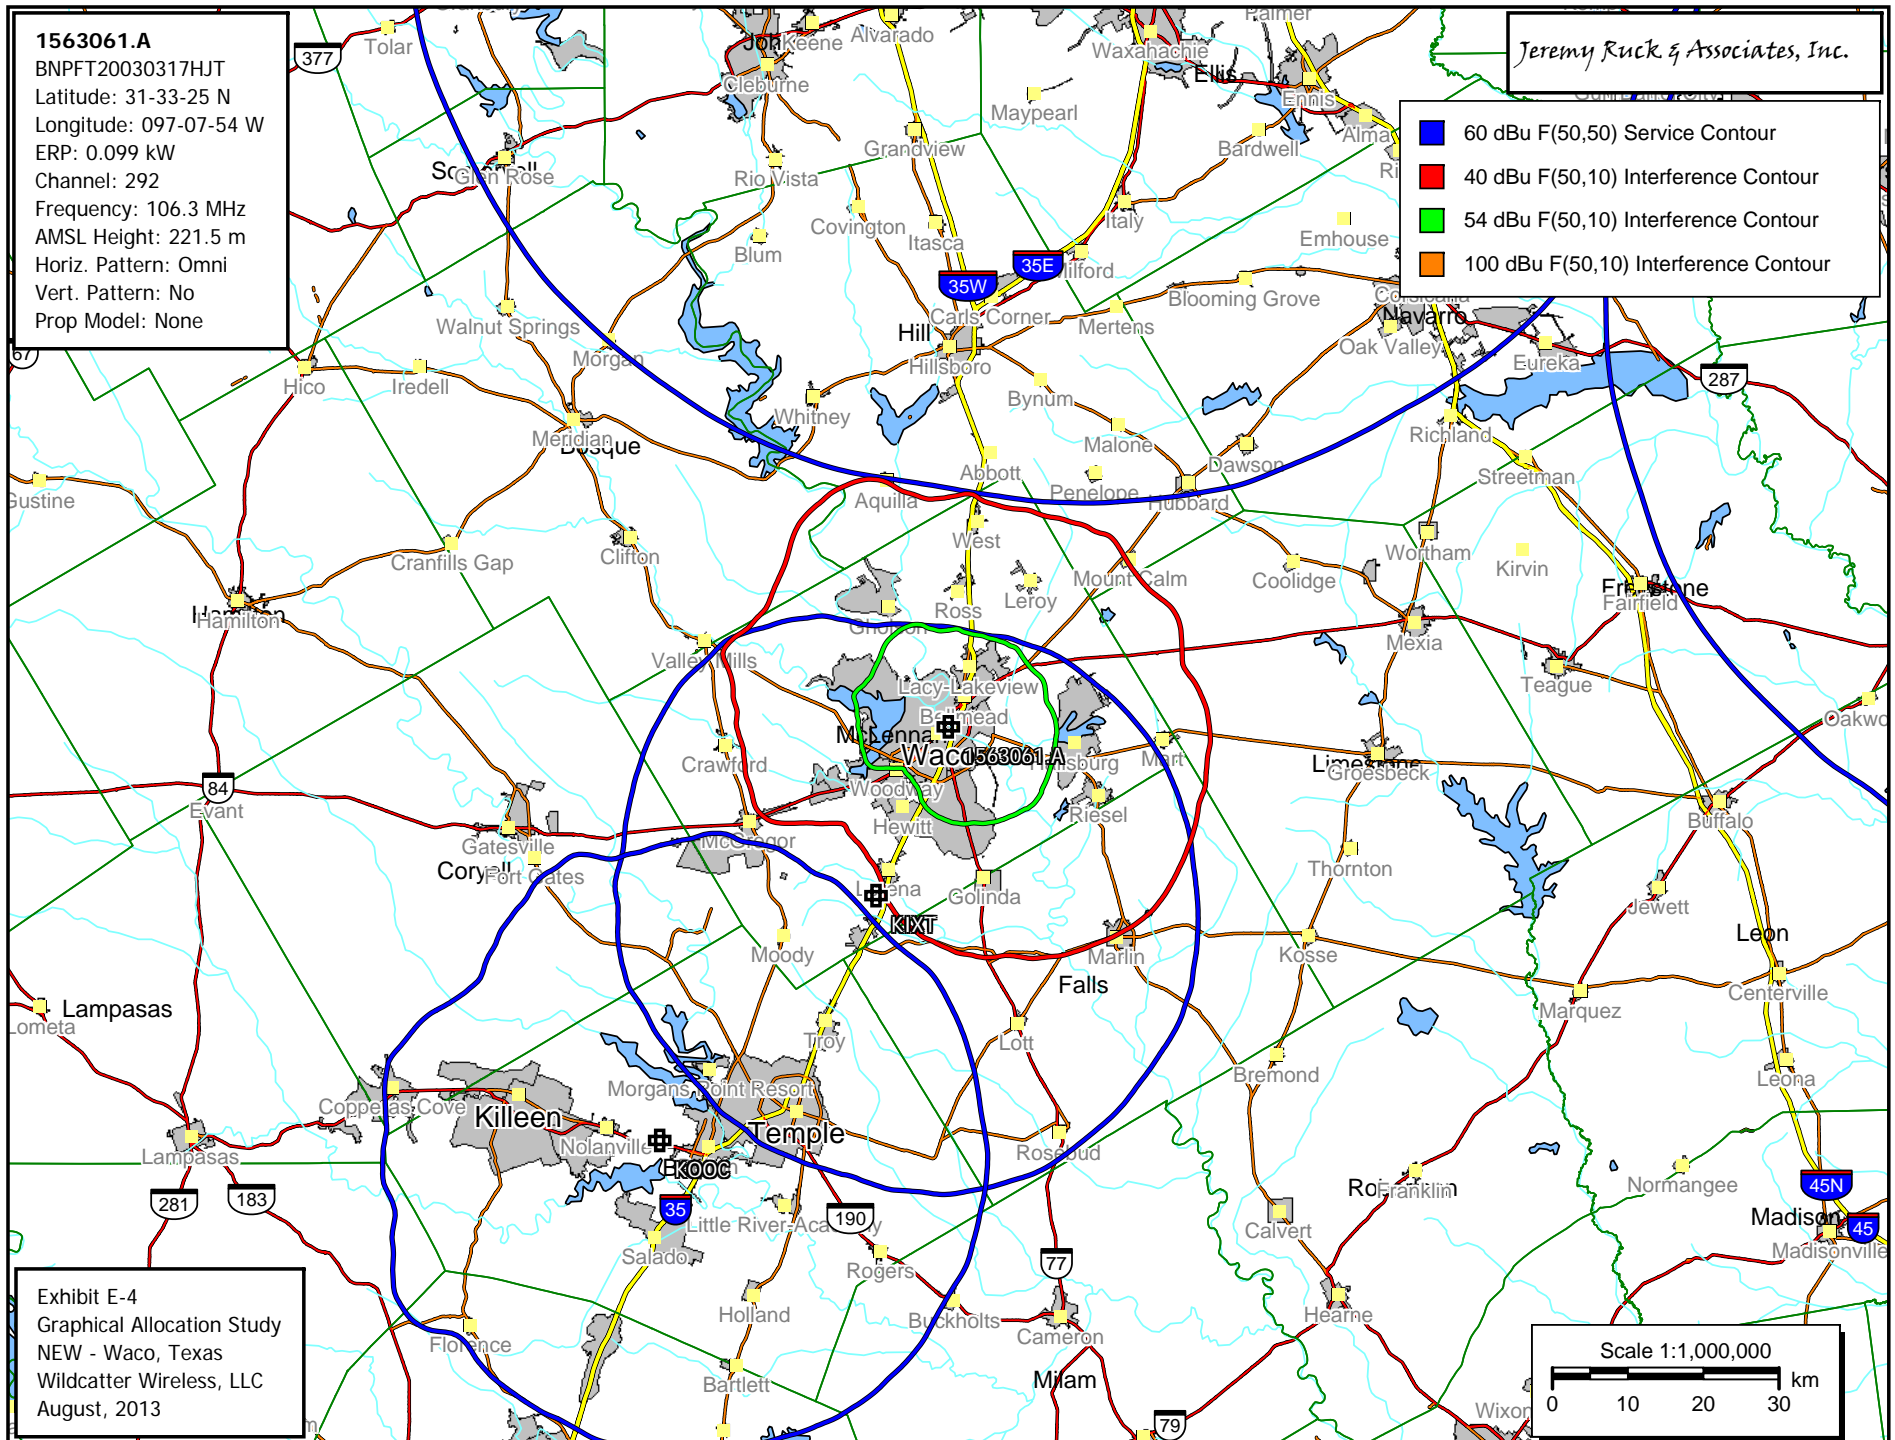


Exhibit E-4

Graphical Allocation Study

NEW - Waco, Texas

Wildcatter Wireless, LLC

August, 2013

1563061.A

BNPFT20030317HJT
Latitude: 31-33-25 N
Longitude: 097-07-54 W
ERP: 0.099 kW
Channel: 292
Frequency: 106.3 MHz
AMSL Height: 221.5 m
Horiz. Pattern: Omni
Vert. Pattern: No
Prop Model: None

1569337.A

BNPFT20130820ABE
Latitude: 31-31-53 N
Longitude: 097-07-01 W
ERP: 0.25 kW
Channel: 289
Frequency: 105.7 MHz
AMSL Height: 246.0 m
Horiz. Pattern: Omni
Vert. Pattern: No
Prop Model: None

Jeremy Ruck & Associates, Inc.

FCC F(50-50) 79.60 dBu (FCC HAAT)

FCC F(50-50) 85.30 dBu (FCC HAAT)

Proposed 79.6 dBu
Service Contour

BBN 85.3 dBu
Service Contour

Exhibit E-5
Interference Study
NEW - Waco, Texas
Wildcatter Wireless, LLC
August, 2013

Scale 1:50,000

0 1 2 3 km



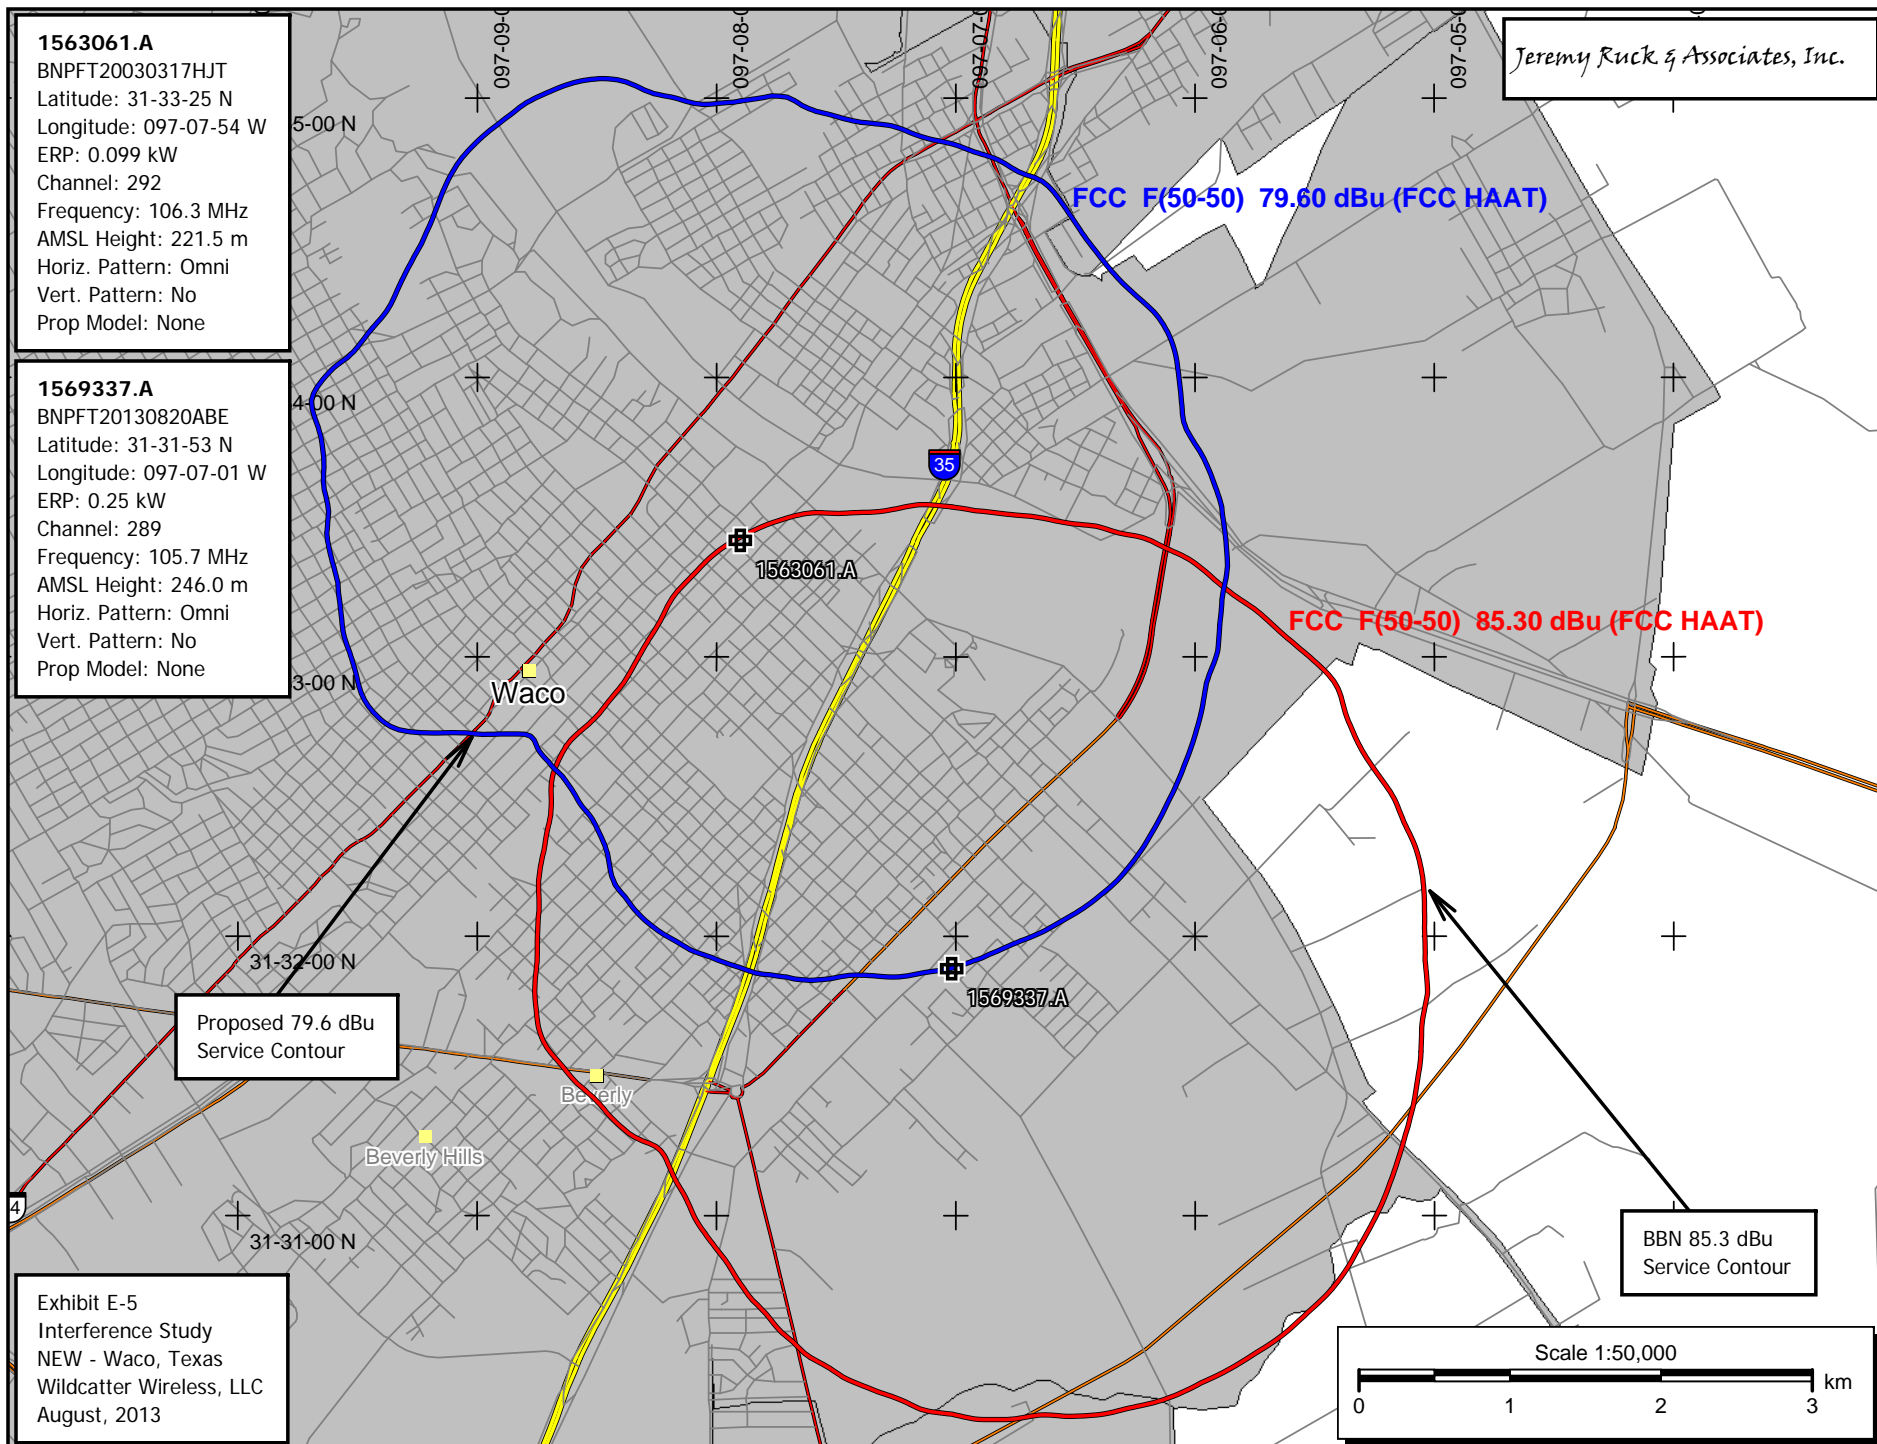


Exhibit E-6

Translator Proximity Interference Analysis

NEW (Wildcatter) - Waco, Texas

Antenna No:	2	<div><div></div><div></div></div>	Center of Radiation:	95 m AGL
Manufacturer:	Shively	<div><div></div><div></div><div></div></div>	Effective Radiated Power:	99 Watts
Model:	6812B-2		FS Contour:	125.3 dBu
Number of Bays:	2		E Field Strength:	1.84077 V/m
Bay Spacing:	Lambda		Z0 (Ohms):	377 Ohms
			Power Density:	0.008987909 W/m^2

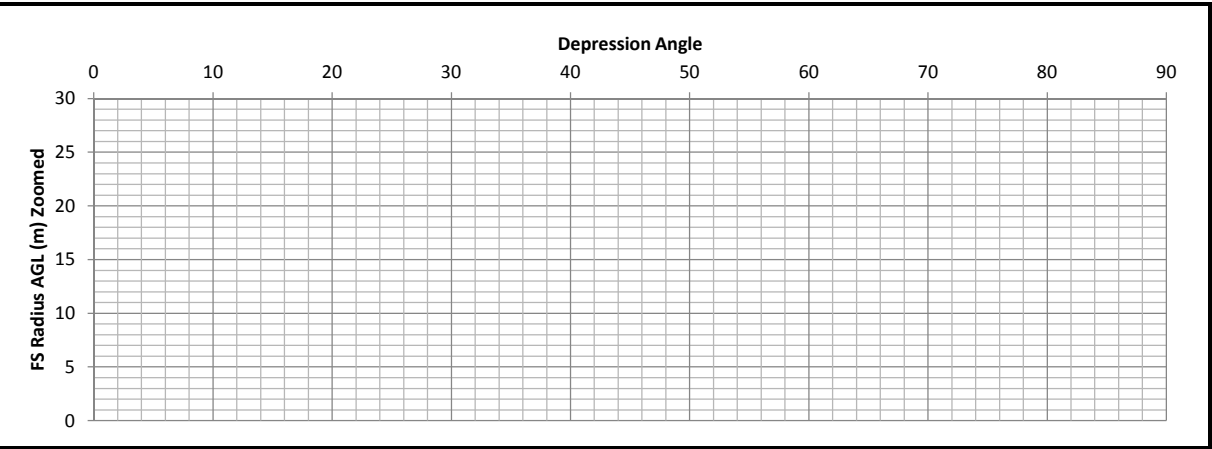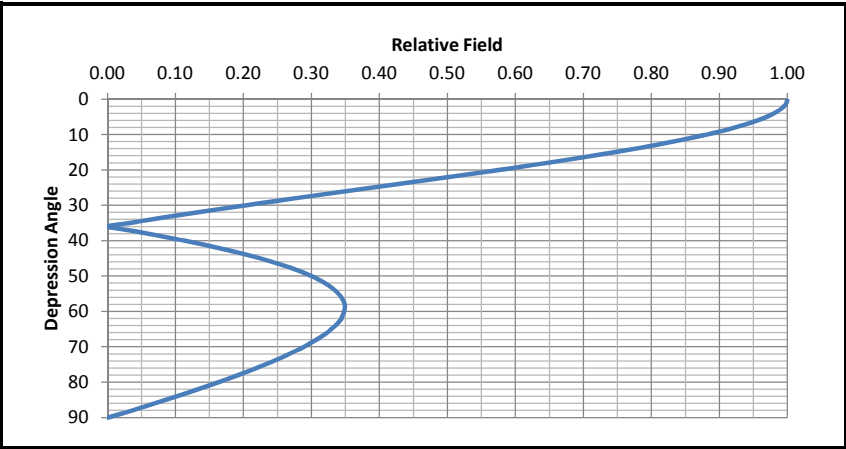

Depression Angle	Relative Field	Relative Power	ERP Watts	Radii in meters			
				Field Strength	Horizontal	Vertical	AGL
0	1.0000	1.0000	99.00	29.61	29.61	0.00	95.00
1	0.9990	0.9980	98.80	29.58	29.57	0.52	94.48
2	0.9950	0.9900	98.01	29.46	29.44	1.03	93.97
3	0.9890	0.9781	96.83	29.28	29.24	1.53	93.47
4	0.9800	0.9604	95.08	29.01	28.94	2.02	92.98
5	0.9690	0.9390	92.96	28.69	28.58	2.50	92.50
6	0.9560	0.9139	90.48	28.30	28.15	2.96	92.04
7	0.9400	0.8836	87.48	27.83	27.62	3.39	91.61
8	0.9230	0.8519	84.34	27.33	27.06	3.80	91.20
9	0.9030	0.8154	80.73	26.73	26.41	4.18	90.82
10	0.8810	0.7762	76.84	26.08	25.69	4.53	90.47
11	0.8570	0.7344	72.71	25.37	24.91	4.84	90.16
12	0.8320	0.6922	68.53	24.63	24.09	5.12	89.88
13	0.8040	0.6464	64.00	23.80	23.19	5.35	89.65
14	0.7750	0.6006	59.46	22.94	22.26	5.55	89.45
15	0.7450	0.5550	54.95	22.06	21.31	5.71	89.29
16	0.7130	0.5084	50.33	21.11	20.29	5.82	89.18
17	0.6800	0.4624	45.78	20.13	19.25	5.89	89.11
18	0.6460	0.4173	41.31	19.13	18.19	5.91	89.09
19	0.6110	0.3733	36.96	18.09	17.10	5.89	89.11
20	0.5750	0.3306	32.73	17.02	16.00	5.82	89.18
21	0.5380	0.2894	28.65	15.93	14.87	5.71	89.29
22	0.5010	0.2510	24.85	14.83	13.75	5.56	89.44
23	0.4640	0.2153	21.31	13.74	12.65	5.37	89.63
24	0.4260	0.1815	17.97	12.61	11.52	5.13	89.87
25	0.3880	0.1505	14.90	11.49	10.41	4.85	90.15
26	0.3510	0.1232	12.20	10.39	9.34	4.56	90.44
27	0.3130	0.0980	9.70	9.27	8.26	4.21	90.79
28	0.2760	0.0762	7.54	8.17	7.21	3.84	91.16
29	0.2390	0.0571	5.65	7.08	6.19	3.43	91.57
30	0.2020	0.0408	4.04	5.98	5.18	2.99	92.01
31	0.1660	0.0276	2.73	4.91	4.21	2.53	92.47
32	0.1310	0.0172	1.70	3.88	3.29	2.06	92.94
33	0.0970	0.0094	0.93	2.87	2.41	1.56	93.44
34	0.0630	0.0040	0.39	1.87	1.55	1.04	93.96
35	0.0310	0.0010	0.10	0.92	0.75	0.53	94.47
36	0.0000	0.0000	0.00	0.00	0.00	0.00	95.00
37	0.0310	0.0010	0.10	0.92	0.73	0.55	94.45
38	0.0600	0.0036	0.36	1.78	1.40	1.09	93.91
39	0.0870	0.0076	0.75	2.58	2.00	1.62	93.38
40	0.1140	0.0130	1.29	3.38	2.59	2.17	92.83
41	0.1390	0.0193	1.91	4.12	3.11	2.70	92.30
42	0.1630	0.0266	2.63	4.83	3.59	3.23	91.77
43	0.1850	0.0342	3.39	5.48	4.01	3.74	91.26
44	0.2060	0.0424	4.20	6.10	4.39	4.24	90.76
45	0.2250	0.0506	5.01	6.66	4.71	4.71	90.29

Depression Angle	Relative Field	Relative Power	ERP Watts	Radii in meters			
				Field Strength	Horizontal	Vertical	AGL
45	0.2250	0.0506	5.01	6.66	4.71	4.71	90.29
46	0.2430	0.0590	5.85	7.19	5.00	5.18	89.82
47	0.2600	0.0676	6.69	7.70	5.25	5.63	89.37
48	0.2750	0.0756	7.49	8.14	5.45	6.05	88.95
49	0.2880	0.0829	8.21	8.53	5.59	6.44	88.56
50	0.3000	0.0900	8.91	8.88	5.71	6.80	88.20
51	0.3110	0.0967	9.58	9.21	5.79	7.16	87.84
52	0.3200	0.1024	10.14	9.47	5.83	7.47	87.53
53	0.3280	0.1076	10.65	9.71	5.84	7.76	87.24
54	0.3350	0.1122	11.11	9.92	5.83	8.02	86.98
55	0.3400	0.1156	11.44	10.07	5.77	8.25	86.75
56	0.3440	0.1183	11.72	10.18	5.70	8.44	86.56
57	0.3470	0.1204	11.92	10.27	5.60	8.62	86.38
58	0.3490	0.1218	12.06	10.33	5.48	8.76	86.24
59	0.3490	0.1218	12.06	10.33	5.32	8.86	86.14
60	0.3480	0.1211	11.99	10.30	5.15	8.92	86.08
61	0.3460	0.1197	11.85	10.24	4.97	8.96	86.04
62	0.3440	0.1183	11.72	10.18	4.78	8.99	86.01
63	0.3400	0.1156	11.44	10.07	4.57	8.97	86.03
64	0.3350	0.1122	11.11	9.92	4.35	8.91	86.09
65	0.3290	0.1082	10.72	9.74	4.12	8.83	86.17
66	0.3230	0.1043	10.33	9.56	3.89	8.74	86.26
67	0.3150	0.0992	9.82	9.33	3.64	8.58	86.42
68	0.3070	0.0942	9.33	9.09	3.40	8.43	86.57
69	0.2980	0.0888	8.79	8.82	3.16	8.24	86.76
70	0.2890	0.0835	8.27	8.56	2.93	8.04	86.96
71	0.2780	0.0773	7.65	8.23	2.68	7.78	87.22
72	0.2670	0.0713	7.06	7.90	2.44	7.52	87.48
73	0.2560	0.0655	6.49	7.58	2.22	7.25	87.75
74	0.2440	0.0595	5.89	7.22	1.99	6.94	88.06
75	0.2320	0.0538	5.33	6.87	1.78	6.63	88.37
76	0.2190	0.0480	4.75	6.48	1.57	6.29	88.71
77	0.2050	0.0420	4.16	6.07	1.37	5.91	89.09
78	0.1910	0.0365	3.61	5.65	1.18	5.53	89.47
79	0.1770	0.0313	3.10	5.24	1.00	5.14	89.86
80	0.1630	0.0266	2.63	4.83	0.84	4.75	90.25
81	0.1480	0.0219	2.17	4.38	0.69	4.33	90.67
82	0.1330	0.0177	1.75	3.94	0.55	3.90	91.10
83	0.1170	0.0137	1.36	3.46	0.42	3.44	91.56
84	0.1010	0.0102	1.01	2.99	0.31	2.97	92.03
85	0.0850	0.0072	0.72	2.52	0.22	2.51	92.49
86	0.0690	0.0048	0.47	2.04	0.14	2.04	92.96
87	0.0520	0.0027	0.27	1.54	0.08	1.54	93.46
88	0.0360	0.0013	0.13	1.07	0.04	1.07	93.93
89	0.0180	0.0003	0.03	0.53	0.01	0.53	94.47
90	0.0000	0.0000	0.00	0.00	0.00	0.00	95.00



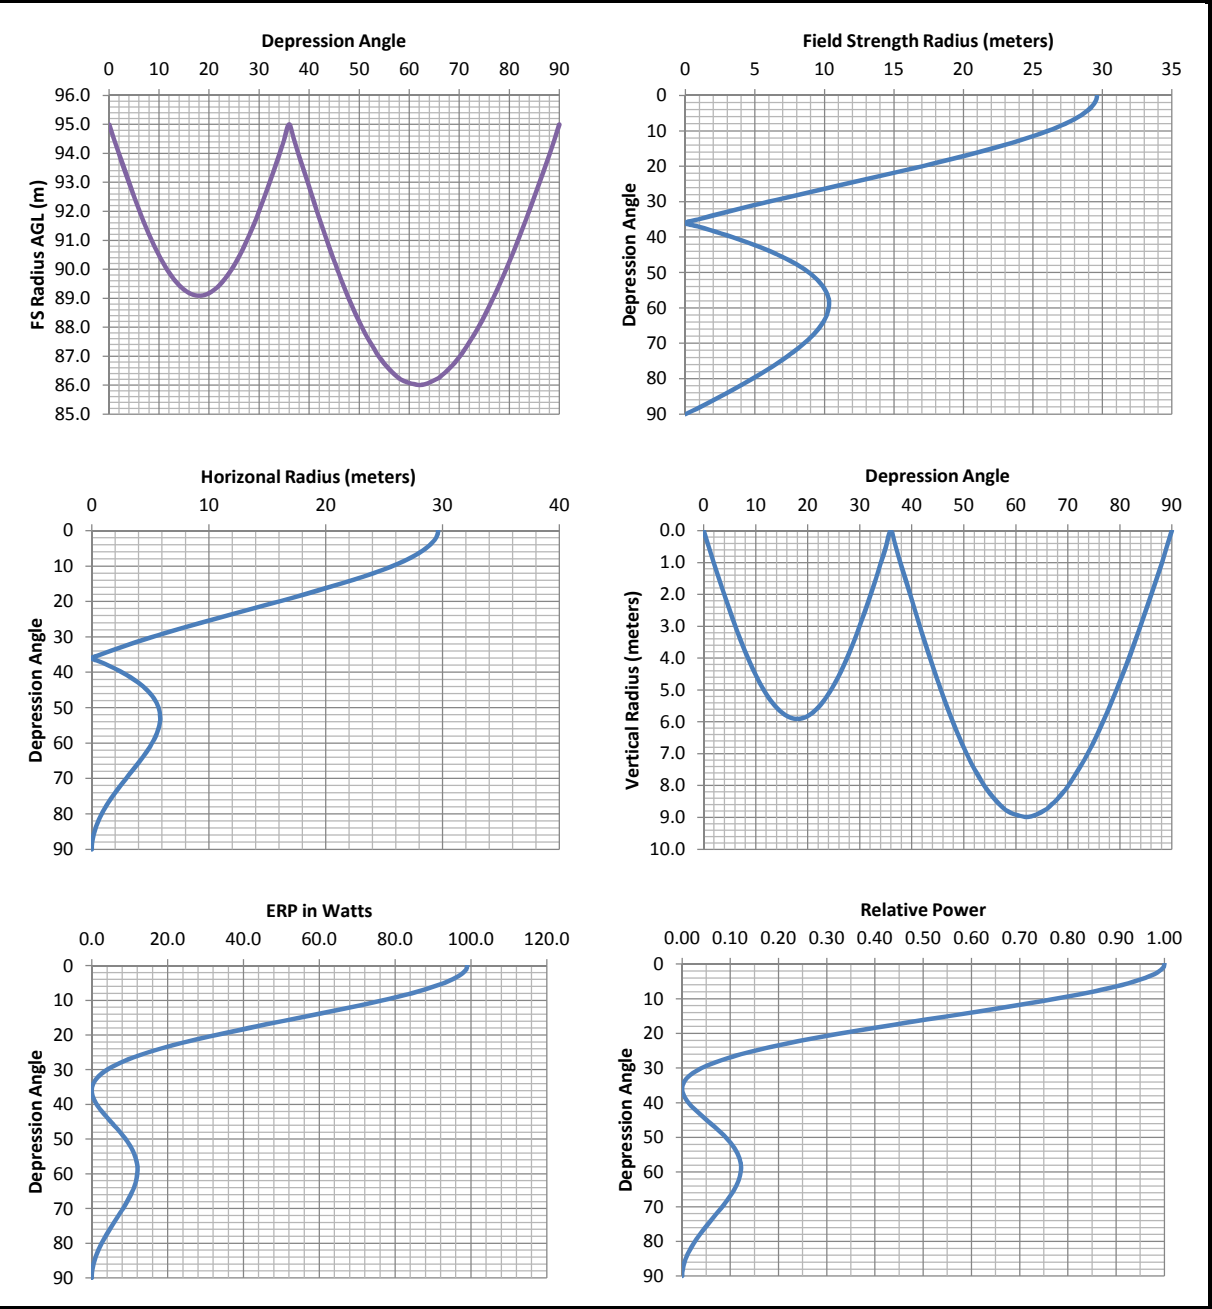



Exhibit E-7
Translator Proximity Interference Analysis
NEW - Waco, Texas (BBN to Wildcatter)

Antenna No:	88	↕	↕	Center of Radiation:	119 m AGL
Manufacturer:	SWR	↕↕↕		Effective Radiated Power:	170 Watts
Model:	FMEC-2			FS Contour:	119.6 dBu
Number of Bays:	2			E Field Strength:	0.95499 V/m
Bay Spacing:	Lambda			Z0 (Ohms):	377 Ohms
				Power Density:	0.002419127 W/m^2

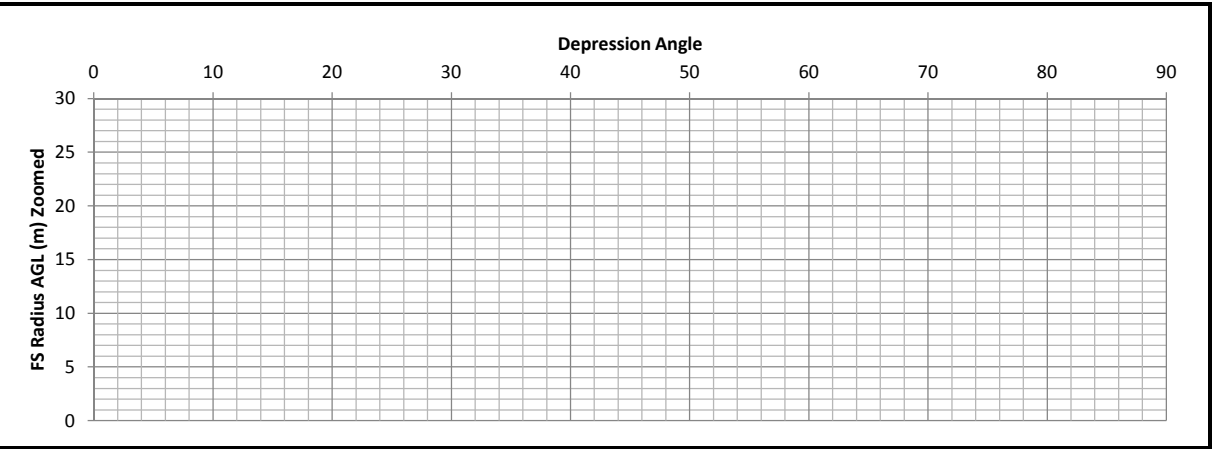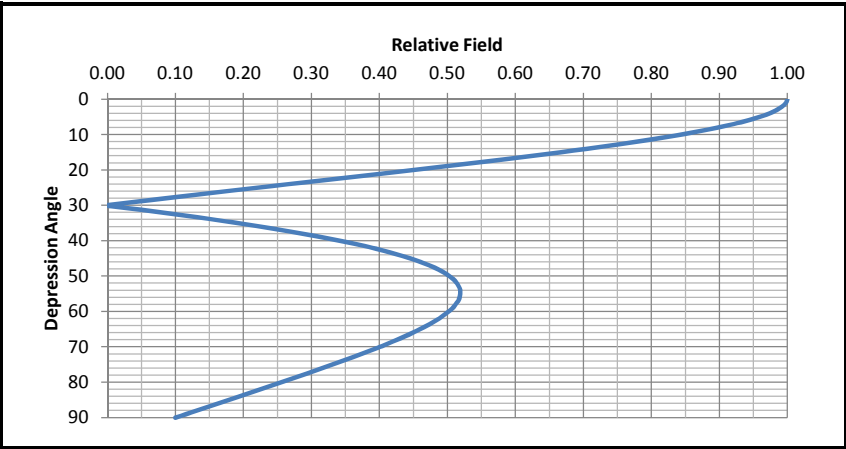

Depression Angle	Relative Field	Relative Power	ERP Watts	Radii in meters			
				Field Strength	Horizontal	Vertical	AGL
0	1.0000	1.0000	170.00	74.78	74.78	0.00	119.00
1	0.9980	0.9960	169.32	74.63	74.62	1.30	117.70
2	0.9930	0.9860	167.63	74.26	74.21	2.59	116.41
3	0.9850	0.9702	164.94	73.66	73.56	3.86	115.14
4	0.9740	0.9487	161.27	72.84	72.66	5.08	113.92
5	0.9590	0.9197	156.35	71.71	71.44	6.25	112.75
6	0.9420	0.8874	150.85	70.44	70.06	7.36	111.64
7	0.9210	0.8482	144.20	68.87	68.36	8.39	110.61
8	0.8980	0.8064	137.09	67.15	66.50	9.35	109.65
9	0.8720	0.7604	129.27	65.21	64.41	10.20	108.80
10	0.8430	0.7106	120.81	63.04	62.08	10.95	108.05
11	0.8120	0.6593	112.09	60.72	59.61	11.59	107.41
12	0.7790	0.6068	103.16	58.25	56.98	12.11	106.89
13	0.7430	0.5520	93.85	55.56	54.14	12.50	106.50
14	0.7050	0.4970	84.49	52.72	51.15	12.75	106.25
15	0.6660	0.4436	75.40	49.80	48.11	12.89	106.11
16	0.6250	0.3906	66.41	46.74	44.93	12.88	106.12
17	0.5830	0.3399	57.78	43.60	41.69	12.75	106.25
18	0.5400	0.2916	49.57	40.38	38.41	12.48	106.52
19	0.4950	0.2450	41.65	37.02	35.00	12.05	106.95
20	0.4500	0.2025	34.43	33.65	31.62	11.51	107.49
21	0.4050	0.1640	27.88	30.29	28.27	10.85	108.15
22	0.3590	0.1289	21.91	26.85	24.89	10.06	108.94
23	0.3120	0.0973	16.55	23.33	21.48	9.12	109.88
24	0.2660	0.0708	12.03	19.89	18.17	8.09	110.91
25	0.2200	0.0484	8.23	16.45	14.91	6.95	112.05
26	0.1750	0.0306	5.21	13.09	11.76	5.74	113.26
27	0.1300	0.0169	2.87	9.72	8.66	4.41	114.59
28	0.0860	0.0074	1.26	6.43	5.68	3.02	115.98
29	0.0420	0.0018	0.30	3.14	2.75	1.52	117.48
30	0.0010	0.0000	0.00	0.07	0.06	0.04	118.96
31	0.0410	0.0017	0.29	3.07	2.63	1.58	117.42
32	0.0810	0.0066	1.12	6.06	5.14	3.21	115.79
33	0.1190	0.0142	2.41	8.90	7.46	4.85	114.15
34	0.1560	0.0243	4.14	11.67	9.67	6.52	112.48
35	0.1920	0.0369	6.27	14.36	11.76	8.24	110.76
36	0.2250	0.0506	8.61	16.83	13.61	9.89	109.11
37	0.2570	0.0660	11.23	19.22	15.35	11.57	107.43
38	0.2880	0.0829	14.10	21.54	16.97	13.26	105.74
39	0.3160	0.0999	16.98	23.63	18.36	14.87	104.13
40	0.3420	0.1170	19.88	25.58	19.59	16.44	102.56
41	0.3670	0.1347	22.90	27.44	20.71	18.01	100.99
42	0.3900	0.1521	25.86	29.16	21.67	19.51	99.49
43	0.4100	0.1681	28.58	30.66	22.42	20.91	98.09
44	0.4290	0.1840	31.29	32.08	23.08	22.29	96.71
45	0.4460	0.1989	33.82	33.35	23.58	23.58	95.42

Depression Angle	Relative Field	Relative Power	ERP Watts	Radii in meters			
				Field Strength	Horizontal	Vertical	AGL
45	0.4460	0.1989	33.82	33.35	23.58	23.58	95.42
46	0.4610	0.2125	36.13	34.47	23.95	24.80	94.20
47	0.4740	0.2247	38.19	35.45	24.17	25.92	93.08
48	0.4860	0.2362	40.15	36.34	24.32	27.01	91.99
49	0.4950	0.2450	41.65	37.02	24.29	27.94	91.06
50	0.5030	0.2530	43.01	37.61	24.18	28.81	90.19
51	0.5100	0.2601	44.22	38.14	24.00	29.64	89.36
52	0.5140	0.2642	44.91	38.44	23.66	30.29	88.71
53	0.5170	0.2673	45.44	38.66	23.27	30.88	88.12
54	0.5190	0.2694	45.79	38.81	22.81	31.40	87.60
55	0.5190	0.2694	45.79	38.81	22.26	31.79	87.21
56	0.5180	0.2683	45.62	38.74	21.66	32.11	86.89
57	0.5160	0.2663	45.26	38.59	21.02	32.36	86.64
58	0.5120	0.2621	44.56	38.29	20.29	32.47	86.53
59	0.5080	0.2581	43.87	37.99	19.57	32.56	86.44
60	0.5020	0.2520	42.84	37.54	18.77	32.51	86.49
61	0.4950	0.2450	41.65	37.02	17.95	32.38	86.62
62	0.4880	0.2381	40.48	36.49	17.13	32.22	86.78
63	0.4790	0.2294	39.00	35.82	16.26	31.92	87.08
64	0.4700	0.2209	37.55	35.15	15.41	31.59	87.41
65	0.4600	0.2116	35.97	34.40	14.54	31.18	87.82
66	0.4490	0.2016	34.27	33.58	13.66	30.67	88.33
67	0.4380	0.1918	32.61	32.75	12.80	30.15	88.85
68	0.4260	0.1815	30.85	31.86	11.93	29.54	89.46
69	0.4130	0.1706	29.00	30.88	11.07	28.83	90.17
70	0.4010	0.1608	27.34	29.99	10.26	28.18	90.82
71	0.3870	0.1498	25.46	28.94	9.42	27.36	91.64
72	0.3740	0.1399	23.78	27.97	8.64	26.60	92.40
73	0.3600	0.1296	22.03	26.92	7.87	25.74	93.26
74	0.3450	0.1190	20.23	25.80	7.11	24.80	94.20
75	0.3310	0.1096	18.63	24.75	6.41	23.91	95.09
76	0.3160	0.0999	16.98	23.63	5.72	22.93	96.07
77	0.3010	0.0906	15.40	22.51	5.06	21.93	97.07
78	0.2860	0.0818	13.91	21.39	4.45	20.92	98.08
79	0.2710	0.0734	12.48	20.27	3.87	19.89	99.11
80	0.2560	0.0655	11.14	19.14	3.32	18.85	100.15
81	0.2410	0.0581	9.87	18.02	2.82	17.80	101.20
82	0.2250	0.0506	8.61	16.83	2.34	16.66	102.34
83	0.2100	0.0441	7.50	15.70	1.91	15.59	103.41
84	0.1940	0.0376	6.40	14.51	1.52	14.43	104.57
85	0.1780	0.0317	5.39	13.31	1.16	13.26	105.74
86	0.1630	0.0266	4.52	12.19	0.85	12.16	106.84
87	0.1470	0.0216	3.67	10.99	0.58	10.98	108.02
88	0.1310	0.0172	2.92	9.80	0.34	9.79	109.21
89	0.1160	0.0135	2.29	8.67	0.15	8.67	110.33
90	0.1000	0.0100	1.70	7.48	0.00	7.48	111.52

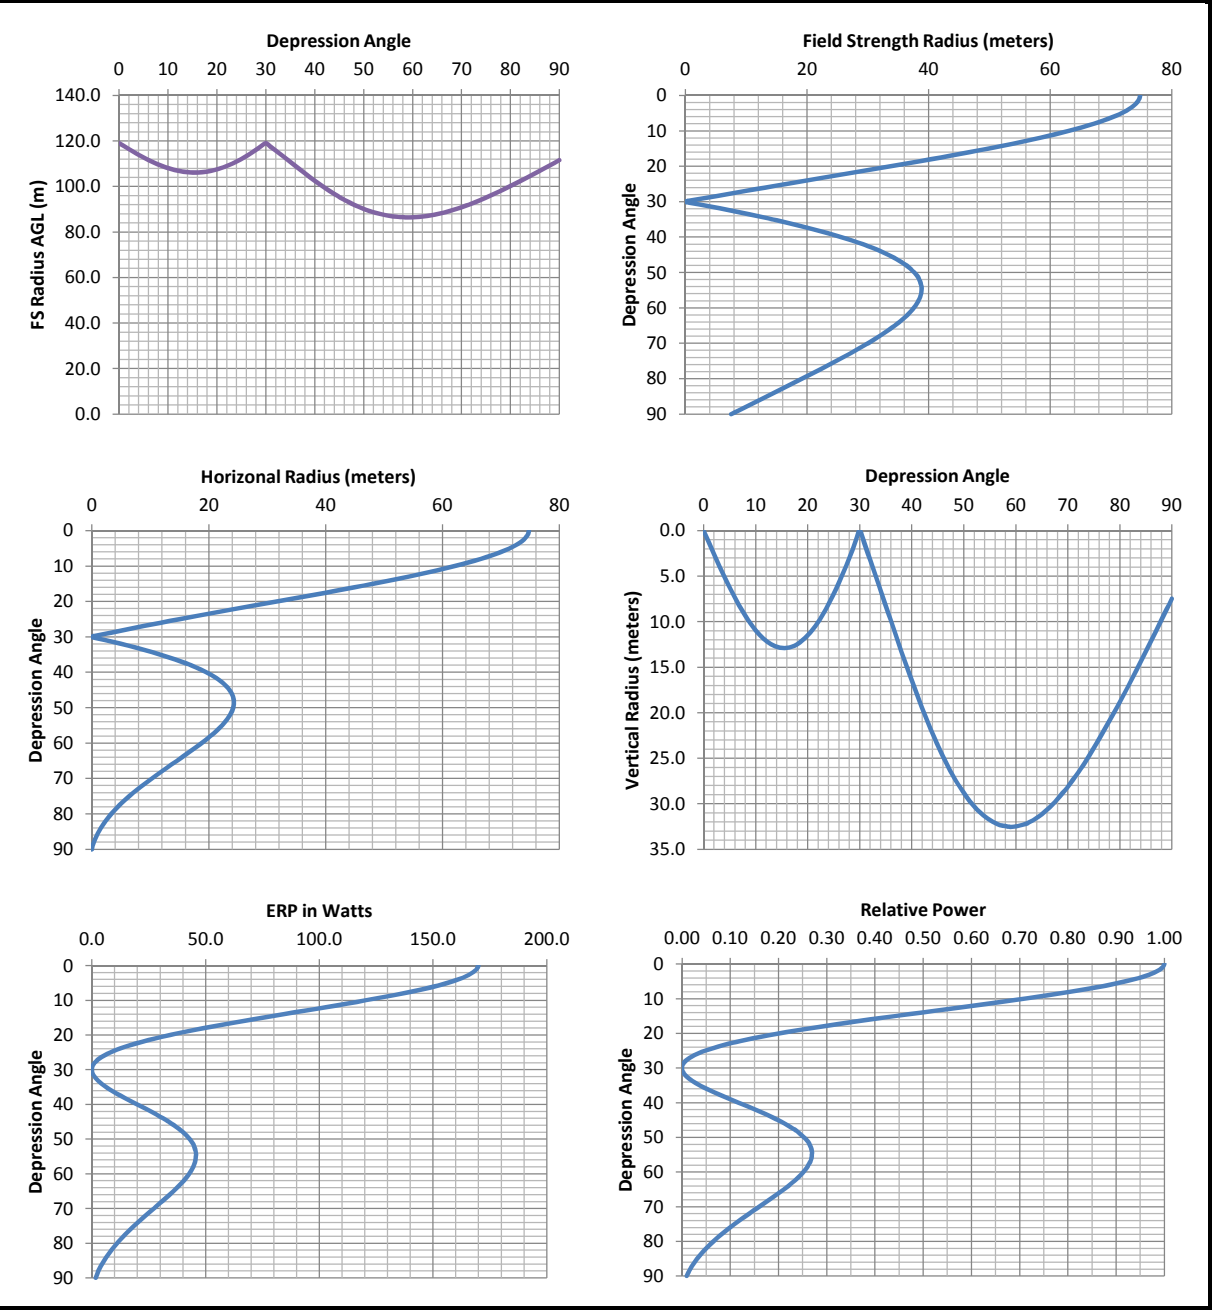

1563061.A

BNPFT20030317HJT
Latitude: 31-33-25 N
Longitude: 097-07-54 W
ERP: 0.099 kW
Channel: 292
Frequency: 106.3 MHz
AMSL Height: 221.5 m
Horiz. Pattern: Omni
Vert. Pattern: No
Prop Model: None

KIXT

BLH20100616AHJ
Latitude: 31-21-20 N
Longitude: 097-13-56 W
ERP: 10.00 kW
Channel: 294
Frequency: 106.7 MHz
AMSL Height: 332.0 m
Horiz. Pattern: Omni
Vert. Pattern: No
Prop Model: None

Exhibit E-8

Interference Study
NEW - Waco, Texas
Wildcatter Wireless, LLC
August, 2013

Jeremy Ruck & Associates, Inc.



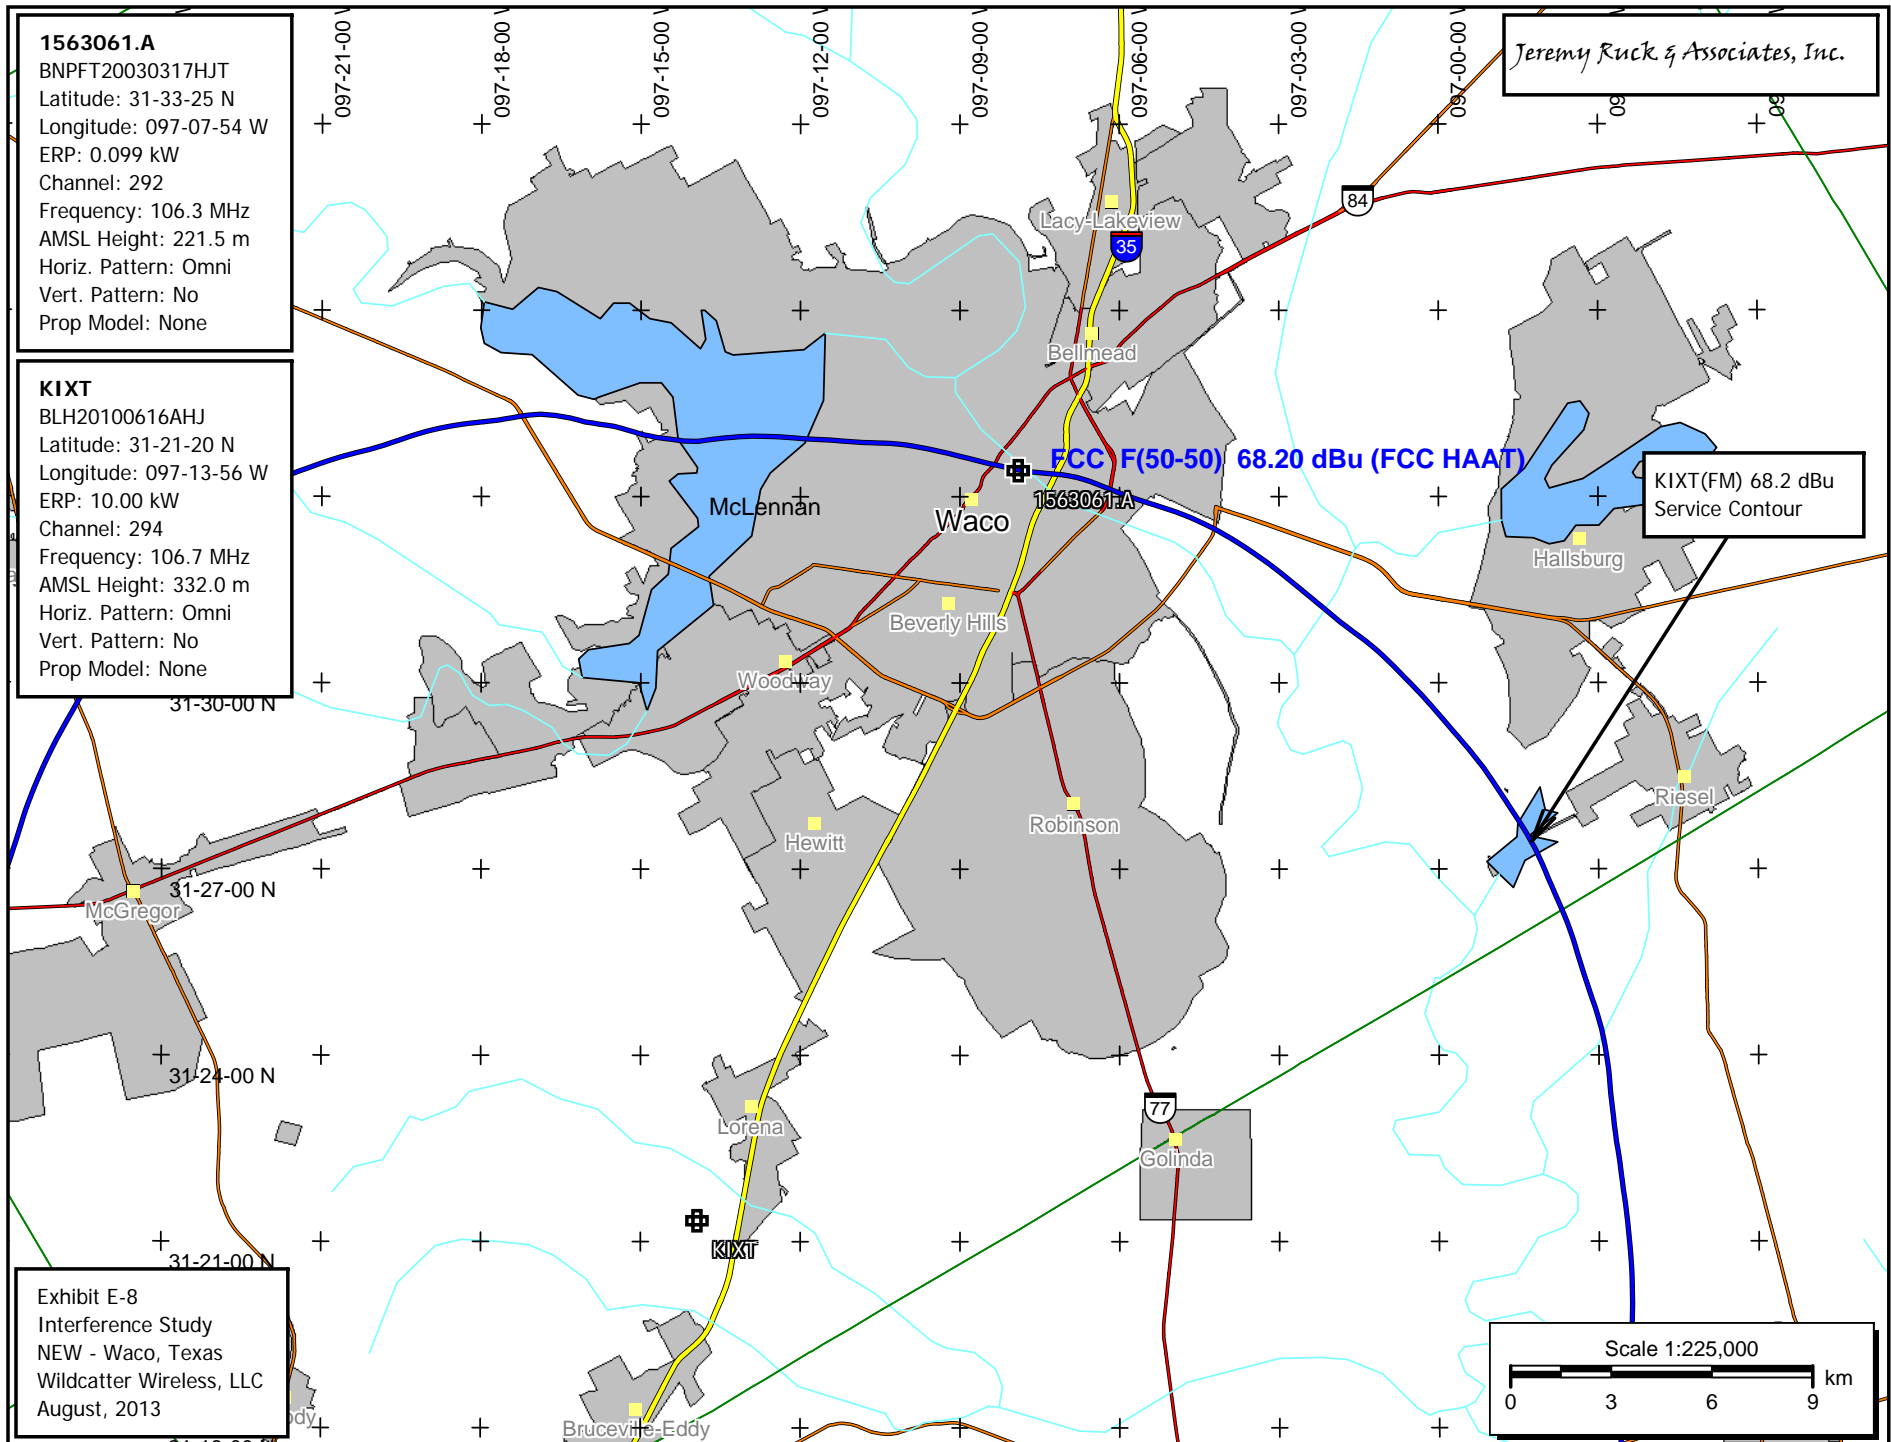


Exhibit E-9
Translator Proximity Interference Analysis
NEW (Wildcatter to KXKT) - Waco, Texas

Antenna No:	2	⬆	⬆	Center of Radiation:	95 m AGL
Manufacturer:	Shively	⬆	⬆	Effective Radiated Power:	99 Watts
Model:	6812B-2			FS Contour:	108.2 dBu
Number of Bays:	2			E Field Strength:	0.25704 V/m
Bay Spacing:	Lambda			Z0 (Ohms):	377 Ohms
				Power Density:	0.00017525 W/m^2

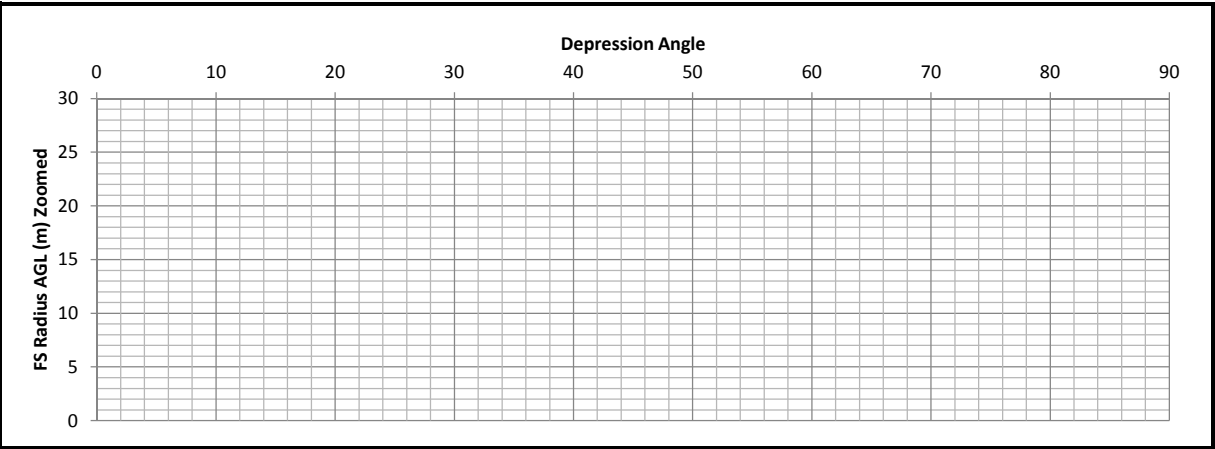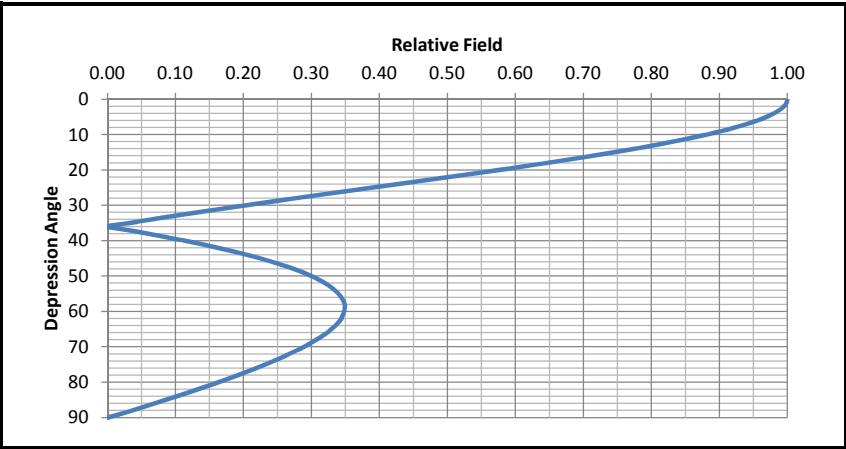

Depression Angle	Relative Field	Relative Power	ERP Watts	Radii in meters			
				Field Strength	Horizontal	Vertical	AGL
0	1.0000	1.0000	99.00	212.02	212.02	0.00	95.00
1	0.9990	0.9980	98.80	211.81	211.78	3.70	91.30
2	0.9950	0.9900	98.01	210.96	210.83	7.36	87.64
3	0.9890	0.9781	96.83	209.69	209.40	10.97	84.03
4	0.9800	0.9604	95.08	207.78	207.28	14.49	80.51
5	0.9690	0.9390	92.96	205.45	204.67	17.91	77.09
6	0.9560	0.9139	90.48	202.69	201.58	21.19	73.81
7	0.9400	0.8836	87.48	199.30	197.82	24.29	70.71
8	0.9230	0.8519	84.34	195.70	193.79	27.24	67.76
9	0.9030	0.8154	80.73	191.46	189.10	29.95	65.05
10	0.8810	0.7762	76.84	186.79	183.95	32.44	62.56
11	0.8570	0.7344	72.71	181.70	178.37	34.67	60.33
12	0.8320	0.6922	68.53	176.40	172.55	36.68	58.32
13	0.8040	0.6464	64.00	170.47	166.10	38.35	56.65
14	0.7750	0.6006	59.46	164.32	159.44	39.75	55.25
15	0.7450	0.5550	54.95	157.96	152.58	40.88	54.12
16	0.7130	0.5084	50.33	151.17	145.32	41.67	53.33
17	0.6800	0.4624	45.78	144.18	137.88	42.15	52.85
18	0.6460	0.4173	41.31	136.97	130.26	42.33	52.67
19	0.6110	0.3733	36.96	129.55	122.49	42.18	52.82
20	0.5750	0.3306	32.73	121.91	114.56	41.70	53.30
21	0.5380	0.2894	28.65	114.07	106.49	40.88	54.12
22	0.5010	0.2510	24.85	106.22	98.49	39.79	55.21
23	0.4640	0.2153	21.31	98.38	90.56	38.44	56.56
24	0.4260	0.1815	17.97	90.32	82.51	36.74	58.26
25	0.3880	0.1505	14.90	82.26	74.56	34.77	60.23
26	0.3510	0.1232	12.20	74.42	66.89	32.62	62.38
27	0.3130	0.0980	9.70	66.36	59.13	30.13	64.87
28	0.2760	0.0762	7.54	58.52	51.67	27.47	67.53
29	0.2390	0.0571	5.65	50.67	44.32	24.57	70.43
30	0.2020	0.0408	4.04	42.83	37.09	21.41	73.59
31	0.1660	0.0276	2.73	35.20	30.17	18.13	76.87
32	0.1310	0.0172	1.70	27.78	23.55	14.72	80.28
33	0.0970	0.0094	0.93	20.57	17.25	11.20	83.80
34	0.0630	0.0040	0.39	13.36	11.07	7.47	87.53
35	0.0310	0.0010	0.10	6.57	5.38	3.77	91.23
36	0.0000	0.0000	0.00	0.00	0.00	0.00	95.00
37	0.0310	0.0010	0.10	6.57	5.25	3.96	91.04
38	0.0600	0.0036	0.36	12.72	10.02	7.83	87.17
39	0.0870	0.0076	0.75	18.45	14.34	11.61	83.39
40	0.1140	0.0130	1.29	24.17	18.52	15.54	79.46
41	0.1390	0.0193	1.91	29.47	22.24	19.33	75.67
42	0.1630	0.0266	2.63	34.56	25.68	23.13	71.87
43	0.1850	0.0342	3.39	39.22	28.69	26.75	68.25
44	0.2060	0.0424	4.20	43.68	31.42	30.34	64.66
45	0.2250	0.0506	5.01	47.71	33.73	33.73	61.27

Depression Angle	Relative Field	Relative Power	ERP Watts	Radii in meters			
				Field Strength	Horizontal	Vertical	AGL
45	0.2250	0.0506	5.01	47.71	33.73	33.73	61.27
46	0.2430	0.0590	5.85	51.52	35.79	37.06	57.94
47	0.2600	0.0676	6.69	55.13	37.60	40.32	54.68
48	0.2750	0.0756	7.49	58.31	39.01	43.33	51.67
49	0.2880	0.0829	8.21	61.06	40.06	46.08	48.92
50	0.3000	0.0900	8.91	63.61	40.89	48.73	46.27
51	0.3110	0.0967	9.58	65.94	41.50	51.24	43.76
52	0.3200	0.1024	10.14	67.85	41.77	53.46	41.54
53	0.3280	0.1076	10.65	69.54	41.85	55.54	39.46
54	0.3350	0.1122	11.11	71.03	41.75	57.46	37.54
55	0.3400	0.1156	11.44	72.09	41.35	59.05	35.95
56	0.3440	0.1183	11.72	72.94	40.79	60.47	34.53
57	0.3470	0.1204	11.92	73.57	40.07	61.70	33.30
58	0.3490	0.1218	12.06	74.00	39.21	62.75	32.25
59	0.3490	0.1218	12.06	74.00	38.11	63.43	31.57
60	0.3480	0.1211	11.99	73.78	36.89	63.90	31.10
61	0.3460	0.1197	11.85	73.36	35.57	64.16	30.84
62	0.3440	0.1183	11.72	72.94	34.24	64.40	30.60
63	0.3400	0.1156	11.44	72.09	32.73	64.23	30.77
64	0.3350	0.1122	11.11	71.03	31.14	63.84	31.16
65	0.3290	0.1082	10.72	69.76	29.48	63.22	31.78
66	0.3230	0.1043	10.33	68.48	27.85	62.56	32.44
67	0.3150	0.0992	9.82	66.79	26.10	61.48	33.52
68	0.3070	0.0942	9.33	65.09	24.38	60.35	34.65
69	0.2980	0.0888	8.79	63.18	22.64	58.99	36.01
70	0.2890	0.0835	8.27	61.27	20.96	57.58	37.42
71	0.2780	0.0773	7.65	58.94	19.19	55.73	39.27
72	0.2670	0.0713	7.06	56.61	17.49	53.84	41.16
73	0.2560	0.0655	6.49	54.28	15.87	51.91	43.09
74	0.2440	0.0595	5.89	51.73	14.26	49.73	45.27
75	0.2320	0.0538	5.33	49.19	12.73	47.51	47.49
76	0.2190	0.0480	4.75	46.43	11.23	45.05	49.95
77	0.2050	0.0420	4.16	43.46	9.78	42.35	52.65
78	0.1910	0.0365	3.61	40.50	8.42	39.61	55.39
79	0.1770	0.0313	3.10	37.53	7.16	36.84	58.16
80	0.1630	0.0266	2.63	34.56	6.00	34.03	60.97
81	0.1480	0.0219	2.17	31.38	4.91	30.99	64.01
82	0.1330	0.0177	1.75	28.20	3.92	27.92	67.08
83	0.1170	0.0137	1.36	24.81	3.02	24.62	70.38
84	0.1010	0.0102	1.01	21.41	2.24	21.30	73.70
85	0.0850	0.0072	0.72	18.02	1.57	17.95	77.05
86	0.0690	0.0048	0.47	14.63	1.02	14.59	80.41
87	0.0520	0.0027	0.27	11.03	0.58	11.01	83.99
88	0.0360	0.0013	0.13	7.63	0.27	7.63	87.37
89	0.0180	0.0003	0.03	3.82	0.07	3.82	91.18
90	0.0000	0.0000	0.00	0.00	0.00	0.00	95.00

