
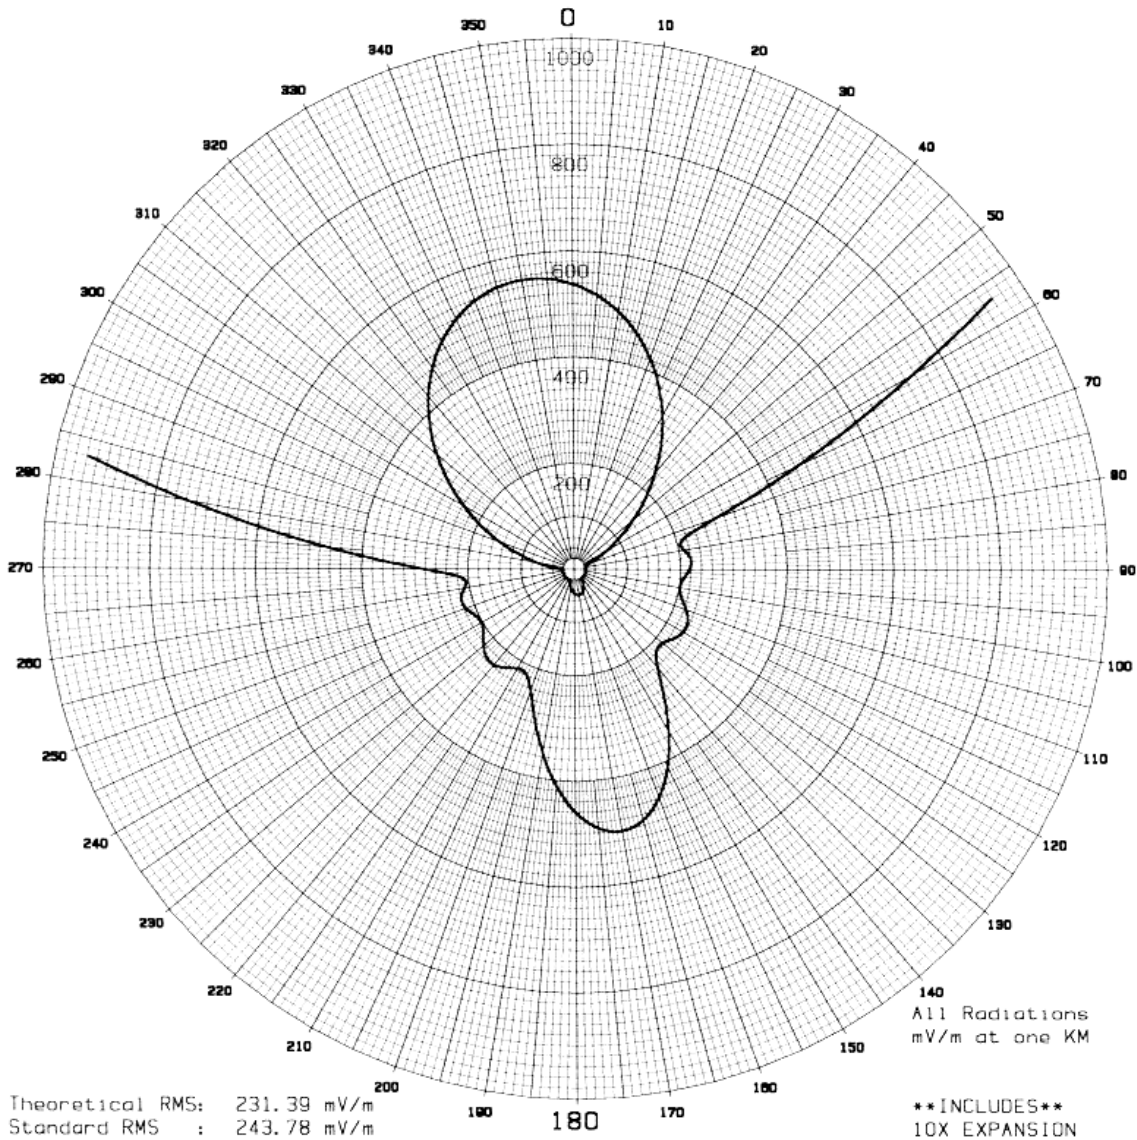


EXHIBIT 15.11

Tabulation of Proposed Nighttime Radiation Protecting WTIC (non-directional)

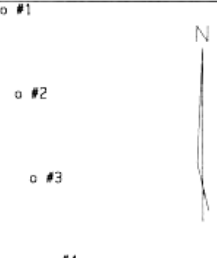

Tower Placement Sketch	Pattern Parameters	Figure 15.11	Station Data																														
	<table><tr><th>Twr No.</th><th>Field Ratio</th><th>Phase ang</th><th>Spacing</th><th>Bearing</th><th>Elev. Hgt</th></tr><tr><td>1</td><td>0.388</td><td>-155.0</td><td>0.0</td><td>0.0</td><td>77.4</td></tr><tr><td>2</td><td>1.000</td><td>0.0</td><td>70.0</td><td>170.0</td><td>77.4*</td></tr><tr><td>3</td><td>0.943</td><td>154.5</td><td>70.0</td><td>170.0</td><td>77.4*</td></tr><tr><td>4</td><td>0.326</td><td>-51.0</td><td>70.0</td><td>170.0</td><td>77.4*</td></tr></table> <p>* referenced to preceeding tower Nighttime Operation</p>	Twr No.	Field Ratio	Phase ang	Spacing	Bearing	Elev. Hgt	1	0.388	-155.0	0.0	0.0	77.4	2	1.000	0.0	70.0	170.0	77.4*	3	0.943	154.5	70.0	170.0	77.4*	4	0.326	-51.0	70.0	170.0	77.4*	<p>Horizontal Plane Standard Pattern</p> <p>$\theta = 0^\circ$</p> <p>Prepared for: OAK LAWN, IL</p>	<p>Call: WNWI Freq: 1080 kHz Power: 0.650 kW Type : DA-N Time : Unlimited Latitude : N 41-38-36 Longitude: W 87-38-45</p> <p>Munn-Reese, Inc. of Coldwater, MI</p>
Twr No.	Field Ratio	Phase ang	Spacing	Bearing	Elev. Hgt																												
1	0.388	-155.0	0.0	0.0	77.4																												
2	1.000	0.0	70.0	170.0	77.4*																												
3	0.943	154.5	70.0	170.0	77.4*																												
4	0.326	-51.0	70.0	170.0	77.4*																												

**Complete Plots of Directional Polar Pattern for 0° to 60°
angles of radiation will be supplied upon request.**

MUNN-REESE, INC.
Broadcast Engineering Consultants
Coldwater, MI 49036