

Non-Interference Compliance

Regarding Facility id 152831

Channel 210

Description of Exhibit 12 Contents

This exhibit demonstrates that the proposed facility complies with contour overlap and interference protection provisions in all of the applicable rule sections and that this application for a construction permit is in full compliance with 47 C.F.R. § 74.1204.

Let it be noted that should any actual real world interference occur, the applicant acknowledges that it will promptly suspend operation of this translator in accordance with 47 C.F.R. § 74.1203.

Page 2 of this exhibit is an explanation of the method used to demonstrate compliance with contour overlap and interference provisions based on 47 C.F.R. § 74.1204(d), which states:

[A]n application otherwise precluded by this section will be accepted if it can be demonstrated that no actual interference will occur due to intervening terrain, lack of population or such other factors as may be applicable.

Page 3 contains a tabulation of the vertical radiation pattern of the proposed antenna and the minimum ground clearance of the interfering contour based on this pattern.

Pages 4 and 5 include a plot and a tabulation of the vertical radiation pattern for the proposed antenna provided by the antenna manufacturer.

Page 6 of this exhibit contains the tabulated data from the interference analysis, which shows all stations whose protected contours come within 50 km of the 34 dBμ F(50,10) contour of the proposed translator. These tabulated values were calculated using data from the FCC's CDBS files and 30 arc second terrain data. The column labeled "Adj" shows the number of channels difference between the entry and the proposed translator. The column labeled "Dist" shows the distance in km. The column labeled "Overlap" shows the area of contour overlap in square kilometers.

Page 7 of this exhibit is a portion of a USGS 1:24,000 scale 7.5 minute quadrangle at full scale with the calculated area of interference overlaid. The sheet includes the quadrangle name and measurement scale at the bottom-left corner (note: "Mt" refers to meters). The area of interference was calculated using the free space equation and 120 radials.

Page 8 of this exhibit is a high resolution aerial photo of the vicinity surrounding the proposed translator's tower site provided by the U.S. Geological Survey's National Aerial Photography Program. It has been included to provide clarification of the nature of the buildings in the vicinity.

Compliance with 47 C.F.R. § 74.1204(d)

All authorized second and third adjacent stations with which the proposed translator has contour overlap are tabulated below. Column four show the station's signal level at the proposed translator's tower site, and column five gives the minimum value within the entire standard interfering contour of the proposed translator (100 dBμ for most classes, 94 for class B, 97 for class B1). The minimum second or third adjacent F(50,50) contour within the proposed translator's standard interfering contour was used to calculate the proposed translator's actual "worst-case" interfering contour.

Application_id	File Number	Callsign	Contour at Tower	Min. Contour
180054	BLED19921221KB	WIPA	54.9	54.8
253356	BLED19970916KF	WQUB	95.1	94.6
Minimum F(50,50) Contour of Adjacent Station within Proposed Translator's Standard Interfering Contour				54.8

FCC 02-244 at Section II.A.5 states that "when demonstrating that 'no actual interference will occur due to . . . other factors,' pursuant to Section 74.1204(d), an applicant may use the undesired-to-desired signal ratio method." The undesired-to-desired ratio for second and third adjacent stations required by § 74.1204(a) is 40 dB. Since the minimum protected contour strength within the proposed translator's standard interference contour is **54.8 dBμ**, this makes the proposed translator's worst-case interfering contour **94.8 dBμ**. By the free-space equation, this contour is calculated to extend a maximum of **285.4 m** from the transmit antenna.

The maximum horizontal plane of the interfering contour was calculated for 120 radials and plotted on the pertinent portion of a USGS quadrangle (page 8 of this exhibit). However, the field strength of the proposed translator's antenna varies with angle of depression from horizontal. The antenna relative fields are tabulated on the following page at 5 degree increments, starting at 5 degrees below horizontal. Antenna relative field strength data was provided and certified by the manufacturer of the proposed antenna. Using a free-space calculation that neglects any loss due to reflection, the vertical ground clearance of the proposed translator's interference contour has been tabulated. As shown on the following page, the area of interference clears the tower ground level (TGL) by **11.9 m** at the lowest point. The applicant has taken into account USGS quadrangles and relevant aerial photography in stating that no structures, except possibly tower support structures, puncture the area of interference. Hence, in accordance with 47 C.F.R. § 74.1204(d) and the clarification provided by the FCC in the decision *Re: Living Way Ministries* (FCC 02-244), a lack of population has been demonstrated within the area of interference and this application is therefore in full compliance with 47 C.F.R. § 74.1204.

Antenna Manufacturer:	NIC
Antenna Model:	BKG77-2(.5)
CORAGL:	92 m
Maximum ERP:	0.005 kW
Interfering Contour:	94.8 dBμ
Max Int. Contour Distance:	285.4 m
Min Ground Clearance:	11.9 m

Depression Angle Below Horizontal	Antenna Relative Field	ERP (watts)	Distance to Interfering Contour from Antenna (m)	Horizontal Distance of Interfering Contour from Tower (m)	Vertical Clearance of Interfering Contour above TGL (m)
5	.973	4.7	277.7	276.7	67.8
10	.933	4.4	266.3	262.3	45.8
15	.855	3.7	244.0	235.7	28.8
20	.777	3.0	221.8	208.4	16.1
25	.664	2.2	189.5	171.8	11.9
30	.560	1.6	159.8	138.4	12.1
35	.456	1.0	130.2	106.6	17.3
40	.365	0.7	104.2	79.8	25.0
45	.292	0.4	83.3	58.9	33.1
50	.227	0.3	64.8	41.6	42.4
55	.172	0.1	49.1	28.2	51.8
60	.126	0.1	36.0	18.0	60.9
65	.096	0.0	27.4	11.6	67.2
70	.072	0.0	20.6	7.0	72.7
75	.056	0.0	16.0	4.1	76.6
80	.046	0.0	13.1	2.3	79.1
85	.039	0.0	11.1	1.0	80.9
90	.035	0.0	10.0	0.0	82.0
Minimum Clearance above TGL:					11.9 m

TX station: TV Mondiale

Site name: Monte Alto

Frequency: 100.00 MHz

Vertical diagram at an azimuth of 0° degrees


Dep (°)	Er (%)	ERP (KW)	Dep (°)	Er (%)	ERP (KW)	Dep (°)	Er (%)	ERP (KW)
0.0	100.0	8.73	120.0	4.5	0.02	240.0	4.5	0.02
2.0	99.1	8.57	122.0	4.6	0.02	242.0	4.3	0.02
4.0	98.0	8.38	124.0	4.7	0.02	244.0	4.1	0.01
6.0	96.6	8.15	126.0	4.9	0.02	246.0	3.9	0.01
8.0	95.1	7.89	128.0	5.0	0.02	248.0	3.8	0.01
10.0	93.3	7.60	130.0	5.1	0.02	250.0	3.7	0.01
12.0	90.3	7.11	132.0	5.3	0.02	252.0	3.6	0.01
14.0	87.1	6.62	134.0	5.4	0.03	254.0	3.4	0.01
16.0	83.9	6.15	136.0	5.6	0.03	256.0	3.3	0.01
18.0	80.9	5.71	138.0	5.8	0.03	258.0	3.3	0.01
20.0	77.7	5.28	140.0	6.1	0.03	260.0	3.3	0.01
22.0	73.1	4.67	142.0	6.5	0.04	262.0	3.3	0.01
24.0	68.6	4.10	144.0	6.8	0.04	264.0	3.3	0.01
26.0	64.2	3.60	146.0	7.2	0.05	266.0	3.4	0.01
28.0	60.0	3.15	148.0	7.6	0.05	268.0	3.4	0.01
30.0	56.0	2.73	150.0	7.9	0.05	270.0	3.5	0.01
32.0	51.7	2.33	152.0	8.2	0.06	272.0	3.6	0.01
34.0	47.5	1.97	154.0	8.4	0.06	274.0	3.8	0.01
36.0	43.6	1.66	156.0	8.7	0.07	276.0	4.0	0.01
38.0	40.0	1.40	158.0	8.9	0.07	278.0	4.2	0.02
40.0	36.5	1.17	160.0	9.1	0.07	280.0	4.6	0.02
42.0	33.5	0.98	162.0	9.2	0.07	282.0	4.9	0.02
44.0	30.5	0.81	164.0	9.3	0.08	284.0	5.3	0.02
46.0	27.8	0.67	166.0	9.4	0.08	286.0	5.9	0.03
48.0	25.1	0.55	168.0	9.5	0.08	288.0	6.5	0.04
50.0	22.7	0.45	170.0	9.5	0.08	290.0	7.2	0.05
52.0	20.3	0.36	172.0	9.5	0.08	292.0	8.1	0.06
54.0	18.2	0.29	174.0	9.5	0.08	294.0	9.1	0.07
56.0	16.2	0.23	176.0	9.5	0.08	296.0	10.1	0.09
58.0	14.3	0.18	178.0	9.5	0.08	298.0	11.3	0.11
60.0	12.6	0.14	180.0	9.4	0.08	300.0	12.6	0.14
62.0	11.3	0.11	182.0	9.5	0.08	302.0	14.3	0.18
64.0	10.1	0.09	184.0	9.5	0.08	304.0	16.2	0.23
66.0	9.1	0.07	186.0	9.6	0.08	306.0	18.2	0.29
68.0	8.1	0.06	188.0	9.5	0.08	308.0	20.3	0.36
70.0	7.2	0.05	190.0	9.5	0.08	310.0	22.7	0.45
72.0	6.5	0.04	192.0	9.5	0.08	312.0	25.1	0.55
74.0	5.9	0.03	194.0	9.4	0.08	314.0	27.8	0.67
76.0	5.3	0.02	196.0	9.3	0.08	316.0	30.5	0.81
78.0	4.9	0.02	198.0	9.2	0.07	318.0	33.5	0.98
80.0	4.6	0.02	200.0	9.1	0.07	320.0	36.5	1.17
82.0	4.2	0.02	202.0	8.9	0.07	322.0	40.0	1.40
84.0	4.0	0.01	204.0	8.7	0.07	324.0	43.6	1.66
86.0	3.8	0.01	206.0	8.4	0.06	326.0	47.5	1.97
88.0	3.6	0.01	208.0	8.2	0.06	328.0	51.7	2.33
90.0	3.5	0.01	210.0	7.9	0.05	330.0	56.0	2.73
92.0	3.4	0.01	212.0	7.6	0.05	332.0	60.0	3.15
94.0	3.4	0.01	214.0	7.2	0.05	334.0	64.2	3.60
96.0	3.3	0.01	216.0	6.8	0.04	336.0	68.6	4.10
98.0	3.3	0.01	218.0	6.5	0.04	338.0	73.1	4.67
100.0	3.3	0.01	220.0	6.1	0.03	340.0	77.7	5.28
102.0	3.3	0.01	222.0	5.8	0.03	342.0	80.9	5.71
104.0	3.3	0.01	224.0	5.6	0.03	344.0	83.9	6.15
106.0	3.4	0.01	226.0	5.4	0.03	346.0	87.1	6.62
108.0	3.6	0.01	228.0	5.3	0.02	348.0	90.3	7.11
110.0	3.7	0.01	230.0	5.1	0.02	350.0	93.3	7.60
112.0	3.8	0.01	232.0	5.0	0.02	352.0	95.1	7.89
114.0	3.9	0.01	234.0	4.9	0.02	354.0	96.6	8.15
116.0	4.1	0.01	236.0	4.7	0.02	356.0	98.0	8.38
118.0	4.3	0.02	238.0	4.6	0.02	358.0	99.1	8.57

TX station: TV Mondiale

Site name: Monte Alto

Frequency: 100.00 MHz

Vertical diagram

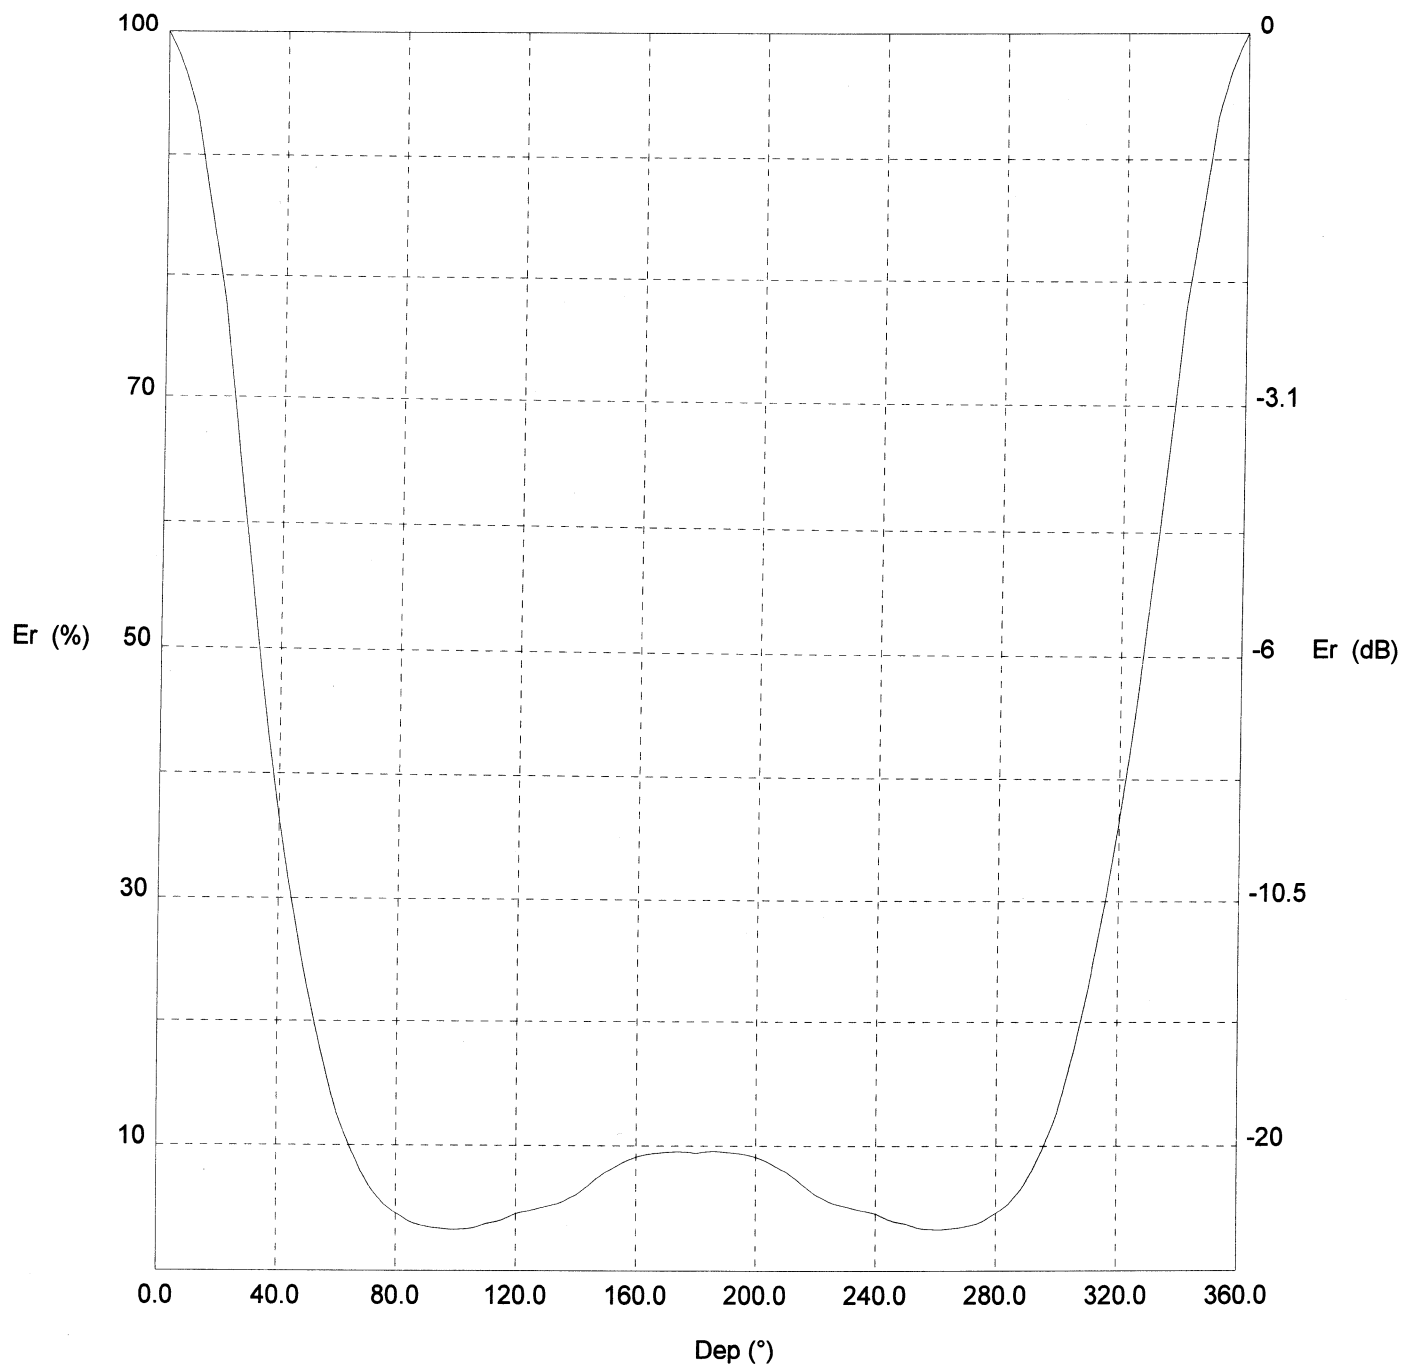

—— 0.0° Az. (Total antenna)

Adjacent Channel Study **For Station W210BW, Facility_id: 152831**

Co-channel through third adjacent:

Application_id	Facility_id	Prefix	ARN	Call	Licensee	Class	City	State	Status	ERP	RCAMSL	Channel	Adj	Dist	Overlap
253356	54282	BLEP	19970916KF	WQUB	QUINCY UNIVERSITY CORPORATION	B	QUINCY	IL	LIC	28	300	212	2	5.6	0.1425
180054	59011	BLEP	19921221KB	WIPA	UNIVERSITY OF IL AT SPRINGFIELD	B	PITTSFIELD	IL	LIC	50	316	207	3	59.8	0.1425
208308	71792	BLEP	19950420KA	WIUW	WESTERN ILLINOIS UNIVERSITY	B1	WARSAW	IL	LIC	10	311	208	2	46.6	0
275932	91919	BPED	19981020MC	981020MC	NEW LIFE EVANGELISTIC CENTER, INC.	C3	BOWLING GREEN	MO	CP	9	314	209	1	65.8	0
1210237	173721	BNPED	20071012AFS	NEW	H.O.P.E. BROADCASTING CORPORATION	A	MACOMB	IL	APP	3	251	213	3	78.4	0
1210239	173722	BNPED	20071012AFR	NEW	H.O.P.E. BROADCASTING CORPORATION	A	MACOMB	IL	APP	4	251	209	1	78.4	0
194949	25804	BLFT	19940215TB	W213AH	H.O.P.E. BROADCASTING CORPORATION	D	MACOMB, ETC.	IL	LIC	0.055	251	213	3	79.4	0
194950	25805	BLFT	19940215TC	W209AL	H.O.P.E. BROADCASTING CORPORATION	D	MACOMB, ETC.	IL	LIC	0.055	251	209	1	79.4	0
1214076	173483	BNPED	20071016AJC	NEW	CORNERSTONE COMMUNITY RADIO, INC.	C3	MACOMB	IL	APP	10	285	213	3	88.8	0
1214493	176422	BNPED	20071022AQX	NEW	2820 COMMUNICATIONS INCORPORATED	B1	TABLE GROVE	IL	APP	15	304	213	3	90.1	0
1205079	172642	BNPED	20071016AFS	NEW	BELIEVER'S BROADCASTING CORPORATION	B1	TABLE GROVE	IL	APP	11	283.5	213	3	91.9	0
1240208	177148	BNPED	20071022BLC	NONE	LIGHTHOUSE CHRISTIAN FELLOWSHIP	B1	MACOMB	IL	CP	10	274	211	1	92.4	0
1215566	177120	BNPED	20071022BRG	NEW	CALIFORNIA ASSOCIATION FOR RESEARCH AND	C2	MIDDLETOWN	MO	APP	31	316	211	1	95.2	0
533939	86561	BLEP	20001114AAA	KAYP	AMERICAN FAMILY ASSOCIATION	C3	BURLINGTON	IA	LIC	9	337	210	0	98.3	0
1211010	174234	BNPED	20071016ADD	NEW	SERENDIPITY EDUCATIONAL BROADCASTING, IN	A	BELLFLOWER	MO	APP	6	287	211	1	102.1	0
1249307	173762	BNPED	20071016AFW	NEW	BELIEVER'S BROADCASTING CORPORATION	C3	TROY	MO	APP	10.75	310.7	211	1	102.4	0

