

Exhibit 13-D
Section 74.1204
Contour Protection to KCCV-FM

This comprehensive exhibit has been prepared to demonstrate that the K224ET modification will not cause prohibited interference to second adjacent station KCCV-FM, Channel 222C3, Olathe, Kansas. The KCCV-FM F(50,50) protected contour at the K224ET application site is 63.9 dBu. Therefore the K224ET F(50,10) interfering contour with respect to KCCV-FM is the 103.9 dBu contour. Using the FCC's FM propagation curves program (see attached), the 103.9 dBu contour was calculated to extend 445 meters from the antenna.


A copy of the Kathrein-Scala CL-FM antenna vertical elevation pattern when operated with vertical polarity is attached. Using the data provided in the vertical elevation pattern, the ERP was calculated for every ten degrees of elevation. The respective contour distance for the K224ET interfering contour was then calculated using the FCC's FM propagation curves program. The attached spreadsheet then plotted the interfering curve from the antenna into free space. The interfering contour does not reach the ground. The nearest point to the ground of the K224ET interfering contour is approximately 240 meters (787 feet) from the tower base where the contour is 140 meters (459.2 feet) above ground level. The tower site is located in a rock quarry and the nearest occupied building is a residence approximately 305 meters (1000 feet) from the tower.

It is believed that the proposed modification to K224ET will not cause prohibited interference to KCCV-FM as no interference reaches the ground. The closest

the interfering contour comes to the ground is approximately 140 meters. There are no high rise or multi story buildings located near the proposed K224ET tower site. Therefore it is believed the proposed K224ET is in compliance with Section 74.1204 contour protection rules with respect to KCCV-FM.

Exhibit 13-C
Section 74.1204 Contour Protection
KCCV-FM CH222C3 Olathe, KS

The KCCV-FM FCC F(50,50) protected contour
with respect to K224ET is 63.9 dBu

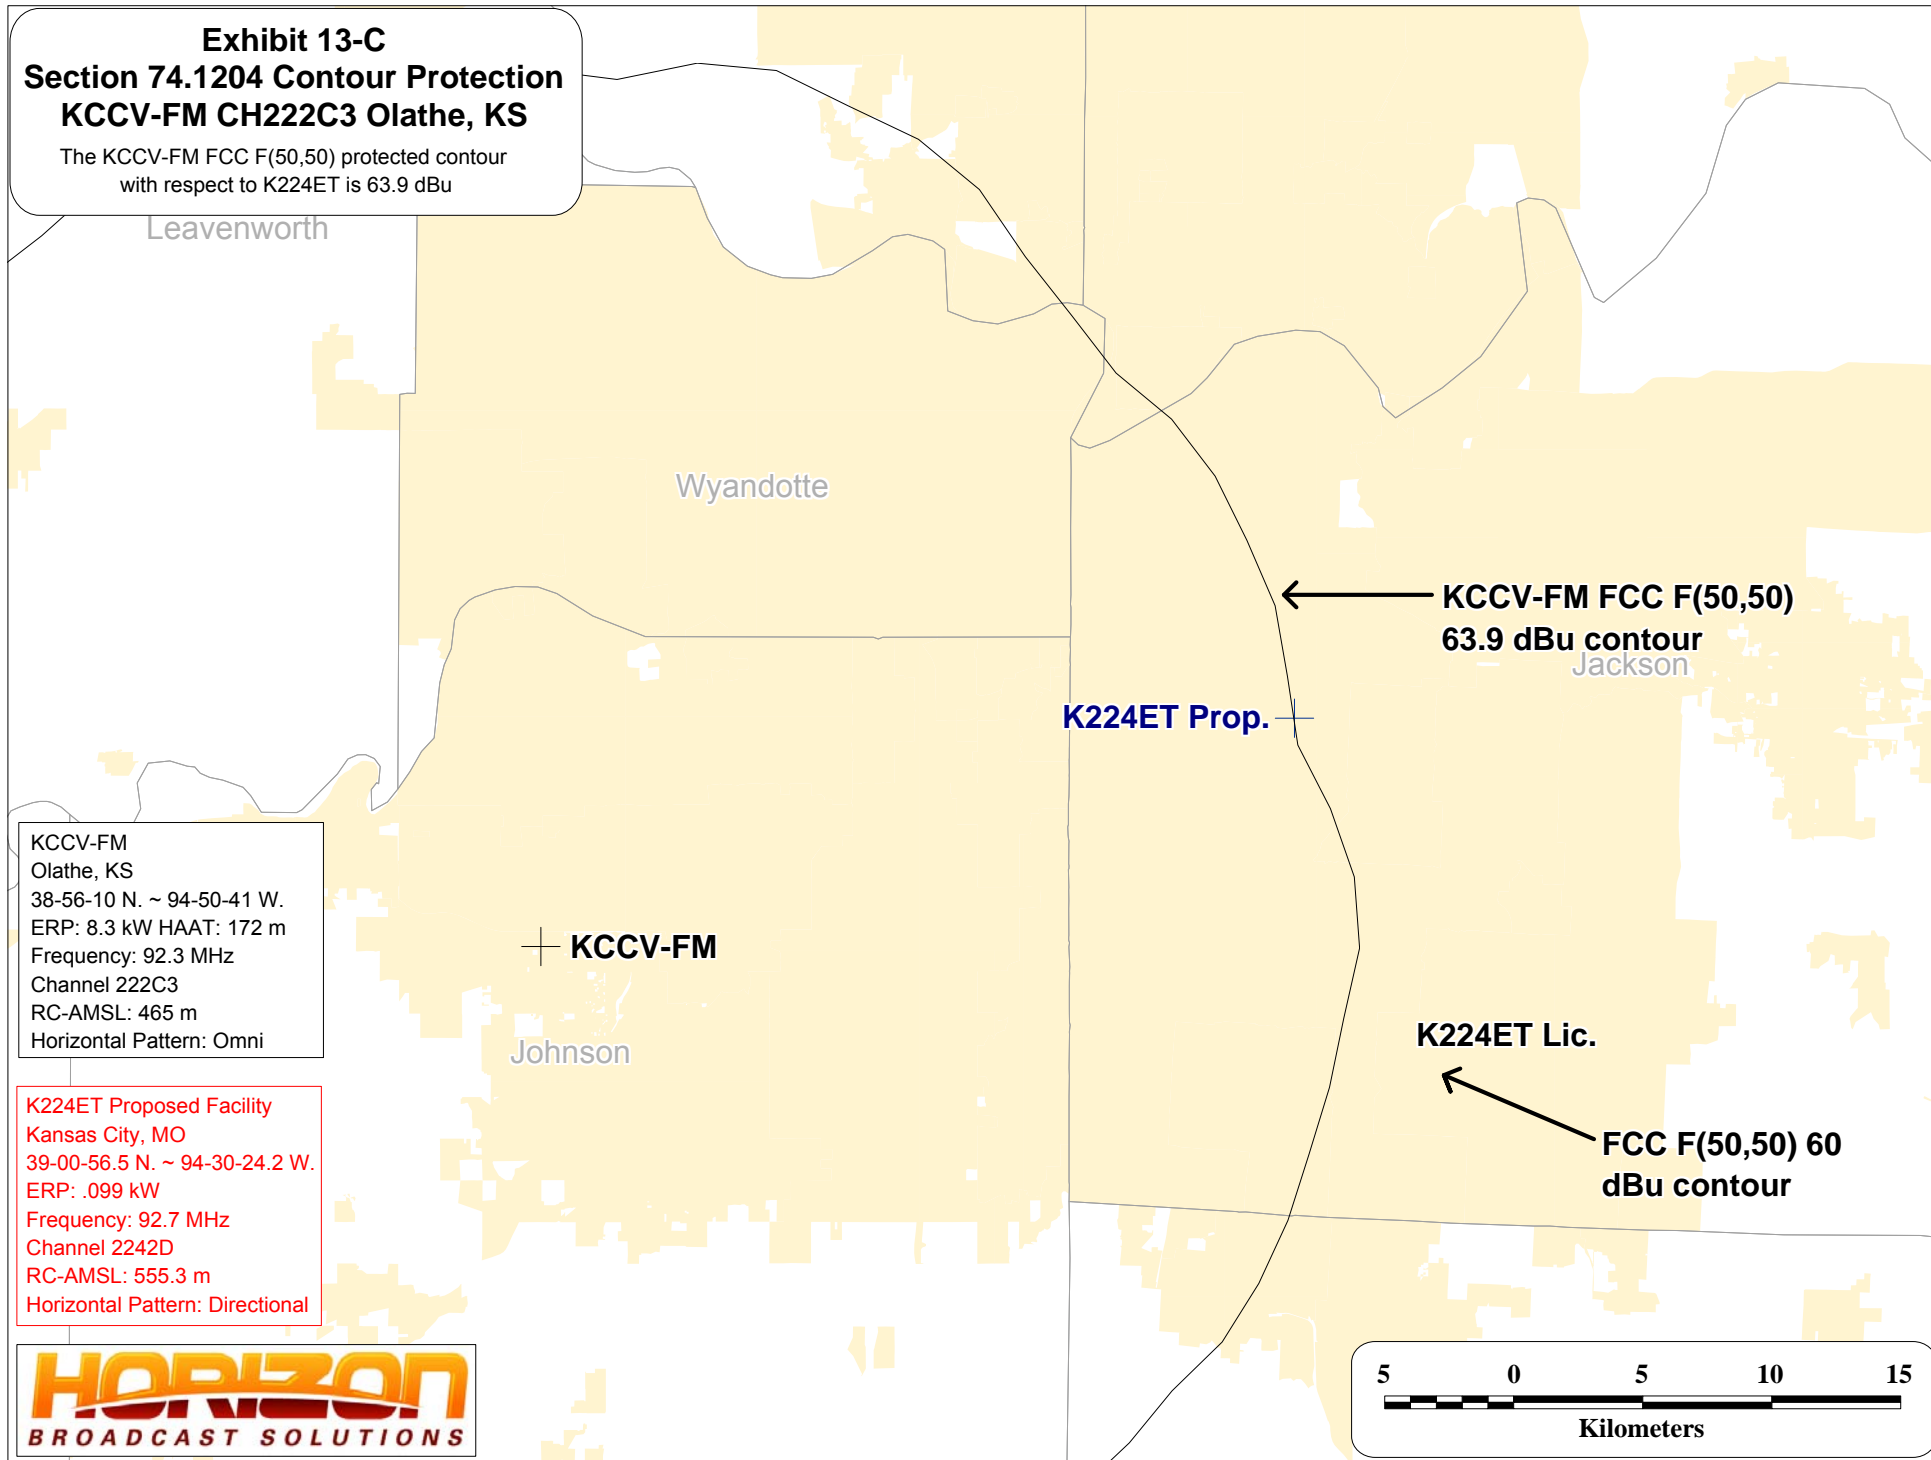



Audio Division

(202)-418-2700

FM and TV Propagations Curves Calculations

[FCC](#) > [MB](#) > [Audio Division](#) > [FM and TV Curves Calculations](#)

[FCC site map](#)

Results -- FM and TV Propagation Curves Calculations

Free Space equation used, not curves

Results of Calculation

Distance to Contour = 0.445 km

[Back to Numeric Entries](#)

[Back to Initial Selections](#)

For input data from Pages 1 and 2:

ERP entered = 0.099 kW

HAAT entered = 284.00 meters

Field Strength entered = 103.900 dBu

Find the Distance to the Contour, Given a Field Strength

F(50,10) curves for interfering contours

FM and NTSC analog TV Channels 2 through 6

[Back to Numeric Entries](#)

[Back to Initial Selections](#)

Comments on this program may be referred to [Dale Bickel](#)


[FCC Home](#) | [Search](#) | [RSS](#) | [Updates](#) | [E-Filing](#) | [Initiatives](#) | [Consumers](#) | [Find People](#)

If you would like more information pertaining to the Media Bureau, please call: (202) 418-7200.

Federal Communications
Commission
445 12th Street SW
Washington, DC 20554
[More FCC Contact Information...](#)

Phone: 1-888-CALL-FCC (1-888-225-5322)
TTY: 1-888-TELL-FCC (1-888-835-5322)
Fax: 1-866-418-0232

- [Privacy Policy](#)
- [Website Policies & Notices](#)
- [Required Browser Plug-ins](#)
- [Freedom of Information Act](#)

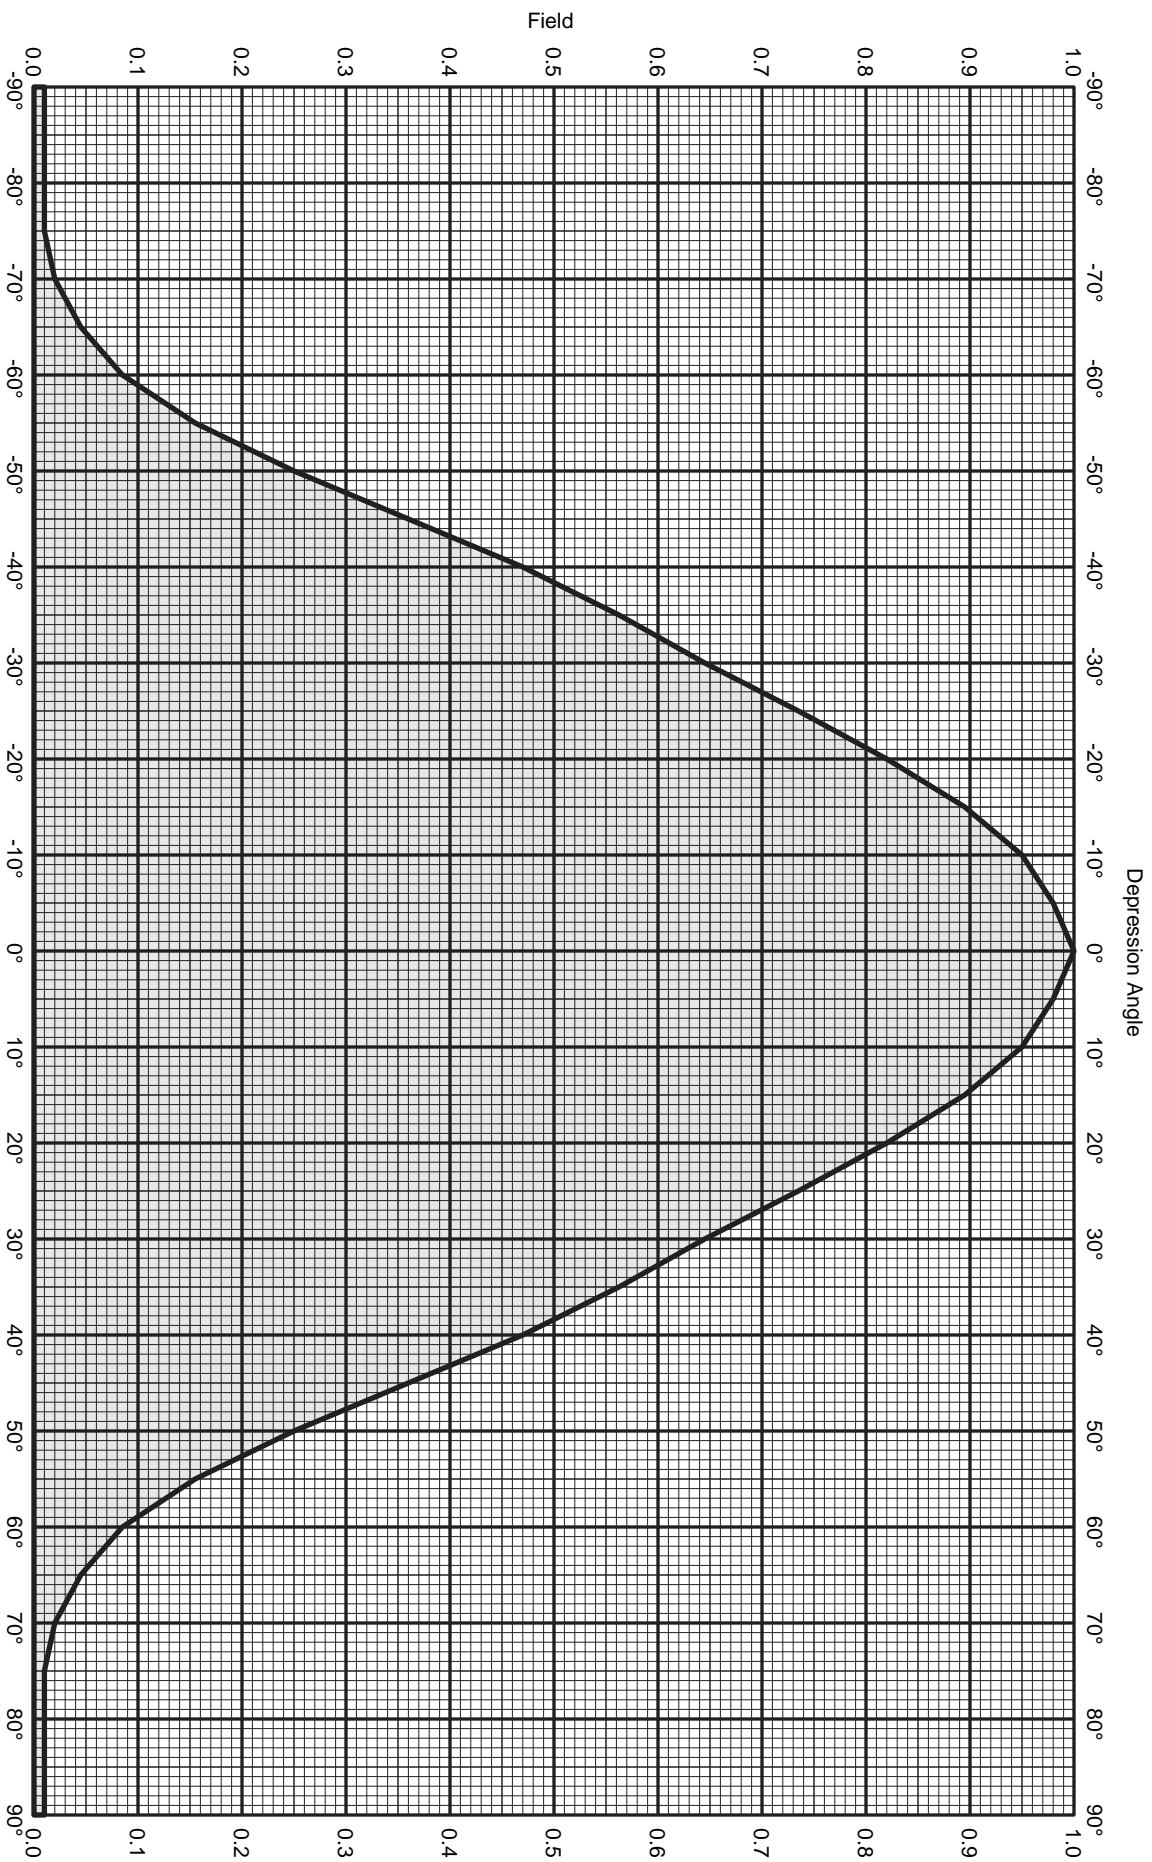

CL-FM

FM

Maximum gain: 7.0 dBd

Vertical polarization

Vertical radiation pattern
0 degree electrical downtilt



KATHREIN
SCALA DIVISION

Post Office Box 4580
Medford, OR 97501 (USA)
Phone: (541) 779-6500
Fax: (541) 779-3991
<http://www.kathrein-scala.com>



CL-FM

FM

Maximum gain: 7.0 dBd

Vertical polarization

Vertical radiation pattern

0 degree electrical downtilt

Angle	Field	Rel.dB	dBd	PwrMult	Angle	Field	Rel.dB	dBd	PwrMult
-90	0.010	-40.00	-33.00	0.00	-45	0.360	-8.87	-1.87	0.65
-89	0.010	-40.00	-33.00	0.00	-44	0.382	-8.36	-1.36	0.73
-88	0.010	-40.00	-33.00	0.00	-43	0.404	-7.87	-0.87	0.82
-87	0.010	-40.00	-33.00	0.00	-42	0.426	-7.41	-0.41	0.91
-86	0.010	-40.00	-33.00	0.00	-41	0.448	-6.97	0.03	1.01
-85	0.010	-40.00	-33.00	0.00	-40	0.470	-6.56	0.44	1.11
-84	0.010	-40.00	-33.00	0.00	-39	0.488	-6.22	0.78	1.20
-83	0.010	-40.00	-33.00	0.00	-38	0.507	-5.90	1.10	1.29
-82	0.010	-40.00	-33.00	0.00	-37	0.525	-5.59	1.41	1.38
-81	0.010	-40.00	-33.00	0.00	-36	0.544	-5.29	1.71	1.48
-80	0.010	-40.00	-33.00	0.00	-35	0.562	-5.00	2.00	1.59
-79	0.010	-40.00	-33.00	0.00	-34	0.579	-4.75	2.25	1.68
-78	0.010	-40.00	-33.00	0.00	-33	0.595	-4.50	2.50	1.78
-77	0.010	-40.00	-33.00	0.00	-32	0.612	-4.26	2.74	1.88
-76	0.010	-40.00	-33.00	0.00	-31	0.628	-4.03	2.97	1.98
-75	0.010	-40.00	-33.00	0.00	-30	0.645	-3.81	3.19	2.09
-74	0.012	-38.42	-31.42	0.00	-29	0.663	-3.57	3.43	2.20
-73	0.014	-37.08	-30.08	0.00	-28	0.681	-3.34	3.66	2.32
-72	0.016	-35.92	-28.92	0.00	-27	0.699	-3.11	3.89	2.45
-71	0.018	-34.89	-27.89	0.00	-26	0.717	-2.89	4.11	2.58
-70	0.020	-33.98	-26.98	0.00	-25	0.735	-2.67	4.33	2.71
-69	0.025	-32.04	-25.04	0.00	-24	0.752	-2.48	4.52	2.83
-68	0.030	-30.46	-23.46	0.00	-23	0.769	-2.28	4.72	2.96
-67	0.035	-29.12	-22.12	0.01	-22	0.786	-2.09	4.91	3.10
-66	0.040	-27.96	-20.96	0.01	-21	0.803	-1.91	5.09	3.23
-65	0.045	-26.94	-19.94	0.01	-20	0.820	-1.72	5.28	3.37
-64	0.053	-25.51	-18.51	0.01	-19	0.835	-1.57	5.43	3.49
-63	0.061	-24.29	-17.29	0.02	-18	0.850	-1.41	5.59	3.62
-62	0.069	-23.22	-16.22	0.02	-17	0.865	-1.26	5.74	3.75
-61	0.077	-22.27	-15.27	0.03	-16	0.880	-1.11	5.89	3.88
-60	0.085	-21.41	-14.41	0.04	-15	0.895	-0.96	6.04	4.01
-59	0.099	-20.09	-13.09	0.05	-14	0.906	-0.86	6.14	4.11
-58	0.113	-18.94	-11.94	0.06	-13	0.917	-0.75	6.25	4.21
-57	0.127	-17.92	-10.92	0.08	-12	0.928	-0.65	6.35	4.32
-56	0.141	-17.02	-10.02	0.10	-11	0.939	-0.55	6.45	4.42
-55	0.155	-16.19	-9.19	0.12	-10	0.950	-0.45	6.55	4.52
-54	0.174	-15.19	-8.19	0.15	-9	0.956	-0.39	6.61	4.58
-53	0.193	-14.29	-7.29	0.19	-8	0.962	-0.34	6.66	4.64
-52	0.212	-13.47	-6.47	0.23	-7	0.968	-0.28	6.72	4.70
-51	0.231	-12.73	-5.73	0.27	-6	0.974	-0.23	6.77	4.75
-50	0.250	-12.04	-5.04	0.31	-5	0.980	-0.18	6.82	4.81
-49	0.272	-11.31	-4.31	0.37	-4	0.984	-0.14	6.86	4.85
-48	0.294	-10.63	-3.63	0.43	-3	0.988	-0.10	6.90	4.89
-47	0.316	-10.01	-3.01	0.50	-2	0.992	-0.07	6.93	4.93
-46	0.338	-9.42	-2.42	0.57	-1	0.996	-0.03	6.97	4.97
					0	1.000	0.00	7.00	5.01



CL-FM

FM

Maximum gain: 7.0 dBd

Vertical polarization

Vertical radiation pattern


0 degree electrical downtilt

Angle	Field	Rel.dB	dBd	PwrMult	Angle	Field	Rel.dB	dBd	PwrMult
0	1.000	0.00	7.00	5.01	45	0.360	-8.87	-1.87	0.65
1	0.996	-0.03	6.97	4.97	46	0.338	-9.42	-2.42	0.57
2	0.992	-0.07	6.93	4.93	47	0.316	-10.01	-3.01	0.50
3	0.988	-0.10	6.90	4.89	48	0.294	-10.63	-3.63	0.43
4	0.984	-0.14	6.86	4.85	49	0.272	-11.31	-4.31	0.37
5	0.980	-0.18	6.82	4.81	50	0.250	-12.04	-5.04	0.31
6	0.974	-0.23	6.77	4.75	51	0.231	-12.73	-5.73	0.27
7	0.968	-0.28	6.72	4.70	52	0.212	-13.47	-6.47	0.23
8	0.962	-0.34	6.66	4.64	53	0.193	-14.29	-7.29	0.19
9	0.956	-0.39	6.61	4.58	54	0.174	-15.19	-8.19	0.15
10	0.950	-0.45	6.55	4.52	55	0.155	-16.19	-9.19	0.12
11	0.939	-0.55	6.45	4.42	56	0.141	-17.02	-10.02	0.10
12	0.928	-0.65	6.35	4.32	57	0.127	-17.92	-10.92	0.08
13	0.917	-0.75	6.25	4.21	58	0.113	-18.94	-11.94	0.06
14	0.906	-0.86	6.14	4.11	59	0.099	-20.09	-13.09	0.05
15	0.895	-0.96	6.04	4.01	60	0.085	-21.41	-14.41	0.04
16	0.880	-1.11	5.89	3.88	61	0.077	-22.27	-15.27	0.03
17	0.865	-1.26	5.74	3.75	62	0.069	-23.22	-16.22	0.02
18	0.850	-1.41	5.59	3.62	63	0.061	-24.29	-17.29	0.02
19	0.835	-1.57	5.43	3.49	64	0.053	-25.51	-18.51	0.01
20	0.820	-1.72	5.28	3.37	65	0.045	-26.94	-19.94	0.01
21	0.803	-1.91	5.09	3.23	66	0.040	-27.96	-20.96	0.01
22	0.786	-2.09	4.91	3.10	67	0.035	-29.12	-22.12	0.01
23	0.769	-2.28	4.72	2.96	68	0.030	-30.46	-23.46	0.00
24	0.752	-2.48	4.52	2.83	69	0.025	-32.04	-25.04	0.00
25	0.735	-2.67	4.33	2.71	70	0.020	-33.98	-26.98	0.00
26	0.717	-2.89	4.11	2.58	71	0.018	-34.89	-27.89	0.00
27	0.699	-3.11	3.89	2.45	72	0.016	-35.92	-28.92	0.00
28	0.681	-3.34	3.66	2.32	73	0.014	-37.08	-30.08	0.00
29	0.663	-3.57	3.43	2.20	74	0.012	-38.42	-31.42	0.00
30	0.645	-3.81	3.19	2.09	75	0.010	-40.00	-33.00	0.00
31	0.628	-4.03	2.97	1.98	76	0.010	-40.00	-33.00	0.00
32	0.612	-4.26	2.74	1.88	77	0.010	-40.00	-33.00	0.00
33	0.595	-4.50	2.50	1.78	78	0.010	-40.00	-33.00	0.00
34	0.579	-4.75	2.25	1.68	79	0.010	-40.00	-33.00	0.00
35	0.562	-5.00	2.00	1.59	80	0.010	-40.00	-33.00	0.00
36	0.544	-5.29	1.71	1.48	81	0.010	-40.00	-33.00	0.00
37	0.525	-5.59	1.41	1.38	82	0.010	-40.00	-33.00	0.00
38	0.507	-5.90	1.10	1.29	83	0.010	-40.00	-33.00	0.00
39	0.488	-6.22	0.78	1.20	84	0.010	-40.00	-33.00	0.00
40	0.470	-6.56	0.44	1.11	85	0.010	-40.00	-33.00	0.00
41	0.448	-6.97	0.03	1.01	86	0.010	-40.00	-33.00	0.00
42	0.426	-7.41	-0.41	0.91	87	0.010	-40.00	-33.00	0.00
43	0.404	-7.87	-0.87	0.82	88	0.010	-40.00	-33.00	0.00
44	0.382	-8.36	-1.36	0.73	89	0.010	-40.00	-33.00	0.00
					90	0.010	-40.00	-33.00	0.00

Θ (°)	Θ (radians)	R (m)		x'	y'	$y = 284 - y'$	Gnd
0	0	445		445	0	284.0	0
10	0.175	423		416.6	73.5	210.5	0
20	0.349	365		343.0	124.8	159.2	0
30	0.524	287		248.5	143.5	140.5	0
40	0.698	210		160.9	135.0	149.0	0
50	0.873	111		71.3	85.0	199.0	0
60	1.047	45		22.5	39.0	245.0	0
70	1.222	0		0.0	0.0	284.0	0
80	1.396	0		0.0	0.0	284.0	0
90	1.571	0		0.0	0	284	0

Angle of			103.9 dBu
Elevation	Relative	ERP	Contour*
(Degrees)	Field	(dBk)	(Meters)
0	1	-10.044	445
10	0.95	-10.489	423
20	0.82	-11.767	365
30	0.645	-13.852	287
40	0.47	-16.602	210
50	0.25	-22.085	111
60	0.085	-31.455	45
70	0.02	-44.023	0
80	0.01	-50.044	0
90	0.01	-50.044	0

K224ET - Kansas City, MO
Section 74.1204 Contour Protection to KCCV-FM CH222C3 Olathe, KS
(103.9 dBu F(50,10) interfering contour shown)

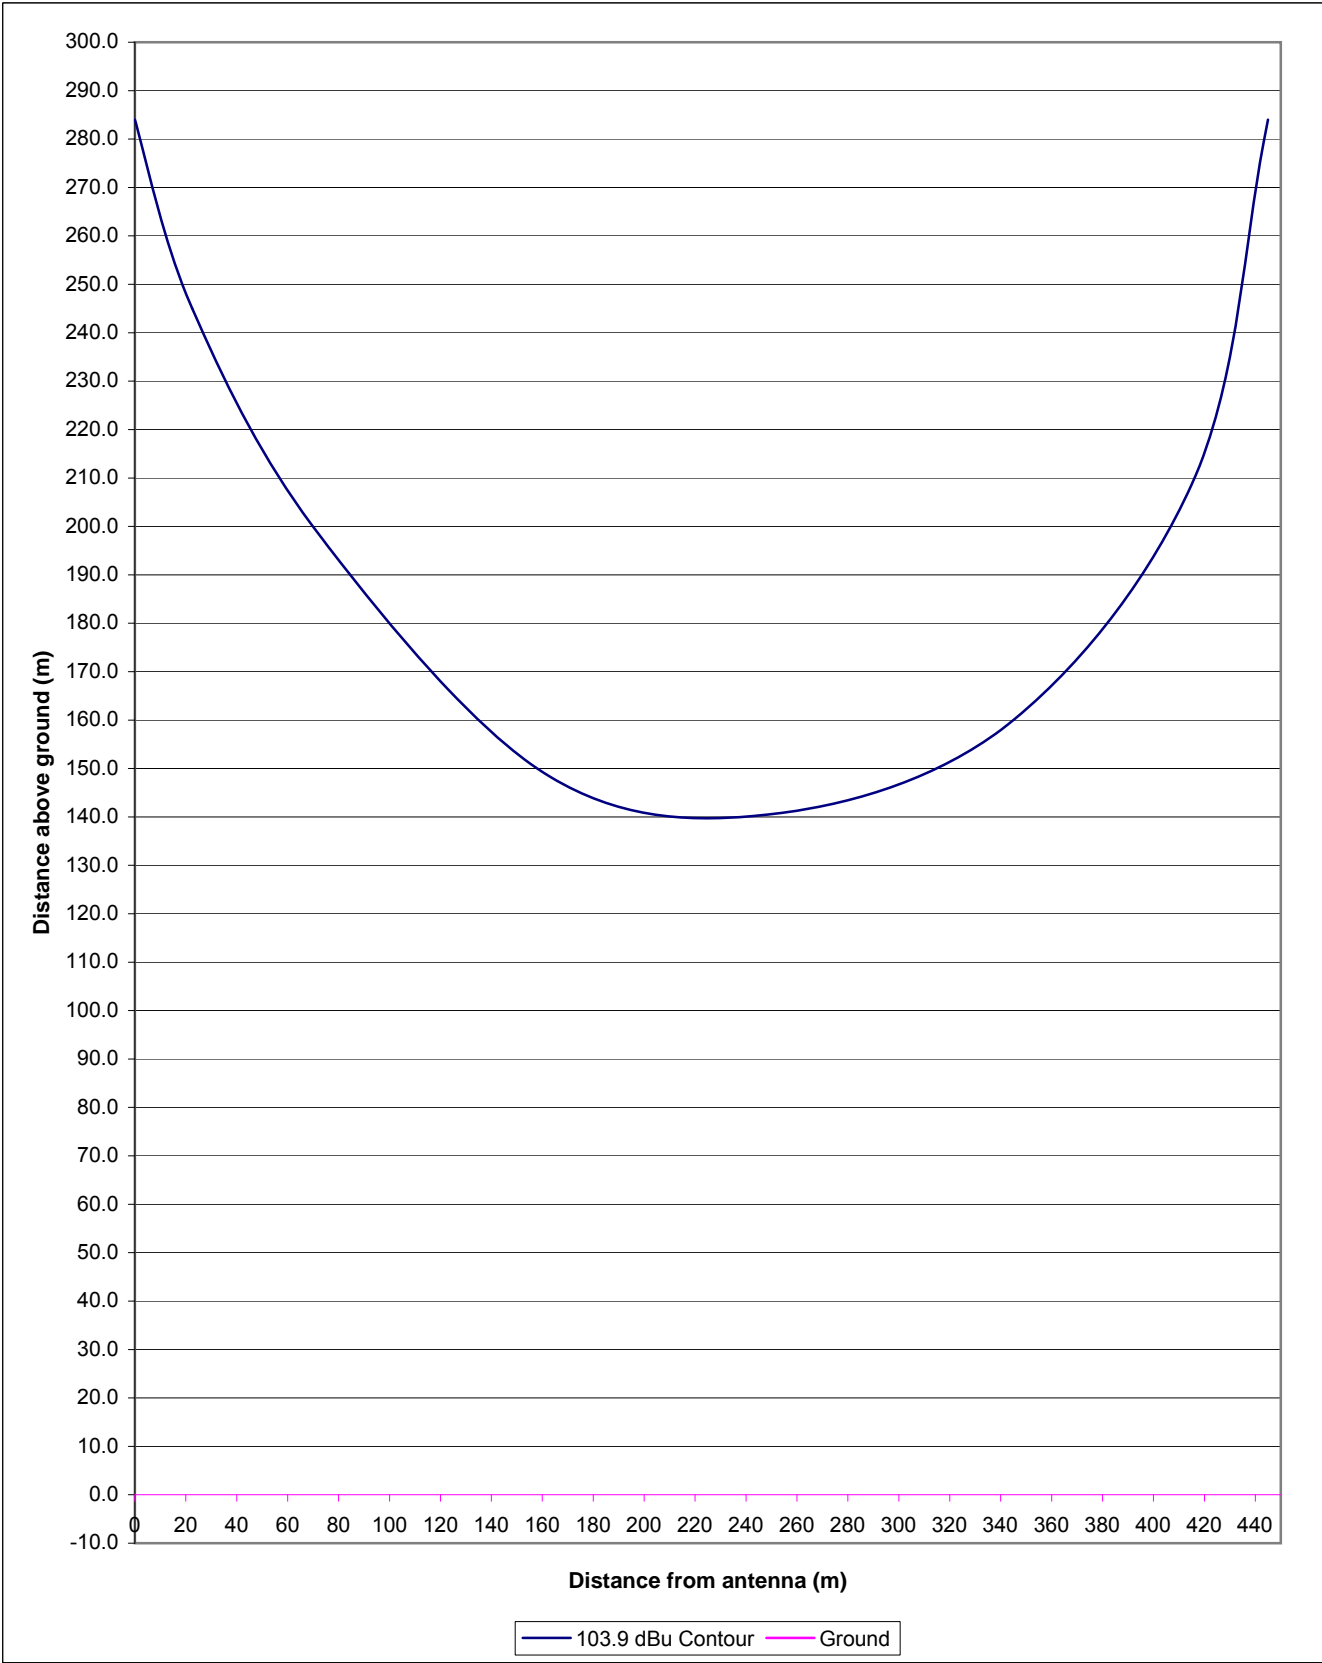

The K224ET interfering contour with respect to KCCV-FM does not reach the ground.