

**December 2007
New NCE FM
Cedarville, CA
NIER Analysis**

Facilities Proposed

The proposed operation will be with an effective radiated power of 0.13 kilowatts. Operation is proposed with a 1-element circularly-polarized omni-directional antenna. The antenna will be side-mounted on a pole atop a building at the corner of Main and Bonner in Cedarville.

NIER Calculations

The power density calculations shown below were made using the techniques outlined in OET Bulletin No. 65. "Ground level" calculations in this report have been made at a reference height of 2 meters above ground to provide a worst-case estimate of exposure for persons standing on the ground in the vicinity of the tower. The equation shown below was used to calculate the ground level power density figures from each antenna.

$$S(mW / cm^2) = \frac{33.40981 \times AdjERP(Watts)}{D^2}$$

Where: *AdjERP(Watts)* is the maximum lobe effective radiated power times the element pattern factor times the array pattern factor.


D is the distance in meters from the center of radiation to the calculation point.

Ground level power densities have been calculated for locations extending from the base of the tower to a distance of 1000 meters. Values past this point are increasingly negligible.

Calculations of the power density produced by the proposed antenna system assume a Type 1 element pattern, which is the element pattern for a "worst case" ring-stub antenna. The highest

calculated ground level power density occurs at a distance of 3 meters from the base of the antenna support structure. At this point the power density is calculated to be $64.2 \mu\text{W}/\text{cm}^2$, which is 32.1% of $200 \mu\text{W}/\text{cm}^2$ (the FCC standard for uncontrolled environments).

The antenna tower is or will be posted with warning signs. Pursuant to OET Bulletin No. 65, all station personnel and contractors are required to follow appropriate safety procedures before any work is commenced on the antenna tower, including reduction in power or discontinuance of operation before any maintenance work is undertaken. The building atop which the antenna will be installed is directly owned by the director and treasurer of the applicant. There is no public access to the rooftop. The applicant agrees to reduce power or cease operation as necessary to protect persons having access to the rooftop from radiofrequency radiation in excess of FCC guidelines.

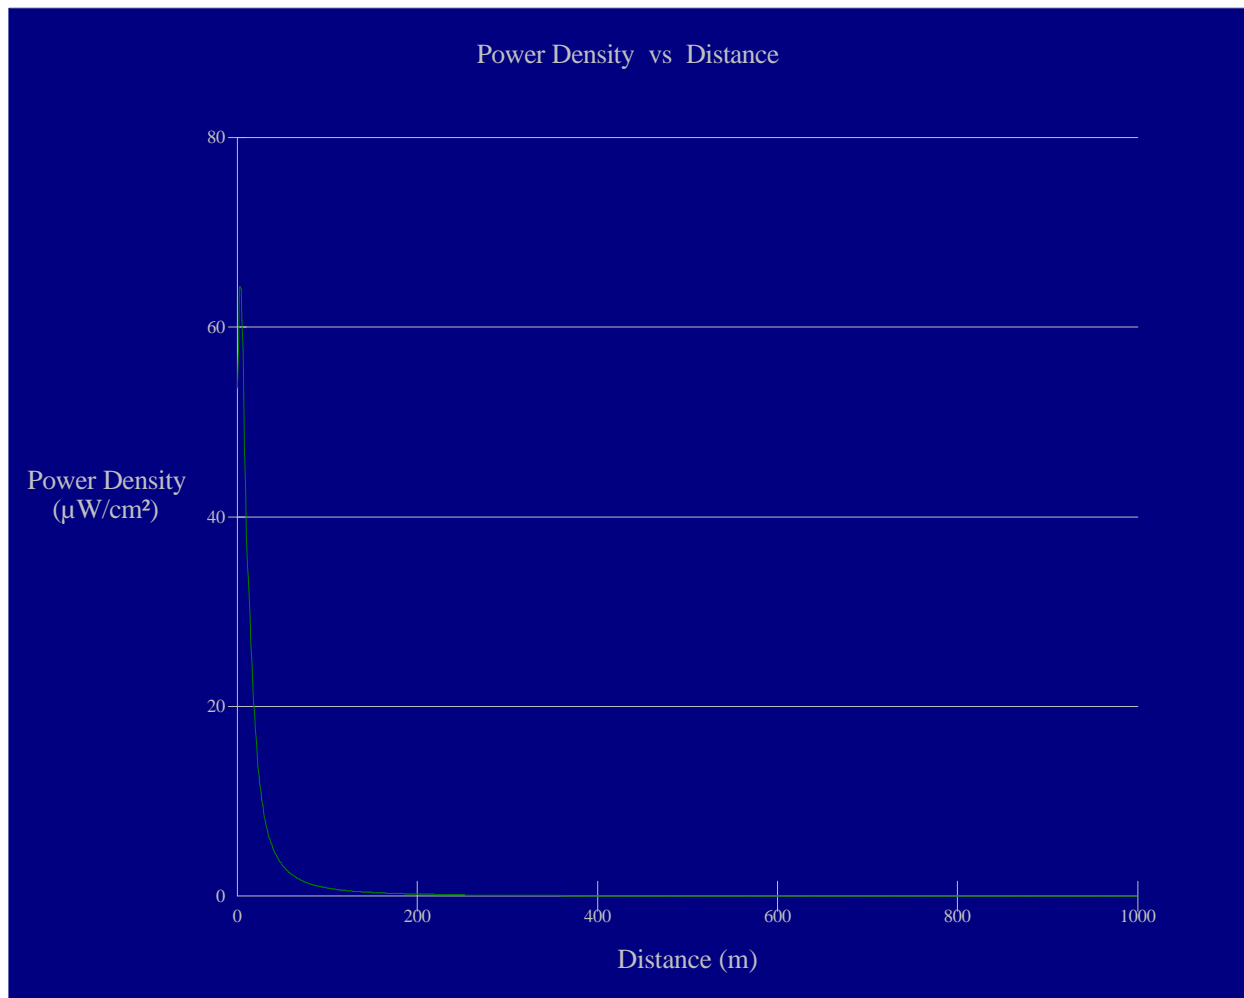

Ground-Level NIER

OET FMModel

Cedarville NCE FM

Antenna Type: "worst case" ring-stub assumed for this study

No. of Elements: 1

Element Spacing: dna

Distance: 1000 meters

Horizontal ERP: 0.13 kW

Vertical ERP: 0.13 kW

Antenna Height: 11 meters AGL

Maximum Power Density is 64.2 : W/cm² at 3 meters from the antenna structure.

Hatfield & Dawson Consulting Engineers