

Exhibit 11 Page 1
Rosalinda C Raabe Ministries
Second-Adjacent Waiver Request
Edinburg, TX

The proposed LPFM station will broadcast on channel 239, which is within the 93 kilometers second-adjacent minimum distance separation of station KBTQ on channel 241. The KBTQ interfering contour at the LPFM tower site is 76.8 dBμ F(50,50). Using the ratio of 100:1 (LPFM to KBTQ) on the second-adjacent channel, the population within the proposed LPFM 116.8 dBμ contour is zero. Applying the antenna manufacturer's vertical radiation pattern the area of interference can be more accurately calculated geometrically, rather than just by using the free space equation alone. This particular antenna is a one bay Nicom BKG77 antenna. It was determined from the manufacturer's vertical plan that at 35 degrees below horizontal the interference area would extend 18.9 meters toward the ground and 27 meters horizontally. We have proposed the antenna radiation center will be 49 meters above ground with an Effective Radiated Power of 33 watts, thus the interference area will not reach the ground. Further, there are no occupied structures or elevated roadways within the interference area. Therefore, the application is in compliance with §73.807(e)(1) *Waiver of the second-adjacent channel separations.*

Antenna Height Above Average Terrain Calculations -- Results

Input Data

Latitude **26° 18' 42"** North
Longitude **98° 8' 35"** West (NAD 27)

These coordinates convert to NAD 83 coordinates of
26° 18' 43.25", North, 98° 08' 36.03" West (NAD 83).

Height of antenna radiation center above mean sea level: **78 meters AMSL**

Number of Evenly Spaced Radials = **8** 0° is referenced to True North

Results

Calculated HAAT = **51 meters**

Antenna Height Above Average Terrain calculated
using 1 km [GLOBE terrain data](#)

Individual "Radial HAAT" Values, in meters

0°	55.0 m
45°	57.9 m
90°	59.2 m
135°	54.0 m
180°	47.7 m
225°	44.1 m
270°	41.6 m
315°	45.6 m

Print Results?

New Calculation?

Exhibit 11 Figure 2


Minimum Ground Clearance

Depression Angle Below Horizontal	Antenna Relative Field	ERP (Watts)	Distance to interfering Contour from Antenna (m)	Horizontal Distance of Interfering contour from tower (m)	Vertical Clearance of Interfering contour above TGL (m)
5	0.998	32.9	58	57.8	43.9
10	0.964	30.7	56	55.1	39.3
15	0.910	27.3	53	51.2	35.3
20	0.843	23.5	49	46.0	32.2
25	0.760	19.1	44	39.9	30.4
30	0.669	14.8	39	33.8	29.5
35	0.575	10.9	33	27.0	30.1
40	0.477	7.5	28	21.4	31.0
45	0.379	4.7	22	15.6	33.4
50	0.289	2.8	17	10.9	36.0
55	0.216	1.5	12	6.9	39.2
60	0.153	0.8	9	4.5	41.2
65	0.098	0.3	6	2.5	43.6
70	0.057	0.1	3	1.0	46.2
75	0.031	0.0	0	0.0	49.0
80	0.017	0.0	0	0.0	49.0
85	0.011	0.0	0	0.0	49.0
90	0.011	0.0	0	0.0	49.0
Minimum Clearance above TGL:					30.1 m

TX station:

Site name: 1 BAY ANTENNA

Frequency: 100.00 MHz

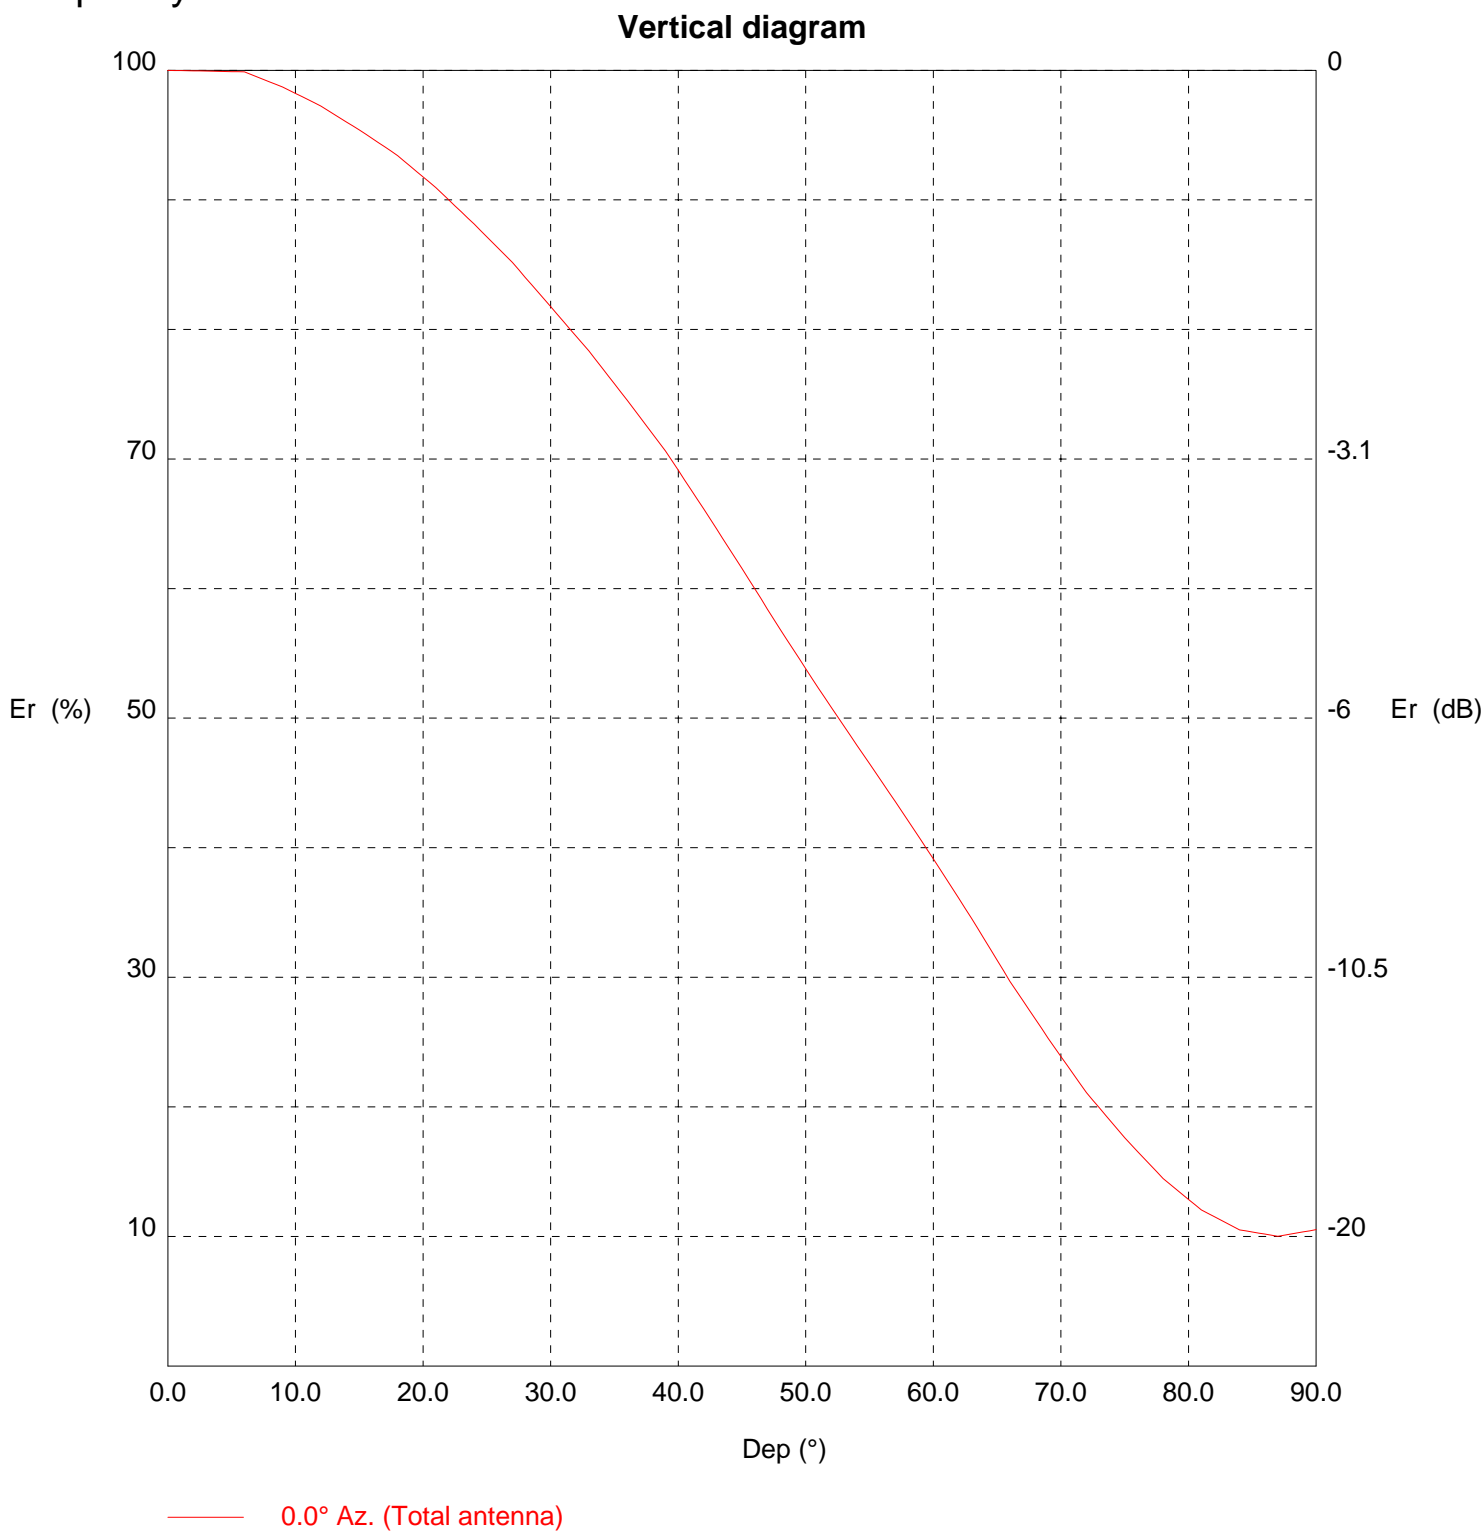

TX station:

Site name: 1 BAY ANTENNA

Frequency: 100.00 MHz

Vertical diagram at an azimuth of 0° degrees

Dep (°)	Er (%)	ERP (W)	Dep (°)	Er (%)	ERP (W)	Dep (°)	Er (%)	ERP (W)
0.0	100.0	373.6	30.0	81.8	249.8	60.0	39.1	57.2
0.5	100.0	373.6	30.5	81.2	246.3	60.5	38.4	55.0
1.0	100.0	373.5	31.0	80.6	242.9	61.0	37.6	52.8
1.5	100.0	373.4	31.5	80.1	239.5	61.5	36.8	50.7
2.0	100.0	373.4	32.0	79.5	236.1	62.0	36.1	48.6
2.5	100.0	373.3	32.5	78.9	232.7	62.5	35.3	46.6
3.0	99.9	373.3	33.0	78.3	229.3	63.0	34.5	44.6
3.5	99.9	373.2	33.5	77.7	225.6	63.5	33.7	42.5
4.0	99.9	373.1	34.0	77.1	222.0	64.0	32.9	40.5
4.5	99.9	373.0	34.5	76.4	218.3	64.5	32.1	38.6
5.0	99.9	372.9	35.0	75.8	214.7	65.0	31.3	36.6
5.5	99.9	372.8	35.5	75.2	211.1	65.5	30.5	34.8
6.0	99.9	372.8	36.0	74.5	207.6	66.0	29.7	33.0
6.5	99.7	371.3	36.5	73.9	204.0	66.5	29.0	31.4
7.0	99.5	369.9	37.0	73.2	200.4	67.0	28.2	29.8
7.5	99.3	368.4	37.5	72.6	196.8	67.5	27.5	28.3
8.0	99.1	367.0	38.0	71.9	193.3	68.0	26.8	26.8
8.5	98.9	365.5	38.5	71.3	189.8	68.5	26.0	25.3
9.0	98.7	364.1	39.0	70.6	186.3	69.0	25.3	23.9
9.5	98.5	362.3	39.5	69.9	182.4	69.5	24.6	22.6
10.0	98.2	360.5	40.0	69.1	178.6	70.0	23.9	21.3
10.5	98.0	358.7	40.5	68.4	174.7	70.5	23.2	20.1
11.0	97.7	356.9	41.0	67.6	170.9	71.0	22.5	18.9
11.5	97.5	355.1	41.5	66.9	167.2	71.5	21.8	17.7
12.0	97.2	353.3	42.0	66.1	163.5	72.0	21.1	16.6
12.5	96.9	351.1	42.5	65.4	159.7	72.5	20.5	15.7
13.0	96.6	348.9	43.0	64.6	156.0	73.0	19.9	14.8
13.5	96.3	346.7	43.5	63.9	152.3	73.5	19.3	14.0
14.0	96.0	344.5	44.0	63.1	148.7	74.0	18.8	13.2
14.5	95.7	342.3	44.5	62.3	145.1	74.5	18.2	12.4
15.0	95.4	340.1	45.0	61.6	141.6	75.0	17.6	11.6
15.5	95.1	337.8	45.5	60.8	138.0	75.5	17.1	10.9
16.0	94.7	335.4	46.0	60.0	134.4	76.0	16.6	10.2
16.5	94.4	333.1	46.5	59.2	130.9	76.5	16.0	9.6
17.0	94.1	330.8	47.0	58.4	127.5	77.0	15.5	9.0
17.5	93.8	328.4	47.5	57.6	124.1	77.5	15.0	8.4
18.0	93.4	326.1	48.0	56.8	120.7	78.0	14.5	7.8
18.5	93.0	323.3	48.5	56.1	117.5	78.5	14.1	7.4
19.0	92.6	320.4	49.0	55.3	114.4	79.0	13.7	7.0
19.5	92.2	317.5	49.5	54.6	111.3	79.5	13.3	6.6
20.0	91.8	314.7	50.0	53.8	108.2	80.0	12.9	6.2
20.5	91.4	311.9	50.5	53.1	105.2	80.5	12.5	5.8
21.0	91.0	309.1	51.0	52.3	102.2	81.0	12.0	5.4
21.5	90.5	305.9	51.5	51.6	99.4	81.5	11.8	5.2
22.0	90.0	302.7	52.0	50.8	96.6	82.0	11.5	5.0
22.5	89.5	299.6	52.5	50.1	93.8	82.5	11.3	4.8
23.0	89.1	296.5	53.0	49.4	91.1	83.0	11.0	4.5
23.5	88.6	293.4	53.5	48.6	88.4	83.5	10.8	4.3
24.0	88.1	290.3	54.0	47.9	85.8	84.0	10.5	4.1
24.5	87.6	287.0	54.5	47.2	83.2	84.5	10.4	4.1
25.0	87.2	283.8	55.0	46.5	80.7	85.0	10.3	4.0
25.5	86.7	280.6	55.5	45.7	78.2	85.5	10.3	3.9
26.0	86.2	277.4	56.0	45.0	75.7	86.0	10.2	3.9
26.5	85.7	274.2	56.5	44.3	73.3	86.5	10.1	3.8
27.0	85.2	271.1	57.0	43.6	71.0	87.0	10.0	3.7
27.5	84.6	267.5	57.5	42.8	68.6	87.5	10.1	3.8
28.0	84.0	263.9	58.0	42.1	66.2	88.0	10.2	3.9
28.5	83.5	260.3	58.5	41.4	63.9	88.5	10.3	3.9
29.0	82.9	256.8	59.0	40.6	61.6	89.0	10.4	4.0
29.5	82.3	253.3	59.5	39.9	59.4	89.5	10.4	4.1

Exhibit 11 Figure 4
Aerial Photo of the 27.0 meter Vicinity Surrounding the Proposed Tower Site

