


Jampro "Double V" (EPA)-Type 2, 2 Bays, Spac= 1, H=1.9 kW, V=1.9 kW, 11.7 M AG

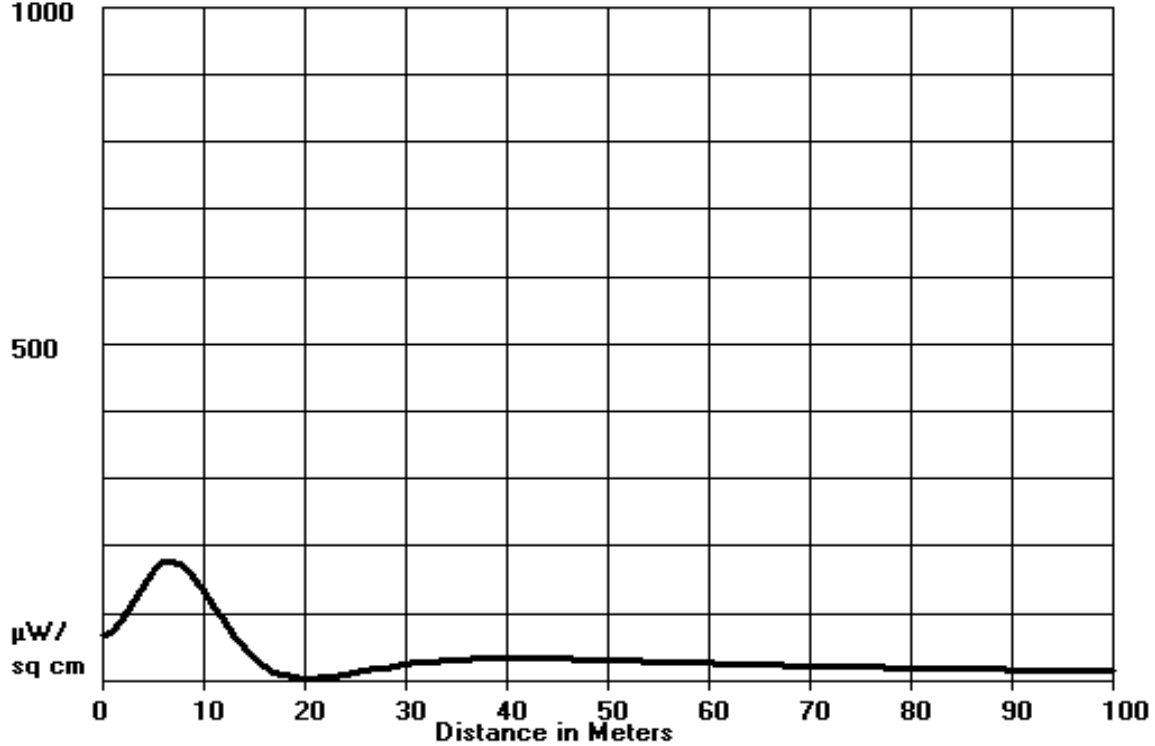

HORZ. DISTANCE FROM FM RADIATOR VS POWER DENSITY (Microwatt/Square cm)
 Dist(Meters) PD (H) PD (V) Total (uW/cm2) Percent Max.(1000)

Dist(Meters)	PD (H)	PD (V)	Total (uW/cm2)	Percent Max.(1000)
0	13.91	51.02	64.93	6.5
1	9.30	59.63	68.93	6.9
2	13.19	75.29	88.49	8.8
3	24.01	88.27	112.28	11.2
4	39.31	97.11	136.43	13.6
5	60.06	98.76	158.82	15.9
6	75.62	96.46	172.09	17.2
7	83.38	90.43	173.81	17.4
8	88.28	79.65	167.93	16.8
9	82.90	67.28	150.18	15.0
10	73.76	54.74	128.50	12.8
11	65.34	43.22	108.56	10.9
12	54.22	32.48	86.70	8.7
13	42.10	22.97	65.08	6.5
14	30.68	15.51	46.19	4.6
15	20.22	10.09	30.31	3.0
16	12.25	6.05	18.30	1.8
17	6.57	3.22	9.78	1.0
18	2.86	1.40	4.26	0.4
19	0.80	0.39	1.20	0.1
20	0.03	0.02	0.05	0.0
21	0.22	0.11	0.33	0.0
22	1.07	0.55	1.62	0.2
23	2.37	1.24	3.61	0.4
24	3.92	2.09	6.01	0.6
25	5.60	3.03	8.63	0.9

Dist (Meters)	PD (H)	PD (V)	Total (uW/cm2)	Percent Max.
26	7.26	4.04	11.30	1.1
27	8.86	5.05	13.91	1.4
28	10.36	6.05	16.41	1.6
29	11.73	7.00	18.73	1.9
30	12.96	7.90	20.87	2.1
31	14.05	8.73	22.79	2.3
32	15.00	9.49	24.49	2.4
33	15.78	10.04	25.82	2.6
34	16.42	10.49	26.92	2.7
35	16.95	10.87	27.82	2.8
36	17.36	11.18	28.54	2.9
37	17.68	11.42	29.11	2.9
38	17.92	11.61	29.53	3.0
39	18.07	11.75	29.82	3.0
40	18.16	11.84	30.01	3.0
41	18.20	11.90	30.09	3.0
42	18.18	11.92	30.09	3.0
43	18.11	11.91	30.02	3.0
44	17.97	11.87	29.84	3.0
45	17.73	11.82	29.55	3.0
46	17.48	11.75	29.22	2.9
47	17.20	11.66	28.85	2.9
48	16.91	11.55	28.46	2.8
49	16.61	11.43	28.04	2.8
50	16.30	11.30	27.60	2.8
51	15.99	11.16	27.15	2.7
52	15.67	11.02	26.69	2.7
53	15.35	10.87	26.22	2.6
54	15.04	10.71	25.75	2.6
55	14.72	10.55	25.27	2.5
56	14.41	10.39	24.80	2.5
57	14.10	10.22	24.32	2.4
58	13.79	10.06	23.85	2.4
59	13.49	9.89	23.38	2.3
60	13.20	9.72	22.92	2.3
61	12.90	9.56	22.46	2.2
62	12.62	9.39	22.01	2.2
63	12.34	9.23	21.56	2.2
64	12.06	9.06	21.13	2.1
65	11.80	8.90	20.70	2.1
66	11.54	8.74	20.28	2.0
67	11.30	8.60	19.90	2.0
68	11.07	8.47	19.54	2.0
69	10.85	8.34	19.19	1.9
70	10.64	8.21	18.85	1.9
71	10.42	8.08	18.51	1.9
72	10.22	7.95	18.17	1.8
73	10.02	7.83	17.85	1.8
74	9.82	7.71	17.52	1.8
75	9.63	7.58	17.21	1.7
76	9.44	7.46	16.90	1.7
77	9.25	7.34	16.60	1.7

Dist (Meters)	PD (H)	PD (V)	Total (uW/cm2)	Percent Max.
78	9.07	7.23	16.30	1.6
79	8.90	7.11	16.01	1.6
80	8.73	7.00	15.72	1.6
81	8.56	6.89	15.44	1.5
82	8.40	6.78	15.17	1.5
83	8.24	6.67	14.90	1.5
84	8.08	6.56	14.64	1.5
85	7.93	6.46	14.39	1.4
86	7.78	6.36	14.14	1.4
87	7.64	6.26	13.89	1.4
88	7.50	6.16	13.65	1.4
89	7.36	6.06	13.42	1.3
90	7.22	5.96	13.19	1.3
91	7.09	5.87	12.96	1.3
92	6.96	5.78	12.75	1.3
93	6.84	5.69	12.53	1.3
94	6.72	5.60	12.32	1.2
95	6.60	5.52	12.12	1.2
96	6.48	5.43	11.92	1.2
97	6.37	5.35	11.72	1.2
98	6.26	5.27	11.53	1.2
99	6.15	5.19	11.34	1.1
100	6.05	5.11	11.16	1.1