

[Exhibit 13]

Non-Interference Compliance

Regarding Facility id 153264

Channel 289

Description of Exhibit 13 Contents

This exhibit demonstrates that the proposed facility complies with contour overlap and interference protection provisions in all of the applicable rule sections and that this application for a construction permit is in full compliance with 47 C.F.R. § 74.1204.

Let it be noted that should any actual real world interference occur, the applicant acknowledges that it will promptly suspend operation of this translator in accordance with 47 C.F.R. § 74.1203.

Page 2 of this exhibit is an explanation of the method used to demonstrate compliance with contour overlap and interference provisions based on 47 C.F.R. § 74.1204(d), which states:

[A]n application otherwise precluded by this section will be accepted if it can be demonstrated that no actual interference will occur due to intervening terrain, lack of population or such other factors as may be applicable.

Page 3 contains a tabulation of the vertical radiation pattern of the proposed antenna and the minimum ground clearance of the interfering contour based on this pattern.

Pages 4 through 5 include a tabulation of the vertical radiation pattern for the proposed antenna provided by the antenna manufacturer.

Page 6 of this exhibit contains the tabulated data from the interference analysis, which shows all stations whose protected contours come within 50 km of the 34 dB μ F(50,10) contour of the proposed translator. These tabulated values were calculated using data from the FCC's CDBS files and 30 arc second terrain data. The column labeled "Adj" shows the number of channels difference between the entry and the proposed translator. The column labeled "Dist" shows the distance in km. The column labeled "Overlap" shows the area of contour overlap in square kilometers.

Page 7 of this exhibit is a portion of a USGS 1:24,000 scale 7.5 minute quadrangle at full scale with the calculated area of interference overlaid. The sheet includes the quadrangle name and measurement scale at the bottom-left corner (note: "Mt" refers to meters). The area of interference was calculated using the free space equation and 120 radials.

Page 8 of this exhibit is an aerial photo of the vicinity surrounding the proposed translator's tower site.

Note: The tallest buildings within the zone of interference are less than 25ft (7.6m) in height. This application provides 30.4m (99.7ft) ground clearance so a lack of population has been demonstrated within the area of interference and this application is therefore in full compliance with 47 C.F.R. § 74.1204.

Compliance with 47 C.F.R. § 74.1204(d)

All authorized second and third adjacent stations with which the proposed translator has contour overlap are tabulated below. Column four show the station's signal level at the proposed translator's tower site, and column five gives the minimum value within the entire standard interfering contour of the proposed translator (100 dBμ for most classes, 94 for class B, 97 for class B1). The minimum second or third adjacent F(50,50) contour within the proposed translator's standard interfering contour was used to calculate the proposed translator's actual "worst-case" interfering contour.

<u>Application id</u>	<u>File Number</u>	<u>Callsign</u>	<u>Contour at Tower</u>	<u>Min. Contour</u>
-----------------------	--------------------	-----------------	-------------------------	---------------------

Minimum F(50,50) Contour of Adjacent Station within Proposed Translator's Standard Interfering Contour			71.9	
---	--	--	-------------	--

FCC 02-244 at Section II.A.5 states that "when demonstrating that 'no actual interference will occur due to . . . other factors,' pursuant to Section 74.1204(d), an applicant may use the undesired-to-desired signal ratio method." The undesired-to-desired ratio for second and third adjacent stations required by § 74.1204(a) is 40 dB. Since the minimum protected contour strength within the proposed translator's standard interference contour is **71.9 dBμ**, this makes the proposed translator's worst-case interfering contour **111.9 dBμ**. By the free-space equation, this contour is calculated to extend a maximum of **281.8 m** from the transmit antenna.

The maximum horizontal plane of the interfering contour was calculated for 120 radials and plotted on the pertinent portion of a USGS quadrangle (page 7 of this exhibit). However, the field strength of the proposed translator's antenna varies with angle of depression from horizontal. The antenna relative fields are tabulated on the following page at 5 degree increments, starting at 5 degrees below horizontal. Antenna relative field strength data was provided and certified by the manufacturer of the proposed antenna. Using a free-space calculation that neglects any loss due to reflection, the vertical ground clearance of the proposed translator's interference contour has been tabulated. As shown on the following page, the area of interference clears the tower ground level (TGL) by **30.4 m** at the lowest point. The applicant has taken into account USGS quadrangles and relevant aerial photography in stating that no structures, except possibly tower support structures, puncture the area of interference.


Note: The tallest buildings within the zone of interference are less than 25ft (7.6m) in height. This application provides 30.4m (99.7ft) ground clearance so a lack of population has been demonstrated within the area of interference and this application is therefore in full compliance with 47 C.F.R. § 74.1204.

Antenna Manufacturer:	PSI
Antenna Model:	FML-3(.75)
CORAGL:	76 m
Maximum ERP:	0.25 kW
Interfering Contour:	111.9 dBμ
Max Int. Contour Distance:	281.8 m
Min Ground Clearance:	30.4 m

Depression Angle Below Horizontal	Antenna Relative Field	ERP (watts)	Distance to Interfering Contour from Antenna (m)	Horizontal Distance of Interfering Contour from Tower (m)	Vertical Clearance of Interfering Contour above TGL (m)
5	.941	221.4	265.2	264.2	52.9
10	.777	150.9	219.0	215.6	38.0
15	.543	73.7	153.0	147.8	36.4
20	.287	20.6	80.9	76.0	48.3
25	.055	0.8	15.5	14.0	69.4
30	.120	3.6	33.8	29.3	59.1
35	.222	12.3	62.6	51.2	40.1
40	.252	15.9	71.0	54.4	30.4
45	.227	12.9	64.0	45.2	30.8
50	.168	7.1	47.3	30.4	39.7
55	.096	2.3	27.1	15.5	53.8
60	.030	0.2	8.5	4.2	68.7
65	.021	0.1	5.9	2.5	70.6
70	.050	0.6	14.1	4.8	62.8
75	.059	0.9	16.6	4.3	59.9
80	.050	0.6	14.1	2.4	62.1
85	.028	0.2	7.9	0.7	68.1
90	.001	0.0	0.3	0.0	75.7
Minimum Clearance above TGL:					30.4 m



Relative Field Elevation Pattern
Model: PSIFML-3
Type: 3-Bay Low Power FM
Polarization: Circular
Configuration: 3/4-wave spaced
Gain: 1.4 (1.46 dB)

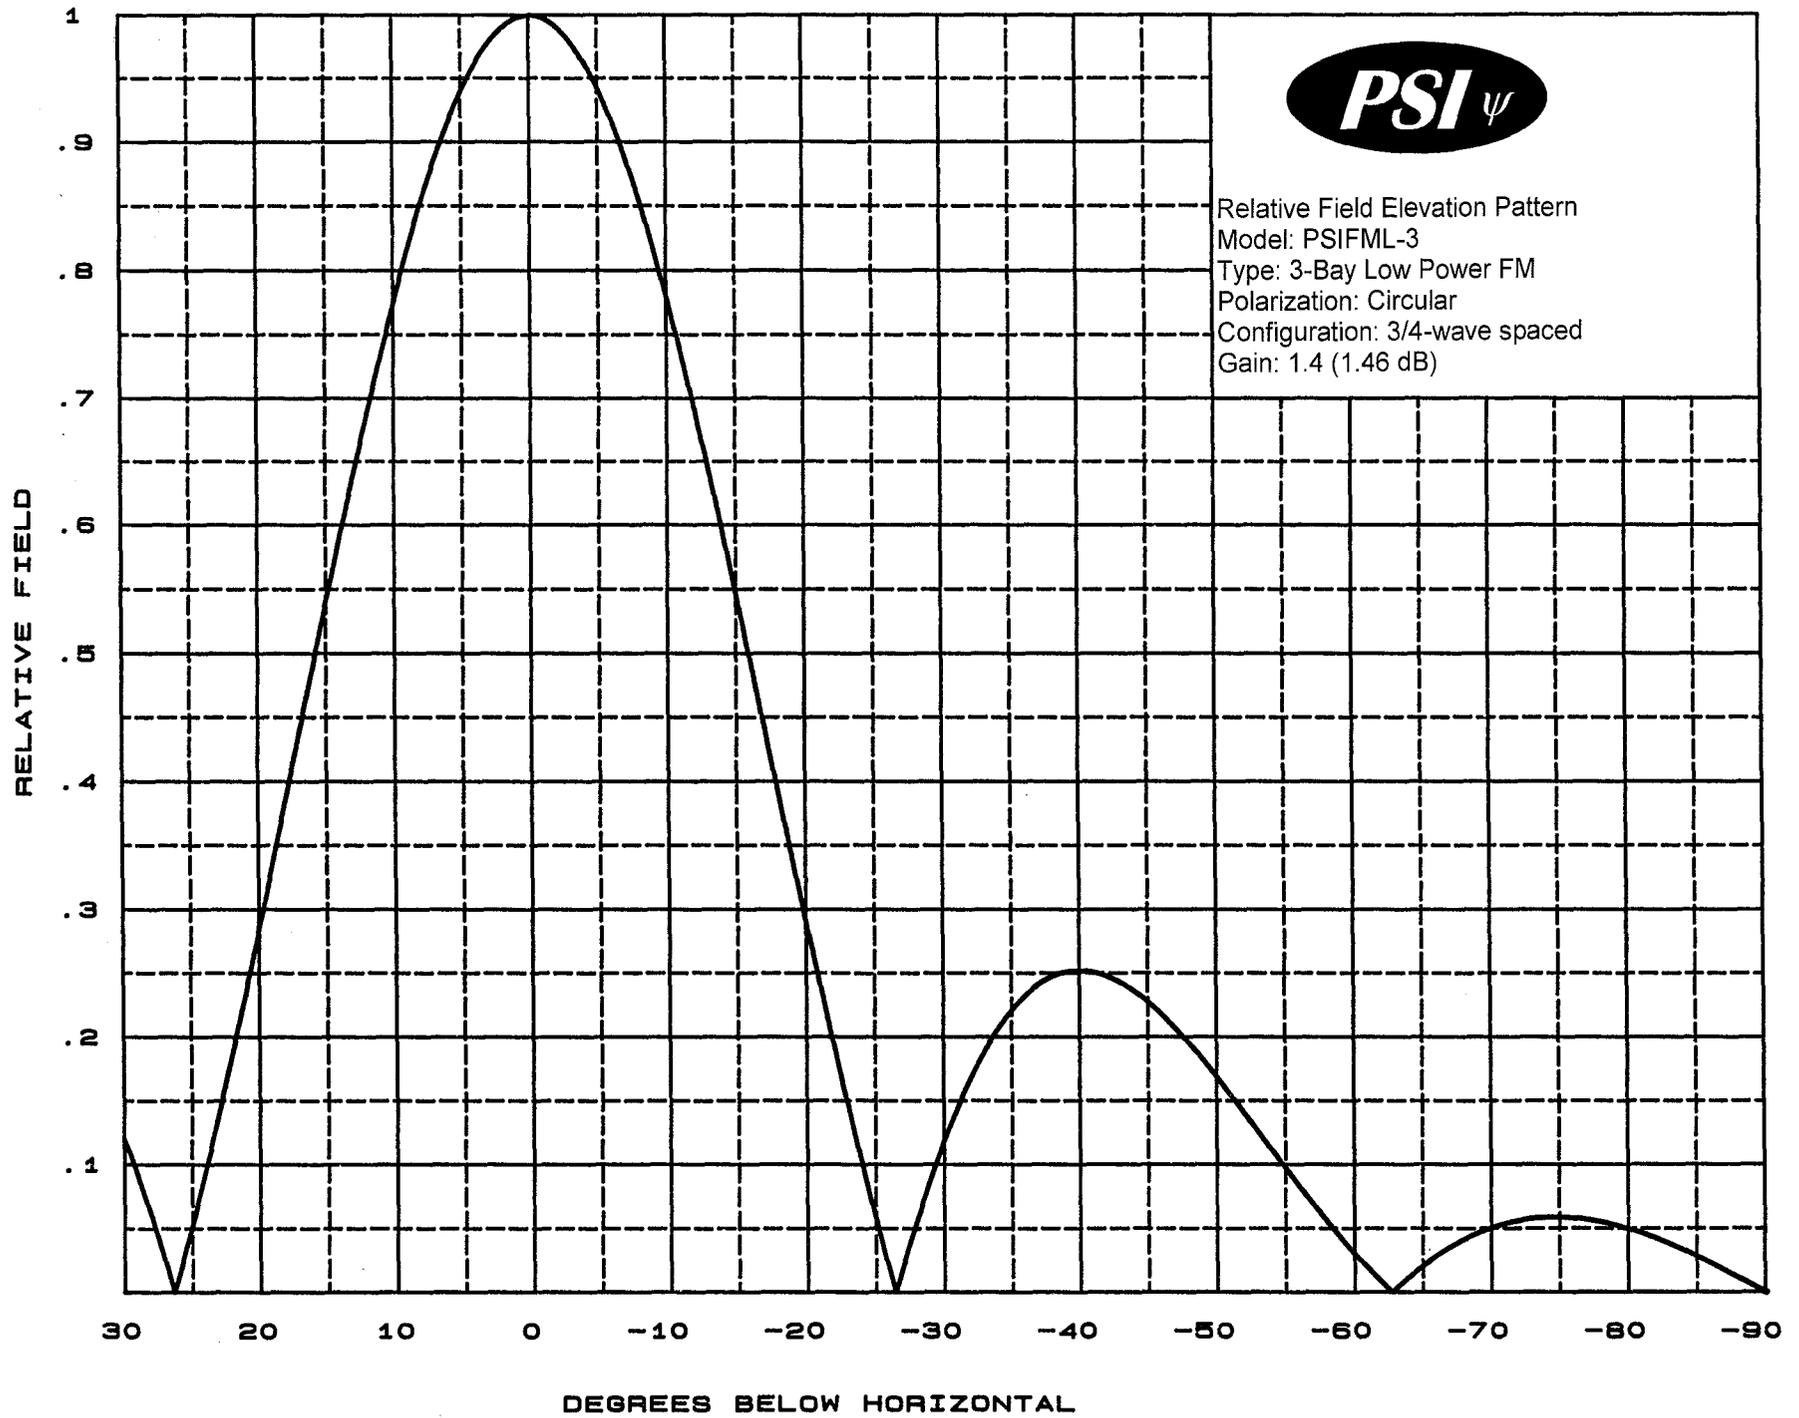



Propagation Systems Inc.
 Elevation Pattern Tabulation
 Antenna: PSIFML-3 Special
 Bay spacing: 3/4 wave

Angle	Field	dB	Angle	Field	dB	Angle	Field	dB
-90.0	0.001	-60.000	-50.0	0.168	-15.500	-10.0	0.777	-2.194
-89.0	0.006	-44.795	-49.0	0.181	-14.829	-9.0	0.817	-1.761
-88.0	0.012	-38.775	-48.0	0.194	-14.240	-8.0	0.853	-1.379
-87.0	0.017	-35.329	-47.0	0.206	-13.714	-7.0	0.886	-1.049
-86.0	0.023	-32.869	-46.0	0.217	-13.266	-6.0	0.916	-0.766
-85.0	0.028	-31.047	-45.0	0.227	-12.881	-5.0	0.941	-0.529
-84.0	0.033	-29.622	-44.0	0.235	-12.562	-4.0	0.962	-0.338
-83.0	0.038	-28.467	-43.0	0.242	-12.308	-3.0	0.978	-0.190
-82.0	0.042	-27.510	-42.0	0.248	-12.126	-2.0	0.990	-0.085
-81.0	0.046	-26.705	-41.0	0.251	-12.010	-1.0	0.998	-0.021
-80.0	0.050	-26.073	-40.0	0.252	-11.968	0.0	1.000	0.000
-79.0	0.053	-25.559	-39.0	0.251	-12.004	1.0	0.998	-0.021
-78.0	0.055	-25.169	-38.0	0.248	-12.126	2.0	0.990	-0.085
-77.0	0.057	-24.887	-37.0	0.242	-12.336	3.0	0.978	-0.190
-76.0	0.058	-24.682	-36.0	0.233	-12.657	4.0	0.962	-0.338
-75.0	0.059	-24.614	-35.0	0.222	-13.092	5.0	0.941	-0.529
-74.0	0.059	-24.637	-34.0	0.207	-13.676	6.0	0.916	-0.766
-73.0	0.058	-24.772	-33.0	0.190	-14.432	7.0	0.886	-1.049
-72.0	0.056	-25.027	-32.0	0.170	-15.414	8.0	0.853	-1.379
-71.0	0.054	-25.411	-31.0	0.146	-16.700	9.0	0.817	-1.759
-70.0	0.050	-25.968	-30.0	0.120	-18.427	10.0	0.777	-2.194
-69.0	0.046	-26.733	-29.0	0.090	-20.871	11.0	0.734	-2.683
-68.0	0.041	-27.731	-28.0	0.058	-24.704	12.0	0.689	-3.233
-67.0	0.035	-29.081	-27.0	0.023	-32.754	13.0	0.642	-3.848
-66.0	0.028	-30.954	-26.0	0.015	-36.745	14.0	0.593	-4.534
-65.0	0.021	-33.656	-25.0	0.055	-25.217	15.0	0.543	-5.301
-64.0	0.012	-38.221	-24.0	0.098	-20.213	16.0	0.492	-6.156
-63.0	0.003	-50.816	-23.0	0.142	-16.928	17.0	0.441	-7.116
-62.0	0.007	-42.949	-22.0	0.189	-14.460	18.0	0.389	-8.196
-61.0	0.018	-34.880	-21.0	0.238	-12.484	19.0	0.338	-9.425
-60.0	0.030	-30.546	-20.0	0.287	-10.839	20.0	0.287	-10.834
-59.0	0.042	-27.541	-19.0	0.338	-9.425	21.0	0.238	-12.484
-58.0	0.055	-25.217	-18.0	0.389	-8.199	22.0	0.189	-14.460
-57.0	0.068	-23.307	-17.0	0.441	-7.116	23.0	0.143	-16.919
-56.0	0.082	-21.711	-16.0	0.492	-6.159	24.0	0.098	-20.200
-55.0	0.096	-20.335	-15.0	0.543	-5.301	25.0	0.055	-25.193
-54.0	0.111	-19.124	-14.0	0.593	-4.536	26.0	0.015	-36.745
-53.0	0.125	-18.051	-13.0	0.642	-3.850	27.0	0.023	-32.754
-52.0	0.140	-17.106	-12.0	0.689	-3.234	28.0	0.058	-24.704
-51.0	0.154	-16.253	-11.0	0.734	-2.683	29.0	0.090	-20.871
						30.0	0.120	-18.438

file: FML 3-bay elevation tabulation

revision: A

Date: 1/28/08

Adjacent Channel Study For Station NEW, Facility_id: 153264

Co-channel through third adjacent:

App_id	Fac_id	File_Number	Call	Licensee	Class	City	State	Status	ERP	RCAMSL	Chan	Adj	Dist	Overlap
227673	35015	BLH-19960606KD	KJMM	KJMM, INC.	C2	BIXBY	OK	LIC	10	465	287	2	26.4	1.4918
1400009	68294	BMLH-20100927ABU	KTGX	CLEAR CHANNEL BROADCASTING LICENSES, INC	C	OWASSO	OK	LIC	100	606	291	2	52.3	1.4918
1516458	157419	BLFT-20120921ACU	K289BK	JOHN JASON BENNETT	D	BRISTOW	OK	LIC	0.25	336	289	0	63.6	0
1049861	153233	BLFT-20050308AAJ	K289AU	THE LOVE STATION, INC.	D	BARTLESVILLE	OK	LIC	0.25	268	289	0	71.7	0
1336772	22267	BLH-20090922ABX	KGFY	STILLWATER BROADCASTING, LLC	A	STILLWATER	OK	LIC	4.2	415.7	288	1	103.9	0
1342435	51938	BLFT-20091112AFN	K290BP	THE LOVE STATION, INC.	D	STILLWATER	OK	LIC	0.25	369	290	1	107.6	0
1175341	140491	BLFT-20070305ACE	K292FJ	EDUCATIONAL MEDIA FOUNDATION	D	STILLWATER	OK	LIC	0.25	341	292	3	108.4	0
650614	157269	BNPFT-20030317LEB	NEW	K95.5, INC.	D	SALLISAW	OK	APP	0.25	294	290	1	117.2	0
226112	50351	BLH-19960523KA	KIRC	ONE TEN BROADCAST GROUP, INC.	A	SEMINOLE	OK	LIC	4.4	411	290	1	118.5	0
285224	67592	BLH-19990517KA	KTMC-FM	SOUTHEASTERN OKLAHOMA RADIO, LLC	A	MCALESTER	OK	LIC	1.6	357	286	3	123.1	0
1433903	189538	BNPH-20110630AAL	KXXM	G2 MEDIA GROUP LLC	A	MULDROW	OK	CP	6	322	286	3	131.1	0
1478446	64630	BLH-20111208CCC	KMCK-FM	CUMULUS LICENSING LLC	C1	PRAIRIE GROVE	AR	LIC	100	519	289	0	140.7	0

Intermediate Frequencies (53 and 54 channels difference):

App_id	Fac_id	File_Number	Call	Licensee	Class	City	State	Status	ERP	RCAMSL	Channel	Adj	Dist	Clr
1516461	142082	BLFT-20120921ACV	K235BK	SCREEN DOOR BROADCASTING, LLC	D	TULSA	OK	LIC	0.115	320	235	54	12.4	2.4

