

[Exhibit 13]

Non-Interference Compliance

Regarding Facility id 151282

Channel 238

Description of Exhibit 13 Contents

This exhibit demonstrates that the proposed facility complies with contour overlap and interference protection provisions in all of the applicable rule sections and that this application for a construction permit is in full compliance with 47 C.F.R. § 74.1204.

Let it be noted that should any actual real world interference occur, the applicant acknowledges that it will promptly suspend operation of this translator in accordance with 47 C.F.R. § 74.1203.

Page 2 of this exhibit is an explanation of the method used to demonstrate compliance with contour overlap and interference provisions based on 47 C.F.R. § 74.1204(d), which states:

[A]n application otherwise precluded by this section will be accepted if it can be demonstrated that no actual interference will occur due to intervening terrain, lack of population or such other factors as may be applicable.

Page 3 contains a tabulation of the vertical radiation pattern of the proposed antenna and the minimum ground clearance of the interfering contour based on this pattern.

Page 4 includes a tabulation of the vertical radiation pattern for the proposed antenna provided by the antenna manufacturer.

Page 5 of this exhibit contains the tabulated data from the interference analysis, which shows all stations whose protected contours come within 50 km of the 34 dB μ F(50,10) contour of the proposed translator. These tabulated values were calculated using data from the FCC's CDBS files and 30 arc second terrain data. The column labeled "Adj" shows the number of channels difference between the entry and the proposed translator. The column labeled "Dist" shows the distance in km. The column labeled "Overlap" shows the area of contour overlap in square kilometers.

Page 6 of this exhibit is a portion of a USGS 1:24,000 scale 7.5 minute quadrangle at full scale with the calculated area of interference overlaid. The sheet includes the quadrangle name and measurement scale at the bottom-left corner (note: "Mt" refers to meters). The area of interference was calculated using the free space equation and 120 radials.

Page 7 of this exhibit is an aerial photo of the vicinity surrounding the proposed translator's tower site.

Since the proposed translator is within 125 km of the Mexican border, 47 C.F.R. § 74.1235(d) has been taken into account and this applicant certifies that in the direction of the Mexican border, the 34 dB μ F(50,10) does not extend beyond 32 km, nor does the 60 dB μ F(50,50) extend beyond 8.7 km. The maximum effective radiated power (ERP) for the proposed translator is 50 watts, which is within the limit of 50 watts. This application is therefore in full compliance with 47 C.F.R. § 74.1235(d)(1), and hence complies with 47 C.F.R. § 74.1204(h).

Note: The tallest buildings within the zone of predicted interference are less than 15ft (4.6m) in height. This proposal provides 6.9m (22.7ft) ground clearance so a lack of population has been demonstrated within the area of interference and this application is therefore in full compliance with 47 C.F.R. § 74.1204.

Compliance with 47 C.F.R. § 74.1204(d)

All authorized second and third adjacent stations with which the proposed translator has contour overlap are tabulated below. Column four show the station's signal level at the proposed translator's tower site, and column five gives the minimum value within the entire standard interfering contour of the proposed translator (100 dBμ for most classes, 94 for class B, 97 for class B1). The minimum second or third adjacent F(50,50) contour within the proposed translator's standard interfering contour was used to calculate the proposed translator's actual "worst-case" interfering contour.

Application_id	File Number	Callsign	Contour at Tower	Min. Contour
1509957	BLH20120803AAD	KUKY	69	69
660777	BLH20020819AAU	KTTI	90.2	89.2
Minimum F(50,50) Contour of Adjacent Station within Proposed Translator's Standard Interfering Contour				69

FCC 02-244 at Section II.A.5 states that "when demonstrating that 'no actual interference will occur due to . . . other factors,' pursuant to Section 74.1204(d), an applicant may use the undesired-to-desired signal ratio method." The undesired-to-desired ratio for second and third adjacent stations required by § 74.1204(a) is 40 dB. Since the minimum protected contour strength within the proposed translator's standard interference contour is **69 dBμ**, this makes the proposed translator's worst-case interfering contour **109 dBμ**. By the free-space equation, this contour is calculated to extend a maximum of **176 m** from the transmit antenna.

The maximum horizontal plane of the interfering contour was calculated for 120 radials and plotted on the pertinent portion of a USGS quadrangle (page 6 of this exhibit). However, the field strength of the proposed translator's antenna varies with angle of depression from horizontal. The antenna relative fields are tabulated on the following page at 5 degree increments, starting at 5 degrees below horizontal. Antenna relative field strength data was provided and certified by the manufacturer of the proposed antenna. Using a free-space calculation that neglects any loss due to reflection, the vertical ground clearance of the proposed translator's interference contour has been tabulated. As shown on the following page, the area of interference clears the tower ground level (TGL) by **6.9 m** at the lowest point. The applicant has taken into account USGS quadrangles and relevant aerial photography in stating that no structures, except possibly tower support structures, puncture the area of interference.

Note: The tallest buildings within the zone of predicted interference are less than 15ft (4.6m) in height. This proposal provides 6.9m (22.7ft) ground clearance so a lack of population has been demonstrated within the area of interference and this application is therefore in full compliance with 47 C.F.R. § 74.1204.

Antenna Manufacturer: PSI
Antenna Model: FML-2(.75)
CORAGL: 46 m
Maximum ERP: 0.05 kW
Interfering Contour: 109 dBμ
Max Int. Contour Distance: 176 m
Min Ground Clearance: 6.9 m

Depression Angle Below Horizontal	Antenna Relative Field	ERP (watts)	Distance to Interfering Contour from Antenna (m)	Horizontal Distance of Interfering Contour from Tower (m)	Vertical Clearance of Interfering Contour above TGL (m)
5	.975	47.5	171.6	170.9	31.0
10	.903	40.8	158.9	156.5	18.4
15	.792	31.4	139.4	134.6	9.9
20	.650	21.1	114.4	107.5	6.9
25	.493	12.2	86.8	78.6	9.3
30	.331	5.5	58.3	50.4	16.9
35	.178	1.6	31.3	25.7	28.0
40	.043	0.1	7.6	5.8	41.1
45	.068	0.2	12.0	8.5	37.5
50	.149	1.1	26.2	16.9	25.9
55	.202	2.0	35.5	20.4	16.9
60	.227	2.6	39.9	20.0	11.4
65	.226	2.6	39.8	16.8	10.0
70	.205	2.1	36.1	12.3	12.1
75	.168	1.4	29.6	7.7	17.4
80	.118	0.7	20.8	3.6	25.5
85	.061	0.2	10.7	0.9	35.3
90	.001	0.0	0.2	0.0	45.8
Minimum Clearance above TGL:					6.9 m


Propagation Systems Inc.
Elevation Pattern Tabulation
Antenna: PSIFML-2 Special
Bay spacing: 3/4 wave

Angle	Field	dB	Angle	Field	dB	Angle	Field	dB
-90.00	0.001	-60.000	-50.00	0.149	-16.513	-10.00	0.903	-0.883
-89.00	0.012	-38.221	-49.00	0.135	-17.364	-9.00	0.921	-0.713
-88.00	0.025	-32.201	-48.00	0.120	-18.405	-8.00	0.937	-0.561
-87.00	0.037	-28.679	-47.00	0.104	-19.677	-7.00	0.952	-0.429
-86.00	0.049	-26.207	-46.00	0.086	-21.289	-6.00	0.964	-0.315
-85.00	0.061	-24.285	-45.00	0.068	-23.404	-5.00	0.975	-0.219
-84.00	0.073	-22.748	-44.00	0.048	-26.425	-4.00	0.984	-0.139
-83.00	0.085	-21.443	-43.00	0.027	-31.481	-3.00	0.991	-0.079
-82.00	0.096	-20.349	-42.00	0.005	-46.848	-2.00	0.996	-0.036
-81.00	0.107	-19.378	-41.00	0.018	-34.664	-1.00	0.999	-0.009
-80.00	0.118	-18.538	-40.00	0.043	-27.417	0.00	1.000	0.000
-79.00	0.129	-17.792	-39.00	0.068	-23.365	1.00	0.999	-0.009
-78.00	0.139	-17.125	-38.00	0.094	-20.529	2.00	0.996	-0.036
-77.00	0.149	-16.522	-37.00	0.121	-18.329	3.00	0.991	-0.079
-76.00	0.159	-15.984	-36.00	0.149	-16.531	4.00	0.984	-0.139
-75.00	0.168	-15.508	-35.00	0.178	-14.998	5.00	0.975	-0.219
-74.00	0.176	-15.072	-34.00	0.207	-13.669	6.00	0.964	-0.315
-73.00	0.184	-14.685	-33.00	0.237	-12.489	7.00	0.952	-0.429
-72.00	0.192	-14.335	-32.00	0.268	-11.431	8.00	0.937	-0.561
-71.00	0.199	-14.026	-31.00	0.299	-10.475	9.00	0.921	-0.713
-70.00	0.205	-13.752	-30.00	0.331	-9.602	10.00	0.903	-0.882
-69.00	0.211	-13.518	-29.00	0.363	-8.801	11.00	0.884	-1.072
-68.00	0.216	-13.315	-28.00	0.395	-8.061	12.00	0.863	-1.279
-67.00	0.220	-13.146	-27.00	0.428	-7.377	13.00	0.841	-1.508
-66.00	0.224	-13.009	-26.00	0.460	-6.742	14.00	0.817	-1.757
-65.00	0.226	-12.904	-25.00	0.493	-6.151	15.00	0.792	-2.029
-64.00	0.228	-12.834	-24.00	0.525	-5.599	16.00	0.765	-2.322
-63.00	0.229	-12.800	-23.00	0.557	-5.083	17.00	0.738	-2.639
-62.00	0.229	-12.794	-22.00	0.589	-4.603	18.00	0.710	-2.979
-61.00	0.228	-12.829	-21.00	0.620	-4.154	19.00	0.680	-3.344
-60.00	0.227	-12.898	-20.00	0.650	-3.736	20.00	0.650	-3.736
-59.00	0.224	-13.009	-19.00	0.680	-3.344	21.00	0.620	-4.154
-58.00	0.220	-13.158	-18.00	0.710	-2.979	22.00	0.589	-4.603
-57.00	0.215	-13.351	-17.00	0.738	-2.639	23.00	0.557	-5.083
-56.00	0.209	-13.600	-16.00	0.765	-2.323	24.00	0.525	-5.599
-55.00	0.202	-13.894	-15.00	0.792	-2.029	25.00	0.493	-6.151
-54.00	0.194	-14.260	-14.00	0.817	-1.759	26.00	0.460	-6.742
-53.00	0.184	-14.685	-13.00	0.840	-1.510	27.00	0.428	-7.377
-52.00	0.174	-15.192	-12.00	0.863	-1.281	28.00	0.395	-8.061
-51.00	0.162	-15.795	-11.00	0.884	-1.072	29.00	0.363	-8.801
						30.00	0.331	-9.602

Adjacent Channel Study
For Station NEW, Facility_id: 151282

Co-channel through third adjacent:

App_id	Fac_id	File_Number	Call	Licensee	Class	City	State	Status	ERP	RCAMSL	Chan	Adj	Dist	Overlap
660777	62234	BLH-20020819AAU	KTTI	EDB YUMA LICENSE LLC	C2	YUMA	AZ	LIC	50	137	236	2	7.7	0.2984
1509957	162388	BLH-20120803AAD	KUKY	HISPANIC TARGET MEDIA, INC.	C3	WELLTON	AZ	LIC	1.6	534	240	2	25.9	0.2984
681308	141810	BNPFT-20030825AFA	K238BJ	HORIZON CHRISTIAN FELLOWSHIP	D	GLAMIS	CA	CP	0.01	745	238	0	44.4	0
682837	142606	BNPFT-20030825AGY	K235BX	MARY V. GUTHRIE	D	CALEXICO	CA	CP	0.001	63	235	3	68.1	0
1525820	142606	BMPFT-20121115AIJ	K235BX	MARY V. GUTHRIE	D	CALEXICO	CA	APP	0.05	21	235	3	68.2	0

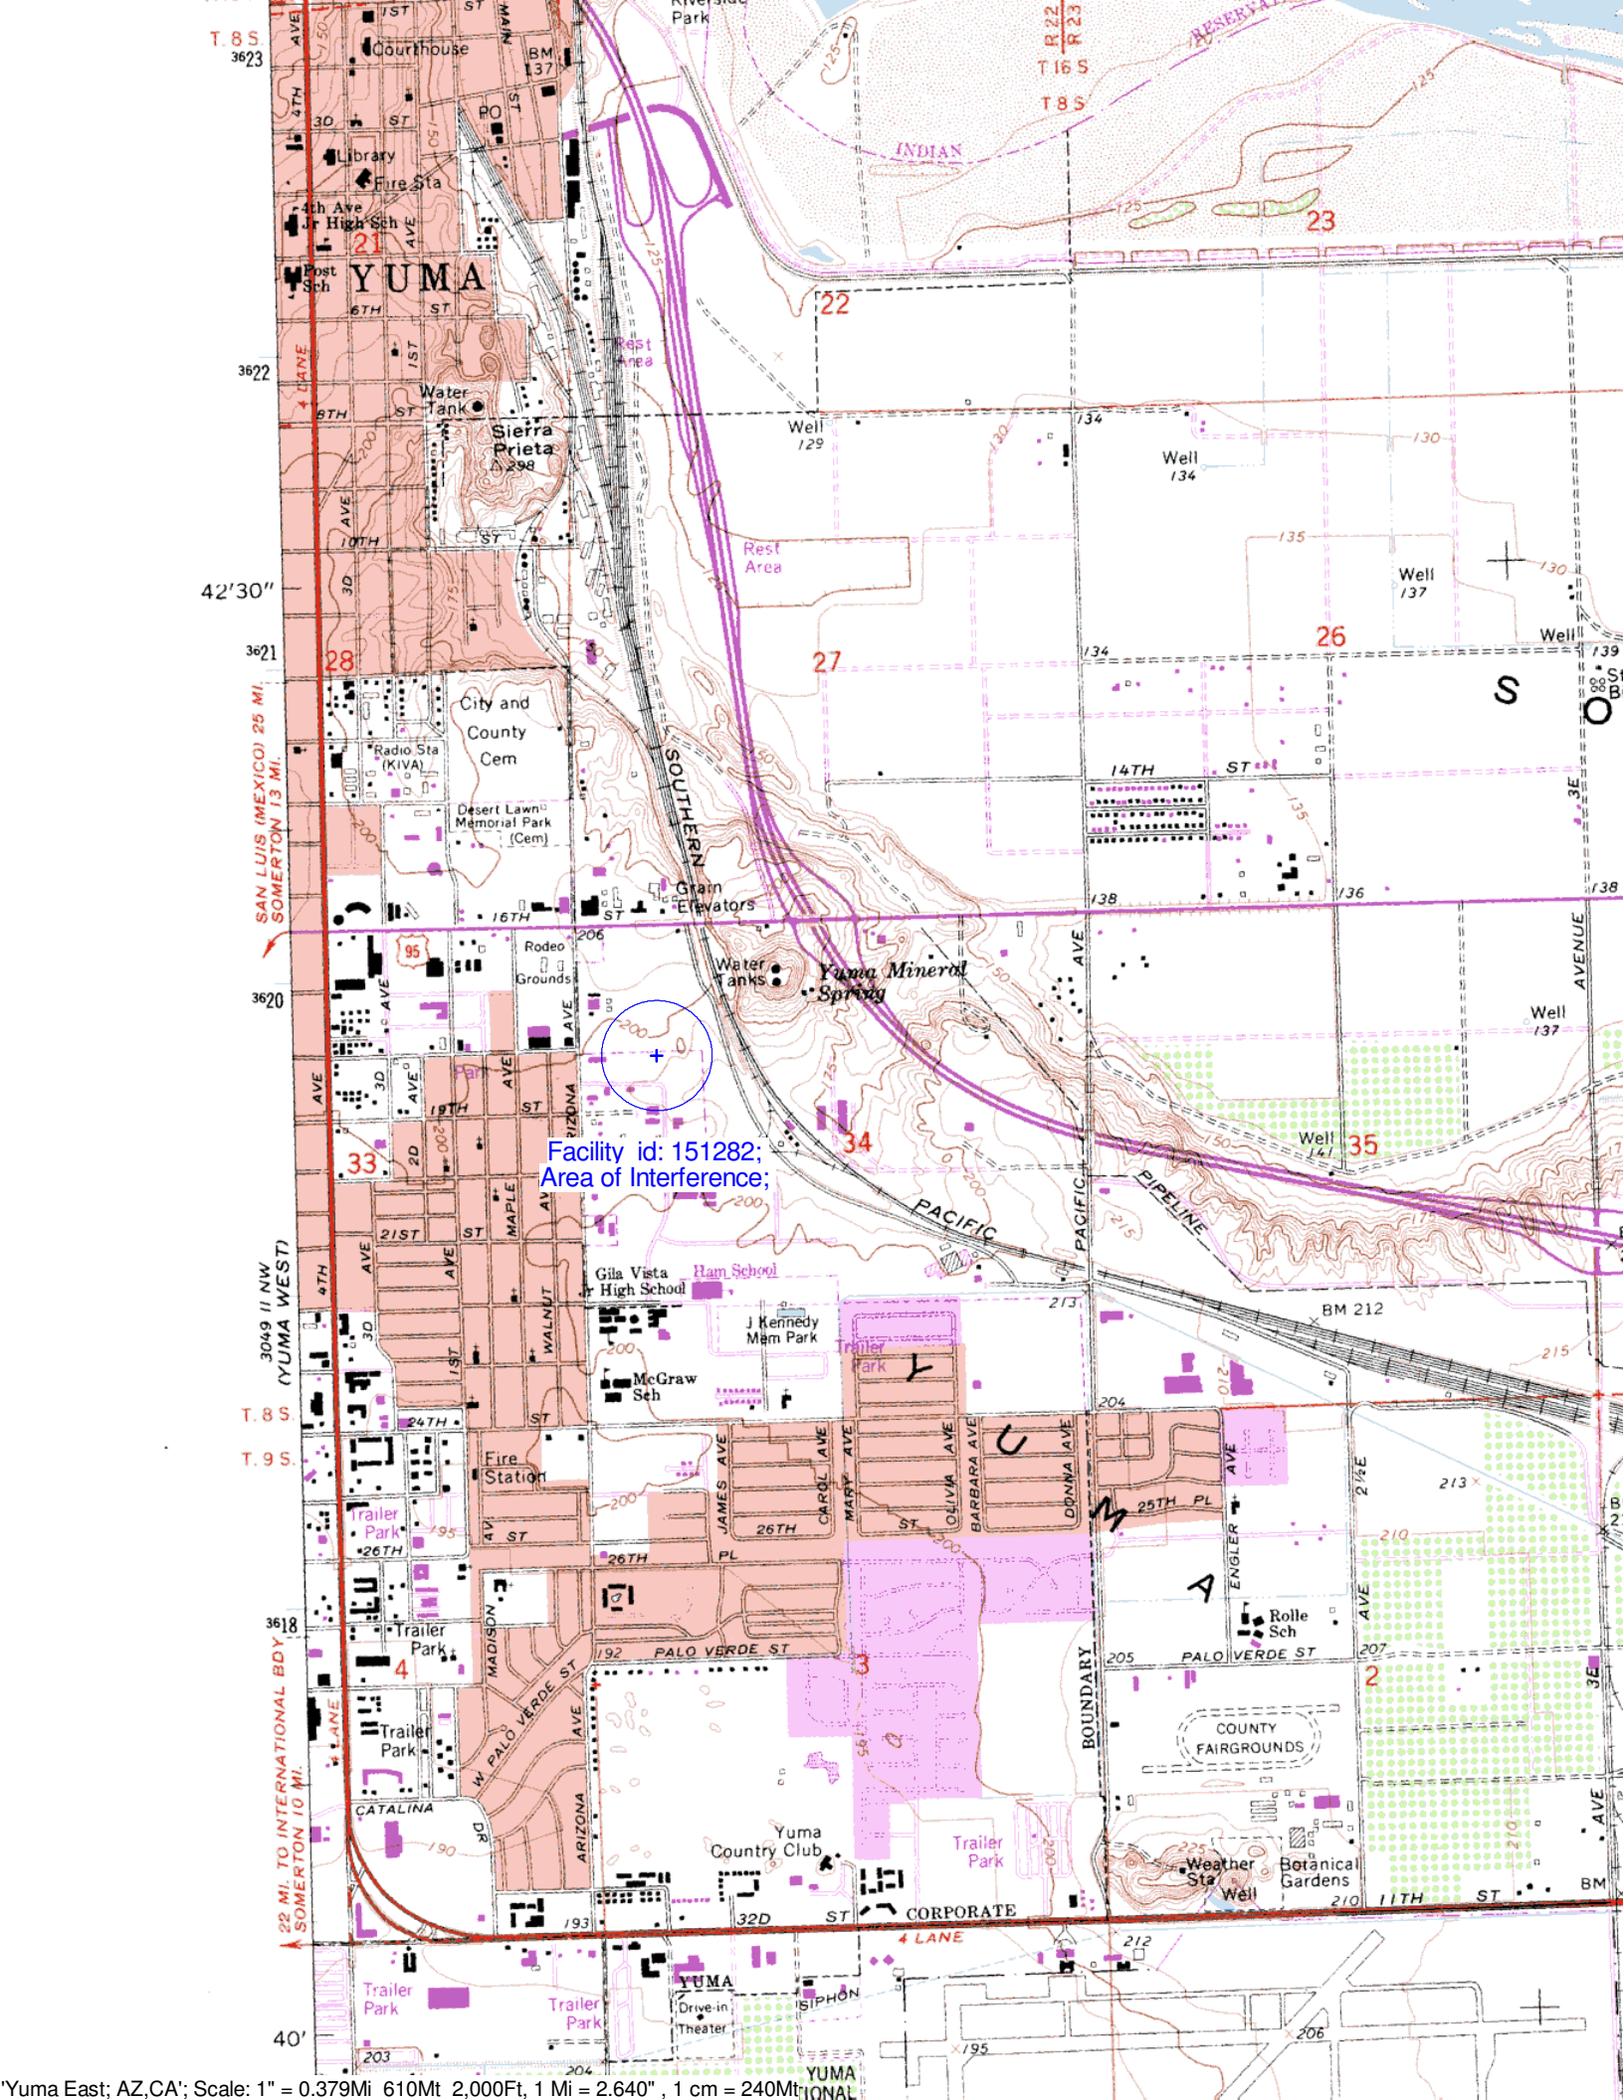

T 8 S
3623

42'30"

3621

3620

T 8 S

T 9 S


3618

40'

SAN LUIS (MEXICO) 25 MI.
SOMERTON 13 MI.

3049 II NW
(YUMA WEST)

22 MI. TO INTERNATIONAL BDY
SOMERTON 10 MI.

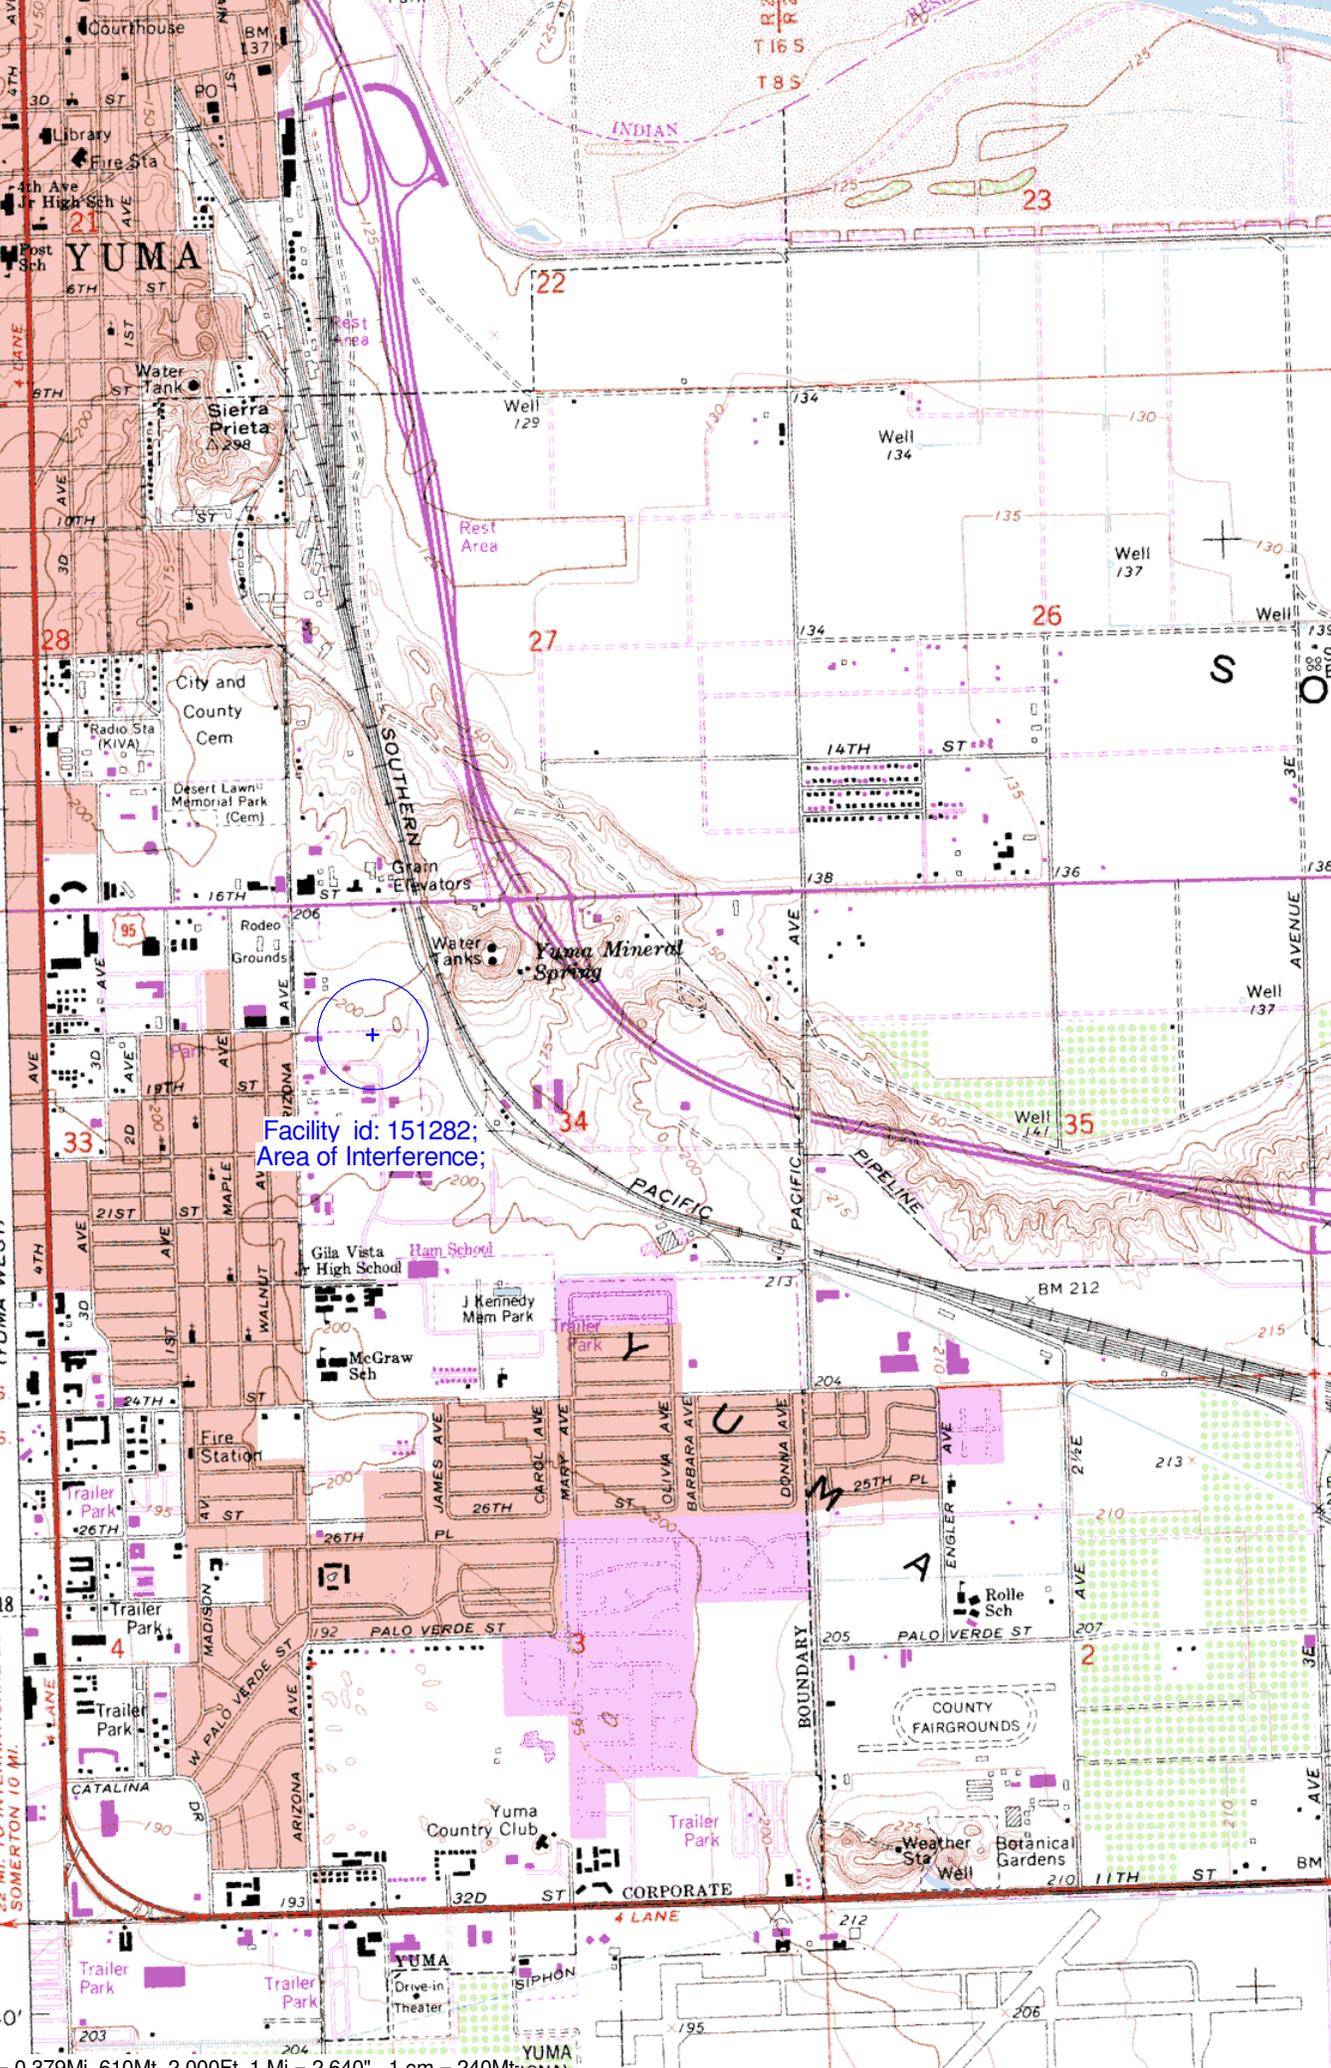

Facility id: 151282;
Area of Interference;

