

[Exhibit 13]

Non-Interference Compliance

Regarding Facility id 30450

Channel 270

Description of Exhibit 13 Contents

This exhibit demonstrates that the proposed facility complies with contour overlap and interference protection provisions in all of the applicable rule sections and that this application for a construction permit is in full compliance with 47 C.F.R. § 74.1204.

Let it be noted that should any actual real world interference occur, the applicant acknowledges that it will promptly suspend operation of this translator in accordance with 47 C.F.R. § 74.1203.

Page 2 of this exhibit is an explanation of the method used to demonstrate compliance with contour overlap and interference provisions based on 47 C.F.R. § 74.1204(d), which states:

[A]n application otherwise precluded by this section will be accepted if it can be demonstrated that no actual interference will occur due to intervening terrain, lack of population or such other factors as may be applicable.

Page 3 of this exhibit contains the tabulated data from the interference analysis, which shows all stations whose protected contours come within 50 km of the 34 dB μ F(50,10) contour of the proposed translator. These tabulated values were calculated using data from the FCC's CDBS files and 30 arc second terrain data. The column labeled "Adj" shows the number of channels difference between the entry and the proposed translator. The column labeled "Dist" shows the distance in km. The column labeled "Overlap" shows the area of contour overlap in square kilometers.

Page 4 of this exhibit is a portion of a USGS 1:24,000 scale 7.5 minute quadrangle at full scale with the calculated area of interference overlaid. The sheet includes the quadrangle name and measurement scale at the bottom-left corner (note: "Mt" refers to meters). The area of interference was calculated using the free space equation and 120 radials.

Page 5 of this exhibit is an aerial photo of the vicinity surrounding the proposed translator's tower site.

Note: The buildings in the zone of predicted interference are unoccupied public restrooms, picnic shelters and storage buildings at the Lake Havasu State Park boat landing. None of the buildings are permanent residences so a lack of population has been demonstrated within the area of interference and this application is therefore in full compliance with 47 C.F.R. § 74.1204.

Compliance with 47 C.F.R. § 74.1204(d)

All authorized second and third adjacent stations with which the proposed translator has contour overlap are tabulated below. Column four show the station's signal level at the proposed translator's tower site, and column five gives the minimum value within the entire standard interfering contour of the proposed translator (100 dB μ for most classes, 94 for class B, 97 for class B1). The minimum second or third adjacent F(50,50) contour within the proposed translator's standard interfering contour was used to calculate the proposed translator's actual "worst-case" interfering contour.

Application_id	File Number	Callsign	Contour at Tower	Min. Contour
1327092	BLH20090820ABV	KJJJ	61.7	61.7
1352532	BLFTB20100108ABU	KJJJ-FM1	69.5	69.5
Minimum F(50,50) Contour of Adjacent Station within Proposed Translator's Standard Interfering Contour				61.7

FCC 02-244 at Section II.A.5 states that "when demonstrating that 'no actual interference will occur due to . . . other factors,' pursuant to Section 74.1204(d), an applicant may use the undesired-to-desired signal ratio method." The undesired-to-desired ratio for second and third adjacent stations required by § 74.1204(a) is 40 dB. Since the minimum protected contour strength within the proposed translator's standard interference contour is **61.7 dB μ** , this makes the proposed translator's worst-case interfering contour **101.7 dB μ** . By the free-space equation, this contour is calculated to extend a maximum of **573.9 m** from the transmit antenna.

The interfering contour of the proposed translator was calculated for 120 radials and plotted on the pertinent portion of a USGS quadrangle (page 4 of this exhibit). As demonstrated on the quadrangle, there are no populated structures or highways within the area of interference (Note: FCC 02-244 at Section II.A.6 states that USGS quadrangles "have been recognized as acceptable to demonstrate lack of population").


Note: The buildings in the zone of predicted interference are unoccupied public restrooms, picnic shelters and storage buildings at the Lake Havasu State Park boat landing. None of the buildings are permanent residences so a lack of population has been demonstrated within the area of interference and this application is therefore in full compliance with 47 C.F.R. § 74.1204.

Antenna Manufacturer: SCA
Antenna Model: CA2-CP @ 75°
CORAGL: 9 m
Maximum ERP: 0.099 kW
Interfering Contour: 101.7 dB μ
Max Int. Contour Distance: 573.9 m

**Adjacent Channel Study
For Station K270AD, Facility_id: 30450**

Co-channel through third adjacent:

App_id	Fac_id	File_Number	Call	Licensee	Class	City	State	Status	ERP	RCAMSL	Chan	Adj	Dist	Overlap
1352532	178460	BLFTB-20100108ABU	KJJJ-FM1	STEVEN M. GREELEY	D	LAKE HAVASU CIT	AZ	LIC	1	1442	272	2	17.3	0.1374
1327092	63410	BLH-20090820ABV	KJJJ	STEVEN M. GREELEY	C1	LAUGHLIN	NV	LIC	17	1367	272	2	63.3	0.1374
1601224	183358	BLH-20131118BJB	KXMK	COCHISE MEDIA LICENSES, LLC	C2	OATMAN	AZ	LIC	2.2	1352	267	3	63.3	0
1569953	156670	BNPFT-20130821AAD	K269GB	DONALD F. HENDREN	D	CALNEVAIR	NV	CP	0.25	1333	269	1	63.3	0
1570821	156491	BNPFT-20130826ACQ	K270CB	DONALD F. HENDREN	D	KINGMAN	AZ	CP	0.25	645	270	0	74.7	0
1352536	181248	BLFTB-20100108ABT	KJJJ-FM2	STEVEN M. GREELEY	D	KINGMAN	AZ	LIC	0.5	2352	272	2	83.8	0
650621	157274	BNPFT-20030317LJQ	NEW	DONALD F. HENDREN	D	QUARTZSITE	AZ	APP	0.25	1280	268	2	87.6	0

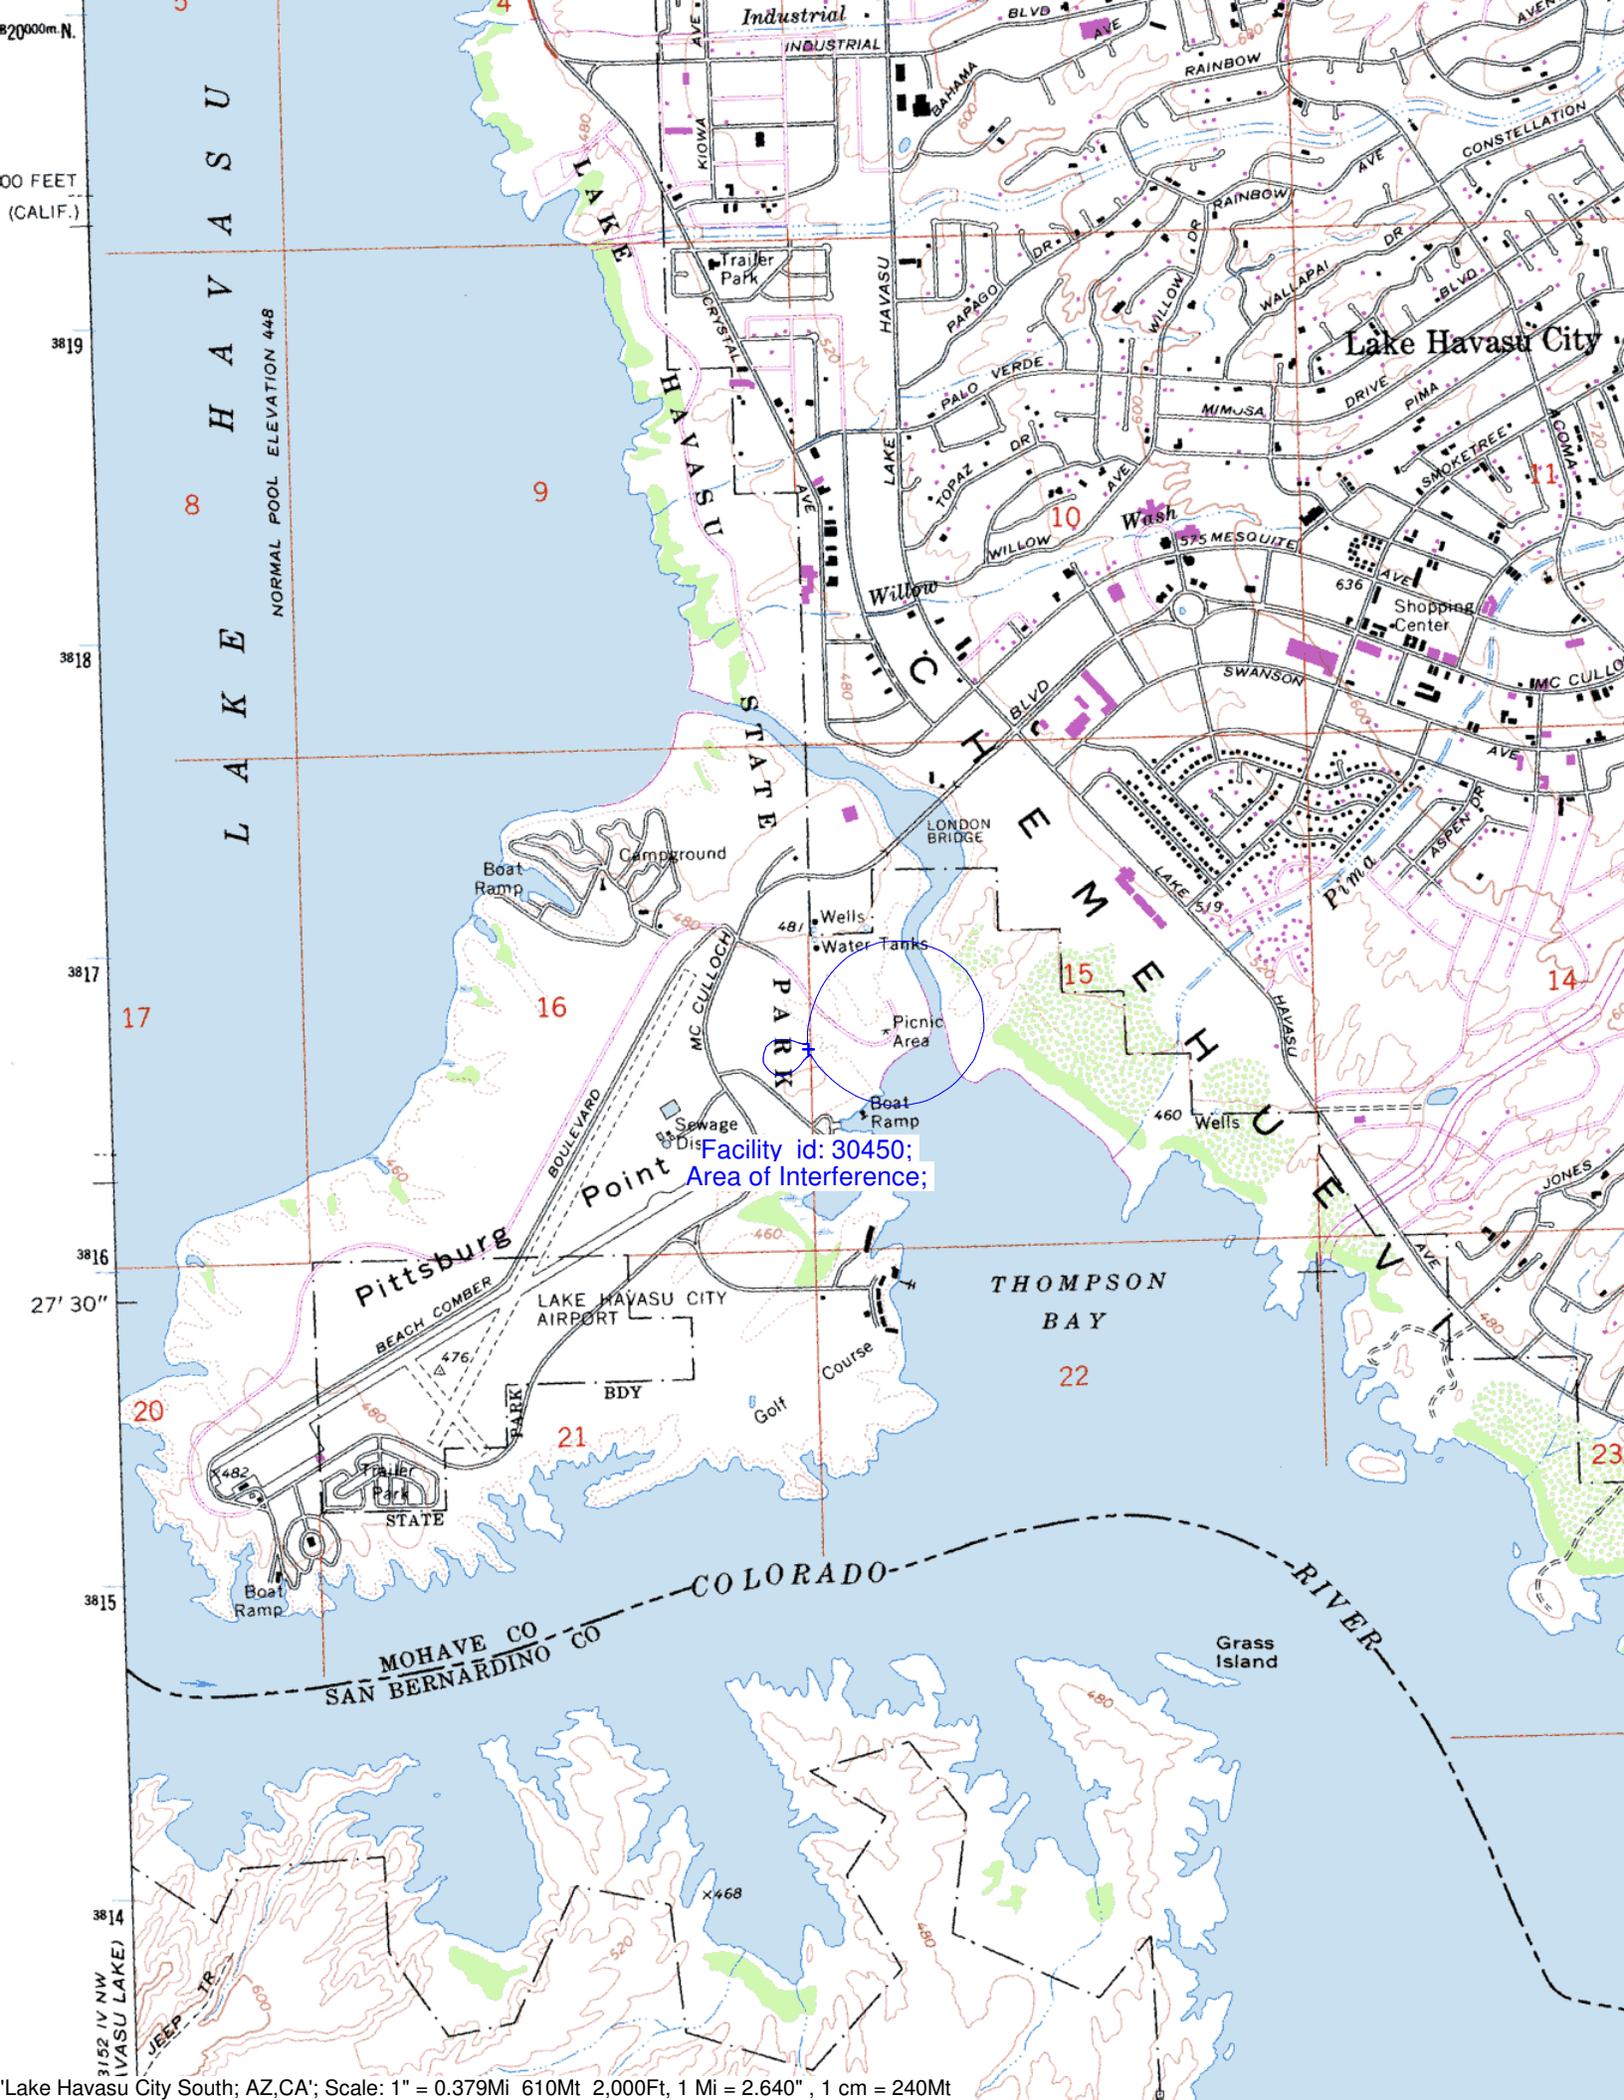

2000m N.
00 FEET (CALIF.)
3819
3818
3817
3816
3815
3814

L A K E H A V A S U

NORMAL POOL ELEVATION 448

8

9

17

16

15

14

20

21

22

23

Facility id: 30450;
Area of Interference;

27' 30"

M O H A V E C O
S A N B E R N A R D I N O C O
C O L O R A D O R I V E R

Grass Island

3152 IV NW (VASU LAKE)
JEEP TR

