

Exhibit #29

Brighton 295A

REFERENCE 44 47 02 N. 71 53 14 W.	CH# 295A - 106.9 MHz, Pwr= 1.42 kW, HAAT=207.4 M, COR= 691 M Average Protected F(50-50)= 28.29 km Ave. F(50-10) 40 dBu= 81.1 54 dBu= 42.7 80 dBu= 9.2 100 dBu= 2.2	DISPLAY DATES DATA 03-02-06 SEARCH 03-02-06								
CH CITY	CALL	TYPE STATE	AZI. <--	DIST FILE #	LAT. LNG.	Pwr(kW) HAAT(M)	COR(M) INT(km)	PRO(km) LICENSEE	*IN* (Overlap in km)	*OUT*
295A Brighton	AP295A	APP VT	338.3 158.3	5.39 BSFH20050811AFD	44 49 44 71 54 45	6.000 -458	100 68.3	15.8 Vermont Public Radio	-90.98*<	-91.06*<
295A Brighton	AU062A	VAC VT	338.3 158.3	5.39 RM10023	44 49 44 71 54 45	6.000 39	597 72.6	18.0 Radio Vermont Classics, L1	-95.22*<	-93.27*<
295C1 Quebec	R---	VAC QU	7.5 187.8	228.44	46 49 17 71 29 48	100.000 376	427 180.8	86.0	28.73	58.89
295B Trois-rivieres	CBMZFM	OPE QC	342.9 162.4	198.78	46 29 27 72 39 00	4.300 319	370 108.2	56.3	62.33	41.79
296A Gorham	WEVC	LIC NC NH	122.3 302.8	67.34 BMLED20050913AAL	44 27 32 71 10 16	6.000 38	525 26.3	17.8 New Hampshire Public Radio	21.54	20.69
295A Moultonborough	WSCY	LIC NCN NH	157.8 338.2	121.67 BLH19961129KA	43 46 09 71 18 52	0.130 622	900 84.7	27.9 Northeast Communications C	20.05	35.17
296A Barre	WORK	LIC NCX VT	214.3 33.8	83.98 BLH20030612AMC	44 09 30 72 28 46	3.900 96	549 38.3	25.1 Nassau Broadcasting	19.67 Iii, L	19.73
294C2 Vergennes	WIZN	LIC CX VT	244.4 63.4	119.83 BMLH20050928AEF	44 18 40 73 14 33	50.000 40	204 52.1	29.8 Hall Communications, Inc.	50.44	64.47
294A Lac Megantic	R---	QU	37.4 218.1	115.91	45 36 27 70 58 54	6.000 66	578 35.4	33.0	52.26	25.38
292A Littleton	WMTK	LIC CN NH	166.2 346.3	49.20 BLH19910927KC	44 21 14 71 44 23	0.390 382	735 1.4	28.2 Vermont Broadcast Associat	21.06	18.86
293B St-hyacinthe	CFEIFM	PRO DCN QC	319.7 139.0	124.43	45 37 57 72 55 15	48.000 81	138 4.3	52.7	88.85	57.50
295B Thomaston	WBQX	LIC CN ME	108.2 290.1	229.88 BLH19920611KC	44 06 30 69 09 28	29.500 194	231 131.6	64.8 Nassau Broadcasting	76.88 Iii, L	82.26
296A1 Disraeli	ALLO	QU	18.6 199.0	131.97	45 54 28 71 20 33	0.250 164	424 25.0	18.0	89.34	76.30
297C1 Montreal	CITEFM	OPE HN QC	301.6 120.4	156.22	45 30 20 73 35 32	43.000 310	321 8.1	78.6	113.65	61.64
298C1 Lewiston	WFNK	LIC NCX ME	126.2 307.2	145.35 BLH20050310AAL	44 00 12 70 25 24	100.000 259	408 9.4	69.0 Nassau Broadcasting	117.35 Iii, L	74.79
242C Rumford	WLOBFM	LIC CN ME	102.3 283.2	101.93 BLH19890731KF	44 34 56 70 37 59	100.000 362	774 91.9	76.9 Atlantic Coast Radio, Llc	29.0R	72.9M

ERP and HAAT are on direct line to and from reference station.

*"affixed to 'IN' or 'Out' values = site inside protected contour.

"=< station meets FCC minimum distance spacing for its class. "<" = contour overlap

^ = Power and antenna height 'Max classed' as per Sec 73.215 protection requirements

HOW TO READ THE FM COMPUTER PRINT-OUT

The computer printout should be self-explanatory for the most part. The parameters of the station being checked, (reference station) are printed in the heading. The 60 dBu protected contour is predicted from the Commission's F(50-50) table, while the 40, 54, 80 and 100 dBu contours are interference contours derived from the Commission's F(50-10) table. Contour distances are in kilometers and are predicted using spline interpolation from data points identical to those published in Report No. RS 76-01 by Gary C. Kalagian. Critical contour distances are determined using the Commission's TVFMINT FORTRAN subroutine. When interference contour distances are less than 16 kilometers the F(50-50) tables are used. If signal contour distances are less than 1.6 km the free-space equation is used.

The column listed "* IN *" is the sum of the reference station's 60 dBu protected contour and the data file station's interference contour subtracted from the distance between the stations. (All distances are derived by the method detailed in Sec. 73.208 of the Rules and Regulations as amended in Docket 80-90.) Therefore, the column is a measure of incoming interference. Negative distances in this column indicate the presence of interference. Listed antenna heights are the average heights of eight standard radials as found in the Commission's records unless otherwise noted, in which case the specific antenna heights and the DA power, if applicable, along the straight line azimuths between the reference station and the database station are used and visa versa. The column labeled "* OUT *" shows the distance in kilometers of overlap or clearance between the reference station's interference contour and the database station's protected contour. Negative distance figures in this column indicate outgoing overlap interference.

Under the "AZIMUTH" column, the first row of numbers indicate the bearings from True North of the data base stations in relationship with the reference station, while the numbers in the second row indicate the reverse bearings from the database station to the reference station.

The columns labeled "INT" and "PRO" hold the distance in kilometers of the appropriate interference contour and the protected contour of a data base station.

For I.F. relationships the "IN" and "OUT" columns change their significance. The letter "R" stands for the minimum **required** distance in kilometers, while the letter "M" in the next column follows the **available clear space** separation in kilometers. Minimum separation distances when displayed are taken from Sec 73.207 of the rules as amended. Canadian and Mexican separation distances, U/D ratios and protected contour values are from the US/Mexican Working Agreement and the US/Canada Working Agreement".


The first three letters of the "TYPE" column identify the current FCC status of the stations. The fourth letter will be a "D" if the facility is directional. "Z" indicates a 73.215 directional. An "N" indicates it is a 73.215 station that operates omni. The fifth letter will be an E, H or V depending on the type of antenna polarization. The sixth letter will be a "Y" if the antenna uses beam tilt or an "X" if the commission is not sure, otherwise it will be an "N".

FMCommander Allocation Study
03-03-2006

New CH 295 A
1.42 kW 691 M COR DA
Prot. = 60 dBu
Intef. = 54 dBu

WEVC CH 296 A BMLED20050913AAL
6 kW, 525 M COR
Prot. = 60 dBu
Intef. = 54 dBu

Scale = 1:1,500,000

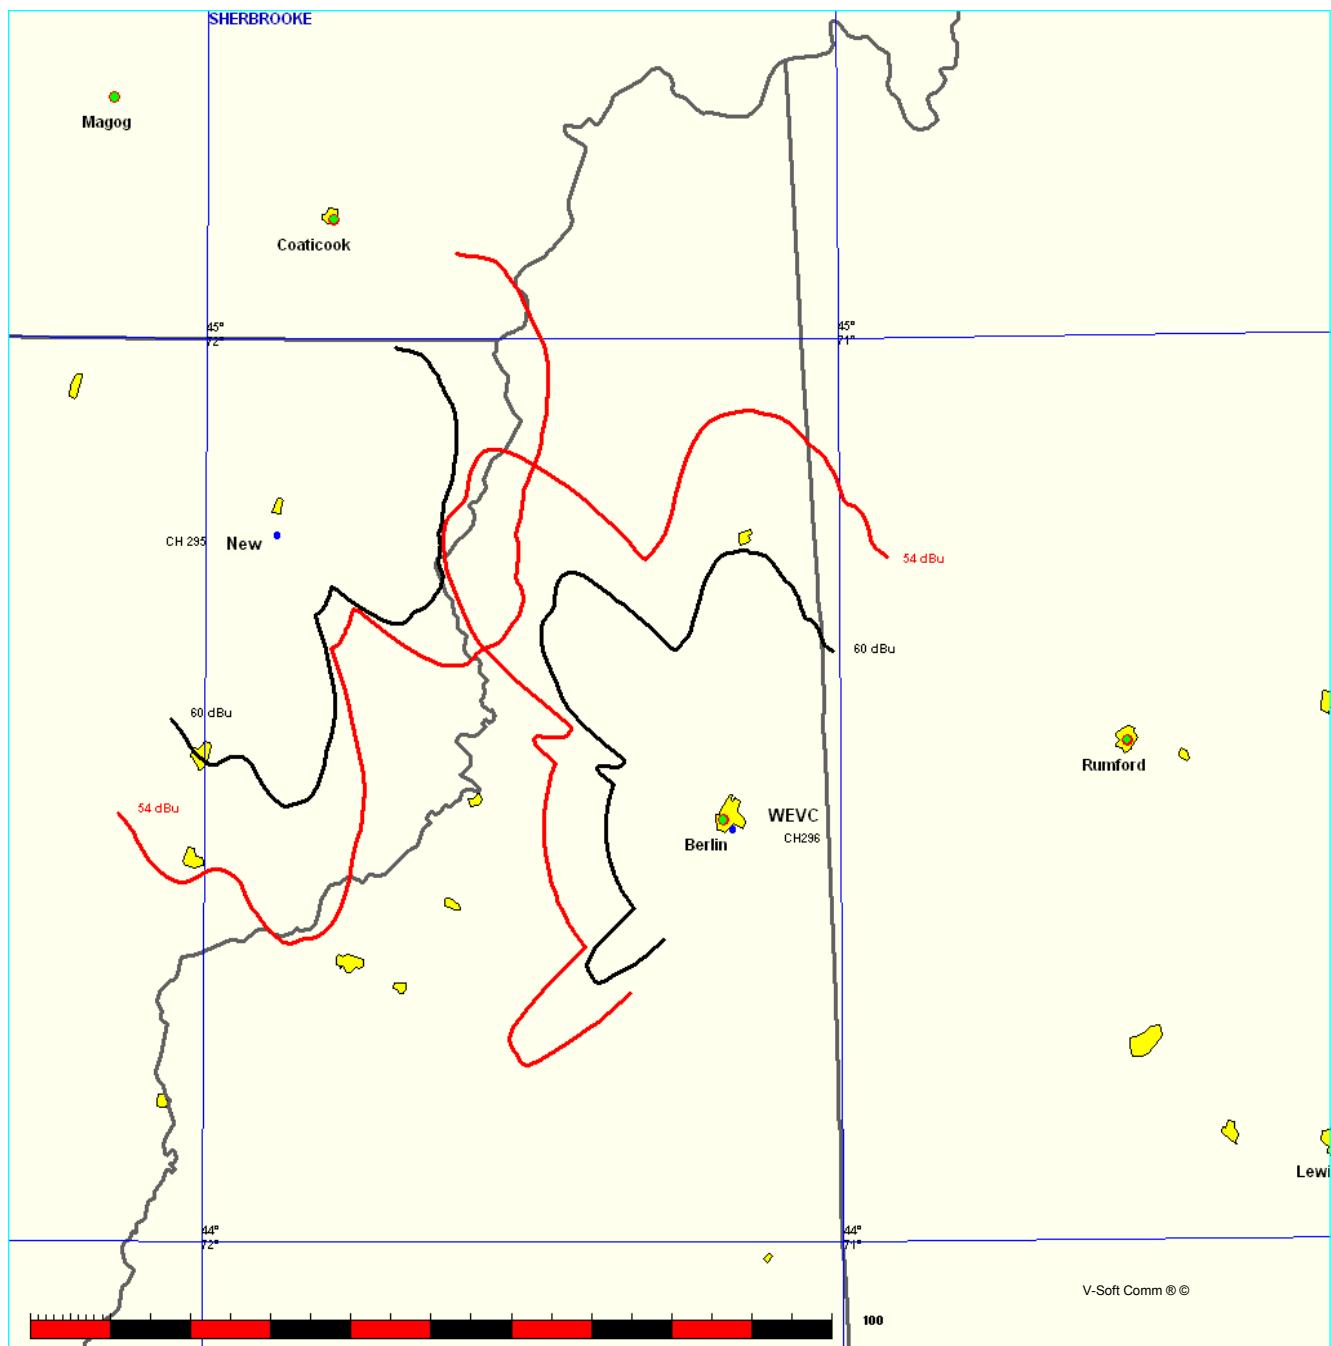

03-02-2006

30 Arc-Sec. Terrain Data

FMOver Analysis Ex #29, Pg #4

New
 Channel = 295A
 Max ERP = 1.42 kW
 RCAMSL = 691 M
 N. Lat = 44 47 02
 W. Lng = 71 53 14
 Protected
 60 dBu

WEVC BMLED20050913AAL
 Channel = 296A
 Max ERP = 6 kW
 RCAMSL = 525 M
 N. Lat = 44 27 32
 W. Lng = 71 10 16
 Interfering
 54 dBu

Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Actual (dBu)
062.0	000.4133	0300.2	025.4	324.7	006.0000	0183.4	059.1	52.68
063.0	000.3957	0300.7	025.2	324.4	006.0000	0179.5	058.7	52.66
064.0	000.3786	0301.0	024.9	324.1	006.0000	0179.5	058.3	52.81
065.0	000.3618	0301.7	024.7	323.8	006.0000	0179.5	057.9	52.95
066.0	000.3454	0302.5	024.4	323.4	006.0000	0173.5	057.5	52.81
067.0	000.3294	0303.3	024.2	323.1	006.0000	0173.5	057.2	52.94
068.0	000.3137	0304.1	024.0	322.8	006.0000	0173.5	056.8	53.07
069.0	000.2985	0304.9	023.7	322.4	006.0000	0166.4	056.5	52.85
070.0	000.2836	0305.9	023.5	322.0	006.0000	0166.4	056.2	52.97
071.0	000.2721	0306.8	023.3	321.7	006.0000	0166.4	055.9	53.09
072.0	000.2607	0307.5	023.1	321.4	006.0000	0160.6	055.6	52.91
073.0	000.2497	0307.7	022.8	321.0	006.0000	0160.6	055.3	53.02
074.0	000.2389	0307.7	022.6	320.6	006.0000	0160.6	055.0	53.12
075.0	000.2283	0307.6	022.3	320.2	006.0000	0157.2	054.7	53.05
076.0	000.2179	0307.3	022.1	319.8	006.0000	0157.2	054.5	53.14
077.0	000.2078	0306.9	021.8	319.4	006.0000	0156.2	054.3	53.17
078.0	000.1980	0306.8	021.6	318.9	006.0000	0156.2	054.1	53.25
079.0	000.1883	0307.3	021.3	318.5	006.0000	0156.2	053.9	53.33
080.0	000.1790	0308.7	021.1	318.1	006.0000	0156.2	053.7	53.40
081.0	000.1741	0310.2	021.0	317.8	006.0000	0156.2	053.4	53.50
082.0	000.1694	0311.6	020.9	317.5	006.0000	0155.3	053.2	53.56
083.0	000.1647	0312.8	020.8	317.2	006.0000	0155.3	052.9	53.65
084.0	000.1601	0314.8	020.8	316.9	006.0000	0155.3	052.7	53.74
085.0	000.1556	0317.4	020.7	316.6	006.0000	0155.3	052.4	53.83
086.0	000.1511	0320.0	020.6	316.3	006.0000	0152.0	052.2	53.75
087.0	000.1467	0321.7	020.5	315.9	006.0000	0152.0	052.0	53.83
088.0	000.1423	0322.9	020.4	315.6	006.0000	0152.0	051.8	53.91
089.0	000.1381	0324.1	020.3	315.2	006.0000	0146.7	051.6	53.70
090.0	000.1338	0325.3	020.2	314.8	006.0000	0146.7	051.5	53.76
091.0	000.1364	0324.9	020.3	314.6	006.0000	0146.7	051.2	53.88
092.0	000.1389	0324.1	020.3	314.4	006.0000	0140.5	050.9	53.66
093.0	000.1415	0323.3	020.4	314.1	006.0000	0140.5	050.6	53.78
094.0	000.1441	0321.8	020.4	313.8	006.0000	0140.5	050.3	53.88
095.0	000.1468	0319.0	020.4	313.5	006.0000	0140.5	050.1	53.97
096.0	000.1494	0316.2	020.4	313.2	006.0000	0133.6	049.9	53.69
097.0	000.1521	0313.3	020.4	312.9	006.0000	0133.6	049.7	53.77
098.0	000.1548	0311.1	020.5	312.5	006.0000	0133.6	049.4	53.85

Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Actual (dBu)
099.0	000.1576	0308.1	020.5	312.2	006.0000	0125.4	049.3	53.49
100.0	000.1603	0304.9	020.4	311.8	006.0000	0125.4	049.1	53.56
101.0	000.1681	0303.6	020.6	311.6	006.0000	0125.4	048.7	53.69
102.0	000.1761	0306.8	021.0	311.4	006.0000	0116.2	048.3	53.37
103.0	000.1843	0307.2	021.2	311.2	006.0000	0116.2	047.9	53.52
104.0	000.1926	0305.5	021.4	310.9	006.0000	0116.2	047.6	53.64
105.0	000.2011	0299.5	021.4	310.5	006.0000	0107.1	047.4	53.11
106.0	000.2099	0293.3	021.4	310.0	006.0000	0107.1	047.2	53.17
107.0	000.2188	0288.4	021.4	309.6	006.0000	0107.1	047.0	53.24
108.0	000.2279	0282.6	021.4	309.2	006.0000	0099.2	046.9	52.70
109.0	000.2371	0275.2	021.4	308.8	006.0000	0099.2	046.8	52.72
110.0	000.2466	0266.1	021.2	308.3	006.0000	0092.9	046.9	52.21
111.0	000.2595	0256.7	021.1	307.8	006.0000	0092.9	046.8	52.21
112.0	000.2728	0248.0	021.0	307.3	006.0000	0087.1	046.8	51.71
113.0	000.2864	0240.6	021.0	306.9	006.0000	0087.1	046.8	51.72
114.0	000.3003	0233.5	020.9	306.4	006.0000	0079.7	046.8	51.04
115.0	000.3146	0225.4	020.8	306.0	006.0000	0079.7	046.8	51.03
116.0	000.3292	0216.0	020.6	305.5	006.0000	0068.9	047.0	49.92
117.0	000.3441	0205.5	020.3	305.0	006.0000	0068.9	047.2	49.85
118.0	000.3593	0194.7	020.0	304.5	006.0000	0068.9	047.4	49.77
119.0	000.3749	0184.9	019.8	304.1	006.0000	0055.3	047.7	48.23
120.0	000.3908	0177.0	019.6	303.7	006.0000	0055.3	047.8	48.18
121.0	000.4113	0171.1	019.5	303.3	006.0000	0041.1	047.9	46.11
122.0	000.4323	0166.4	019.5	302.8	006.0000	0041.1	047.9	46.11
123.0	000.4539	0162.3	019.5	302.4	006.0000	0030.3	047.9	44.23
124.0	000.4760	0156.6	019.3	302.0	006.0000	0030.3	048.0	44.21
125.0	000.4986	0149.1	019.1	301.7	006.0000	0030.3	048.3	44.14
126.0	000.5217	0140.4	018.7	301.3	006.0000	0025.7	048.7	44.00
127.0	000.5453	0130.8	018.2	301.0	006.0000	0025.7	049.2	43.89
128.0	000.5695	0120.2	017.7	300.7	006.0000	0025.7	049.8	43.76
129.0	000.5942	0107.5	016.8	300.5	006.0000	0025.7	050.7	43.57
130.0	000.6194	0091.6	015.5	300.4	006.0000	0026.6	052.1	43.27
131.0	000.6519	0072.7	013.9	300.5	006.0000	0026.6	053.7	42.93
132.0	000.6852	0053.0	012.2	300.6	006.0000	0025.7	055.4	42.56
133.0	000.7194	0035.5	010.1	300.9	006.0000	0025.7	057.5	42.12
134.0	000.7544	0022.6	009.5	300.9	006.0000	0025.7	058.1	41.98
135.0	000.7902	0014.6	009.6	300.7	006.0000	0025.7	058.1	41.99
136.0	000.8268	0008.7	009.7	300.5	006.0000	0026.6	058.0	42.00
137.0	000.8643	0002.3	009.8	300.3	006.0000	0026.6	057.9	42.02
138.0	000.9026	-0005.1	009.9	300.1	006.0000	0026.6	057.9	42.03
139.0	000.9417	-0011.7	010.0	299.9	006.0000	0026.6	057.8	42.04
140.0	000.9817	-0015.8	010.1	299.7	006.0000	0026.6	057.8	42.04
141.0	001.0219	-0018.6	010.2	299.5	006.0000	0029.3	057.8	42.05
142.0	001.0629	-0022.6	010.3	299.3	006.0000	0029.3	057.8	42.05
143.0	001.1047	-0028.8	010.4	299.1	006.0000	0029.3	057.7	42.06
144.0	001.1473	-0036.9	010.5	298.9	006.0000	0029.3	057.7	42.06
145.0	001.1908	-0045.0	010.6	298.7	006.0000	0029.3	057.7	42.06
146.0	001.2350	-0049.3	010.7	298.5	006.0000	0031.5	057.7	42.27
147.0	001.2800	-0048.2	010.8	298.3	006.0000	0031.5	057.7	42.27
148.0	001.3259	-0042.6	010.9	298.1	006.0000	0031.5	057.7	42.26
149.0	001.3725	-0034.0	011.0	297.8	006.0000	0031.5	057.8	42.26

Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Actual (dBu)
150.0	001.4200	-0024.4	011.1	297.6	006.0000	0031.5	057.8	42.25
151.0	001.4200	-0014.6	011.1	297.5	006.0000	0033.6	057.9	42.52
152.0	001.4200	-0003.8	011.1	297.3	006.0000	0033.6	058.0	42.49
153.0	001.4200	0008.7	011.1	297.2	006.0000	0033.6	058.1	42.47
154.0	001.4200	0021.8	011.1	297.0	006.0000	0033.6	058.2	42.44
155.0	001.4200	0034.5	011.8	296.4	006.0000	0036.5	057.8	42.93
156.0	001.4200	0047.5	013.7	295.0	006.0000	0039.5	056.5	43.67
157.0	001.4200	0060.4	015.5	293.5	006.0000	0040.6	055.3	44.10
158.0	001.4200	0074.2	017.3	292.0	006.0000	0036.6	054.3	43.79
159.0	001.4200	0091.2	019.4	290.1	006.0000	0029.3	053.1	43.04
160.0	001.4200	0109.3	021.3	288.3	006.0000	0020.9	052.2	43.24
161.0	001.4200	0123.9	022.5	286.9	006.0000	0017.5	051.8	43.34
162.0	001.4200	0135.6	023.4	285.9	006.0000	0013.4	051.6	43.37
163.0	001.4200	0148.1	024.3	284.7	006.0000	0009.7	051.5	43.41
164.0	001.4200	0160.2	025.2	283.7	006.0000	0004.6	051.4	43.42
165.0	001.4200	0170.0	025.9	282.8	006.0000	-0002.8	051.5	43.40
166.0	001.4200	0180.9	026.6	281.8	006.0000	-0010.7	051.6	43.38
167.0	001.4200	0196.8	027.6	280.6	006.0000	-0018.2	051.6	43.38
168.0	001.4200	0214.6	028.8	279.1	006.0000	-0029.7	051.6	43.38
169.0	001.4200	0230.5	029.8	277.8	006.0000	-0035.2	051.7	43.35
170.0	001.4200	0245.2	030.7	276.7	006.0000	-0040.3	052.0	43.30
171.0	001.4200	0258.7	031.6	275.7	006.0000	-0044.8	052.3	43.23
172.0	001.4200	0270.1	032.2	274.8	006.0000	-0050.3	052.7	43.15
173.0	001.4200	0278.9	032.8	274.1	006.0000	-0055.3	053.1	43.05
174.0	001.4200	0283.8	033.0	273.7	006.0000	-0055.3	053.6	42.94
175.0	001.4200	0286.6	033.2	273.5	006.0000	-0060.1	054.2	42.82
176.0	001.4200	0287.2	033.2	273.4	006.0000	-0060.1	054.7	42.70
177.0	001.4200	0289.9	033.4	273.1	006.0000	-0060.1	055.3	42.57
178.0	001.4200	0292.7	033.5	272.9	006.0000	-0060.1	055.9	42.45
179.0	001.4200	0290.3	033.4	273.0	006.0000	-0060.1	056.5	42.33
180.0	001.4200	0282.3	032.9	273.4	006.0000	-0060.1	057.1	42.20
181.0	001.4200	0274.3	032.5	273.9	006.0000	-0055.3	057.7	42.07
182.0	001.4200	0262.6	031.8	274.5	006.0000	-0050.3	058.2	41.95

03-02-2006 30 Arc-Sec. Sec. Terrain Data

Ex #29, Pg #7

WEVC BMLED20050913AAL
 Channel = 296A
 Max ERP = 6 kW
 RCAMSL = 525 M
 N. Lat = 44 27 32
 W. Lng = 71 10 16
 Protected
 60 dBu

New
 Channel = 295A
 Max ERP = 1.42 kW
 RCAMSL = 691 M
 N. Lat = 44 47 02
 W. Lng = 71 53 14
 Interfering
 54 dBu

Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Actual (dBu)
243.0	006.0000	-0136.2	015.8	135.2	000.7976	0014.6	060.9	32.65
244.0	006.0000	-0129.8	015.8	135.1	000.7945	0014.6	060.6	32.68
245.0	006.0000	-0125.3	015.8	135.0	000.7914	0014.6	060.4	32.72
246.0	006.0000	-0125.2	015.8	134.9	000.7882	0014.6	060.1	32.75
247.0	006.0000	-0128.3	015.8	134.8	000.7847	0014.6	059.8	32.79
248.0	006.0000	-0132.5	015.8	134.7	000.7811	0014.6	059.6	32.82
249.0	006.0000	-0137.3	015.8	134.6	000.7773	0014.6	059.3	32.85
250.0	006.0000	-0142.0	015.8	134.5	000.7733	0014.6	059.1	32.88
251.0	006.0000	-0146.5	015.8	134.4	000.7692	0022.6	058.8	32.91
252.0	006.0000	-0149.5	015.8	134.3	000.7649	0022.6	058.6	32.93
253.0	006.0000	-0149.1	015.8	134.2	000.7604	0022.6	058.3	32.96
254.0	006.0000	-0147.1	015.8	134.0	000.7557	0022.6	058.1	32.98
255.0	006.0000	-0143.9	015.8	133.9	000.7509	0022.6	057.9	33.00
256.0	006.0000	-0138.7	015.8	133.8	000.7459	0022.6	057.6	33.02
257.0	006.0000	-0133.0	015.8	133.6	000.7407	0022.6	057.4	33.04
258.0	006.0000	-0125.9	015.8	133.5	000.7354	0035.5	057.2	33.83
259.0	006.0000	-0120.1	015.8	133.3	000.7299	0035.5	056.9	33.85
260.0	006.0000	-0116.0	015.8	133.1	000.7243	0035.5	056.7	33.87
261.0	006.0000	-0111.1	015.8	133.0	000.7185	0035.5	056.5	33.89
262.0	006.0000	-0106.3	015.8	132.8	000.7125	0035.5	056.3	33.90
263.0	006.0000	-0103.0	015.8	132.6	000.7064	0035.5	056.1	33.91
264.0	006.0000	-0103.0	015.8	132.4	000.7001	0053.0	055.9	36.15
265.0	006.0000	-0100.6	015.8	132.3	000.6937	0053.0	055.7	36.17
266.0	006.0000	-0097.8	015.8	132.1	000.6872	0053.0	055.5	36.19
267.0	006.0000	-0091.0	015.8	131.9	000.6805	0053.0	055.3	36.20
268.0	006.0000	-0082.3	015.8	131.7	000.6737	0053.0	055.1	36.21
269.0	006.0000	-0073.6	015.8	131.4	000.6667	0072.7	054.9	38.07
270.0	006.0000	-0066.9	015.8	131.2	000.6596	0072.7	054.7	38.09
271.0	006.0000	-0064.7	015.8	131.0	000.6524	0072.7	054.5	38.10
272.0	006.0000	-0062.5	015.8	130.8	000.6451	0072.7	054.3	38.11
273.0	006.0000	-0060.1	015.8	130.6	000.6377	0072.7	054.2	38.12
274.0	006.0000	-0055.3	015.8	130.3	000.6302	0091.6	054.0	39.67
275.0	006.0000	-0050.3	015.8	130.1	000.6225	0091.6	053.8	39.68
276.0	006.0000	-0044.8	015.8	129.9	000.6158	0091.6	053.7	39.69

Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Actual (dBu)
277.0	006.0000	-0040.3	015.8	129.6	000.6096	0091.6	053.5	39.70
278.0	006.0000	-0035.2	015.8	129.4	000.6033	0107.5	053.4	40.85
279.0	006.0000	-0029.7	015.8	129.1	000.5969	0107.5	053.2	40.85
280.0	006.0000	-0023.6	015.8	128.9	000.5905	0107.5	053.1	40.86
281.0	006.0000	-0018.2	015.8	128.6	000.5840	0107.5	053.0	40.86
282.0	006.0000	-0010.7	015.8	128.3	000.5775	0120.2	052.9	41.64
283.0	006.0000	-0002.8	015.8	128.1	000.5709	0120.2	052.7	41.64
284.0	006.0000	0004.6	015.8	127.8	000.5643	0120.2	052.6	41.63
285.0	006.0000	0009.7	015.8	127.5	000.5576	0120.2	052.5	41.62
286.0	006.0000	0013.4	015.8	127.2	000.5509	0130.8	052.4	42.18
287.0	006.0000	0017.5	015.8	127.0	000.5442	0130.8	052.3	42.16
288.0	006.0000	0020.9	015.8	126.7	000.5374	0130.8	052.2	42.14
289.0	006.0000	0025.1	015.8	126.4	000.5306	0140.4	052.1	42.63
290.0	006.0000	0029.3	015.8	126.1	000.5238	0140.4	052.0	42.61
291.0	006.0000	0033.0	016.5	126.0	000.5222	0140.4	051.2	42.91
292.0	006.0000	0036.6	017.4	126.0	000.5208	0140.4	050.3	43.27
293.0	006.0000	0039.4	018.1	125.8	000.5171	0140.4	049.5	43.53
294.0	006.0000	0040.6	018.4	125.5	000.5105	0140.4	049.2	43.62
295.0	006.0000	0039.5	018.2	125.1	000.5008	0149.1	049.4	43.92
296.0	006.0000	0036.5	017.4	124.6	000.4894	0149.1	050.1	43.55
297.0	006.0000	0033.6	016.7	124.1	000.4791	0156.6	050.8	43.57
298.0	006.0000	0031.5	016.1	123.7	000.4704	0156.6	051.2	43.30
299.0	006.0000	0029.3	015.8	123.4	000.4627	0162.3	051.6	43.38
300.0	006.0000	0026.6	015.8	123.1	000.4560	0162.3	051.6	43.33
301.0	006.0000	0025.7	015.8	122.8	000.4493	0162.3	051.6	43.27
302.0	006.0000	0030.3	015.8	122.5	000.4428	0166.4	051.5	43.44
303.0	006.0000	0041.1	018.5	122.2	000.4356	0166.4	048.8	44.42
304.0	006.0000	0055.3	021.6	121.6	000.4247	0166.4	045.7	45.54
305.0	006.0000	0068.9	023.8	121.0	000.4112	0171.1	043.5	46.55
306.0	006.0000	0079.7	025.4	120.2	000.3958	0177.0	041.9	47.37
307.0	006.0000	0087.1	026.5	119.5	000.3821	0184.9	040.9	48.05
308.0	006.0000	0092.9	027.3	118.6	000.3691	0184.9	040.2	48.25
309.0	006.0000	0099.2	028.2	117.7	000.3551	0194.7	039.4	48.90
310.0	006.0000	0107.1	029.2	116.7	000.3394	0205.5	038.5	49.64
311.0	006.0000	0116.2	030.3	115.5	000.3222	0216.0	037.6	50.34
312.0	006.0000	0125.4	031.3	114.3	000.3045	0233.5	036.8	51.22
313.0	006.0000	0133.6	032.2	113.0	000.2866	0240.6	036.1	51.55
314.0	006.0000	0140.5	033.0	111.7	000.2689	0248.0	035.5	51.78
315.0	006.0000	0146.7	033.7	110.4	000.2515	0266.1	035.1	52.29
316.0	006.0000	0152.0	034.3	109.1	000.2379	0275.2	034.8	52.48
317.0	006.0000	0155.3	034.7	107.9	000.2271	0282.6	034.8	52.53
318.0	006.0000	0156.2	034.8	107.0	000.2185	0288.4	035.0	52.44
319.0	006.0000	0156.2	034.8	106.1	000.2110	0293.3	035.3	52.28
320.0	006.0000	0157.2	034.9	105.2	000.2029	0299.5	035.5	52.18
321.0	006.0000	0160.6	035.3	104.1	000.1931	0305.5	035.6	52.11
322.0	006.0000	0166.4	035.9	102.6	000.1813	0307.2	035.5	51.94
323.0	006.0000	0173.5	036.6	101.1	000.1690	0303.6	035.4	51.60
324.0	006.0000	0179.5	037.2	099.7	000.1596	0304.9	035.4	51.37
325.0	006.0000	0183.4	037.5	098.6	000.1565	0308.1	035.6	51.27
326.0	006.0000	0185.2	037.6	097.7	000.1540	0311.1	036.0	51.11
327.0	006.0000	0184.0	037.5	097.1	000.1525	0313.3	036.5	50.87

Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Actual (dBu)
328.0	006.0000	0178.9	037.1	097.0	000.1522	0313.3	037.3	50.49
329.0	006.0000	0170.5	036.3	097.3	000.1530	0313.3	038.3	50.06
330.0	006.0000	0160.5	035.3	098.0	000.1548	0311.1	039.5	49.52
331.0	006.0000	0149.4	034.0	098.8	000.1571	0308.1	040.7	48.94
332.0	006.0000	0137.5	032.7	099.8	000.1598	0304.9	042.0	48.34
333.0	006.0000	0126.7	031.4	100.7	000.1654	0303.6	043.2	47.94
334.0	006.0000	0117.5	030.5	101.2	000.1700	0303.6	044.2	47.62
335.0	006.0000	0109.0	029.5	101.9	000.1749	0306.8	045.3	47.41
336.0	006.0000	0099.9	028.3	102.7	000.1814	0307.2	046.4	47.12
337.0	006.0000	0091.5	027.1	103.4	000.1877	0307.2	047.4	46.84
338.0	006.0000	0085.4	026.3	103.9	000.1920	0305.5	048.3	46.53
339.0	006.0000	0079.6	025.4	104.4	000.1961	0305.5	049.2	46.28
340.0	006.0000	0072.7	024.4	105.1	000.2019	0299.5	050.2	45.84
341.0	006.0000	0066.5	023.5	105.7	000.2071	0293.3	051.0	45.41
342.0	006.0000	0063.8	023.0	105.8	000.2082	0293.3	051.6	45.20
343.0	006.0000	0064.8	023.2	105.4	000.2047	0299.5	051.9	45.23
344.0	006.0000	0066.7	023.5	104.9	000.2004	0299.5	052.1	45.06
345.0	006.0000	0068.4	023.7	104.4	000.1963	0305.5	052.3	45.07
346.0	006.0000	0070.5	024.1	103.9	000.1918	0305.5	052.5	44.89
347.0	006.0000	0072.9	024.4	103.3	000.1870	0307.2	052.7	44.75
348.0	006.0000	0076.3	024.9	102.6	000.1813	0307.2	052.9	44.55
349.0	006.0000	0081.3	025.7	101.7	000.1738	0306.8	053.0	44.32
350.0	006.0000	0087.7	026.6	100.6	000.1649	0303.6	053.0	43.96
351.0	006.0000	0095.2	027.6	099.3	000.1585	0308.1	053.1	43.89
352.0	006.0000	0103.6	028.8	098.0	000.1549	0311.1	053.3	43.84
353.0	006.0000	0113.0	029.9	096.7	000.1512	0313.3	053.4	43.74
354.0	006.0000	0121.9	030.9	095.5	000.1481	0316.2	053.7	43.62
355.0	006.0000	0129.8	031.8	094.5	000.1454	0321.8	054.1	43.58
356.0	006.0000	0137.2	032.6	093.5	000.1429	0321.8	054.5	43.34
357.0	006.0000	0141.9	033.2	092.9	000.1412	0323.3	055.0	43.15
358.0	006.0000	0145.9	033.6	092.4	000.1399	0324.1	055.6	42.92
359.0	006.0000	0147.8	033.8	092.1	000.1392	0324.1	056.1	42.68
000.0	006.0000	0148.7	033.9	091.9	000.1388	0324.1	056.7	42.45
001.0	006.0000	0149.7	034.1	091.8	000.1385	0324.1	057.3	42.21
002.0	006.0000	0151.1	034.2	091.7	000.1381	0324.1	057.9	41.97
003.0	006.0000	0151.1	034.2	091.7	000.1381	0324.1	058.5	41.74