

Non-Interference Compliance

Regarding Facility id 140009

Channel 288

Description of Exhibit 13 Contents

This exhibit demonstrates that the proposed facility complies with contour overlap and interference protection provisions in all of the applicable rule sections and that this application for a construction permit is in full compliance with 47 C.F.R. § 74.1204.

Let it be noted that should any actual real world interference occur, the applicant acknowledges that it will promptly suspend operation of this translator in accordance with 47 C.F.R. § 74.1203.

Page 2 of this exhibit is an explanation of the method used to demonstrate compliance with contour overlap and interference provisions based on 47 C.F.R. § 74.1204(d), which states:

[A]n application otherwise precluded by this section will be accepted if it can be demonstrated that no actual interference will occur due to intervening terrain, lack of population or such other factors as may be applicable.

Page 3 contains a tabulation of the vertical radiation pattern of the proposed antenna and the minimum ground clearance of the interfering contour based on this pattern.

Pages 4 through 6 include a tabulation of the vertical radiation pattern for the proposed antenna provided by the antenna manufacturer.

Page 7 of this exhibit contains the tabulated data from the interference analysis, which shows all stations whose protected contours come within 50 km of the 34 dBμ F(50,10) contour of the proposed translator. These tabulated values were calculated using data from the FCC's CDBS files and 30 arc second terrain data. The column labeled "Adj" shows the number of channels difference between the entry and the proposed translator. The column labeled "Dist" shows the distance in km. The column labeled "Overlap" shows the area of contour overlap in square kilometers.

Page 8 of this exhibit is a portion of a USGS 1:24,000 scale 7.5 minute quadrangle at full scale with the calculated area of interference overlaid. The sheet includes the quadrangle name and measurement scale at the bottom-left corner (note: "Mt" refers to meters). The area of interference was calculated using the free space equation and 120 radials.

Page 9 of this exhibit is an aerial photo of the vicinity surrounding the proposed translator's tower site.

Note: This proposal provides 61.8m of ground clearance which is more than adequate to protect any buildings within the zone of interference so a lack of population has been demonstrated within the area of interference and this application is therefore in full compliance with 47 C.F.R. § 74.1204.

Compliance with 47 C.F.R. § 74.1204(d)

All authorized second and third adjacent stations with which the proposed translator has contour overlap are tabulated below. Column four show the station's signal level at the proposed translator's tower site, and column five gives the minimum value within the entire standard interfering contour of the proposed translator (100 dBμ for most classes, 94 for class B, 97 for class B1). The minimum second or third adjacent F(50,50) contour within the proposed translator's standard interfering contour was used to calculate the proposed translator's actual "worst-case" interfering contour.

Application_id	File Number	Callsign	Contour at Tower	Min. Contour
1019851	BLH20041018ACR	WGKX	92.2	92.2
Minimum F(50,50) Contour of Adjacent Station within Proposed Translator's Standard Interfering Contour				92.2


FCC 02-244 at Section II.A.5 states that "when demonstrating that 'no actual interference will occur due to . . . other factors,' pursuant to Section 74.1204(d), an applicant may use the undesired-to-desired signal ratio method." The undesired-to-desired ratio for second and third adjacent stations required by § 74.1204(a) is 40 dB. Since the minimum protected contour strength within the proposed translator's standard interference contour is **92.2 dBμ**, this makes the proposed translator's worst-case interfering contour **132.2 dBμ**. By the free-space equation, this contour is calculated to extend a maximum of **27.2 m** from the transmit antenna.

The maximum horizontal plane of the interfering contour was calculated for 120 radials and plotted on the pertinent portion of a USGS quadrangle (page 8 of this exhibit). However, the field strength of the proposed translator's antenna varies with angle of depression from horizontal. The antenna relative fields are tabulated on the following page at 5 degree increments, starting at 5 degrees below horizontal. Antenna relative field strength data was provided and certified by the manufacturer of the proposed antenna. Using a free-space calculation that neglects any loss due to reflection, the vertical ground clearance of the proposed translator's interference contour has been tabulated. As shown on the following page, the area of interference clears the tower ground level (TGL) by **61.8 m** at the lowest point. The applicant has taken into account USGS quadrangles and relevant aerial photography in stating that no structures, except possibly tower support structures, puncture the area of interference.

Note: This proposal provides 61.8m of ground clearance which is more than adequate to protect any buildings within the zone of interference so a lack of population has been demonstrated within the area of interference and this application is therefore in full compliance with 47 C.F.R. § 74.1204.

Antenna Manufacturer:	SWR
Antenna Model:	FM1
CORAGL:	76 m
Maximum ERP:	0.25 kW
Interfering Contour:	132.2 dBμ
Max Int. Contour Distance:	27.2 m
Min Ground Clearance:	61.8 m

Depression Angle Below Horizontal	Antenna Relative Field	ERP (watts)	Distance to Interfering Contour from Antenna (m)	Horizontal Distance of Interfering Contour from Tower (m)	Vertical Clearance of Interfering Contour above TGL (m)
5	.997	248.5	27.1	27.0	73.6
10	.986	243.0	26.8	26.4	71.3
15	.969	234.7	26.4	25.5	69.2
20	.946	223.7	25.8	24.2	67.2
25	.916	209.8	24.9	22.6	65.5
30	.879	193.2	23.9	20.7	64.0
35	.837	175.1	22.8	18.7	62.9
40	.789	155.6	21.5	16.5	62.2
45	.736	135.4	20.0	14.2	61.8
50	.679	115.3	18.5	11.9	61.8
55	.616	94.9	16.8	9.6	62.3
60	.550	75.6	15.0	7.5	63.0
65	.480	57.6	13.1	5.5	64.2
70	.408	41.6	11.1	3.8	65.6
75	.333	27.7	9.1	2.3	67.2
80	.256	16.4	7.0	1.2	69.1
85	.178	7.9	4.8	0.4	71.2
90	.100	2.5	2.7	0.0	73.3
Minimum Clearance above TGL:					61.8 m

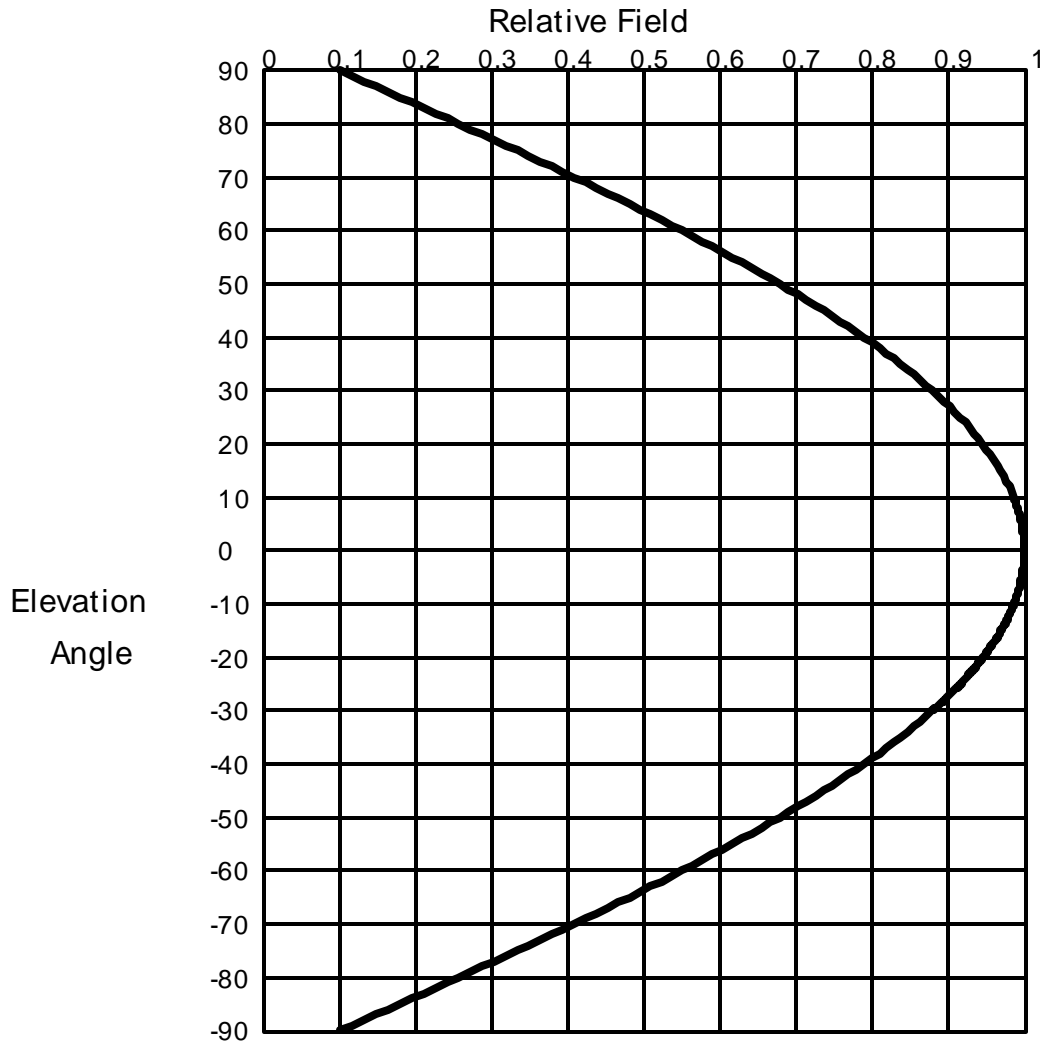

Elevation Pattern

Scale: Linear

Systems With Reliability Inc.

Units: Field, Relative

CLIENT: *General*

Date: 11/10/03

ANTENNA TYPE: FM1/1

FREQUENCY: 98.1

PATTERN POL.: Circular

DIRECTIVITY(Peak): 0.883/ -0.539 dBd

Beam Tilt (Deg.) : 0

DIRECTIVITY(Horiz): 0.883/ -0.539 dBd

Null Fill(s)(%) : 0, 0, 0

Relative Field Tabulation

Elev. Angle	Rel. Fld(dB)	Elev. Angle	Rel. Fld(dB)	Elev. Angle	Rel. Fld(dB)
3.2	.999 (-0.012)	-4.4	.997 (-0.023)	-12.0	.98 (-0.173)
3.0	.999 (-0.011)	-4.6	.997 (-0.025)	-12.2	.98 (-0.178)
2.8	.999 (-0.009)	-4.8	.997 (-0.027)	-12.4	.979 (-0.184)
2.6	.999 (-0.008)	-5.0	.997 (-0.03)	-12.6	.978 (-0.19)
2.4	.999 (-0.007)	-5.2	.996 (-0.032)	-12.8	.978 (-0.196)
2.2	.999 (-0.006)	-5.4	.996 (-0.035)	-13.0	.977 (-0.203)
2.0	.999 (-0.005)	-5.6	.996 (-0.037)	-13.2	.976 (-0.209)
1.8	1.00 (-0.004)	-5.8	.995 (-0.04)	-13.4	.975 (-0.215)
1.6	1.00 (-0.003)	-6.0	.995 (-0.043)	-13.6	.975 (-0.222)
1.4	1.00 (-0.002)	-6.2	.995 (-0.046)	-13.8	.974 (-0.229)
1.2	1.00 (-0.002)	-6.4	.994 (-0.049)	-14.0	.973 (-0.235)
1.0	1.00 (-0.001)	-6.6	.994 (-0.052)	-14.2	.973 (-0.242)
.8	1.00 (-0.001)	-6.8	.994 (-0.055)	-14.4	.972 (-0.249)
.6	1.00 (0)	-7.0	.993 (-0.058)	-14.6	.971 (-0.256)
.4	1.00 (0)	-7.2	.993 (-0.062)	-14.8	.97 (-0.263)
.2	1.00 (0)	-7.4	.993 (-0.065)	-15.0	.969 (-0.271)
.0	1.00 (0)	-7.6	.992 (-0.069)	-15.2	.969 (-0.278)
-.2	1.00 (0)	-7.8	.992 (-0.073)	-15.4	.968 (-0.285)
-.4	1.00 (0)	-8.0	.991 (-0.076)	-15.6	.967 (-0.293)
-.6	1.00 (0)	-8.2	.991 (-0.08)	-15.8	.966 (-0.3)
-.8	1.00 (-0.001)	-8.4	.99 (-0.084)	-16.0	.965 (-0.308)
-1.0	1.00 (-0.001)	-8.6	.99 (-0.088)	-16.2	.964 (-0.316)
-1.2	1.00 (-0.002)	-8.8	.989 (-0.093)	-16.4	.963 (-0.324)
-1.4	1.00 (-0.002)	-9.0	.989 (-0.097)	-16.6	.962 (-0.332)
-1.6	1.00 (-0.003)	-9.2	.988 (-0.101)	-16.8	.962 (-0.34)
-1.8	1.00 (-0.004)	-9.4	.988 (-0.106)	-17.0	.961 (-0.348)
-2.0	.999 (-0.005)	-9.6	.987 (-0.11)	-17.2	.96 (-0.357)
-2.2	.999 (-0.006)	-9.8	.987 (-0.115)	-17.4	.959 (-0.365)
-2.4	.999 (-0.007)	-10.0	.986 (-0.12)	-17.6	.958 (-0.374)
-2.6	.999 (-0.008)	-10.2	.986 (-0.124)	-17.8	.957 (-0.383)
-2.8	.999 (-0.009)	-10.4	.985 (-0.129)	-18.0	.956 (-0.391)
-3.0	.999 (-0.011)	-10.6	.985 (-0.134)	-18.2	.955 (-0.4)
-3.2	.999 (-0.012)	-10.8	.984 (-0.14)	-18.4	.954 (-0.409)
-3.4	.998 (-0.014)	-11.0	.983 (-0.145)	-18.6	.953 (-0.418)
-3.6	.998 (-0.015)	-11.2	.983 (-0.15)	-18.8	.952 (-0.427)
-3.8	.998 (-0.017)	-11.4	.982 (-0.156)	-19.0	.951 (-0.437)
-4.0	.998 (-0.019)	-11.6	.982 (-0.161)	-19.2	.95 (-0.446)
-4.2	.998 (-0.021)	-11.8	.981 (-0.167)	-19.4	.949 (-0.456)

Systems With Reliability Inc.

Page 1 of 2

CLIENT: *General*

Date: 11/10/03

ANTENNA TYPE: FM1/1

FREQUENCY: 98.1

PATTERN POL.: Circular

DIRECTIVITY(Peak): 0.883/ -0.539 dBd

Beam Tilt (Deg.) : 0

DIRECTIVITY(Horiz): 0.883/ -0.539 dBd

Null Fill(s)(%) : 0, 0, 0

Relative Field Tabulation

Elev. Angle	Rel. Fld(dB)	Elev. Angle	Rel. Fld(dB)	Elev. Angle	Rel. Fld(dB)
-19.6	.948 (-0.465)	-27.2	.90 (-0.911)	-54.0	.629 (-4.027)
-19.8	.947 (-0.475)	-27.4	.899 (-0.924)	-55.0	.616 (-4.205)
-20.0	.946 (-0.485)	-27.6	.898 (-0.939)	-56.0	.603 (-4.39)
-20.2	.945 (-0.495)	-27.8	.896 (-0.953)	-57.0	.59 (-4.58)
-20.4	.944 (-0.505)	-28.0	.895 (-0.967)	-58.0	.577 (-4.778)
-20.6	.942 (-0.515)	-28.2	.893 (-0.981)	-59.0	.564 (-4.982)
-20.8	.941 (-0.525)	-28.4	.892 (-0.996)	-60.0	.55 (-5.193)
-21.0	.94 (-0.535)	-28.6	.89 (-1.01)	-61.0	.536 (-5.411)
-21.2	.939 (-0.546)	-28.8	.889 (-1.025)	-62.0	.523 (-5.638)
-21.4	.938 (-0.556)	-29.0	.887 (-1.04)	-63.0	.509 (-5.873)
-21.6	.937 (-0.567)	-29.2	.886 (-1.055)	-64.0	.495 (-6.116)
-21.8	.936 (-0.578)	-29.4	.884 (-1.07)	-65.0	.48 (-6.369)
-22.0	.934 (-0.589)	-29.6	.883 (-1.085)	-66.0	.466 (-6.631)
-22.2	.933 (-0.6)	-29.8	.881 (-1.101)	-67.0	.452 (-6.904)
-22.4	.932 (-0.611)	-30.0	.879 (-1.116)	-68.0	.437 (-7.187)
-22.6	.931 (-0.622)	-31.0	.871 (-1.195)	-69.0	.423 (-7.483)
-22.8	.93 (-0.633)	-32.0	.863 (-1.277)	-70.0	.408 (-7.791)
-23.0	.928 (-0.645)	-33.0	.855 (-1.363)	-71.0	.393 (-8.112)
-23.2	.927 (-0.656)	-34.0	.846 (-1.451)	-72.0	.378 (-8.448)
-23.4	.926 (-0.668)	-35.0	.837 (-1.543)	-73.0	.363 (-8.799)
-23.6	.925 (-0.68)	-36.0	.828 (-1.638)	-74.0	.348 (-9.167)
-23.8	.923 (-0.692)	-37.0	.819 (-1.737)	-75.0	.333 (-9.553)
-24.0	.922 (-0.704)	-38.0	.809 (-1.839)	-76.0	.318 (-9.959)
-24.2	.921 (-0.716)	-39.0	.799 (-1.944)	-77.0	.302 (-10.387)
-24.4	.92 (-0.728)	-40.0	.789 (-2.054)	-78.0	.287 (-10.839)
-24.6	.918 (-0.74)	-41.0	.779 (-2.167)	-79.0	.272 (-11.317)
-24.8	.917 (-0.753)	-42.0	.769 (-2.283)	-80.0	.256 (-11.826)
-25.0	.916 (-0.765)	-43.0	.758 (-2.404)	-81.0	.241 (-12.367)
-25.2	.914 (-0.778)	-44.0	.747 (-2.529)	-82.0	.225 (-12.946)
-25.4	.913 (-0.791)	-45.0	.736 (-2.658)	-83.0	.21 (-13.569)
-25.6	.912 (-0.803)	-46.0	.725 (-2.791)	-84.0	.194 (-14.241)
-25.8	.91 (-0.816)	-47.0	.714 (-2.928)	-85.0	.178 (-14.97)
-26.0	.909 (-0.83)	-48.0	.702 (-3.071)	-86.0	.163 (-15.768)
-26.2	.908 (-0.843)	-49.0	.69 (-3.217)	-87.0	.147 (-16.648)
-26.4	.906 (-0.856)	-50.0	.679 (-3.369)	-88.0	.131 (-17.627)
-26.6	.905 (-0.87)	-51.0	.666 (-3.525)	-89.0	.116 (-18.733)
-26.8	.903 (-0.883)	-52.0	.654 (-3.687)	-90.0	.10 (-20)
-27.0	.902 (-0.897)	-53.0	.642 (-3.854)	90.0	.00 (-50)

Systems With Reliability Inc.

Page 2 of 2

CLIENT: *General*

Date: 11/10/03

ANTENNA TYPE: FM1/1

FREQUENCY: 98.1

PATTERN POL.: Circular

DIRECTIVITY(Peak): 0.883/ -0.539 dBd

Beam Tilt (Deg.) : 0

DIRECTIVITY(Horiz): 0.883/ -0.539 dBd

Null Fill(s)(%) : 0, 0, 0


Adjacent Channel Study For Station W288BJ, Facility_id: 140009

Co-channel through third adjacent:

Application_id	Facility_id	Prefix	ARN	Call	Licensee	Class	City	State	Status	ERP	RCMSL	Channel	Adj	Dist	Overlap
1218030	35009	BXPH	20071207AAW	WGKX	RADIO LICENSE HOLDING CBC, LLC	C	MEMPHIS	TN	CP	11.5	227	290	2	16.4	1.4918
1019851	35009	BLH	20041018ACR	WGKX	RADIO LICENSE HOLDING CBC, LLC	C	MEMPHIS	TN	LIC	100	393	290	2	16.4	1.4918
633641	141913	BNPFT	20030312BBW	NEW	COMMUNITY BROADCASTING, INC.	D	GERMANTOWN	TN	APP	0.25	186	286	2	17.4	0
643381	150427	BNPFT	20030317MFP	NEW	EDGEWATER BROADCASTING, INC.	D	BARTLETT	TN	APP	0.01	435.2	286	2	21.7	0
983557	36143	BLH	20040330BFG	KAKJ	L.T. SIMES II & RAYMOND SIMES	A	MARIANNA	AR	LIC	6	163	287	1	83.7	0
200702	53472	BLH	19940705KE	KDXY	SAGA COMMUNICATIONS OF ARKANSAS, LLC	C3	LAKE CITY	AR	LIC	13.5	212	285	3	86.9	0
1405199	84091	BPH	19961107ME	961107ME	GEORGE S. FLINN, JR.	A	OXFORD	MS	APP	3.1	250	286	2	91.2	0
75171	71608	BLH	19850103LB	KCLT	WEST HELENA BROADCASTERS INC.	A	WEST HELENA	AR	LIC	3	149	285	3	97.5	0
540101	6200	BLH	20001211ACG	WTNM	TELESOUTH COMMUNICATIONS, INC.	A	WATER VALLEY	MS	LIC	4.7	213	288	0	111.6	0
282149	53977	BLH	19990219KE	KCRV-FM	POLLACK BROADCASTING CO.	A	CARUTHERSVILLE	MO	LIC	4.8	178	286	2	116.5	0
281621	52325	BLH	19990208KG	WXOQ	GERALD W. HUNT	A	SELMER	TN	LIC	6	237	288	0	120.2	0
1210593	6583	BPH	20070504AAU	WTJW	FOREVER SOUTH LICENSES, LLC	A	HUMBOLDT	TN	CP	4.7	211	287	1	122.4	0
123126	6583	BLH	19890126KA	WTJW	FOREVER SOUTH LICENSES, LLC	A	HUMBOLDT	TN	LIC	3	215	287	1	122.5	0
1011458	33673	BLH	20040524AAQ	KBOA-FM	POLLACK BROADCASTING CO.	A	PIGGOTT	AR	LIC	6	180	288	0	126.7	0
588758	43243	BMLED	20011017AEE	KJLV	EDUCATIONAL MEDIA FOUNDATION	C3	HOXIE	AR	LIC	25	180	287	1	135.1	0
151897	59614	BLH	19900827KB	WKZU	KUDZU COMMUNICATIONS, INC.	C2	IUKA	MS	LIC	50	290	285	3	153.1	0

Intermediate Frequencies (53 and 54 channels difference):

Application_id	Facility_id	Prefix	ARN	Call	Licensee	Class	City	State	Status	ERP	RCMSL	Channel	Adj	Dist	Clr
1398954	859	BMPED	20100914AHA	WKVF	EDUCATIONAL MEDIA FOUNDATION	C3	BARTLETT	TN	CP MOD	11.5	200	235	53	17.4	5.4
542218	52903	BMLED	20001128ABC	KKLV	EDUCATIONAL MEDIA FOUNDATION	A	TURRELL	AR	LIC	6	165	234	54	32.3	22.3
614764	859	BLED	20021030AAV	WKVF	EDUCATIONAL MEDIA FOUNDATION	A	BYHALIA	MS	LIC	4.1	220	235	53	41.4	31.4
1346291	52903	BMPED	20091203AIH	KKLV	EDUCATIONAL MEDIA FOUNDATION	A	WEINER	AR	CP MOD	6	153	234	54	85.5	75.5
175976	31865	BLH	19920807KB	WOJG	JOHNNY W. SHAW & OPAL J. SHAW	A	BOLIVAR	TN	LIC	6	230	234	54	97.3	87.3

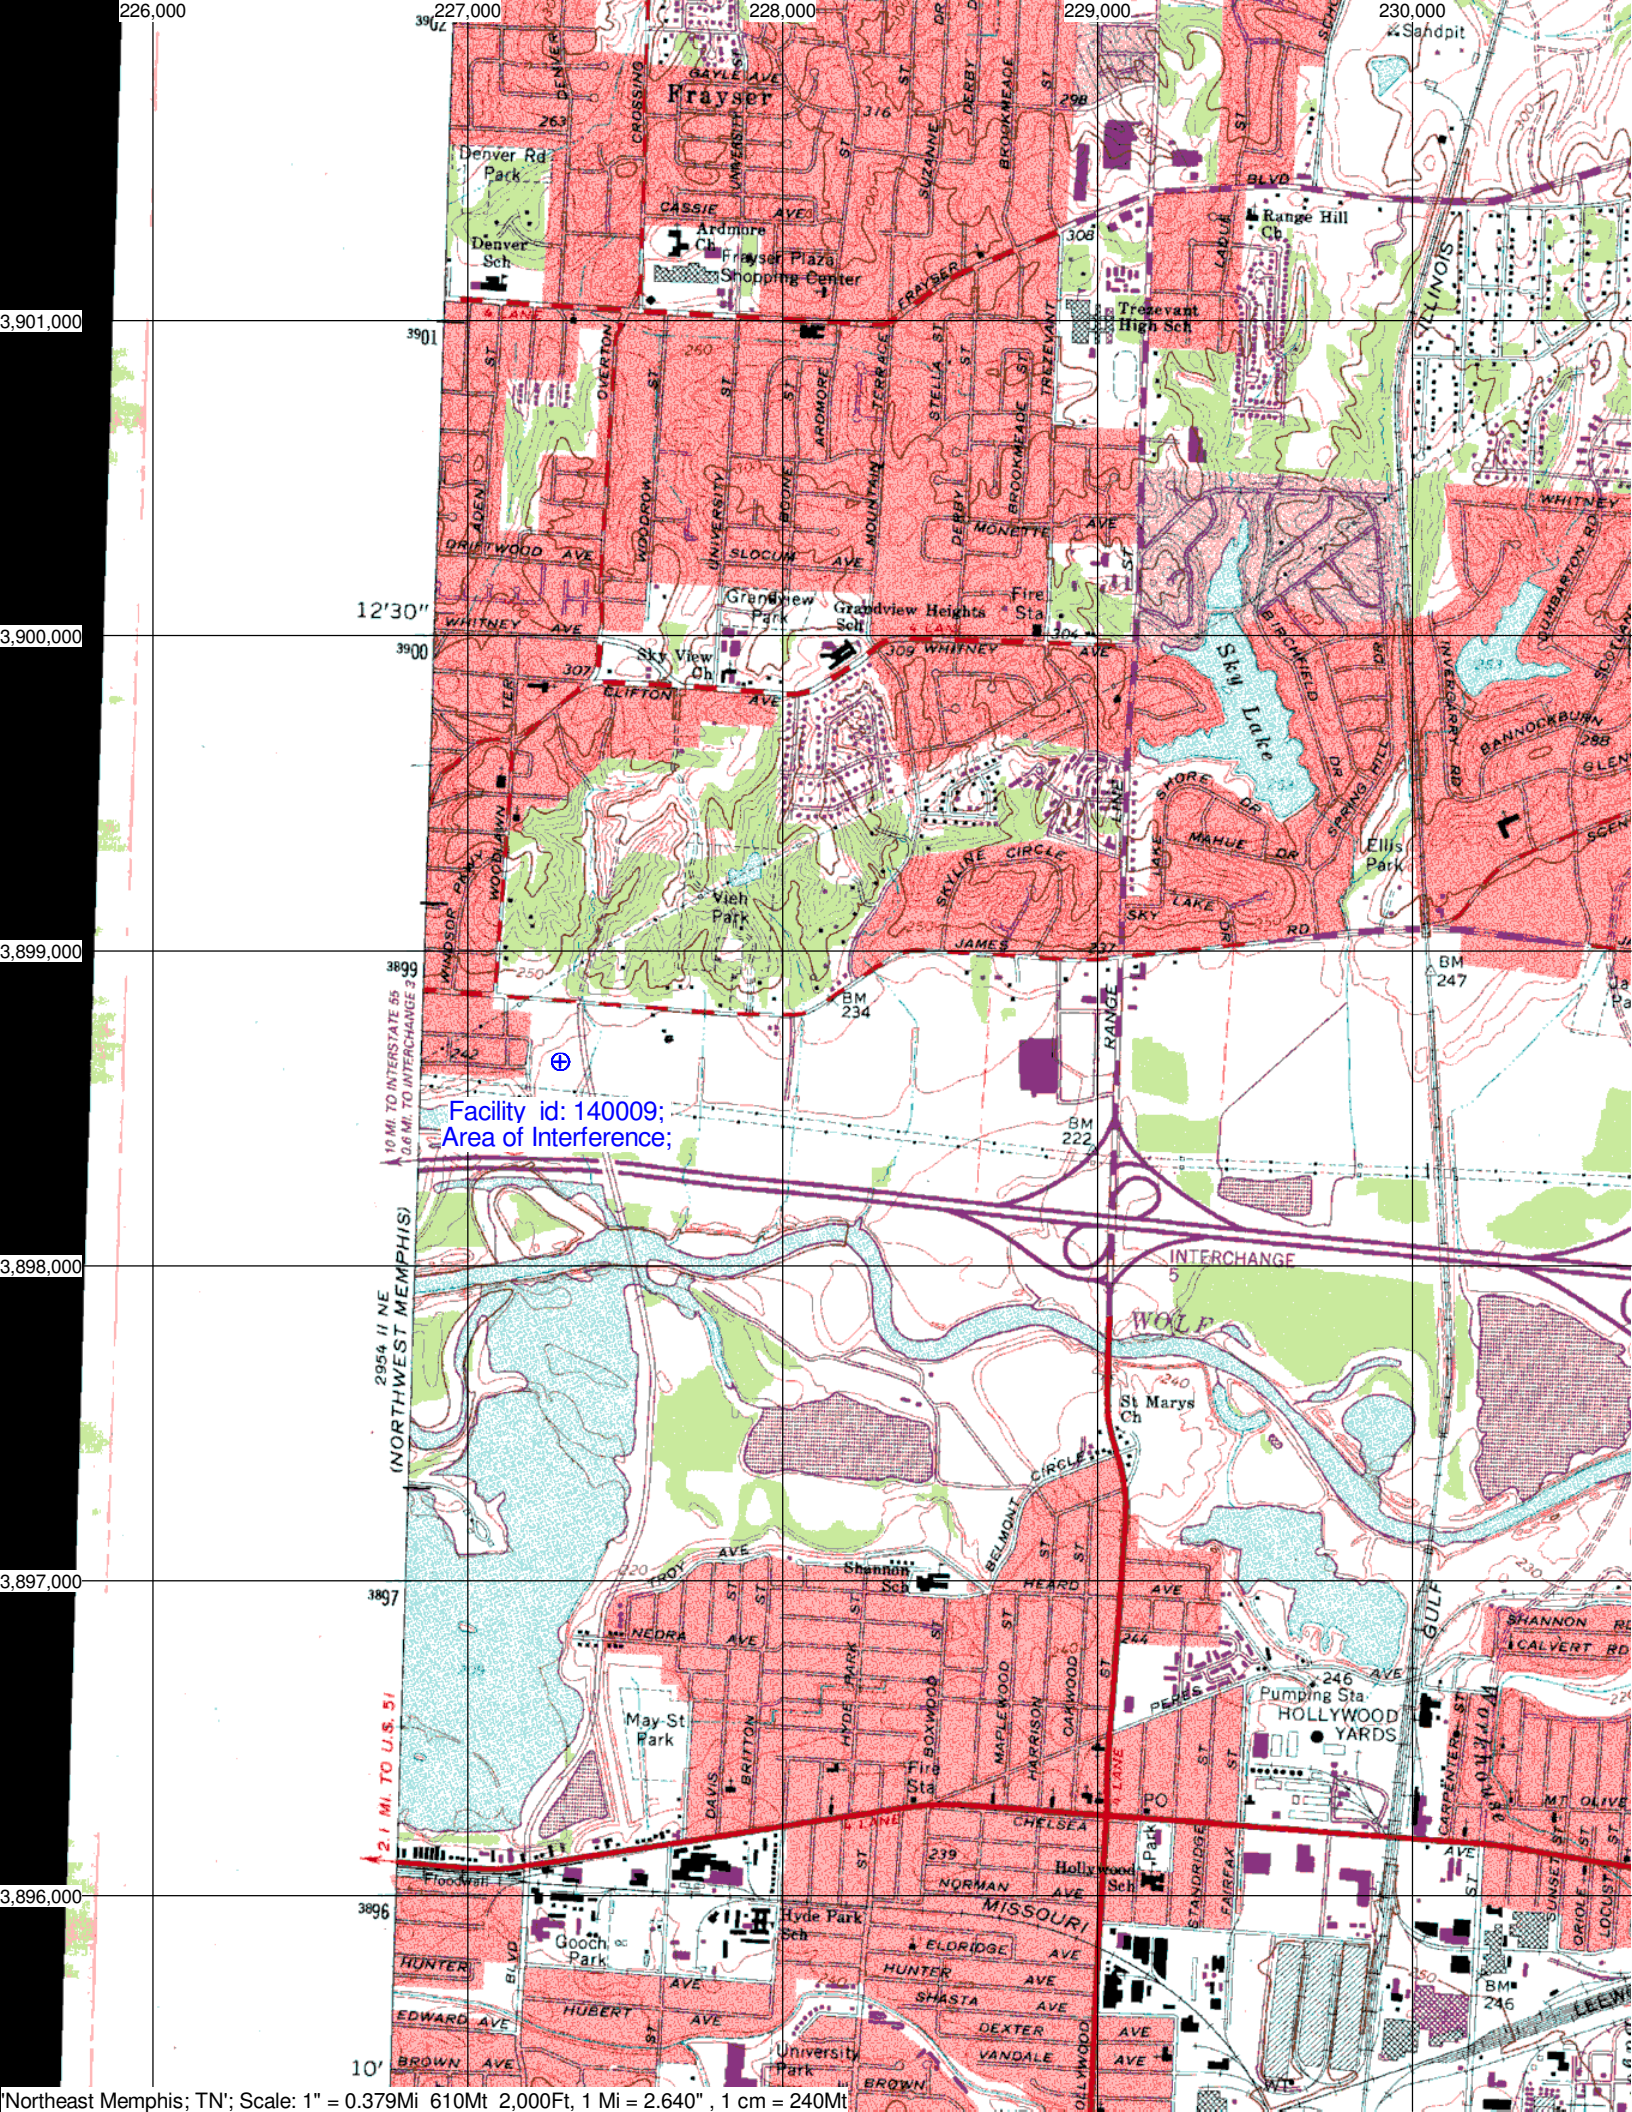

Facility id: 140009;
Area of Interference;

