

WFPB - 73.203 Spacing Requirements
Minor Change

Exhibit #17

REFERENCE

41 36 50 N.
70 35 56 W.

CLASS = A

Current Spacings

DISPLAY DATES

DATA 06-23-05
SEARCH 06-24-05

----- Channel 220 - 91.9 MHz -----


Call	Channel	Location		Azi	Dist	FCC	Margin
WFPBFM	LIC-Z 220A	Falmouth	MA	0.0	0.00	115.0	-115.00
WUMBFM	LIC 220A	Boston	MA	333.7	79.88	115.0	-35.12
AP219	APP 219A	Marshfield	MA	349.4	53.91	72.0	-18.09
AP219	APP-D 219A	Marshfield	MA	351.0	55.89	72.0	-16.11
WSDH	LIC 218A	Sandwich	MA	40.6	17.75	31.0	-13.25
WOMR	LIC-N 221A	Provincetown	MA	35.9	62.03	72.0	-9.97
WPROFM	LIC 222B	Providence	RI	286.6	75.81	69.0	-6.81
WBPR	LIC-D 220A	Worcester	MA	302.8	133.42	115.0	18.42
WBIMFM	LIC-D 218A	Bridgewater	MA	323.4	51.82	31.0	20.82
990618	APP 217A	Orleans	MA	69.5	52.20	31.0	21.20
990618	APP 217A	Orleans	MA	69.5	52.20	31.0	21.20
AP217	APP 217A	Orleans	MA	69.1	52.36	31.0	21.36
WMWM	LIC 219A	Salem	MA	346.4	101.76	72.0	29.76
WSHLFM	LIC-D 217A	Easton	MA	321.2	63.42	31.0	32.42
AP219	APP-D 219A	Lexington	MA	330.9	106.94	72.0	34.94
AP219	APP-D 219A	Lexington	MA	330.9	106.94	72.0	34.94
AP217	APP-D 217A	Wakefield	RI	260.1	72.93	31.0	41.93
WAVM.A	APP 219A	Maynard	MA	322.1	114.31	72.0	42.31
WDOM	LIC 217A	Providence	RI	290.5	74.29	31.0	43.29
WHUS	LIC-D 219B1	Storrs	CT	279.7	140.01	96.0	44.01
990719	APP 218A	East Greenwich	RI	274.2	75.25	31.0	44.25
AP219	APP-D 219A	Stow	MA	322.1	120.26	72.0	48.26
WEDY-D	CPM 06 1E	New Haven	CT	261.4	195.39	154.0	41.39
WLNETV	LI 06+1C	New Bedford	MA	268.0	49.31	154.0	-104.69

FMCommander Allocation Study
06-27-2005

WFPBFM CH 220 A
6 kW 84 M COR DA
Prot. = 60 dBu
Intef. = 54 dBu

WOMR CH 221 A BLED19960904KA
6 kW, 104 M COR
Prot. = 60 dBu
Intef. = 54 dBu

Scale = 1:1,125,000

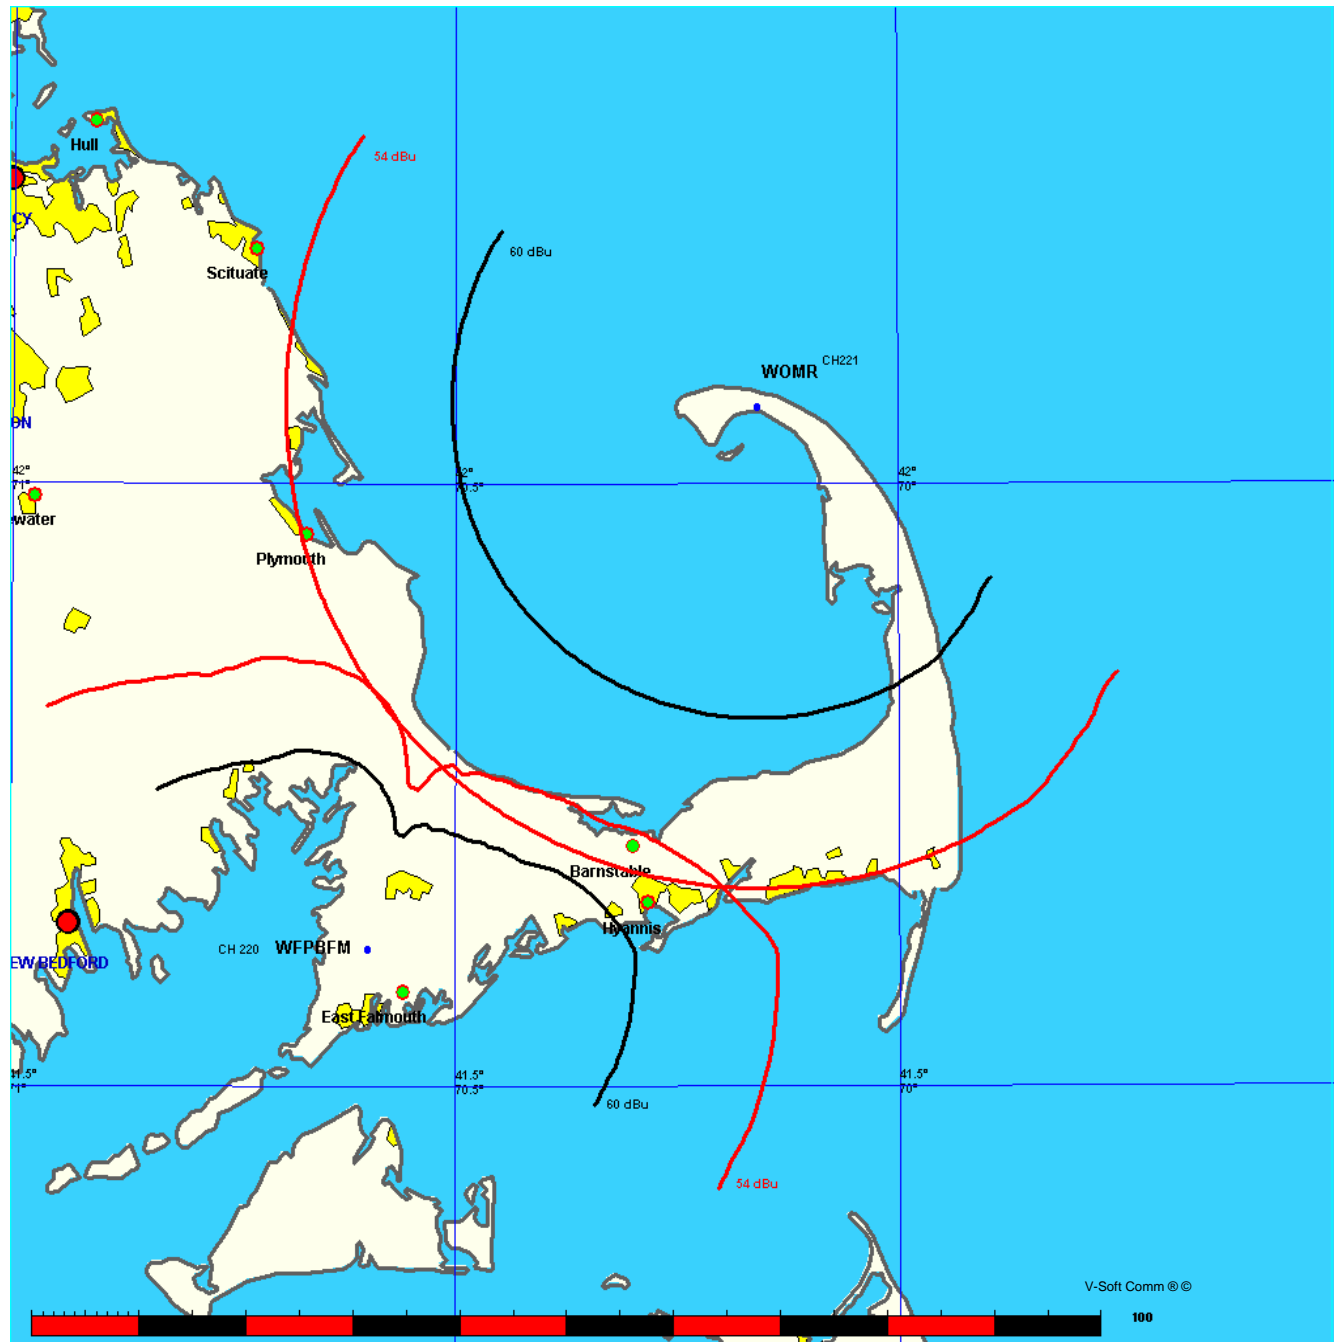

WFPBFM

Channel = 220A

Max ERP = 6 kW

RCAMSL = 84 M

N. Lat = 41 36 50

W. Lng = 70 35 56

Protected

60 dBu

WOMR BLED19960904KA

Channel = 221A

Max ERP = 6 kW

RCAMSL = 104 M

N. Lat = 42 03 54

W. Lng = 70 09 31

Interfering

54 dBu

Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Actual (dBu)
336.0	001.8682	0081.9	019.6	234.2	006.0000	0103.7	054.9	49.98
337.0	001.8548	0082.1	019.6	234.1	006.0000	0103.7	054.6	50.11
338.0	001.8415	0082.3	019.6	234.0	006.0000	0103.7	054.3	50.23
339.0	001.8282	0082.3	019.5	233.9	006.0000	0103.7	053.9	50.36
340.0	001.8150	0082.3	019.5	233.7	006.0000	0103.7	053.6	50.48
341.0	001.7822	0082.2	019.4	233.5	006.0000	0103.7	053.3	50.59
342.0	001.7496	0082.1	019.3	233.3	006.0000	0103.8	053.0	50.71
343.0	001.7174	0081.9	019.2	233.1	006.0000	0103.8	052.8	50.81
344.0	001.6854	0081.6	019.1	232.8	006.0000	0103.8	052.5	50.92
345.0	001.6537	0081.1	018.9	232.5	006.0000	0103.8	052.2	51.01
346.0	001.6224	0080.5	018.7	232.2	006.0000	0103.8	052.0	51.11
347.0	001.5913	0080.0	018.6	231.9	006.0000	0103.8	051.8	51.20
348.0	001.5606	0080.1	018.5	231.6	006.0000	0103.8	051.5	51.29
349.0	001.5301	0080.0	018.4	231.4	006.0000	0103.8	051.3	51.39
350.0	001.5000	0079.7	018.3	231.1	006.0000	0103.8	051.1	51.47
351.0	001.4880	0079.2	018.2	230.8	006.0000	0103.8	050.8	51.56
352.0	001.4761	0078.6	018.0	230.5	006.0000	0103.8	050.6	51.64
353.0	001.4642	0077.6	017.9	230.2	006.0000	0103.9	050.4	51.71
354.0	001.4524	0076.4	017.7	229.8	006.0000	0103.9	050.3	51.77
355.0	001.4406	0075.3	017.5	229.4	006.0000	0103.9	050.1	51.83
356.0	001.4289	0074.2	017.3	229.0	006.0000	0103.9	050.0	51.88
357.0	001.4172	0073.1	017.2	228.7	006.0000	0103.9	049.9	51.93
358.0	001.4055	0071.9	017.0	228.3	006.0000	0103.9	049.8	51.98
359.0	001.3939	0070.7	016.8	227.9	006.0000	0103.9	049.7	52.01
000.0	001.3824	0068.9	016.5	227.4	006.0000	0103.9	049.6	52.03
001.0	001.3824	0066.9	016.2	227.0	006.0000	0103.9	049.6	52.04
002.0	001.3824	0064.9	016.0	226.5	006.0000	0103.9	049.6	52.04
003.0	001.3824	0062.8	015.7	226.1	006.0000	0104.0	049.6	52.05
004.0	001.3824	0060.4	015.4	225.6	006.0000	0104.0	049.6	52.03
005.0	001.3824	0057.8	015.1	225.2	006.0000	0104.0	049.7	52.01
006.0	001.3824	0055.2	014.7	224.7	006.0000	0104.0	049.8	51.97
007.0	001.3824	0053.3	014.5	224.2	006.0000	0104.0	049.9	51.94
008.0	001.3824	0050.9	014.1	223.8	006.0000	0104.0	050.0	51.90
009.0	001.3824	0048.2	013.7	223.3	006.0000	0104.0	050.2	51.83
010.0	001.3824	0044.9	013.3	222.8	006.0000	0104.0	050.4	51.72
011.0	001.3824	0041.5	012.8	222.3	006.0000	0104.0	050.8	51.60
012.0	001.3824	0038.1	012.2	221.7	006.0000	0104.0	051.1	51.47

Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Actual (dBu)
013.0	001.3824	0034.5	011.7	221.2	006.0000	0104.0	051.5	51.32
014.0	001.3824	0031.2	011.2	220.8	006.0000	0104.0	051.8	51.18
015.0	001.3824	0029.3	011.0	220.5	006.0000	0104.0	051.9	51.16
016.0	001.3824	0028.7	011.0	220.3	006.0000	0104.0	051.8	51.19
017.0	001.3824	0029.0	011.0	220.1	006.0000	0104.0	051.8	51.22
018.0	001.3824	0030.0	011.0	219.9	006.0000	0104.0	051.7	51.25
019.0	001.3824	0032.0	011.3	219.8	006.0000	0104.0	051.3	51.38
020.0	001.3824	0034.5	011.7	219.8	006.0000	0104.0	050.9	51.55
021.0	001.3824	0036.9	012.0	219.7	006.0000	0104.0	050.5	51.70
022.0	001.3824	0038.5	012.3	219.5	006.0000	0104.0	050.2	51.82
023.0	001.3824	0039.4	012.4	219.4	006.0000	0104.0	050.0	51.89
024.0	001.3824	0040.3	012.6	219.2	006.0000	0104.0	049.8	51.97
025.0	001.3824	0041.3	012.7	219.0	006.0000	0104.0	049.6	52.04
026.0	001.3824	0041.6	012.8	218.7	006.0000	0104.0	049.5	52.08
027.0	001.3824	0041.0	012.7	218.4	006.0000	0104.0	049.5	52.07
028.0	001.3824	0040.4	012.6	218.2	006.0000	0104.0	049.6	52.05
029.0	001.3824	0040.3	012.6	217.9	006.0000	0104.0	049.6	52.06
030.0	001.3824	0040.9	012.7	217.7	006.0000	0104.0	049.4	52.10
031.0	001.3824	0042.0	012.8	217.4	006.0000	0104.0	049.3	52.18
032.0	001.3824	0043.2	013.0	217.2	006.0000	0104.0	049.1	52.25
033.0	001.3824	0043.8	013.1	216.9	006.0000	0104.0	048.9	52.29
034.0	001.3824	0044.1	013.1	216.7	006.0000	0104.0	048.9	52.32
035.0	001.3824	0044.4	013.2	216.4	006.0000	0104.0	048.8	52.33
036.0	001.3824	0044.7	013.2	216.1	006.0000	0104.0	048.8	52.35
037.0	001.3824	0045.2	013.3	215.9	006.0000	0104.0	048.7	52.38
038.0	001.3824	0045.8	013.4	215.6	006.0000	0104.0	048.6	52.41
039.0	001.3824	0046.5	013.5	215.3	006.0000	0104.0	048.5	52.45
040.0	001.3824	0047.2	013.6	215.0	006.0000	0104.0	048.5	52.48
041.0	001.3824	0047.7	013.7	214.7	006.0000	0104.0	048.4	52.50
042.0	001.3824	0048.1	013.7	214.4	006.0000	0104.0	048.4	52.51
043.0	001.3824	0048.6	013.8	214.2	006.0000	0104.0	048.3	52.52
044.0	001.3824	0049.4	013.9	213.8	006.0000	0104.0	048.3	52.55
045.0	001.3824	0050.5	014.1	213.5	006.0000	0104.0	048.1	52.60
046.0	001.3824	0051.9	014.3	213.2	006.0000	0104.0	048.0	52.65
047.0	001.3824	0053.1	014.5	212.8	006.0000	0104.0	047.9	52.69
048.0	001.3824	0054.1	014.6	212.5	006.0000	0104.0	047.8	52.72
049.0	001.3824	0054.7	014.7	212.2	006.0000	0104.0	047.8	52.72
050.0	001.3824	0055.2	014.7	211.9	006.0000	0104.0	047.8	52.71
051.0	001.4172	0055.9	014.9	211.5	006.0000	0104.0	047.7	52.75
052.0	001.4524	0056.8	015.2	211.1	006.0000	0104.0	047.6	52.79
053.0	001.4880	0057.6	015.4	210.7	006.0000	0104.0	047.5	52.83
054.0	001.5241	0058.3	015.6	210.3	006.0000	0104.0	047.4	52.86
055.0	001.5606	0058.8	015.7	209.9	006.0000	0104.0	047.4	52.88
056.0	001.5975	0059.1	015.9	209.6	006.0000	0104.0	047.4	52.88
057.0	001.6349	0059.2	016.0	209.2	006.0000	0104.0	047.4	52.87
058.0	001.6727	0059.5	016.1	208.8	006.0000	0104.0	047.4	52.87
059.0	001.7109	0059.9	016.3	208.4	006.0000	0104.0	047.4	52.87
060.0	001.7496	0060.3	016.5	208.0	006.0000	0104.0	047.4	52.86
061.0	001.8282	0060.6	016.7	207.6	006.0000	0104.0	047.4	52.88
062.0	001.9086	0061.1	017.0	207.1	006.0000	0104.0	047.3	52.90
063.0	001.9907	0062.0	017.3	206.6	006.0000	0104.0	047.2	52.94

Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Actual (dBu)
064.0	002.0745	0063.4	017.7	206.0	006.0000	0104.0	047.1	52.98
065.0	002.1600	0065.0	018.1	205.4	006.0000	0104.0	047.0	53.03
066.0	002.2473	0066.7	018.5	204.8	006.0000	0104.0	046.9	53.08
067.0	002.3363	0068.0	018.9	204.2	006.0000	0104.0	046.8	53.09
068.0	002.4270	0068.9	019.2	203.6	006.0000	0104.0	046.8	53.09
069.0	002.5194	0069.5	019.4	203.1	006.0000	0104.0	046.9	53.07
070.0	002.6136	0069.9	019.7	202.6	006.0000	0104.0	047.0	53.04
071.0	002.7500	0070.4	020.0	202.0	006.0000	0104.0	047.0	53.02
072.0	002.8898	0070.9	020.3	201.5	006.0000	0104.0	047.1	53.00
073.0	003.0331	0071.3	020.6	200.9	006.0000	0104.0	047.2	52.96
074.0	003.1799	0071.6	020.9	200.4	006.0000	0104.0	047.3	52.91
075.0	003.3302	0071.9	021.2	199.9	006.0000	0104.0	047.4	52.86
076.0	003.4839	0072.2	021.4	199.3	006.0000	0104.0	047.6	52.80
077.0	003.6410	0072.5	021.7	198.8	006.0000	0104.0	047.8	52.73
078.0	003.8017	0072.8	022.0	198.3	006.0000	0104.0	048.0	52.66
079.0	003.9658	0073.1	022.2	197.8	006.0000	0104.0	048.2	52.58
080.0	004.1334	0073.3	022.5	197.3	006.0000	0104.0	048.4	52.50
081.0	004.3045	0073.4	022.7	196.9	006.0000	0104.0	048.7	52.40
082.0	004.4790	0073.6	022.9	196.4	006.0000	0104.0	048.9	52.31
083.0	004.6570	0073.9	023.2	196.0	006.0000	0104.0	049.2	52.20
084.0	004.8384	0074.2	023.4	195.5	006.0000	0104.0	049.5	52.10
085.0	005.0233	0074.7	023.7	195.1	006.0000	0104.0	049.8	51.99
086.0	005.2117	0075.2	024.0	194.6	006.0000	0104.0	050.1	51.87
087.0	005.4036	0075.6	024.2	194.2	006.0000	0104.0	050.4	51.75
088.0	005.5989	0076.1	024.5	193.8	006.0000	0104.0	050.7	51.62
089.0	005.7977	0076.5	024.8	193.4	006.0000	0104.0	051.1	51.49
090.0	006.0000	0076.8	025.0	193.0	006.0000	0104.0	051.4	51.34
091.0	006.0000	0077.0	025.0	192.9	006.0000	0104.0	051.8	51.18
092.0	006.0000	0077.2	025.1	192.7	006.0000	0104.0	052.3	51.02
093.0	006.0000	0077.4	025.1	192.6	006.0000	0104.0	052.7	50.86
094.0	006.0000	0077.5	025.1	192.5	006.0000	0104.0	053.1	50.69
095.0	006.0000	0077.6	025.1	192.5	006.0000	0104.0	053.6	50.52
096.0	006.0000	0077.7	025.1	192.4	006.0000	0104.0	054.0	50.36

WOMR BLED19960904KA
 Channel = 221A
 Max ERP = 6 kW
 RCAMSL = 104 M
 N. Lat = 42 03 54
 W. Lng = 70 09 31
 Protected
 60 dBu

WFPBFM
 Channel = 220A
 Max ERP = 6 kW
 RCAMSL = 84 M
 N. Lat = 41 36 50
 W. Lng = 70 35 56
 Interfering
 54 dBu

Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Actual (dBu)
156.0	006.0000	0104.0	028.8	063.6	002.0366	0063.4	053.9	42.42
157.0	006.0000	0104.0	028.8	063.5	002.0338	0063.4	053.4	42.58
158.0	006.0000	0104.0	028.8	063.5	002.0310	0062.0	052.9	42.61
159.0	006.0000	0104.0	028.8	063.4	002.0274	0062.0	052.4	42.76
160.0	006.0000	0104.0	028.8	063.4	002.0229	0062.0	051.9	42.91
161.0	006.0000	0104.0	028.8	063.3	002.0174	0062.0	051.4	43.06
162.0	006.0000	0104.0	028.8	063.2	002.0111	0062.0	050.9	43.21
163.0	006.0000	0104.0	028.8	063.2	002.0038	0062.0	050.4	43.35
164.0	006.0000	0104.0	028.8	063.1	001.9956	0062.0	049.9	43.49
165.0	006.0000	0104.0	028.8	062.9	001.9864	0062.0	049.4	43.63
166.0	006.0000	0104.0	028.8	062.8	001.9761	0062.0	048.9	43.76
167.0	006.0000	0104.0	028.8	062.7	001.9649	0062.0	048.4	43.89
168.0	006.0000	0104.0	028.8	062.5	001.9526	0062.0	047.9	44.02
169.0	006.0000	0104.0	028.8	062.4	001.9393	0061.1	047.5	44.05
170.0	006.0000	0104.0	028.8	062.2	001.9249	0061.1	047.0	44.17
171.0	006.0000	0104.0	028.8	062.0	001.9094	0061.1	046.5	44.29
172.0	006.0000	0104.0	028.8	061.8	001.8928	0061.1	046.0	44.41
173.0	006.0000	0104.0	028.8	061.6	001.8751	0061.1	045.5	44.53
174.0	006.0000	0104.0	028.8	061.4	001.8563	0060.6	045.1	44.59
175.0	006.0000	0104.0	028.8	061.1	001.8363	0060.6	044.6	44.70
176.0	006.0000	0104.0	028.8	060.8	001.8152	0060.6	044.2	44.81
177.0	006.0000	0104.0	028.8	060.6	001.7930	0060.6	043.7	44.92
178.0	006.0000	0104.0	028.8	060.3	001.7696	0060.3	043.3	44.98
179.0	006.0000	0104.0	028.8	059.9	001.7473	0060.3	042.8	45.09
180.0	006.0000	0104.0	028.8	059.6	001.7345	0060.3	042.4	45.21
181.0	006.0000	0104.0	028.8	059.3	001.7210	0059.9	041.9	45.30
182.0	006.0000	0104.0	028.8	058.9	001.7069	0059.9	041.5	45.42
183.0	006.0000	0104.0	028.8	058.5	001.6922	0059.9	041.1	45.53
184.0	006.0000	0104.0	028.8	058.1	001.6768	0059.5	040.7	45.60
185.0	006.0000	0104.0	028.8	057.7	001.6608	0059.5	040.3	45.71
186.0	006.0000	0104.0	028.8	057.2	001.6442	0059.2	039.9	45.78
187.0	006.0000	0104.0	028.8	056.8	001.6270	0059.2	039.5	45.89
188.0	006.0000	0104.0	028.8	056.3	001.6092	0059.1	039.1	45.96
189.0	006.0000	0104.0	028.8	055.8	001.5907	0059.1	038.7	46.06

Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Actual (dBu)
190.0	006.0000	0104.0	028.8	055.3	001.5717	0058.8	038.4	46.12
191.0	006.0000	0104.0	028.8	054.8	001.5520	0058.8	038.0	46.20
192.0	006.0000	0104.0	028.8	054.2	001.5318	0058.3	037.7	46.22
193.0	006.0000	0104.0	028.8	053.6	001.5110	0058.3	037.3	46.29
194.0	006.0000	0104.0	028.8	053.0	001.4897	0057.6	037.0	46.27
195.0	006.0000	0104.0	028.8	052.4	001.4679	0056.8	036.7	46.21
196.0	006.0000	0104.0	028.8	051.8	001.4455	0056.8	036.4	46.26
197.0	006.0000	0104.0	028.8	051.2	001.4227	0055.9	036.1	46.18
198.0	006.0000	0104.0	028.8	050.5	001.3994	0055.2	035.8	46.12
199.0	006.0000	0104.0	028.8	049.8	001.3824	0055.2	035.6	46.18
200.0	006.0000	0104.0	028.8	049.1	001.3824	0054.7	035.3	46.21
201.0	006.0000	0104.0	028.8	048.4	001.3824	0054.1	035.1	46.23
202.0	006.0000	0104.0	028.8	047.7	001.3824	0054.1	034.9	46.32
203.0	006.0000	0104.0	028.8	046.9	001.3824	0053.1	034.6	46.25
204.0	006.0000	0104.0	028.8	046.1	001.3824	0051.9	034.4	46.13
205.0	006.0000	0104.0	028.8	045.4	001.3824	0050.5	034.3	45.99
206.0	006.0000	0104.0	028.8	044.6	001.3824	0050.5	034.1	46.06
207.0	006.0000	0104.0	028.8	043.8	001.3824	0049.4	033.9	45.92
208.0	006.0000	0104.0	028.8	042.9	001.3824	0048.6	033.8	45.84
209.0	006.0000	0104.0	028.8	042.1	001.3824	0048.1	033.7	45.81
210.0	006.0000	0104.0	028.8	041.3	001.3824	0047.7	033.6	45.79
211.0	006.0000	0104.0	028.8	040.4	001.3824	0047.2	033.5	45.73
212.0	006.0000	0104.0	028.8	039.6	001.3824	0047.2	033.4	45.76
213.0	006.0000	0104.0	028.8	038.7	001.3824	0046.5	033.3	45.66
214.0	006.0000	0104.0	028.8	037.9	001.3824	0045.8	033.3	45.55
215.0	006.0000	0104.0	028.8	037.0	001.3824	0045.2	033.3	45.45
216.0	006.0000	0104.0	028.8	036.1	001.3824	0044.7	033.2	45.36
217.0	006.0000	0104.0	028.8	035.3	001.3824	0044.4	033.3	45.29
218.0	006.0000	0104.0	028.8	034.4	001.3824	0044.1	033.3	45.24
219.0	006.0000	0104.0	028.8	033.5	001.3824	0044.1	033.3	45.22
220.0	006.0000	0104.0	028.8	032.7	001.3824	0043.8	033.4	45.15
221.0	006.0000	0104.0	028.8	031.8	001.3824	0043.2	033.4	44.99
222.0	006.0000	0104.0	028.8	031.0	001.3824	0042.0	033.5	44.73
223.0	006.0000	0104.0	028.8	030.2	001.3824	0040.9	033.6	44.47
224.0	006.0000	0104.0	028.8	029.3	001.3824	0040.3	033.7	44.30
225.0	006.0000	0104.0	028.8	028.5	001.3824	0040.3	033.9	44.25
226.0	006.0000	0104.0	028.8	027.7	001.3824	0040.4	034.0	44.21
227.0	006.0000	0103.9	028.8	026.9	001.3824	0041.0	034.2	44.27
228.0	006.0000	0103.9	028.8	026.1	001.3824	0041.6	034.4	44.31
229.0	006.0000	0103.9	028.8	025.3	001.3824	0041.3	034.6	44.17
230.0	006.0000	0103.9	028.8	024.6	001.3824	0041.3	034.8	44.08
231.0	006.0000	0103.8	028.8	023.9	001.3824	0040.3	035.0	43.80
232.0	006.0000	0103.8	028.8	023.1	001.3824	0039.4	035.2	43.53
233.0	006.0000	0103.8	028.8	022.4	001.3824	0038.5	035.5	43.25
234.0	006.0000	0103.7	028.8	021.8	001.3824	0038.5	035.8	43.15
235.0	006.0000	0103.7	028.8	021.1	001.3824	0036.9	036.0	42.73
236.0	006.0000	0103.6	028.8	020.4	001.3824	0034.5	036.3	42.12
237.0	006.0000	0103.6	028.8	019.8	001.3824	0034.5	036.6	42.01
238.0	006.0000	0103.6	028.8	019.2	001.3824	0032.0	036.9	41.37
239.0	006.0000	0103.5	028.8	018.6	001.3824	0032.0	037.3	41.26
240.0	006.0000	0103.5	028.8	018.0	001.3824	0030.0	037.6	40.73

FMOver Analysis

Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Azimuth (degrees)	ERP (kW)	HAAT (m)	Dist (km)	Actual (dBu)
241.0	006.0000	0103.4	028.7	017.5	001.3824	0029.0	037.9	40.61
242.0	006.0000	0103.4	028.7	016.9	001.3824	0029.0	038.3	40.49
243.0	006.0000	0103.3	028.7	016.4	001.3824	0028.7	038.7	40.37
244.0	006.0000	0103.3	028.7	015.9	001.3824	0028.7	039.0	40.25
245.0	006.0000	0103.2	028.7	015.5	001.3824	0029.3	039.4	40.12
246.0	006.0000	0103.2	028.7	015.0	001.3824	0029.3	039.8	40.00
247.0	006.0000	0103.1	028.7	014.6	001.3824	0029.3	040.2	39.87
248.0	006.0000	0103.0	028.7	014.2	001.3824	0031.2	040.6	39.99
249.0	006.0000	0103.0	028.7	013.8	001.3824	0031.2	041.0	39.86
250.0	006.0000	0102.9	028.7	013.4	001.3824	0034.5	041.4	40.39
251.0	006.0000	0102.8	028.7	013.0	001.3824	0034.5	041.9	40.25
252.0	006.0000	0102.7	028.7	012.7	001.3824	0034.5	042.3	40.12
253.0	006.0000	0102.7	028.6	012.3	001.3824	0038.1	042.7	40.68
254.0	006.0000	0102.5	028.6	012.0	001.3824	0038.1	043.2	40.54
255.0	006.0000	0102.4	028.6	011.8	001.3824	0038.1	043.6	40.41
256.0	006.0000	0102.3	028.6	011.5	001.3824	0041.5	044.1	40.89
257.0	006.0000	0102.1	028.6	011.2	001.3824	0041.5	044.5	40.75
258.0	006.0000	0102.0	028.6	011.0	001.3824	0041.5	045.0	40.61
259.0	006.0000	0101.9	028.5	010.8	001.3824	0041.5	045.5	40.47
260.0	006.0000	0101.8	028.5	010.6	001.3824	0041.5	045.9	40.34
261.0	006.0000	0101.7	028.5	010.4	001.3824	0044.9	046.4	40.76
262.0	006.0000	0101.6	028.5	010.2	001.3824	0044.9	046.9	40.62
263.0	006.0000	0101.6	028.5	010.0	001.3824	0044.9	047.4	40.49
264.0	006.0000	0101.6	028.5	009.8	001.3824	0044.9	047.8	40.35
265.0	006.0000	0101.6	028.5	009.7	001.3824	0044.9	048.3	40.22
266.0	006.0000	0101.6	028.5	009.5	001.3824	0044.9	048.8	40.09
267.0	006.0000	0101.6	028.5	009.4	001.3824	0048.2	049.3	40.43
268.0	006.0000	0101.6	028.5	009.3	001.3824	0048.2	049.8	40.29
269.0	006.0000	0101.7	028.5	009.2	001.3824	0048.2	050.3	40.15
270.0	006.0000	0101.7	028.5	009.1	001.3824	0048.2	050.7	40.01
271.0	006.0000	0101.7	028.5	009.0	001.3824	0048.2	051.2	39.87
272.0	006.0000	0101.7	028.5	008.9	001.3824	0048.2	051.7	39.73
273.0	006.0000	0101.7	028.5	008.8	001.3824	0048.2	052.2	39.59
274.0	006.0000	0101.8	028.5	008.8	001.3824	0048.2	052.7	39.45
275.0	006.0000	0101.8	028.5	008.7	001.3824	0048.2	053.2	39.30
276.0	006.0000	0101.9	028.5	008.7	001.3824	0048.2	053.7	39.16