

## **EXHIBIT 11**

### **COMPLIANCE WITH RADIOFREQUENCY RADIATION GUIDELINES**

The potential for human exposure to non-ionizing radiofrequency radiation at the transmitter site has been evaluated. In addition to the proposed K297AU STA facility, the transmitter site is also shared by three (3) other FM translator facilities, K209DK, K247AZ, and K292FE.

The proposed K297AU STA facility will operate on Channel 297D with an effective radiated power of 0.0 kW (H) and 0.03 kW (V). The antenna will be a single-bay Nicom BLD1/P mounted 4.6 meters Above Ground Level.

K209DK operates on Channel 209D with an effective radiated power of 0.115 kW (H) and 0.115 kW (V). The antenna is a two-bay SWR FMEC/2 mounted 45 meters Above Ground Level.

K247AZ operates on Channel 247D with an effective radiated power of 0.140 kW (H) and 0.140 kW (V). The antenna is a two-bay SWR FMEC/2 mounted 40 meters Above Ground Level.

K292FE operates on Channel 292D with an effective radiated power of 0.062 kW (H) and 0.062 kW (V). The antenna is a single-bay Nicom BKG77 mounted 91 meters Above Ground Level.

There are no other known broadcast facilities within 3115 meters of the shared transmitter site.

The site has been evaluated for compliance with the FCC guidelines concerning human exposure to radiofrequency radiation. The standards employed are detailed in OET Bulletin No. 65 (Edition 97-01). The "RF Haz<sup>TM</sup>" software program version 2.45 from V-Soft Communications<sup>TM</sup> was utilized to determine the individual contribution of the proposed K297AU STA facility as well as the existing K209DK, K247AZ, and K292FE FM translator stations. This software program combines formulas from the OET Bulletin No. 65 (Edition 97-01) with EPA researched element and array patterns as published in PB85-2458-68, "Engineering Assessment of the Potential Impact of Federal Radiation Protection Guidance on the AM, FM and TV Broadcast Services." FM radiofrequency radiation levels were predicted using calculations, which were based on the number of bays of the antenna, wavelength spacing between the bays, the effective radiated power of the antennas and the heights above ground level (AGL) of the radiation center of the proposed and existing antennas.

The result of the evaluations for the stations is shown in both graphical and tabular forms at the end of this report. The tabulation lists the portion of the tabular output for the stations showing the region of maximum radio frequency radiation. The FM graphical displays have been scaled to show the best definition of the data curve.

To evaluate the total exposure to non-ionizing radiofrequency radiation it is necessary to sum the individual contributions as a decimal fraction of the maximum permissible limit. If the resulting sum is less than or equal to 100%, the exposure is concluded to be within the guidelines of OET Bulletin No. 65 (Edition 97-01). To simplify the calculations and produce a "worst case" study, the maximum exposure level produced by each station has been selected

without regard to the location of that exposure. The following table is based on the uncontrolled limits set forth in OET Bulletin No. 65 (Edition 97-01).

The "Dist to COR" value shown on all tabulations represents the height of the antenna center of radiation above an observer on the ground who is assumed to be 2 meters in height.


<u>Contributing Station</u>	<u>Maximum Contribution</u>	<u>Uncontrolled Limit</u>	<u>% of Limit</u>
K297AU STA	141.1897 $\mu\text{W}/\text{cm}^2$	200 $\mu\text{W}/\text{cm}^2$	70.59%
K209DK	0.7795 $\mu\text{W}/\text{cm}^2$	200 $\mu\text{W}/\text{cm}^2$	0.39%
K247AZ	1.2150 $\mu\text{W}/\text{cm}^2$	200 $\mu\text{W}/\text{cm}^2$	0.61%
K209DK	0.7795 $\mu\text{W}/\text{cm}^2$	200 $\mu\text{W}/\text{cm}^2$	0.07%
<b>Total % of Limit</b>			<b>71.66%</b>

Since the Total % of the Limit is less than 100% of the more stringent uncontrolled environment guidelines, the proposed installation will comply with the current guidelines.


In addition to the protection afforded by the proposed antenna heights above ground, the facility is properly marked with signs, and entry to the facility is restricted by means of fencing with locked doors and/or gates. Any other means that may be required to protect employees and the general public will be employed.

In the event work is required in proximity to the antenna(s) such that the person or persons working in the area will be potential exposed to fields in excess of the current guidelines, an agreement signed by all broadcast parties at the site will be in effect for the offending transmitter(s) to reduced power, or cease operation during the critical period.

## RFHAZ v2.45 Calculation for Proposed K297AU STA

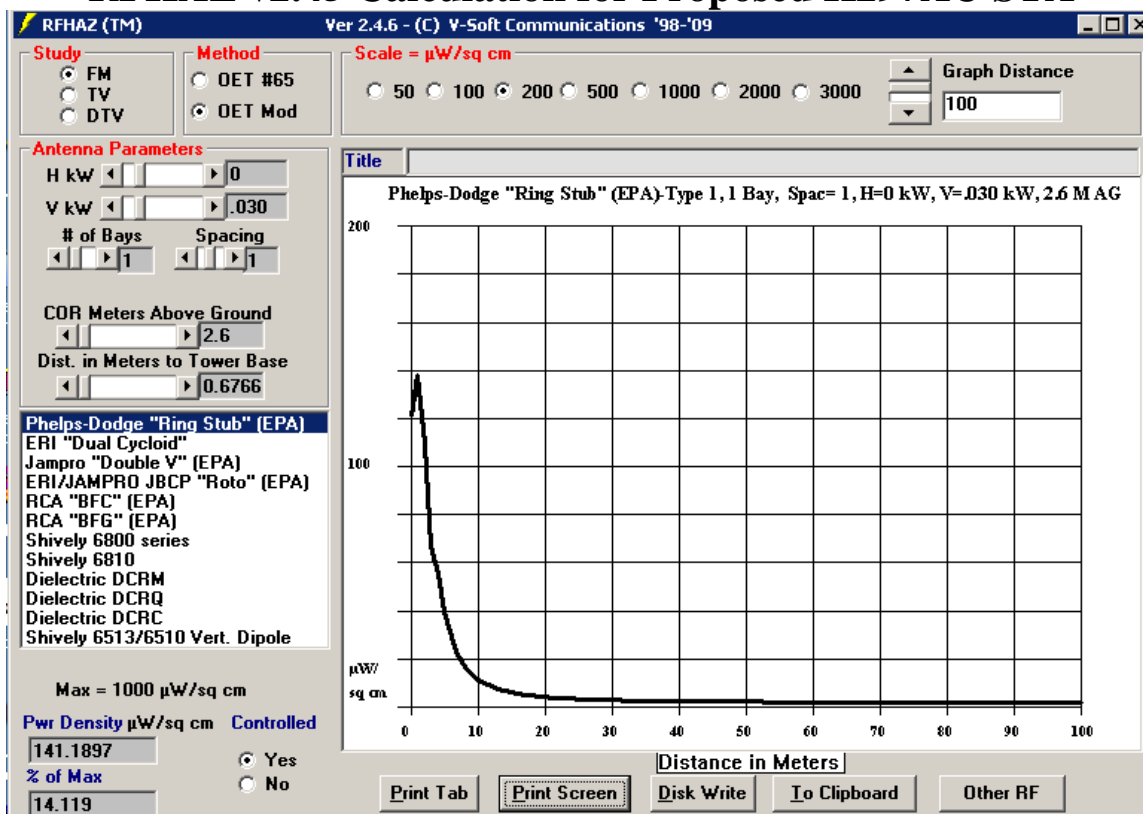

Environment = Uncontrolled, Maximum = 200  $\mu\text{W}/\text{sq cm}$   
 Phelps-Dodge "Ring Stub" (EPA)-Type 1, 1 Bay, Spac= 1, H=0 kW, V=.030 kW, 2.6 MAG

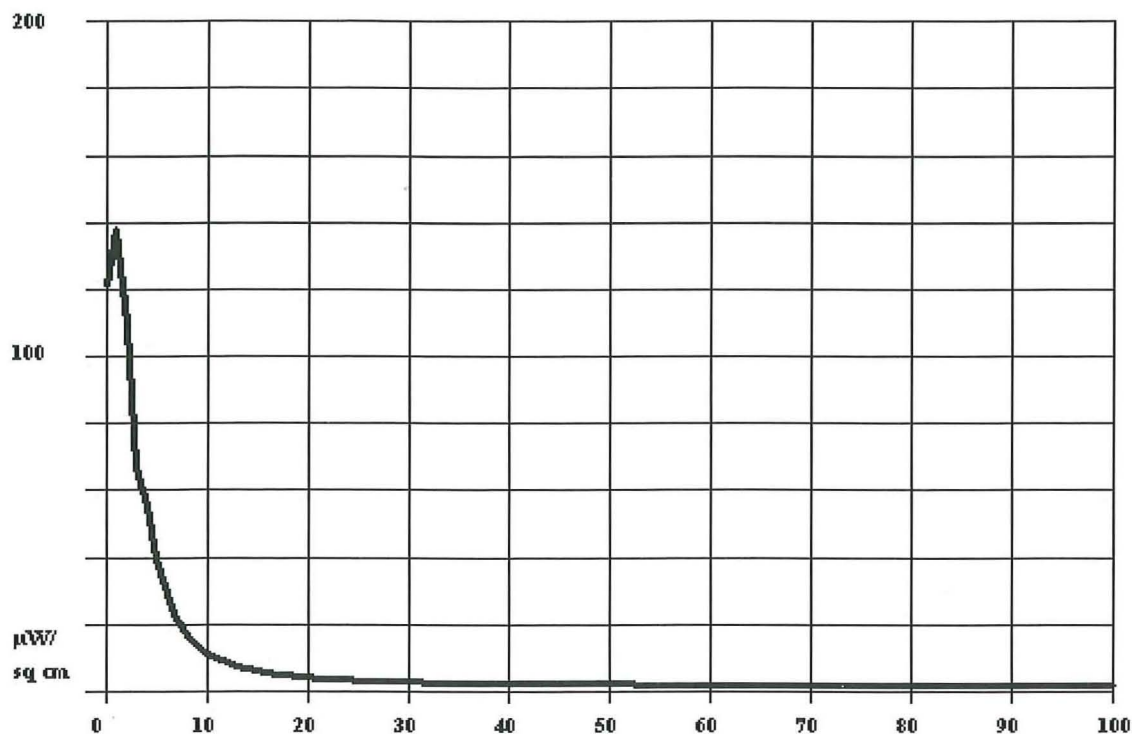


HORZ. DISTANCE FROM FM RADIATOR VS POWER DENSITY (Microwatt/Square cm)  
 Dist(Meters) PD (H) PD (V) Total ( $\mu\text{W}/\text{cm}^2$ ) Percent Max.

0	0.00	120.10	120.10	60.0
1	0.00	137.47	137.47	68.7
2	0.00	108.48	108.48	54.2
3	0.00	66.02	66.02	33.0
4	0.00	54.17	54.17	27.1
5	0.00	38.34	38.34	19.2
6	0.00	27.53	27.53	13.8
7	0.00	20.24	20.24	10.1
8	0.00	15.29	15.29	7.6
9	0.00	11.90	11.90	5.9
10	0.00	9.56	9.56	4.8
11	0.00	7.95	7.95	4.0
12	0.00	6.71	6.71	3.4
13	0.00	5.73	5.73	2.9
14	0.00	4.95	4.95	2.5
15	0.00	4.32	4.32	2.2
16	0.00	3.81	3.81	1.9
17	0.00	3.39	3.39	1.7
18	0.00	3.03	3.03	1.5
19	0.00	2.73	2.73	1.4
20	0.00	2.46	2.46	1.2
21	0.00	2.24	2.24	1.1
22	0.00	2.04	2.04	1.0
23	0.00	1.87	1.87	0.9
24	0.00	1.72	1.72	0.9
25	0.00	1.59	1.59	0.8


Dist (Meters)	PD (H)	PD (V)	Total (uW/cm2)	Percent Max.
26	0.00	1.47	1.47	0.7
27	0.00	1.36	1.36	0.7
28	0.00	1.27	1.27	0.6
29	0.00	1.18	1.18	0.6
30	0.00	1.11	1.11	0.6
31	0.00	1.04	1.04	0.5
32	0.00	0.97	0.97	0.5
33	0.00	0.91	0.91	0.5
34	0.00	0.86	0.86	0.4
35	0.00	0.81	0.81	0.4
36	0.00	0.77	0.77	0.4
37	0.00	0.73	0.73	0.4
38	0.00	0.69	0.69	0.3
39	0.00	0.66	0.66	0.3
40	0.00	0.62	0.62	0.3
41	0.00	0.59	0.59	0.3
42	0.00	0.57	0.57	0.3
43	0.00	0.54	0.54	0.3
44	0.00	0.52	0.52	0.3
45	0.00	0.49	0.49	0.2
46	0.00	0.47	0.47	0.2
47	0.00	0.45	0.45	0.2
48	0.00	0.43	0.43	0.2
49	0.00	0.42	0.42	0.2
50	0.00	0.40	0.40	0.2
51	0.00	0.38	0.38	0.2
52	0.00	0.37	0.37	0.2
53	0.00	0.36	0.36	0.2
54	0.00	0.34	0.34	0.2
55	0.00	0.33	0.33	0.2
56	0.00	0.32	0.32	0.2
57	0.00	0.31	0.31	0.2
58	0.00	0.30	0.30	0.1
59	0.00	0.29	0.29	0.1
60	0.00	0.28	0.28	0.1
61	0.00	0.27	0.27	0.1
62	0.00	0.26	0.26	0.1
63	0.00	0.25	0.25	0.1
64	0.00	0.24	0.24	0.1
65	0.00	0.24	0.24	0.1
66	0.00	0.23	0.23	0.1
67	0.00	0.22	0.22	0.1
68	0.00	0.22	0.22	0.1
69	0.00	0.21	0.21	0.1
70	0.00	0.20	0.20	0.1
71	0.00	0.20	0.20	0.1
72	0.00	0.19	0.19	0.1
73	0.00	0.19	0.19	0.1
74	0.00	0.18	0.18	0.1
75	0.00	0.18	0.18	0.1
76	0.00	0.17	0.17	0.1
77	0.00	0.17	0.17	0.1

Dist (Meters)	PD (H)	PD (V)	Total (uW/cm2)	Percent Max.
78	0.00	0.16	0.16	0.1
79	0.00	0.16	0.16	0.1
80	0.00	0.16	0.16	0.1
81	0.00	0.15	0.15	0.1
82	0.00	0.15	0.15	0.1
83	0.00	0.15	0.15	0.1
84	0.00	0.14	0.14	0.1
85	0.00	0.14	0.14	0.1
86	0.00	0.14	0.14	0.1
87	0.00	0.13	0.13	0.1
88	0.00	0.13	0.13	0.1
89	0.00	0.13	0.13	0.1
90	0.00	0.12	0.12	0.1
91	0.00	0.12	0.12	0.1
92	0.00	0.12	0.12	0.1
93	0.00	0.12	0.12	0.1
94	0.00	0.11	0.11	0.1
95	0.00	0.11	0.11	0.1
96	0.00	0.11	0.11	0.1
97	0.00	0.11	0.11	0.1
98	0.00	0.10	0.10	0.1
99	0.00	0.10	0.10	0.1
100	0.00	0.10	0.10	0.1

# RF HAZ v2.45 Calculation for K209DK

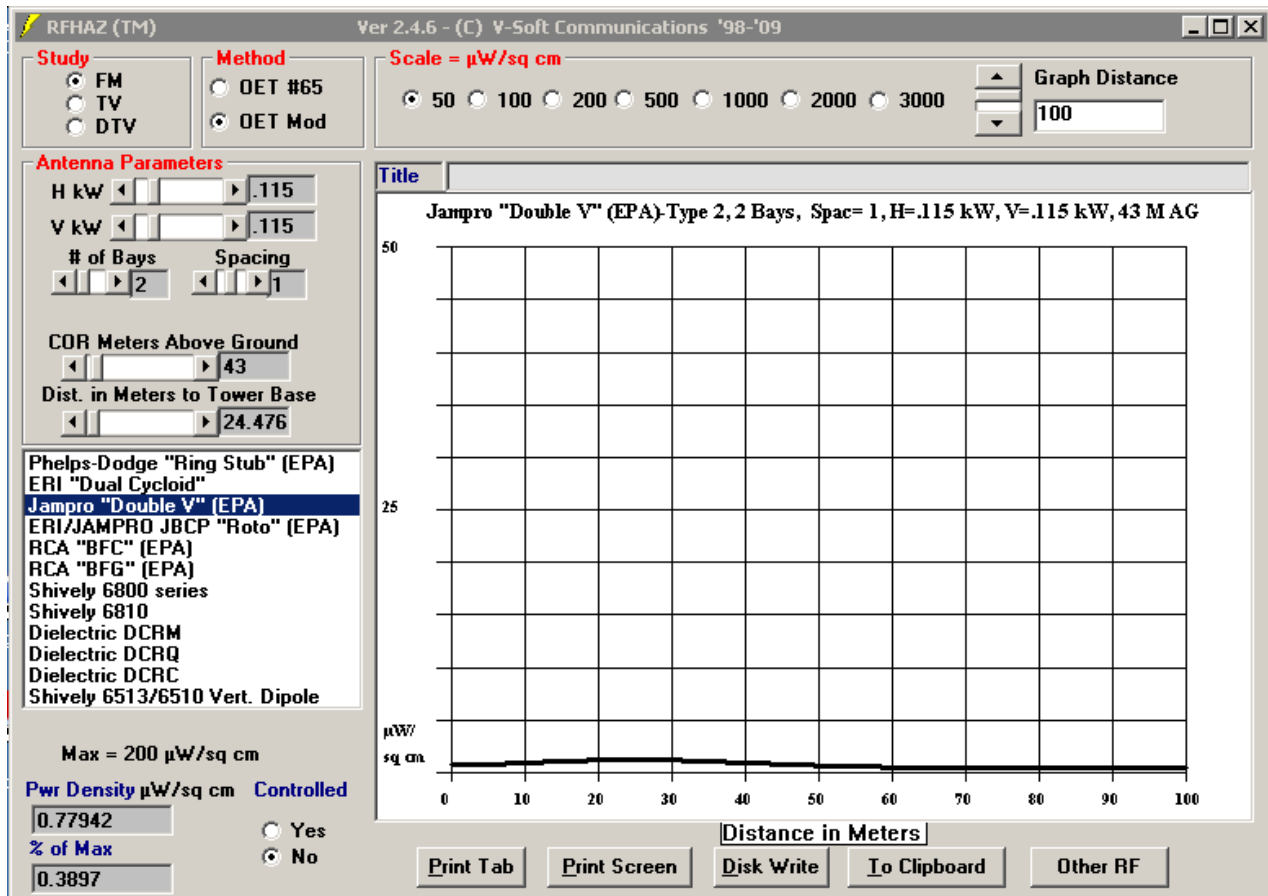

Environment = Uncontrolled, Maximum = 200  $\mu\text{W}/\text{sq cm}$   
 Jampro "Double V" (EPA)-Type 2, 2 Bays, Spac= 1, H=.115 kW, V=.115 kW, 43 MAG

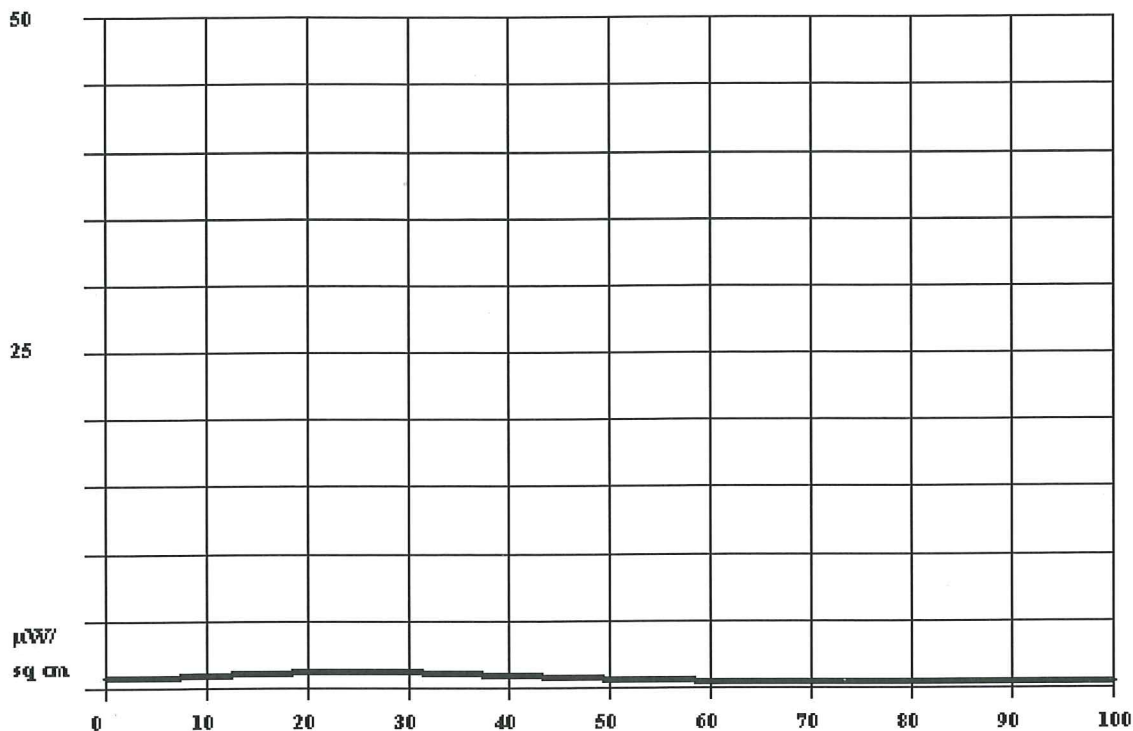

HORZ. DISTANCE FROM FM RADIATOR VS POWER DENSITY (Microwatt/Square cm)  
 Dist (Meters) PD (H) PD (V) Total ( $\mu\text{W}/\text{cm}^2$ ) Percent Max.

Dist (Meters)	PD (H)	PD (V)	Total ( $\mu\text{W}/\text{cm}^2$ )	Percent Max.
0	0.06	0.23	0.29	0.1
1	0.06	0.24	0.30	0.1
2	0.05	0.25	0.30	0.2
3	0.05	0.26	0.31	0.2
4	0.04	0.27	0.32	0.2
5	0.05	0.29	0.34	0.2
6	0.05	0.31	0.36	0.2
7	0.06	0.33	0.39	0.2
8	0.07	0.35	0.41	0.2
9	0.08	0.36	0.44	0.2
10	0.09	0.38	0.47	0.2
11	0.11	0.40	0.50	0.3
12	0.12	0.41	0.53	0.3
13	0.14	0.42	0.56	0.3
14	0.16	0.43	0.59	0.3
15	0.18	0.44	0.62	0.3
16	0.20	0.44	0.65	0.3
17	0.23	0.44	0.68	0.3
18	0.26	0.44	0.70	0.4
19	0.29	0.44	0.73	0.4
20	0.31	0.44	0.75	0.4
21	0.33	0.44	0.76	0.4
22	0.34	0.43	0.77	0.4
23	0.35	0.43	0.78	0.4
24	0.36	0.42	0.78	0.4
25	0.37	0.41	0.78	0.4




Dist (Meters)	PD (H)	PD (V)	Total (uW/cm2)	Percent Max.
26	0.38	0.40	0.78	0.4
27	0.38	0.39	0.77	0.4
28	0.39	0.38	0.77	0.4
29	0.39	0.36	0.76	0.4
30	0.40	0.35	0.74	0.4
31	0.39	0.33	0.72	0.4
32	0.38	0.32	0.70	0.4
33	0.37	0.30	0.67	0.3
34	0.36	0.29	0.65	0.3
35	0.35	0.27	0.62	0.3
36	0.34	0.26	0.59	0.3
37	0.33	0.24	0.57	0.3
38	0.32	0.23	0.55	0.3
39	0.31	0.21	0.52	0.3
40	0.30	0.20	0.50	0.2
41	0.29	0.19	0.47	0.2
42	0.27	0.17	0.45	0.2
43	0.26	0.16	0.42	0.2
44	0.24	0.15	0.39	0.2
45	0.23	0.13	0.36	0.2
46	0.21	0.12	0.34	0.2
47	0.20	0.11	0.31	0.2
48	0.19	0.10	0.29	0.1
49	0.17	0.09	0.26	0.1
50	0.16	0.08	0.24	0.1
51	0.14	0.07	0.22	0.1
52	0.13	0.07	0.20	0.1
53	0.12	0.06	0.17	0.1
54	0.10	0.05	0.16	0.1
55	0.09	0.05	0.14	0.1
56	0.08	0.04	0.12	0.1
57	0.07	0.04	0.11	0.1
58	0.06	0.03	0.09	0.0
59	0.05	0.03	0.08	0.0
60	0.05	0.02	0.07	0.0
61	0.04	0.02	0.06	0.0
62	0.03	0.02	0.05	0.0
63	0.03	0.01	0.04	0.0
64	0.02	0.01	0.03	0.0
65	0.02	0.01	0.03	0.0
66	0.01	0.01	0.02	0.0
67	0.01	0.00	0.02	0.0
68	0.01	0.00	0.01	0.0
69	0.01	0.00	0.01	0.0
70	0.00	0.00	0.00	0.0
71	0.00	0.00	0.00	0.0
72	0.00	0.00	0.00	0.0
73	0.00	0.00	0.00	0.0
74	0.00	0.00	0.00	0.0
75	0.00	0.00	0.00	0.0
76	0.00	0.00	0.00	0.0
77	0.00	0.00	0.00	0.0




Dist (Meters)	PD (H)	PD (V)	Total (uW/cm2)	Percent Max.
78	0.00	0.00	0.00	0.0
79	0.00	0.00	0.00	0.0
80	0.00	0.00	0.01	0.0
81	0.01	0.00	0.01	0.0
82	0.01	0.00	0.01	0.0
83	0.01	0.00	0.01	0.0
84	0.01	0.01	0.01	0.0
85	0.01	0.01	0.02	0.0
86	0.01	0.01	0.02	0.0
87	0.02	0.01	0.02	0.0
88	0.02	0.01	0.03	0.0
89	0.02	0.01	0.03	0.0
90	0.02	0.01	0.03	0.0
91	0.02	0.01	0.04	0.0
92	0.03	0.01	0.04	0.0
93	0.03	0.01	0.04	0.0
94	0.03	0.02	0.05	0.0
95	0.03	0.02	0.05	0.0
96	0.03	0.02	0.05	0.0
97	0.04	0.02	0.06	0.0
98	0.04	0.02	0.06	0.0
99	0.04	0.02	0.06	0.0
100	0.04	0.02	0.06	0.0

## RF HAZ v2.45 Calculation for K247AZ

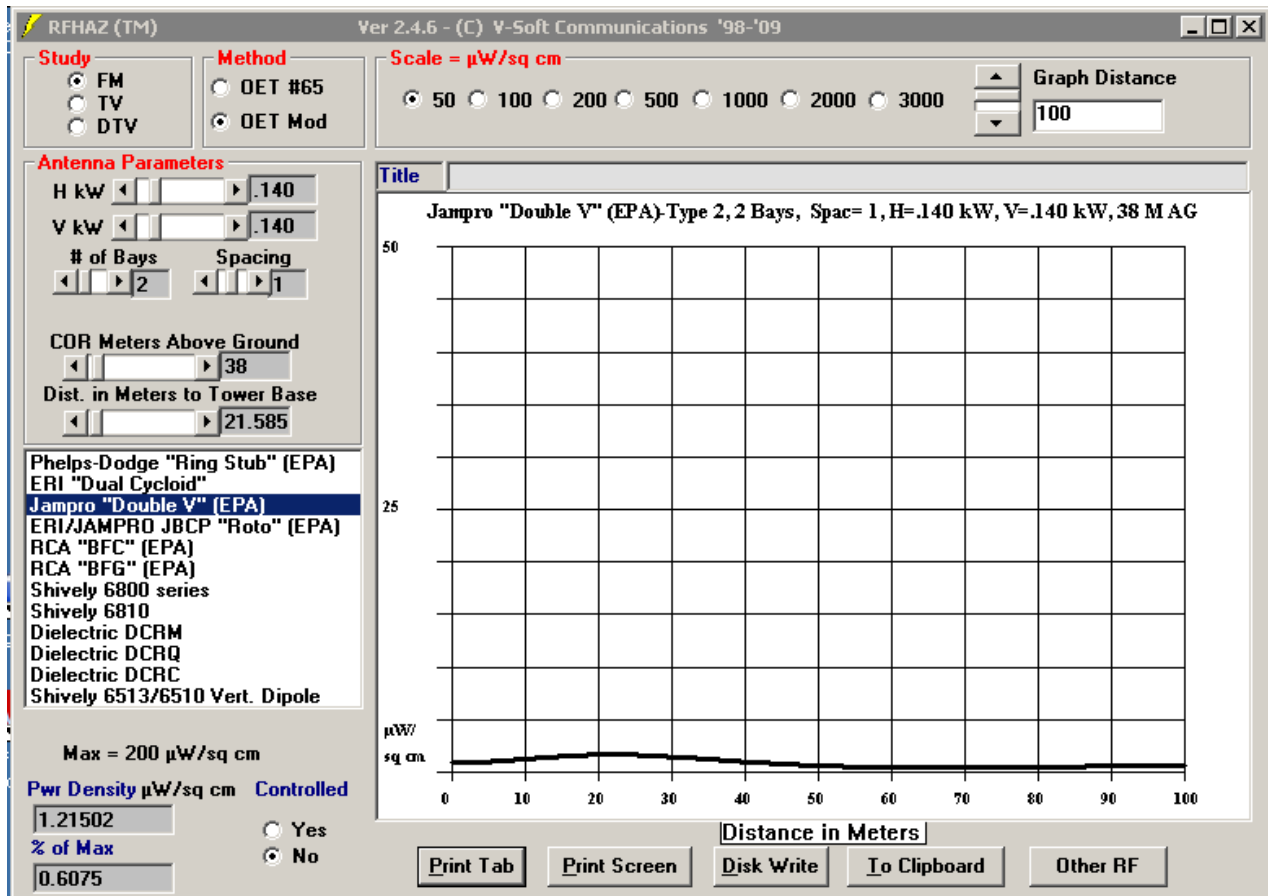

Environment = Uncontrolled, Maximum = 200  $\mu\text{W}/\text{sq cm}$   
**Jampro "Double V" (EPA)-Type 2,2 Bays, Spac= 1,H=.140 kW,V=.140 kW,38 MAG**

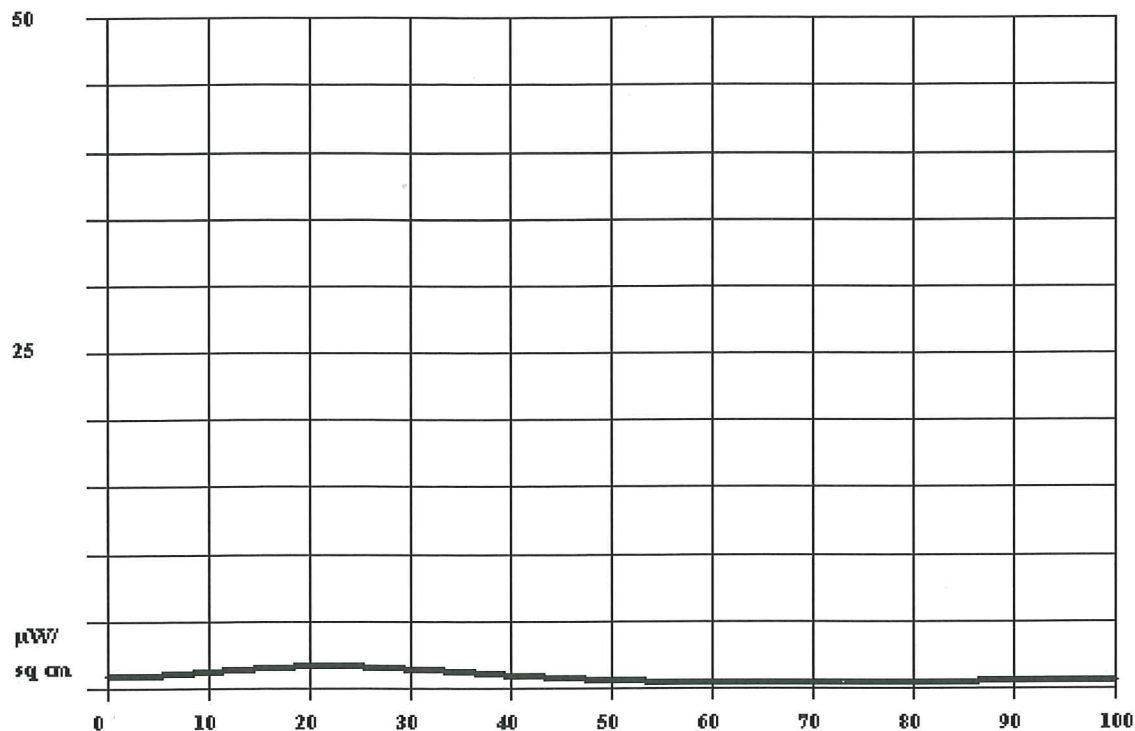

HORZ. DISTANCE FROM FM RADIATOR VS POWER DENSITY (Microwatt/Square cm)  
 Dist(Meters) PD (H) PD (V) Total ( $\mu\text{W}/\text{cm}^2$ ) Percent Max.

0	0.10	0.36	0.45	0.2
1	0.09	0.38	0.46	0.2
2	0.08	0.39	0.47	0.2
3	0.07	0.41	0.48	0.2
4	0.07	0.44	0.51	0.3
5	0.08	0.48	0.55	0.3
6	0.09	0.51	0.60	0.3
7	0.10	0.54	0.64	0.3
8	0.12	0.57	0.69	0.3
9	0.15	0.60	0.75	0.4
10	0.17	0.62	0.80	0.4
11	0.21	0.64	0.85	0.4
12	0.24	0.66	0.90	0.5
13	0.27	0.68	0.95	0.5
14	0.31	0.69	1.00	0.5
15	0.36	0.69	1.05	0.5
16	0.41	0.69	1.10	0.5
17	0.45	0.69	1.14	0.6
18	0.49	0.68	1.18	0.6
19	0.52	0.68	1.20	0.6
20	0.54	0.67	1.21	0.6
21	0.55	0.66	1.21	0.6
22	0.57	0.65	1.21	0.6
23	0.59	0.63	1.21	0.6
24	0.60	0.60	1.21	0.6
25	0.61	0.58	1.19	0.6

Dist (Meters)	PD (H)	PD (V)	Total (uW/cm2)	Percent Max.
26	0.62	0.56	1.17	0.6
27	0.61	0.53	1.14	0.6
28	0.60	0.50	1.10	0.6
29	0.58	0.48	1.06	0.5
30	0.56	0.45	1.01	0.5
31	0.54	0.42	0.96	0.5
32	0.52	0.39	0.92	0.5
33	0.51	0.37	0.88	0.4
34	0.49	0.34	0.83	0.4
35	0.47	0.32	0.79	0.4
36	0.45	0.30	0.75	0.4
37	0.43	0.27	0.70	0.3
38	0.40	0.25	0.65	0.3
39	0.38	0.23	0.60	0.3
40	0.35	0.20	0.56	0.3
41	0.33	0.18	0.51	0.3
42	0.30	0.16	0.46	0.2
43	0.27	0.15	0.42	0.2
44	0.25	0.13	0.38	0.2
45	0.23	0.11	0.34	0.2
46	0.20	0.10	0.30	0.2
47	0.18	0.09	0.27	0.1
48	0.16	0.08	0.23	0.1
49	0.14	0.07	0.20	0.1
50	0.12	0.06	0.18	0.1
51	0.10	0.05	0.15	0.1
52	0.09	0.04	0.13	0.1
53	0.07	0.04	0.11	0.1
54	0.06	0.03	0.09	0.0
55	0.05	0.02	0.07	0.0
56	0.04	0.02	0.06	0.0
57	0.03	0.01	0.04	0.0
58	0.02	0.01	0.03	0.0
59	0.02	0.01	0.03	0.0
60	0.01	0.01	0.02	0.0
61	0.01	0.00	0.01	0.0
62	0.00	0.00	0.01	0.0
63	0.00	0.00	0.00	0.0
64	0.00	0.00	0.00	0.0
65	0.00	0.00	0.00	0.0
66	0.00	0.00	0.00	0.0
67	0.00	0.00	0.00	0.0
68	0.00	0.00	0.00	0.0
69	0.00	0.00	0.00	0.0
70	0.00	0.00	0.01	0.0
71	0.01	0.00	0.01	0.0
72	0.01	0.00	0.01	0.0
73	0.01	0.01	0.02	0.0
74	0.01	0.01	0.02	0.0
75	0.02	0.01	0.03	0.0
76	0.02	0.01	0.03	0.0
77	0.02	0.01	0.04	0.0

Dist (Meters)	PD (H)	PD (V)	Total (uW/cm2)	Percent Max.
78	0.03	0.01	0.04	0.0
79	0.03	0.02	0.05	0.0
80	0.03	0.02	0.05	0.0
81	0.04	0.02	0.06	0.0
82	0.04	0.02	0.06	0.0
83	0.05	0.03	0.07	0.0
84	0.05	0.03	0.08	0.0
85	0.05	0.03	0.08	0.0
86	0.06	0.03	0.09	0.0
87	0.06	0.03	0.09	0.0
88	0.06	0.04	0.10	0.0
89	0.07	0.04	0.10	0.1
90	0.07	0.04	0.11	0.1
91	0.07	0.04	0.11	0.1
92	0.08	0.04	0.12	0.1
93	0.08	0.05	0.13	0.1
94	0.08	0.05	0.13	0.1
95	0.08	0.05	0.13	0.1
96	0.09	0.05	0.14	0.1
97	0.09	0.05	0.14	0.1
98	0.09	0.06	0.15	0.1
99	0.09	0.06	0.15	0.1
100	0.10	0.06	0.16	0.1

## RF HAZ v2.45 Calculation for K292FE

RFHAZ (TM) Ver 2.4.6 - (C) V-Soft Communications '98-'09

**Study** ☒ FM ☐ TV ☐ DTV **Method** ☐ OET #65 ☒ OET Mod

**Scale** =  $\mu\text{W}/\text{sq cm}$  ☒ 50 ☐ 100 ☐ 200 ☐ 500 ☐ 1000 ☐ 2000 ☐ 3000 **Graph Distance**

**Antenna Parameters**  
H kW  V kW   
# of Bays  Spacing   
COR Meters Above Ground   
Dist. in Meters to Tower Base

**Title** Jampro "Double V" (EPA)-Type 2, 1 Bay, Spac= 1, H=.062 kW, V=.062 kW, 89 MAG

Phelps-Dodge "Ring Stub" (EPA)  
ERI "Dual Cycloid"  
**Jampro "Double V" (EPA)**  
ERI/JAMPRO JBCP "Roto" (EPA)  
RCA "BFC" (EPA)  
RCA "BFG" (EPA)  
Shively 6800 series  
Shively 6810  
Dielectric DCRM  
Dielectric DCRQ  
Dielectric DCRC  
Shively 6513/6510 Vert. Dipole


Max = 200  $\mu\text{W}/\text{sq cm}$

**Pwr Density**  $\mu\text{W}/\text{sq cm}$  **Controlled**  
 ☐ Yes  
% of Max ☒ No

**Distance in Meters**

**Print Tab** **Print Screen** **Disk Write** **To Clipboard** **Other RF**

Environment = Uncontrolled, Maximum = 200  $\mu\text{W}/\text{sq cm}$   
 Jampro "Double V" (EPA)-Type 2, 1 Bay, Spac= 1, H=.062 kW, V=.062 kW, 89 MAG

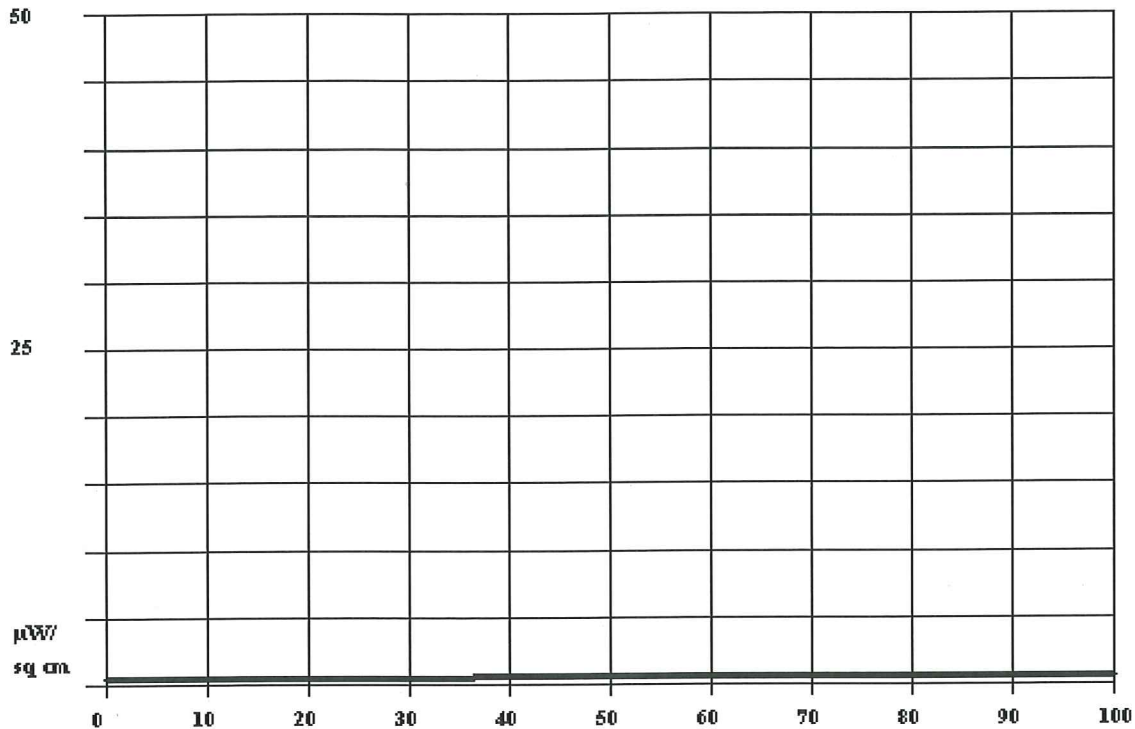

HORZ. DISTANCE FROM FM RADIATOR VS POWER DENSITY (Microwatt/Square cm)  
 Dist(Meters) PD (H) PD (V) Total(uW/cm2) Percent Max.

Dist(Meters)	PD (H)	PD (V)	Total(uW/cm2)	Percent Max.
0	0.01	0.03	0.04	0.0
1	0.01	0.03	0.04	0.0
2	0.01	0.03	0.04	0.0
3	0.01	0.03	0.04	0.0
4	0.01	0.03	0.04	0.0
5	0.01	0.03	0.04	0.0
6	0.01	0.03	0.04	0.0
7	0.01	0.03	0.04	0.0
8	0.01	0.03	0.04	0.0
9	0.01	0.04	0.04	0.0
10	0.01	0.04	0.04	0.0
11	0.01	0.04	0.04	0.0
12	0.01	0.04	0.05	0.0
13	0.01	0.04	0.05	0.0
14	0.01	0.04	0.05	0.0
15	0.01	0.04	0.05	0.0
16	0.01	0.04	0.05	0.0
17	0.01	0.04	0.05	0.0
18	0.01	0.05	0.05	0.0
19	0.01	0.05	0.06	0.0
20	0.01	0.05	0.06	0.0
21	0.01	0.05	0.06	0.0
22	0.01	0.05	0.06	0.0
23	0.01	0.05	0.06	0.0
24	0.01	0.05	0.07	0.0
25	0.02	0.05	0.07	0.0



Dist (Meters)	PD (H)	PD (V)	Total (uW/cm2)	Percent Max.
26	0.02	0.05	0.07	0.0
27	0.02	0.05	0.07	0.0
28	0.02	0.05	0.07	0.0
29	0.02	0.06	0.08	0.0
30	0.02	0.06	0.08	0.0
31	0.02	0.06	0.08	0.0
32	0.02	0.06	0.08	0.0
33	0.03	0.06	0.08	0.0
34	0.03	0.06	0.09	0.0
35	0.03	0.06	0.09	0.0
36	0.03	0.06	0.09	0.0
37	0.03	0.06	0.09	0.0
38	0.04	0.06	0.10	0.0
39	0.04	0.06	0.10	0.0
40	0.04	0.06	0.10	0.0
41	0.04	0.06	0.10	0.1
42	0.04	0.06	0.10	0.1
43	0.04	0.06	0.11	0.1
44	0.05	0.06	0.11	0.1
45	0.05	0.06	0.11	0.1
46	0.05	0.06	0.11	0.1
47	0.05	0.06	0.11	0.1
48	0.05	0.06	0.11	0.1
49	0.05	0.06	0.11	0.1
50	0.05	0.06	0.12	0.1
51	0.05	0.06	0.12	0.1
52	0.06	0.06	0.12	0.1
53	0.06	0.06	0.12	0.1
54	0.06	0.06	0.12	0.1
55	0.06	0.06	0.12	0.1
56	0.06	0.06	0.12	0.1
57	0.06	0.06	0.13	0.1
58	0.06	0.06	0.13	0.1
59	0.07	0.06	0.13	0.1
60	0.07	0.06	0.13	0.1
61	0.07	0.06	0.13	0.1
62	0.07	0.06	0.13	0.1
63	0.07	0.06	0.13	0.1
64	0.07	0.06	0.13	0.1
65	0.07	0.06	0.13	0.1
66	0.07	0.06	0.13	0.1
67	0.07	0.06	0.13	0.1
68	0.07	0.06	0.13	0.1
69	0.07	0.06	0.13	0.1
70	0.07	0.06	0.13	0.1
71	0.08	0.06	0.13	0.1
72	0.08	0.06	0.13	0.1
73	0.08	0.06	0.13	0.1
74	0.08	0.06	0.13	0.1
75	0.08	0.06	0.14	0.1
76	0.08	0.06	0.14	0.1
77	0.08	0.06	0.14	0.1

Dist (Meters)	PD (H)	PD (V)	Total (uW/cm2)	Percent Max.
78	0.08	0.06	0.14	0.1
79	0.08	0.06	0.14	0.1
80	0.08	0.06	0.14	0.1
81	0.08	0.06	0.14	0.1
82	0.08	0.06	0.14	0.1
83	0.08	0.06	0.14	0.1
84	0.09	0.06	0.14	0.1
85	0.09	0.06	0.14	0.1
86	0.09	0.06	0.14	0.1
87	0.09	0.06	0.14	0.1
88	0.09	0.06	0.14	0.1
89	0.09	0.05	0.14	0.1
90	0.09	0.05	0.14	0.1
91	0.09	0.05	0.14	0.1
92	0.09	0.05	0.14	0.1
93	0.09	0.05	0.14	0.1
94	0.09	0.05	0.14	0.1
95	0.09	0.05	0.14	0.1
96	0.09	0.05	0.14	0.1
97	0.09	0.05	0.14	0.1
98	0.09	0.05	0.14	0.1
99	0.09	0.05	0.14	0.1
100	0.09	0.05	0.14	0.1