

RF HAZARD STATEMENT
PROPOSED DIGITAL FLASH-CUT FACILITY
TELEVISION TRANSLATOR STATION K44CJ
TUCUMCARI, NEW MEXICO
CHANNEL 44 0.36 KW 1523 M AMSL

With respect to the potential for human exposure to radio frequency (RF) energy, calculations prepared in accordance with FCC Bulletin OET-65 (Edition 97-01) indicate that the proposal will not result in human exposure to RF energy at ground level in excess of FCC standards. Power density calculations were conducted at 2-m above ground* based on the following conservative assumptions, with the following results:


Call Sign	Channel	Average ERP (kW)	Distance (m)	Relative Field Factor†	FCC Limit‡ (mW/cm ²)	Percentage of Limit
K44CJ (digital)	44	0.36	13	0.3	0.435	2.1%

As indicated above, the exposure to RF energy at 2-m above ground level will not exceed 2.1% of the FCC limit for general population / uncontrolled exposure. Therefore, the proposal complies with the FCC limits for human exposure to RF energy and it is categorically excluded from environmental processing. The applicant, in coordination with other users of the transmission facility, shall reduce power or cease operation as necessary to protect persons having access to the tower or antenna from RF energy in excess of the FCC guidelines.

* The radiation center is located 13 m above ground level.

† This is a conservative estimate of the downward relative field at steep elevation angles (see Figure 1).

‡ for general population/uncontrolled environments

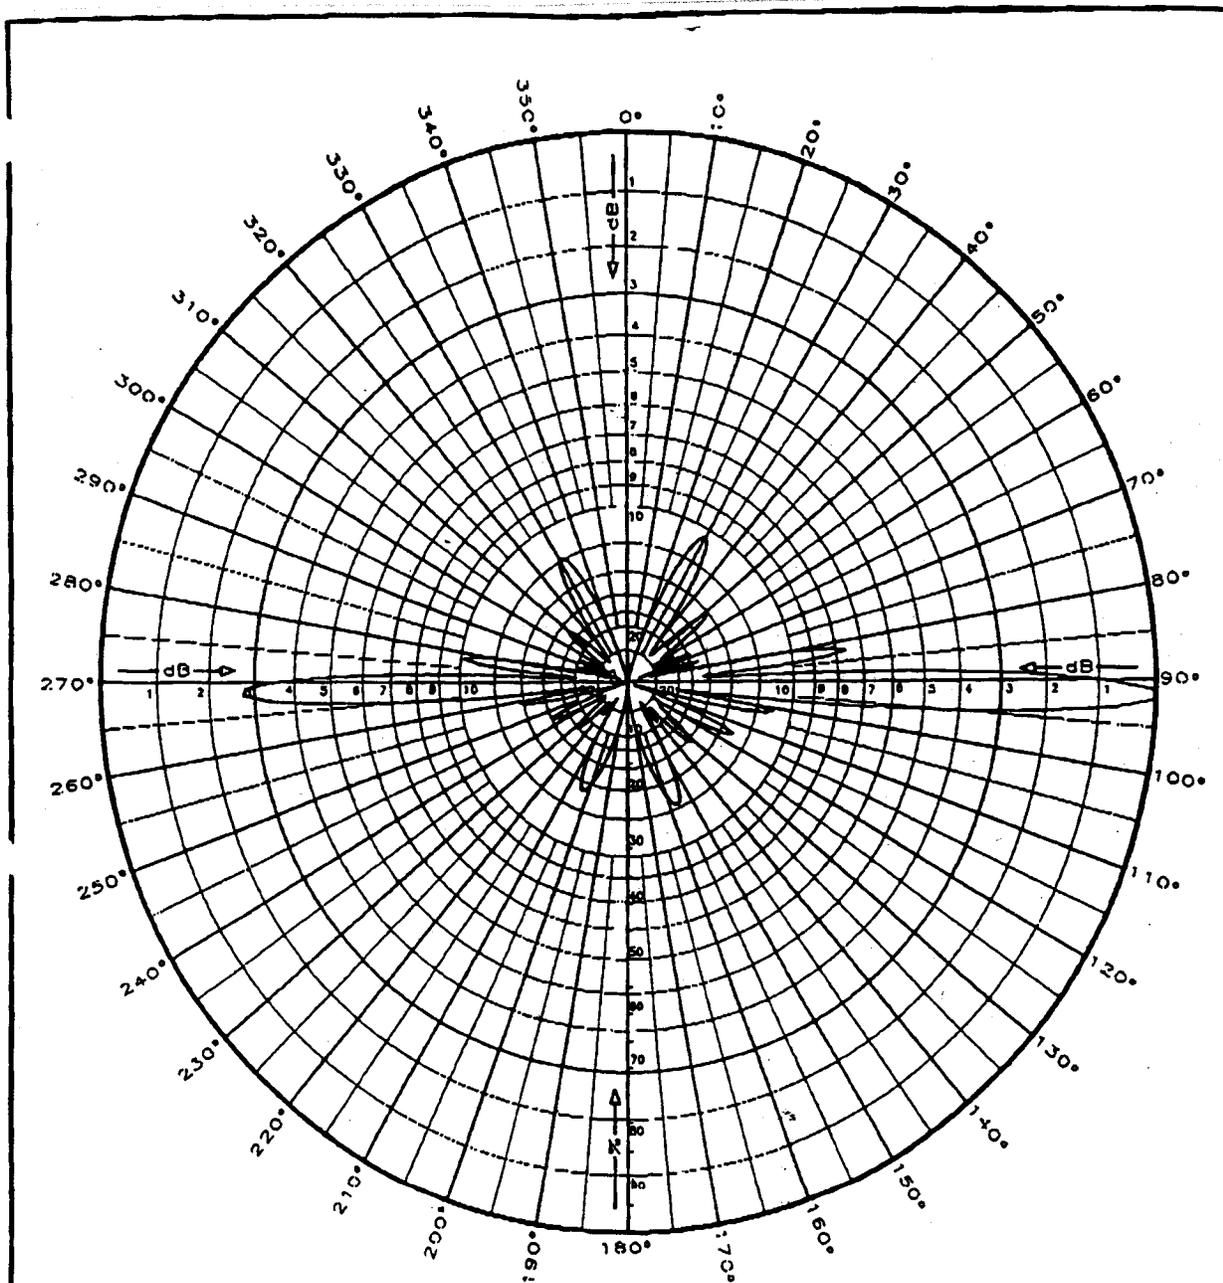

ONE SCALA SL-8 PARASLOT
 WITH 1.75 DEGREE DOWNTILT
 ANY SPECIFIED UHF-TV CHANNEL
 GAIN: 11.4 dBd.
 POWER GAIN: 13.8
 HORIZONTAL POLARIZATION
 VERTICAL PLANE PATTERN

SCALA
 ELECTRONIC CORPORATION
 MEDFORD, OREGON (USA)
 (503) 774-6500
 FAX: (503) 778-3991

FORM: E-100-01 REV: 15/PLD/81