


ELEVATION PATTERN

RMS Gain at Main Lobe	24 (13.80 dB)	Beam Tilt	1.00 Degrees
RMS Gain at Horizontal	11.9 (10.76 dB)	Frequency	605.00 MHz
Calculated / Measured	Calculated	Drawing #	24B240100

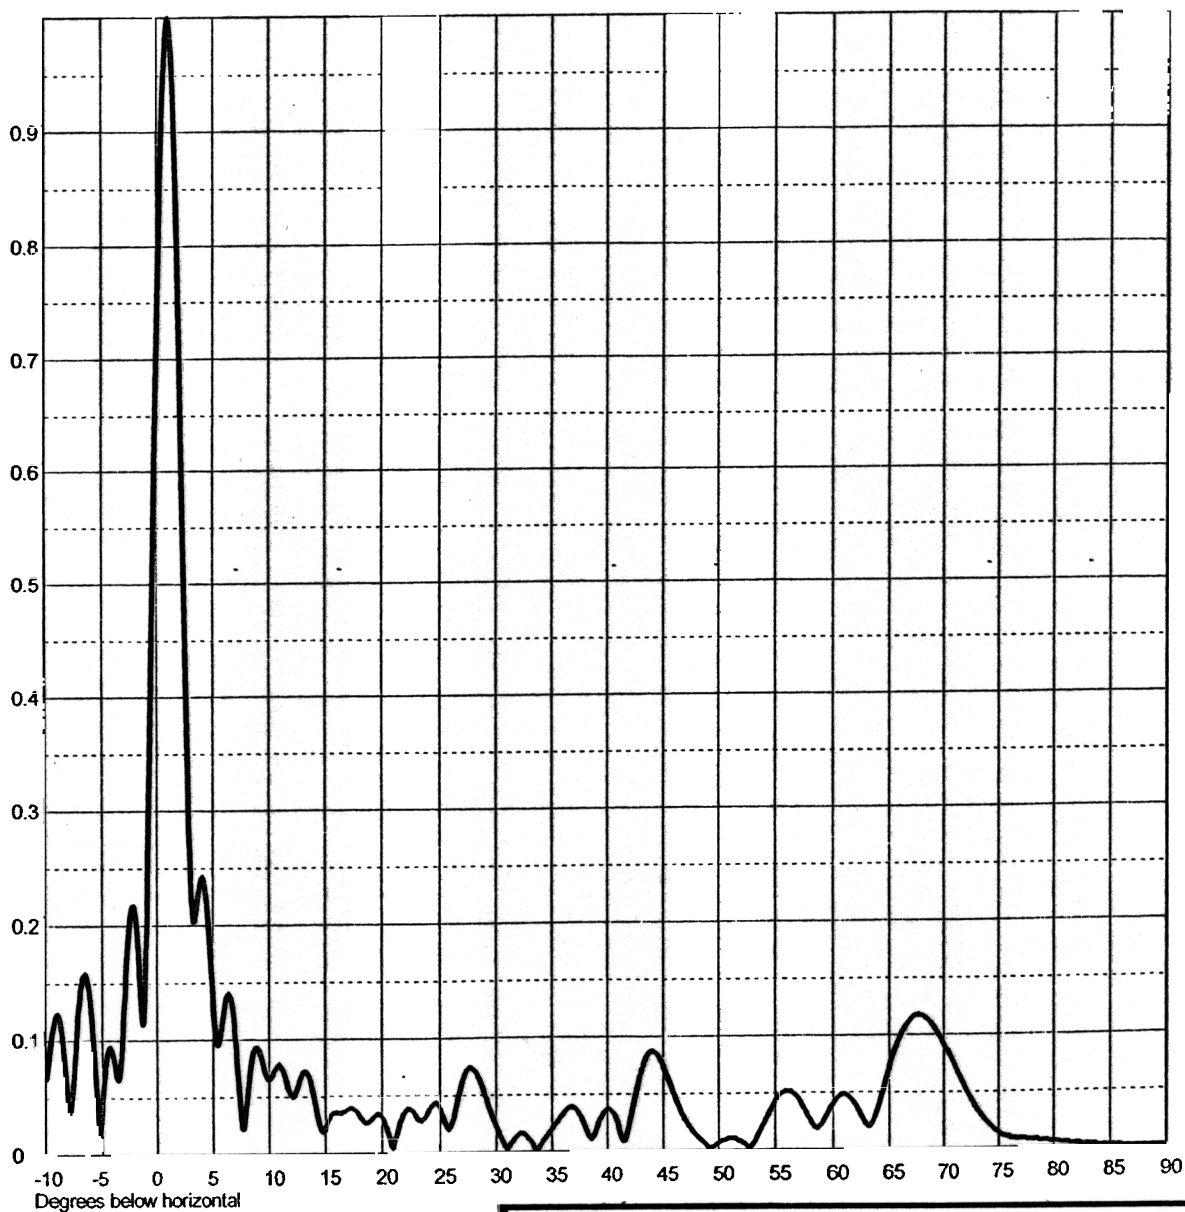

Remarks:

EXHIBIT B-1

ANTENNA ELEVATION PATTERN

**PROPOSED KSKN-DT
 CHANNEL 36 – SPOKANE, WASHINGTON
 [AMENDMENT TO BMPCDT-20031110AMP]**


SMITH AND FISHER

AZIMUTH PATTERN

Gain
Calculated / Measured

3.90 (5.91 dB)
Calculated

Frequency 605 MHz
Drawing # DSB-E

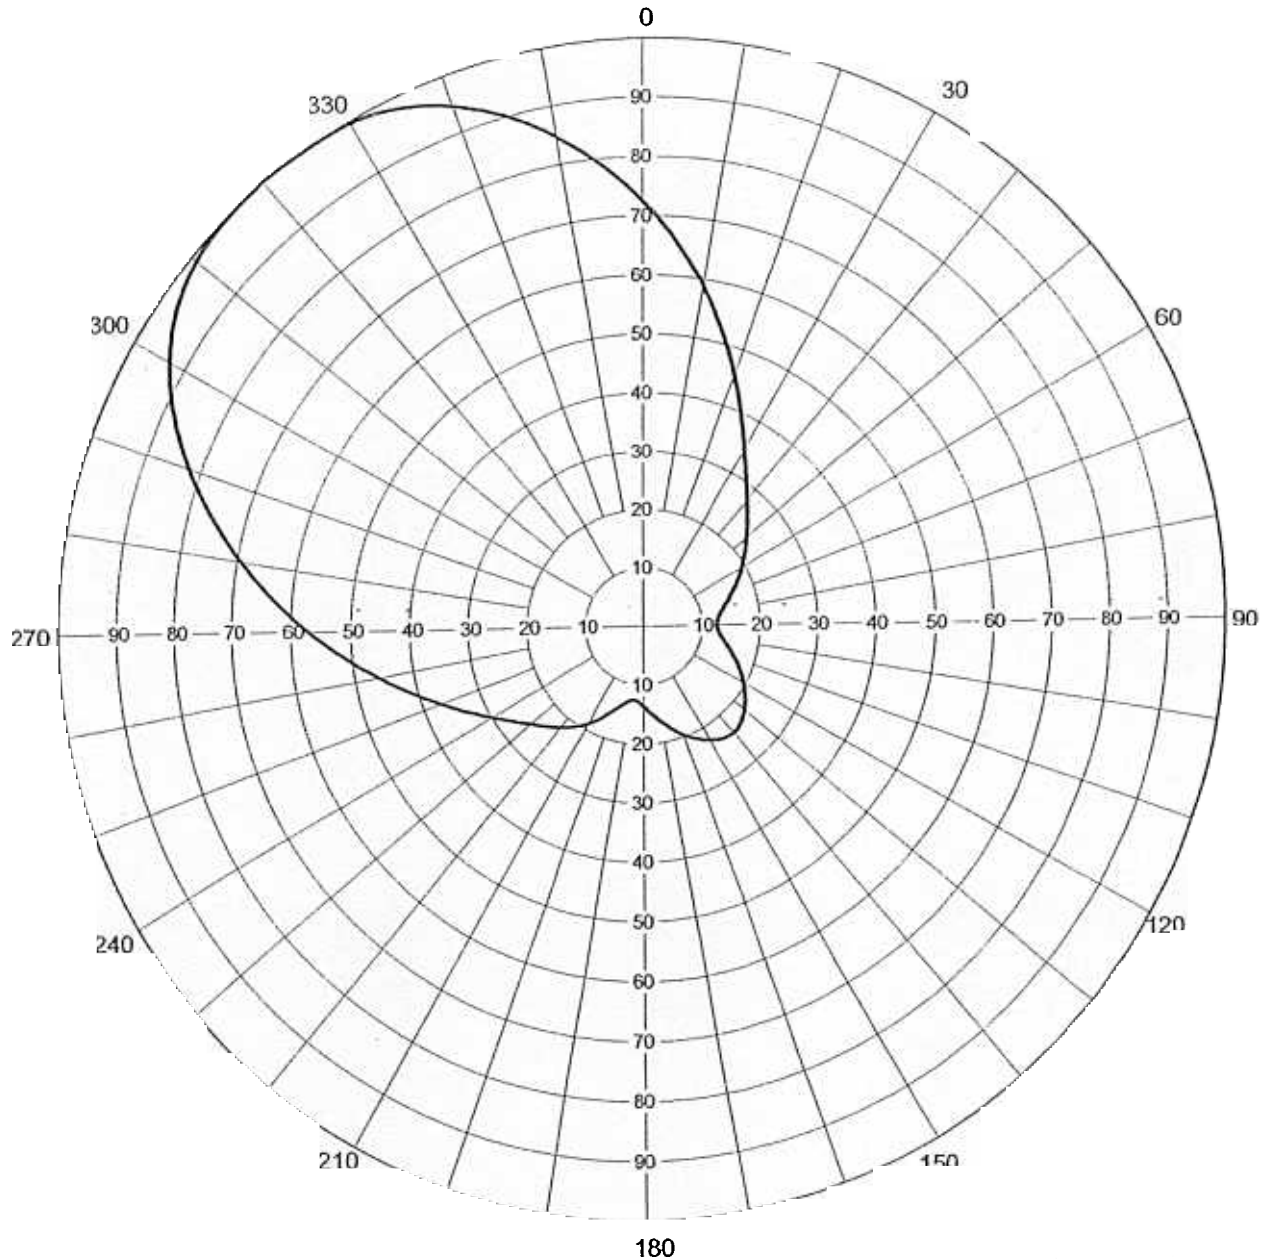

Remarks:

EXHIBIT B-2

ANTENNA AZMUTH PATTERN

PROPOSED KSKN-DT
CHANNEL 36 – SPOKANE, WASHINGTON
[AMENDMENT TO BMPCDT-20031110AMP]

SMITH AND FISHER

ANTENNA AZIMUTH PATTERN DATA

PROPOSED KSKN-DT
CHANNEL 36 – SPOKANE, WASHINGTON
[AMENDMENT TO BMPCDT-20031110AMP]

<u>Azimuth</u> <u>(° T)</u>	<u>Relative</u> <u>Field</u>	<u>ERP</u> <u>(dbk)</u>	<u>Azimuth</u> <u>(° T)</u>	<u>Relative</u> <u>Field</u>	<u>ERP</u> <u>(dbk)</u>
0	0.725	27.2	180	0.136	12.7
10	0.590	25.4	190	0.128	12.1
20	0.457	23.2	200	0.153	13.7
30	0.346	20.8	210	0.190	15.6
40	0.277	18.8	220	0.222	16.9
50	0.231	17.3	230	0.254	18.1
60	0.195	15.8	240	0.301	19.6
70	0.162	14.2	250	0.369	21.3
80	0.137	12.7	260	0.459	23.2
90	0.127	12.1	270	0.570	25.1
100	0.139	12.9	280	0.693	26.8
110	0.166	14.4	290	0.820	28.3
120	0.198	15.9	300	0.928	29.4
130	0.225	17.0	310	0.988	29.9
140	0.240	17.6	320	1.000	30.0
150	0.226	17.1	330	0.995	30.0
160	0.197	15.9	340	0.945	29.9
170	0.164	14.3	350	0.848	28.6