




Proposal Number	C-04057	Exhibit 1
Date	16-Mar-10	
Call Letters	WPVI-TV	Channel 6
Location	Philadelphia, PA	
Customer		
Antenna Type	CBR-O3FMB-6/18H-1	

ELEVATION PATTERN

RMS Gain at Main Lobe	5.50 (7.40 dB)	Beam Tilt	1.00 deg
RMS Gain at Horizontal	5.40 (7.32 dB)	Frequency	85.00 MHz
Calculated / Measured	Calculated	Drawing #	06C055100

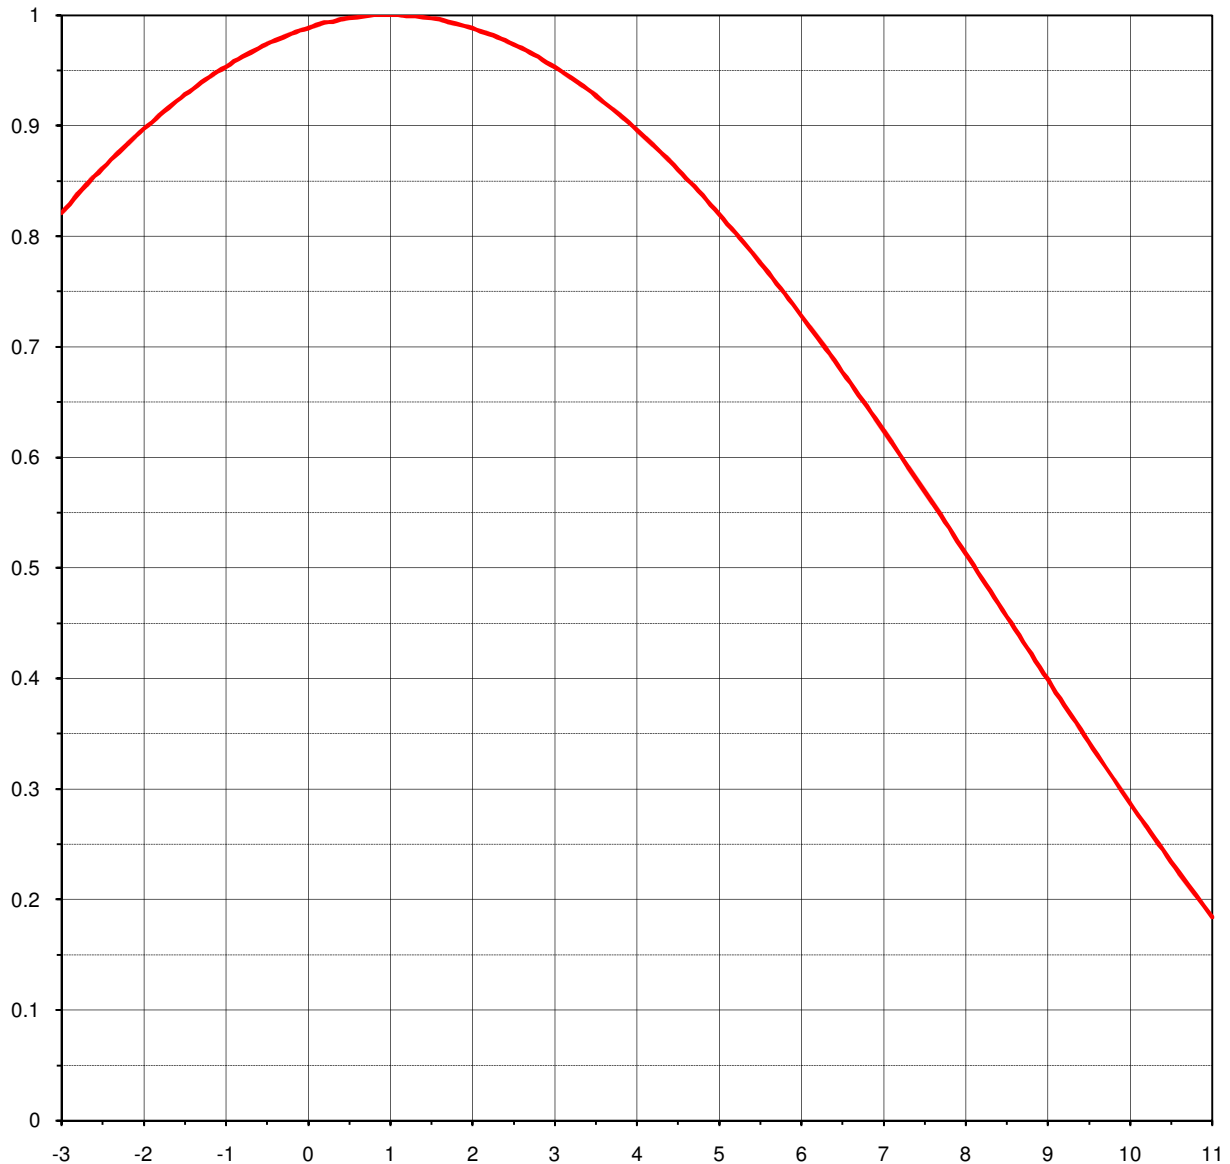


Degrees Below Horizontal



Proposal Number	C-04057	Exhibit 2
Date	16-Mar-10	
Call Letters	WPVI-TV	Channel 6
Location	Philadelphia, PA	
Customer		
Antenna Type	CBR-O3FMB-6/18H-1	

ELEVATION PATTERN

RMS Gain at Main Lobe	5.50 (7.40 dB)	Beam Tilt	1.00 deg
RMS Gain at Horizontal	5.40 (7.32 dB)	Frequency	85.00 MHz
Calculated / Measured	Calculated	Drawing #	06C055100-90

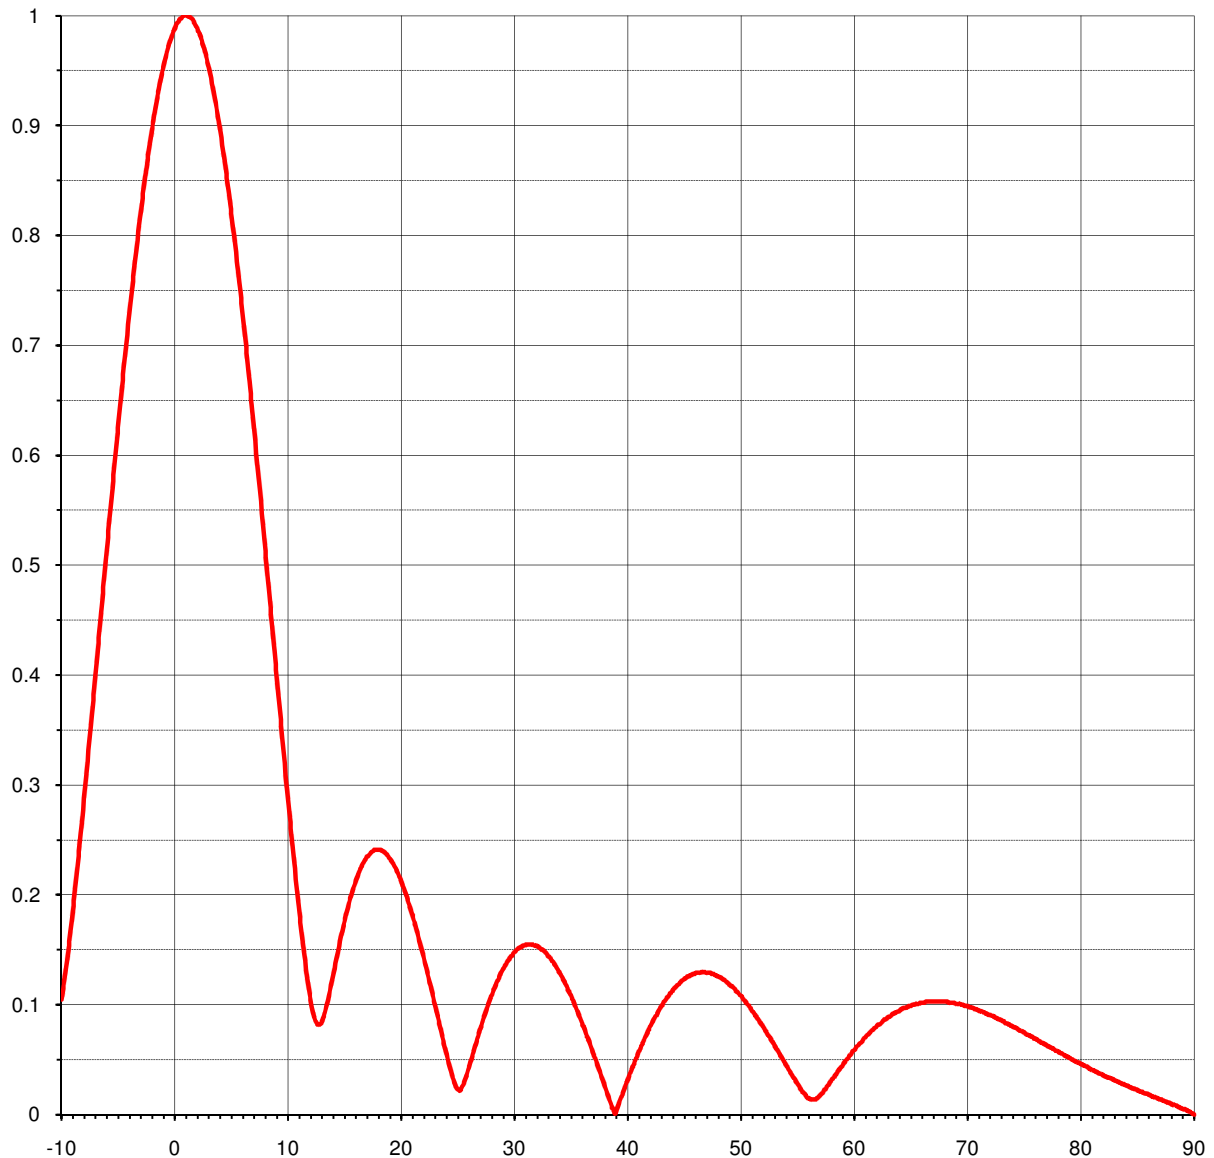



Proposal Number **C-04057** **Exhibit 3**
Date **16-Mar-10**
Call Letters **WPVI-TV** Channel **6**
Location **Philadelphia, PA**
Customer
Antenna Type **CBR-O3FMB-6/18H-1**

TABULATION OF ELEVATION PATTERN

Elevation Pattern Drawing #: **06C055100-90**

Angle	Field	Angle	Field	Angle	Field	Angle	Field	Angle	Field	Angle	Field
-10.0	0.105	2.4	0.977	10.6	0.234	30.5	0.152	51.0	0.096	71.5	0.093
-9.5	0.141	2.6	0.970	10.8	0.214	31.0	0.154	51.5	0.088	72.0	0.091
-9.0	0.185	2.8	0.962	11.0	0.194	31.5	0.155	52.0	0.081	72.5	0.088
-8.5	0.235	3.0	0.953	11.5	0.148	32.0	0.154	52.5	0.072	73.0	0.086
-8.0	0.288	3.2	0.943	12.0	0.110	32.5	0.150	53.0	0.064	73.5	0.083
-7.5	0.343	3.4	0.933	12.5	0.086	33.0	0.145	53.5	0.055	74.0	0.080
-7.0	0.400	3.6	0.921	13.0	0.083	33.5	0.139	54.0	0.046	74.5	0.077
-6.5	0.457	3.8	0.909	13.5	0.099	34.0	0.130	54.5	0.038	75.0	0.075
-6.0	0.514	4.0	0.896	14.0	0.123	34.5	0.121	55.0	0.029	75.5	0.072
-5.5	0.570	4.2	0.882	14.5	0.148	35.0	0.110	55.5	0.021	76.0	0.069
-5.0	0.625	4.4	0.868	15.0	0.172	35.5	0.098	56.0	0.015	76.5	0.066
-4.5	0.679	4.6	0.852	15.5	0.193	36.0	0.085	56.5	0.014	77.0	0.063
-4.0	0.729	4.8	0.837	16.0	0.210	36.5	0.071	57.0	0.017	77.5	0.060
-3.5	0.777	5.0	0.820	16.5	0.224	37.0	0.057	57.5	0.023	78.0	0.057
-3.0	0.821	5.2	0.803	17.0	0.234	37.5	0.043	58.0	0.030	78.5	0.054
-2.8	0.838	5.4	0.785	17.5	0.239	38.0	0.028	58.5	0.037	79.0	0.052
-2.6	0.854	5.6	0.767	18.0	0.241	38.5	0.013	59.0	0.044	79.5	0.049
-2.4	0.869	5.8	0.748	18.5	0.240	39.0	0.001	59.5	0.051	80.0	0.046
-2.2	0.883	6.0	0.728	19.0	0.234	39.5	0.016	60.0	0.058	80.5	0.044
-2.0	0.897	6.2	0.708	19.5	0.226	40.0	0.030	60.5	0.064	81.0	0.041
-1.8	0.910	6.4	0.688	20.0	0.215	40.5	0.043	61.0	0.070	81.5	0.038
-1.6	0.922	6.6	0.667	20.5	0.201	41.0	0.056	61.5	0.075	82.0	0.036
-1.4	0.933	6.8	0.646	21.0	0.184	41.5	0.067	62.0	0.080	82.5	0.034
-1.2	0.944	7.0	0.624	21.5	0.166	42.0	0.079	62.5	0.084	83.0	0.031
-1.0	0.953	7.2	0.602	22.0	0.146	42.5	0.089	63.0	0.088	83.5	0.029
-0.8	0.962	7.4	0.580	22.5	0.125	43.0	0.098	63.5	0.092	84.0	0.027
-0.6	0.970	7.6	0.558	23.0	0.103	43.5	0.106	64.0	0.094	84.5	0.024
-0.4	0.977	7.8	0.536	23.5	0.081	44.0	0.112	64.5	0.097	85.0	0.022
-0.2	0.983	8.0	0.513	24.0	0.059	44.5	0.118	65.0	0.099	85.5	0.020
0.0	0.988	8.2	0.490	24.5	0.039	45.0	0.123	65.5	0.101	86.0	0.018
0.2	0.993	8.4	0.467	25.0	0.024	45.5	0.126	66.0	0.102	86.5	0.016
0.4	0.996	8.6	0.445	25.5	0.026	46.0	0.128	66.5	0.103	87.0	0.014
0.6	0.998	8.8	0.422	26.0	0.041	46.5	0.129	67.0	0.103	87.5	0.012
0.8	1.000	9.0	0.399	26.5	0.058	47.0	0.129	67.5	0.103	88.0	0.010
1.0	1.000	9.2	0.376	27.0	0.076	47.5	0.128	68.0	0.103	88.5	0.008
1.2	0.999	9.4	0.354	27.5	0.092	48.0	0.126	68.5	0.102	89.0	0.005
1.4	0.998	9.6	0.331	28.0	0.107	48.5	0.123	69.0	0.101	89.5	0.003
1.6	0.996	9.8	0.320	28.5	0.120	49.0	0.119	69.5	0.100	90.0	0.000
1.8	0.992	10.0	0.298	29.0	0.131	49.5	0.115	70.0	0.099		
2.0	0.988	10.2	0.276	29.5	0.140	50.0	0.109	70.5	0.097		
2.2	0.983	10.4	0.255	30.0	0.147	50.5	0.103	71.0	0.095		

This document contains proprietary and confidential information of Dielectric Communications and SPX Corporation. It is to be used solely for the purpose for which it is provided. No disclosure, reproduction, or use of this document or any part of it may be made without the written permission of Dielectric Communications or SPX Corporation.