


AM Directional Pattern

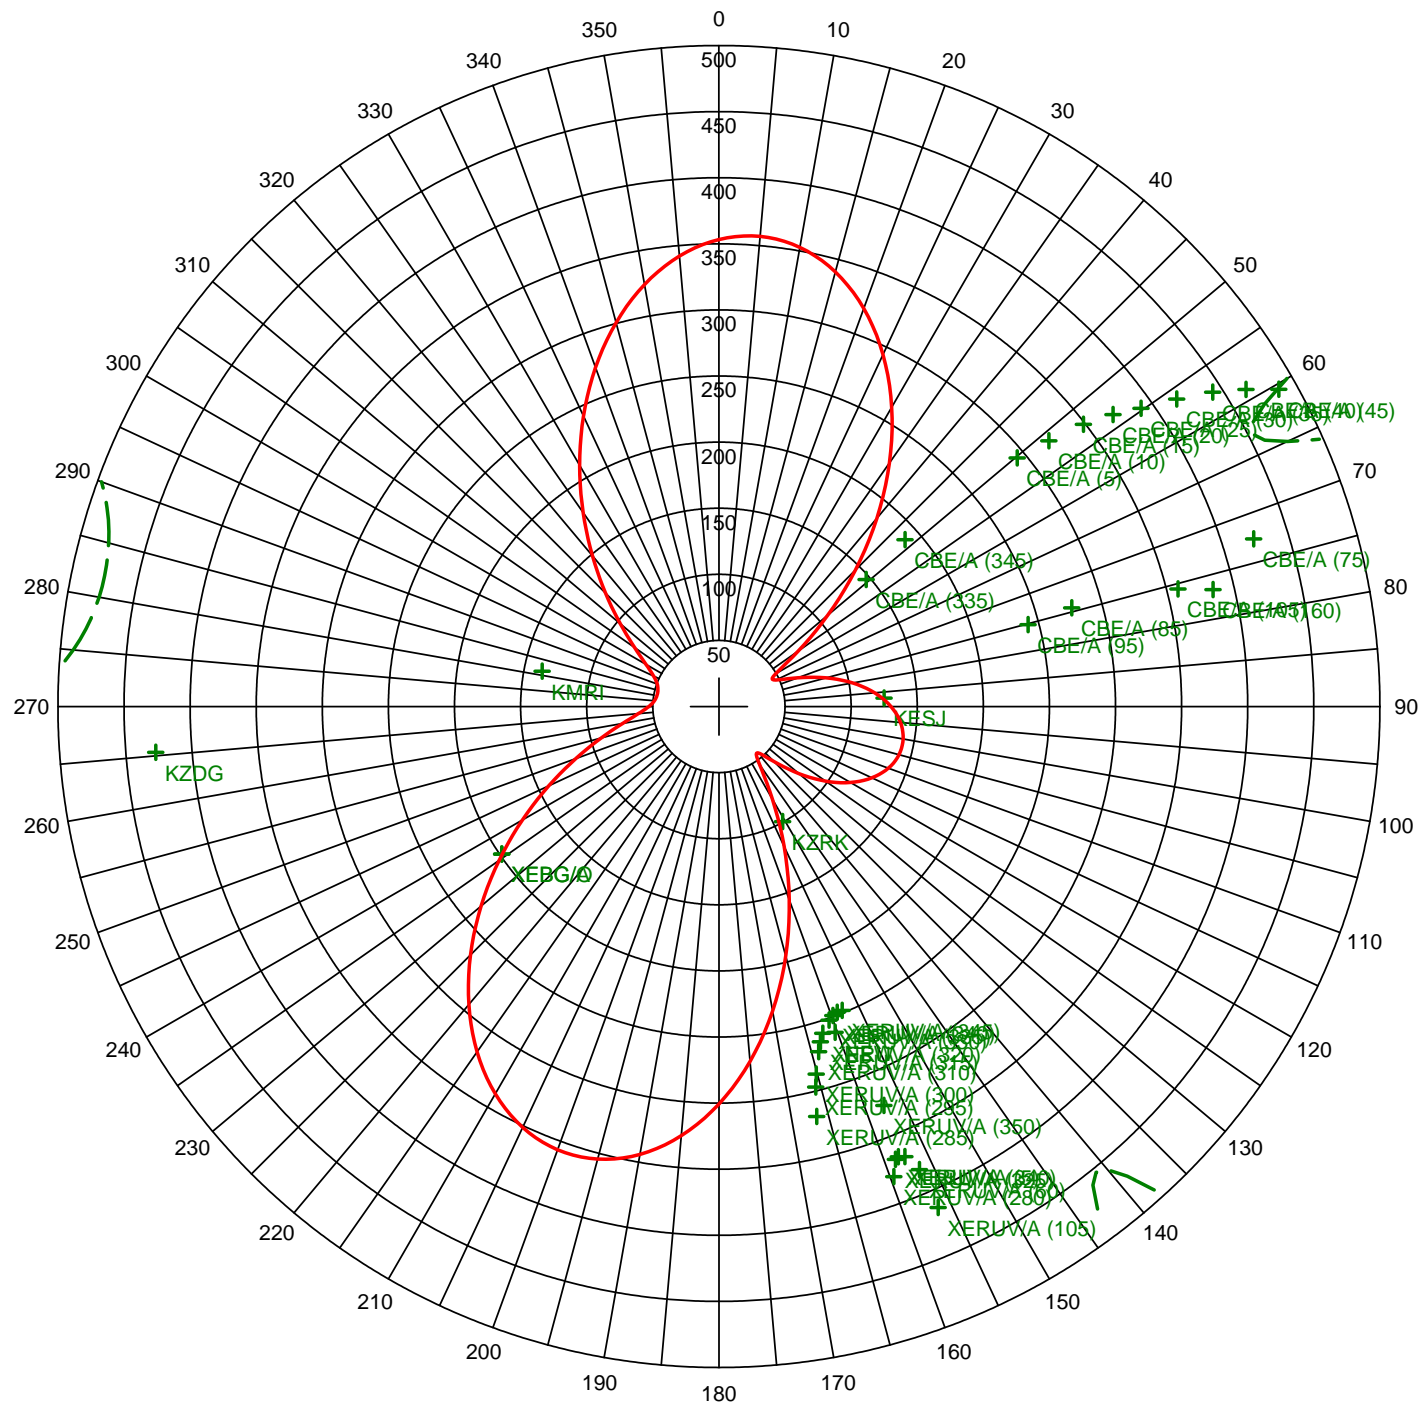

Theo RMS: 197.584 mV/m@1km  
Std RMS: 207.729 mV/m@1km  
Q: 10.0 mV/m@1km

Standard Horizontal Plane Pattern

— Pattern (mV/m @ 1km)  
— Pattern X10

#	Field Ratio	Phase (deg)	Spacing (deg)	Orient (deg)	Height (deg)	Ref Switch	TL Switch	A (deg)	B (deg)	C (deg)	D (deg)
1	1.000	0.0	0.0	0.0	85.0	0	0	0.0	0.0	0.0	0.0
2	0.780	-335.4	200.0	101.9	85.0	0	0	0.0	0.0	0.0	0.0

Call: KDCO  
Freq: 1550 kHz  
GOLDEN, CO, US  
Hours: N  
Lat: 39-53-31 N  
Lng: 105-14-20 W  
Power: 0.48 kW  
Theo RMS: 197.58 mV/m@1km  
@ 0.48 kW