

***Directional Antenna System
for
KWCB, Floresville, Texas***

May 30, 2007

Electronics Research Inc. is providing a custom fabricated antenna system that is specially designed to meet the FCC requirements and the general needs of radio station KWCB.

The antenna is the ERI model MP-6C-DA configuration. The circular polarized system consists of 2 full-wavelength spaced bays using one driven circular polarized radiating element and two horizontal parasitic elements placed one-quarter wave above and below each bay. The antenna was mounted on the North 245 degrees East tower face with bracketry to provide an antenna orientation of North 245 degrees East. The antenna was tested on a 24" face tower, which is the structure the station plans to use to support the array. All tests were performed on a frequency of 89.7 megahertz, which is the center of the FM broadcast channel assigned to KWCB.

Pattern measurements were made on a sixty-acre antenna pattern range that is owned and operated by Electronics Research, Inc. The tests were performed under the direction of Thomas B. Silliman, president of Electronics Research, Inc. Mr. Silliman has the Bachelor of Electrical Engineering and the Master of Electrical Engineering degrees from Cornell University and is a registered professional engineer in the states of Indiana, Maryland and Minnesota.

Directional Antenna System Proposed For KWCB, Floresville, Texas

(Continued)

DESCRIPTION OF THE TEST PROCEDURE

The test antenna consisted of two bay levels of the circular polarized system with the associated horizontal parasitic elements. The elements and brackets that were used in this test are electrically equivalent to those that will be supplied with the antenna. A section of 3 1/8 inch o.d. rigid coaxial line was used to feed the test antenna, and a section of 3 1/8 inch o.d. rigid outer conductor only was attached above the test antenna. The lines were properly grounded during all tests.


The power distribution and phase relationship to the antenna elements was adjusted in order to achieve the directional radiation patterns for both horizontal and vertical polarization components.

The proof-of-performance was accomplished using a 24" face tower with identical dimension and configuration including all braces, ladders, conduits, coaxial lines and other appurtenances that are included in the actual aperture at which the antenna will be installed. The structure was erected vertically on a turntable mounted on a non-metallic building with the antenna centered vertically on the structure, making the center of radiation of the test approximately 30 feet above ground. The turntable is equipped with a motor drive and a US Digital angle position indicator. The resolution of this angle position indicator is one-hundredth of a degree.

The antenna under test was operated in the transmitting mode and fed from a HP8657D signal generator.

The frequency of the signal source was set at 89.7 MHz and was constantly monitored by a Rohde & Schwarz ESVD measuring receiver.

A broadband horizontal and vertical dipole system, located approximately 628 feet from the test antenna, was used to receive the emitted test signals. The dipole system was mounted at the same height above terrain as the center of the antenna under test. The signals received by the dipole system were fed to the test building by way of two buried Heliax cables to a Rohde & Schwarz measuring receiver.

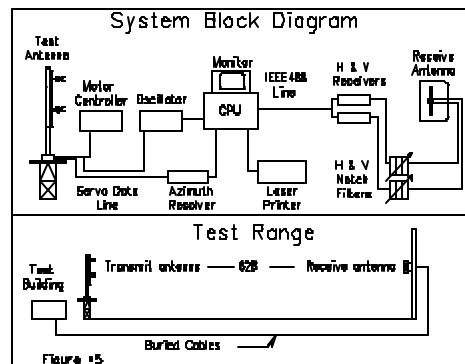

Directional Antenna System
Proposed For
KWCB, Floresville, Texas

(Continued)

This data was interfaced to a Hewlett-Packard Laser Jet 4P printer by means of a Pentium computer system. Relative field strength was plotted as a function of azimuth.

The measurements were performed by rotating the test antenna in a counter-clockwise direction and plotting the received signal on polar coordinated graph paper in a clockwise direction. Both horizontal and vertical components were recorded separately.

CONCLUSIONS

The circular polarized system consists of 2 full-wavelength spaced bays using one driven circular polarized radiating element and two horizontal parasitic elements placed one-quarter wave above and below each bay. The power distribution and phase relationship will be fixed when antenna is manufactured. Proper maintenance of the elements should be all that is required to maintain the pattern in adjustment.

The MP-6C-DA array is to be mounted on the North 245 degrees East tower face of the 24" face tower at a bearing of North 245 degrees East. Blue prints provided with the antenna will show the proper antenna orientation alignment. The antenna alignment procedure should be directed by a licensed surveyor as prescribed by the FCC.

Figure #1 represents the maximum value of either the horizontal or vertical component at any azimuth. The measured horizontal plane relative field pattern, for both the horizontal and vertical polarization components, is shown on Figure #2 attached. The actual measured pattern does not exceed the authorized FCC composite pattern at any azimuth. A calculated vertical plane relative field pattern is shown on Figure #3 attached. The power in the maximum will reach 100 kilowatts (20.00 dBk).

The RMS of the vertically polarized horizontal plane component does not exceed the RMS of the horizontally polarized horizontal plane component.

The composite horizontal and vertical maximum relative field pattern obtained from the measured data as shown on Figure #1 has an RMS that is greater than 85% of the filed composite pattern.

The clear vertical length of the structure required to support the antenna is 74 ft 8 in.

Directional Antenna System
Proposed For
KWCB, Floresville, Texas

(Continued)

The directional antenna should not be mounted on the top of an antenna tower that includes a top-mounted platform larger than the cross-sectional area of the tower in the horizontal plane. No obstructions other than those that are specified by the blue prints supplied with the antenna are to be mounted within 75 ft. horizontally of the system. The vertical distance to the nearest obstruction should be a minimum of 10 ft. from the directional antenna. Metallic guy wires should be a minimum distance of forty feet horizontally from the antenna.

ELECTRONICS RESEARCH, INC.

A handwritten signature in black ink, appearing to read "Tom Schaefer". The signature is fluid and cursive, with the first name "Tom" and last name "Schaefer" clearly distinguishable.

The Microsoft Word document on file electronically at Electronic Research, Inc. governs the specifications, scope, and configuration of the product described. All other representations whether verbal, printed, or electronic are subordinate to the master copy of this document on file at ERI.

ERI® *Horizontal Plane Relative Field Pattern*

Electronics Research, Inc. 7777 Gardner Rd. Chandler, In 47610 Phone (812) 925-6000 Fax (812) 925-4030 <http://www.eriinc.com/>

FIGURE NO: 1
STATION: KWCB
LOCATION: FLORESVILLE, TX
ANTENNA: MP-6C-DA
STRUCTURE: 24" FACE TOWER

DATE: 5/18/2007
FREQUENCY: 89.7 MHz
ORIENTATION: 245° TRUE
MOUNTING: STANDARD
BAYS TESTED: TWO



FCC COMPOSITE
RMS: 0.813
MAXIMUM: 1.000 @ 180° TRUE
MINIMUM: 0.365 @ 10° TRUE

Measured Composite:
RMS: 0.748
Maximum: 1.000 @ 215° True
Minimum: 0.343 @ 12° True

COMMENTS: COMPOSITE PATTERN: THIS PATTERN SHOWS THE MAXIMUM OF EITHER THE H OR V AZIMUTH VALUES. THIS PATTERN IS GREATER THAN 85% OF THE FCC FILED COMPOSITE PATTERN BPED-20060512AAA.

ERI[®] *Horizontal Plane Relative Field List*

Electronics Research, Inc. 7777 Gardner Rd. Chandler, In 47610 Phone (812) 925-6000 Fax (812) 925-4030 <http://www.eriinc.com/>

Station: KWCB
Location: Floresville, TX
Frequency: 89.7 MHz

Antenna: MP-6C-DA
Orientation: 245° True
Tower: 24'' Face tower

Figure: 1
Date: 5/18/2007
Reference: kwcb1m.fig

Angle	Envelope			Polarization	Angle	Envelope			Polarization
	Field	kW	dBk			Field	kW	dBk	
0°	0.438	19.15	12.82	Vertical	180°	0.918	84.27	19.26	Horizontal
5°	0.393	15.47	11.89	Vertical	185°	0.930	86.57	19.37	Vertical
10°	0.353	12.48	10.96	Vertical	190°	0.953	90.75	19.58	Vertical
15°	0.345	11.91	10.76	Horizontal	195°	0.971	94.19	19.74	Vertical
20°	0.354	12.52	10.98	Horizontal	200°	0.984	96.86	19.86	Vertical
25°	0.369	13.61	11.34	Horizontal	205°	0.994	98.71	19.94	Vertical
30°	0.390	15.23	11.83	Horizontal	210°	0.999	99.73	19.99	Vertical
35°	0.416	17.28	12.37	Horizontal	215°	1.000	100.00	20.00	Vertical
40°	0.436	18.99	12.78	Horizontal	220°	1.000	99.91	20.00	Vertical
45°	0.450	20.21	13.06	Horizontal	225°	0.998	99.66	19.99	Vertical
50°	0.457	20.89	13.20	Horizontal	230°	0.996	99.27	19.97	Vertical
55°	0.458	20.96	13.21	Horizontal	235°	0.994	98.77	19.95	Vertical
60°	0.452	20.47	13.11	Horizontal	240°	0.991	98.13	19.92	Vertical
65°	0.445	19.79	12.96	Horizontal	245°	0.987	97.37	19.88	Vertical
70°	0.436	18.99	12.79	Horizontal	250°	0.982	96.49	19.84	Vertical
75°	0.426	18.12	12.58	Horizontal	255°	0.977	95.49	19.80	Vertical
80°	0.415	17.23	12.36	Horizontal	260°	0.971	94.37	19.75	Vertical
85°	0.405	16.44	12.16	Horizontal	265°	0.965	93.13	19.69	Vertical
90°	0.397	15.79	11.98	Horizontal	270°	0.958	91.78	19.63	Vertical
95°	0.389	15.11	11.79	Horizontal	275°	0.957	91.63	19.62	Horizontal
100°	0.382	14.63	11.65	Horizontal	280°	0.969	93.90	19.73	Horizontal
105°	0.378	14.27	11.54	Horizontal	285°	0.979	95.83	19.82	Horizontal
110°	0.376	14.17	11.51	Horizontal	290°	0.987	97.41	19.89	Horizontal
115°	0.385	14.79	11.70	Horizontal	295°	0.993	98.62	19.94	Horizontal
120°	0.401	16.10	12.07	Horizontal	300°	0.997	99.45	19.98	Horizontal
125°	0.429	18.37	12.64	Horizontal	305°	1.000	99.91	20.00	Horizontal
130°	0.468	21.87	13.40	Horizontal	310°	0.998	99.63	19.98	Horizontal
135°	0.504	25.43	14.05	Horizontal	315°	0.983	96.58	19.85	Horizontal
140°	0.544	29.56	14.71	Horizontal	320°	0.952	90.61	19.57	Horizontal
145°	0.586	34.36	15.36	Horizontal	325°	0.906	82.02	19.14	Horizontal
150°	0.632	39.94	16.01	Horizontal	330°	0.844	71.23	18.53	Horizontal
155°	0.679	46.07	16.63	Horizontal	335°	0.768	58.91	17.70	Horizontal
160°	0.729	53.14	17.25	Horizontal	340°	0.698	48.72	16.88	Horizontal
165°	0.786	61.75	17.91	Horizontal	345°	0.616	37.94	15.79	Horizontal
170°	0.847	71.74	18.56	Horizontal	350°	0.554	30.73	14.88	Vertical
175°	0.893	79.73	19.02	Horizontal	355°	0.494	24.42	13.88	Vertical

Polarization:
Maximum Field:
Minimum Field:
RMS:
Maximum ERP:
Maximum Power Gain:

Envelope
1.000 @ 215° True
0.343 @ 12° True
0.748
100.000 kW
6.162 (7.897 dB)


Total Input Power: 16.230 kW

ERI® *Horizontal Plane Relative Field Pattern*

Electronics Research, Inc. 7777 Gardner Rd. Chandler, In 47610 Phone (812) 925-6000 Fax (812) 925-4030 <http://www.eriinc.com/>

FIGURE NO: 2
STATION: KWCB
LOCATION: FLORESVILLE, TX
ANTENNA: MP-6C-DA
STRUCTURE: 24" FACE TOWER

DATE: 5/18/2007
FREQUENCY: 89.7 MHz
ORIENTATION: 245° TRUE
MOUNTING: STANDARD
BAYS TESTED: TWO

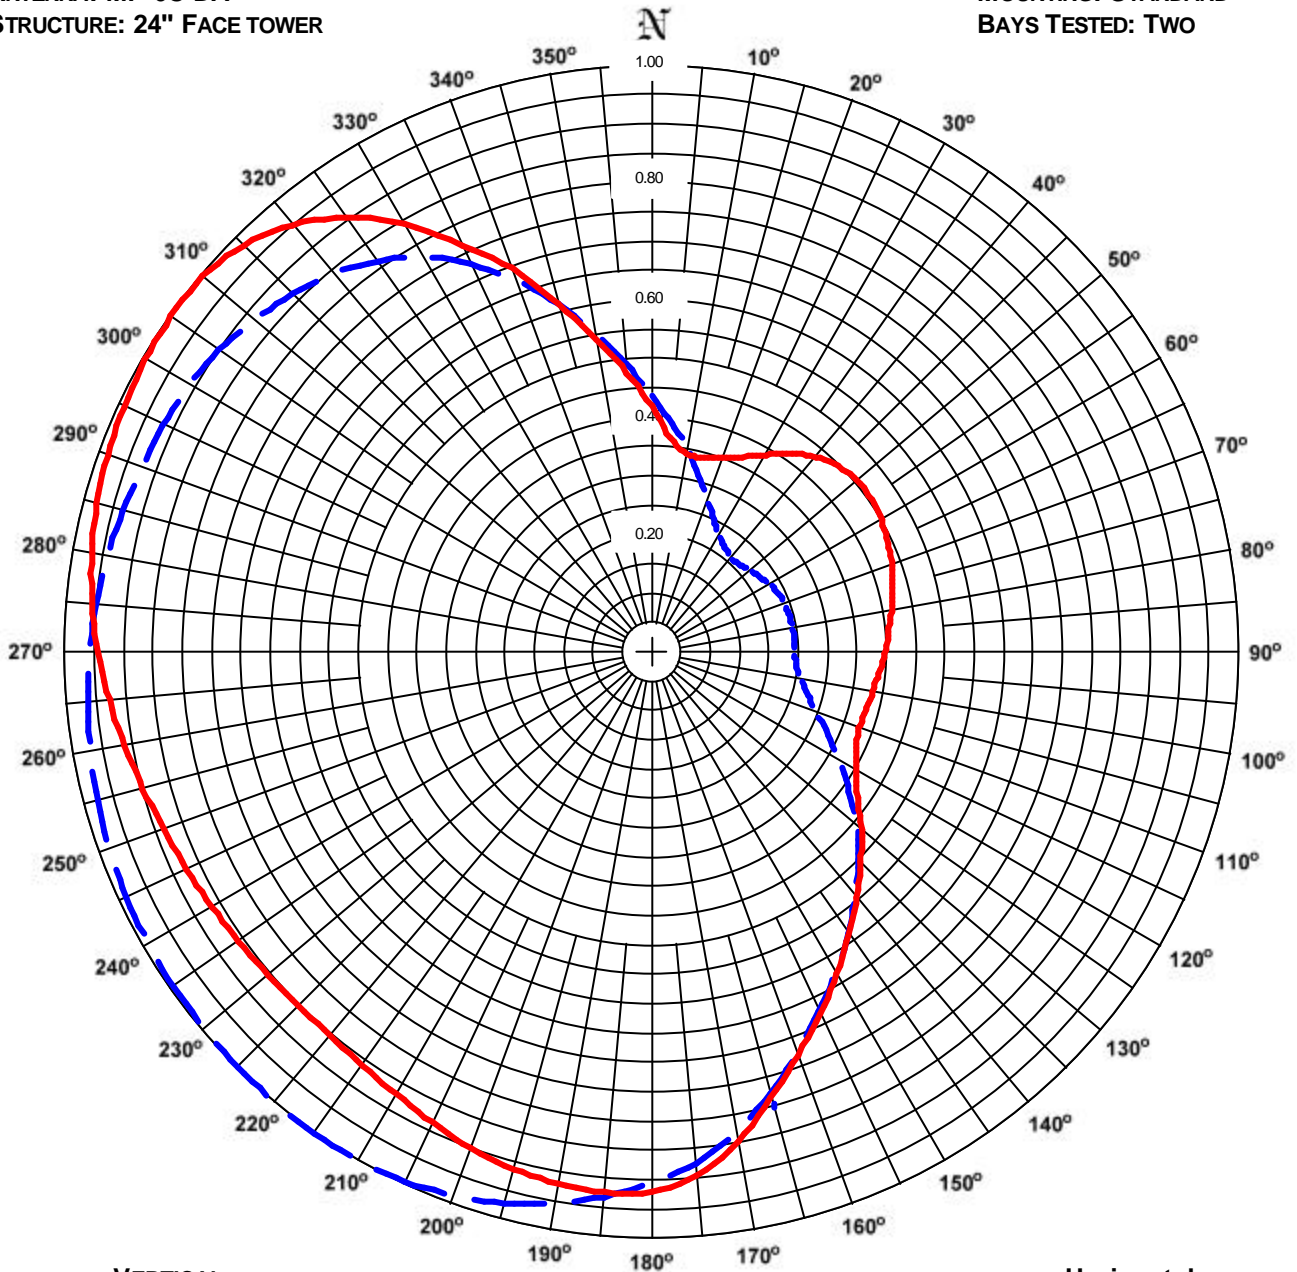

VERTICAL

RMS: 0.709
MAXIMUM: 1.000 @ 215° TRUE
MINIMUM: 0.211 @ 42° TRUE

Horizontal

RMS: 0.718
Maximum: 1.000 @ 308° True
Minimum: 0.343 @ 11° True

COMMENTS: MEASURED PATTERNS OF THE HORIZONTAL AND VERTICAL COMPONENTS.

ERI[®] *Horizontal Plane Relative Field List*

Electronics Research, Inc. 7777 Gardner Rd. Chandler, In 47610 Phone (812) 925-6000 Fax (812) 925-4030 <http://www.eriinc.com/>

Station: KWCB

Location: Floresville, TX

Frequency: 89.7 MHz

Antenna: MP-6C-DA

Orientation: 245° True

Tower: 24'' Face tower

Figure: 2

Date: 5/18/2007

Reference: kwcb1m.fig

Angle	Horizontal			Vertical			Angle	Horizontal			Vertical		
	Field	kW	dBk	Field	kW	dBk		Field	kW	dBk	Field	kW	dBk
0°	0.422	17.81	12.51	0.438	19.15	12.82	180°	0.918	84.27	19.26	0.904	81.70	19.12
5°	0.368	13.53	11.31	0.393	15.47	11.89	185°	0.923	85.11	19.30	0.930	86.57	19.37
10°	0.344	11.82	10.73	0.353	12.48	10.96	190°	0.919	84.38	19.26	0.953	90.75	19.58
15°	0.345	11.91	10.76	0.314	9.84	9.93	195°	0.911	82.94	19.19	0.971	94.19	19.74
20°	0.354	12.52	10.98	0.279	7.79	8.91	200°	0.899	80.80	19.07	0.984	96.86	19.86
25°	0.369	13.61	11.34	0.251	6.32	8.01	205°	0.883	78.01	18.92	0.994	98.71	19.94
30°	0.390	15.23	11.83	0.231	5.34	7.27	210°	0.869	75.53	18.78	0.999	99.73	19.99
35°	0.416	17.28	12.37	0.218	4.75	6.77	215°	0.859	73.76	18.68	1.000	100.00	20.00
40°	0.436	18.99	12.78	0.212	4.49	6.53	220°	0.853	72.68	18.61	1.000	99.91	20.00
45°	0.450	20.21	13.06	0.213	4.52	6.55	225°	0.850	72.27	18.59	0.998	99.66	19.99
50°	0.457	20.89	13.20	0.218	4.76	6.78	230°	0.853	72.79	18.62	0.996	99.27	19.97
55°	0.458	20.96	13.21	0.225	5.05	7.04	235°	0.858	73.64	18.67	0.994	98.77	19.95
60°	0.452	20.47	13.11	0.232	5.38	7.31	240°	0.865	74.83	18.74	0.991	98.13	19.92
65°	0.445	19.79	12.96	0.239	5.69	7.55	245°	0.874	76.35	18.83	0.987	97.37	19.88
70°	0.436	18.99	12.79	0.242	5.86	7.68	250°	0.884	78.23	18.93	0.982	96.49	19.84
75°	0.426	18.12	12.58	0.244	5.95	7.74	255°	0.897	80.47	19.06	0.977	95.49	19.80
80°	0.415	17.23	12.36	0.244	5.97	7.76	260°	0.912	83.09	19.20	0.971	94.37	19.75
85°	0.405	16.44	12.16	0.244	5.94	7.74	265°	0.928	86.09	19.35	0.965	93.13	19.69
90°	0.397	15.79	11.98	0.244	5.95	7.75	270°	0.943	89.02	19.49	0.958	91.78	19.63
95°	0.389	15.11	11.79	0.248	6.15	7.89	275°	0.957	91.63	19.62	0.950	90.32	19.56
100°	0.382	14.63	11.65	0.258	6.67	8.24	280°	0.969	93.90	19.73	0.942	88.75	19.48
105°	0.378	14.27	11.54	0.276	7.60	8.81	285°	0.979	95.83	19.82	0.933	87.07	19.40
110°	0.376	14.17	11.51	0.300	9.01	9.55	290°	0.987	97.41	19.89	0.925	85.48	19.32
115°	0.385	14.79	11.70	0.332	11.00	10.41	295°	0.993	98.62	19.94	0.919	84.52	19.27
120°	0.401	16.10	12.07	0.370	13.66	11.36	300°	0.997	99.45	19.98	0.912	83.21	19.20
125°	0.429	18.37	12.64	0.411	16.92	12.28	305°	1.000	99.91	20.00	0.901	81.09	19.09
130°	0.468	21.87	13.40	0.458	20.96	13.21	310°	0.998	99.63	19.98	0.884	78.17	18.93
135°	0.504	25.43	14.05	0.500	24.95	13.97	315°	0.983	96.58	19.85	0.865	74.85	18.74
140°	0.544	29.56	14.71	0.540	29.18	14.65	320°	0.952	90.61	19.57	0.844	71.26	18.53
145°	0.586	34.36	15.36	0.583	34.00	15.31	325°	0.906	82.02	19.14	0.815	66.43	18.22
150°	0.632	39.94	16.01	0.629	39.53	15.97	330°	0.844	71.23	18.53	0.780	60.87	17.84
155°	0.679	46.07	16.63	0.675	45.62	16.59	335°	0.768	58.91	17.70	0.731	53.38	17.27
160°	0.729	53.14	17.25	0.725	52.52	17.20	340°	0.698	48.72	16.88	0.676	45.70	16.60
165°	0.786	61.75	17.91	0.778	60.50	17.82	345°	0.616	37.94	15.79	0.615	37.81	15.78
170°	0.847	71.74	18.56	0.831	68.98	18.39	350°	0.544	29.55	14.71	0.554	30.73	14.88
175°	0.893	79.73	19.02	0.872	76.05	18.81	355°	0.479	22.94	13.61	0.494	24.42	13.88

Polarization:

Maximum Field:

Minimum Field:

RMS:

Maximum ERP:

Maximum Power Gain:

Horizontal

1.000 @ 308° True

0.343 @ 11° True

0.718

100.000 kW

6.162 (7.897 dB)

Vertical

1.000 @ 215° True

0.211 @ 42° True

0.709

100.000 kW

6.162 (7.897 dB)

Total Input Power: 16.230 kW




Vertical Plane Relative Field Pattern

KWCB, Floresville, TX, 89.7 MHz

Figure#: 3

Date: 5/18/2007

*A 6 level, 1 wave-length spaced MP-6C-DA directional antenna
with 0° beam tilt, 0% null fill and a H/V maximum power ratio of 1.000*

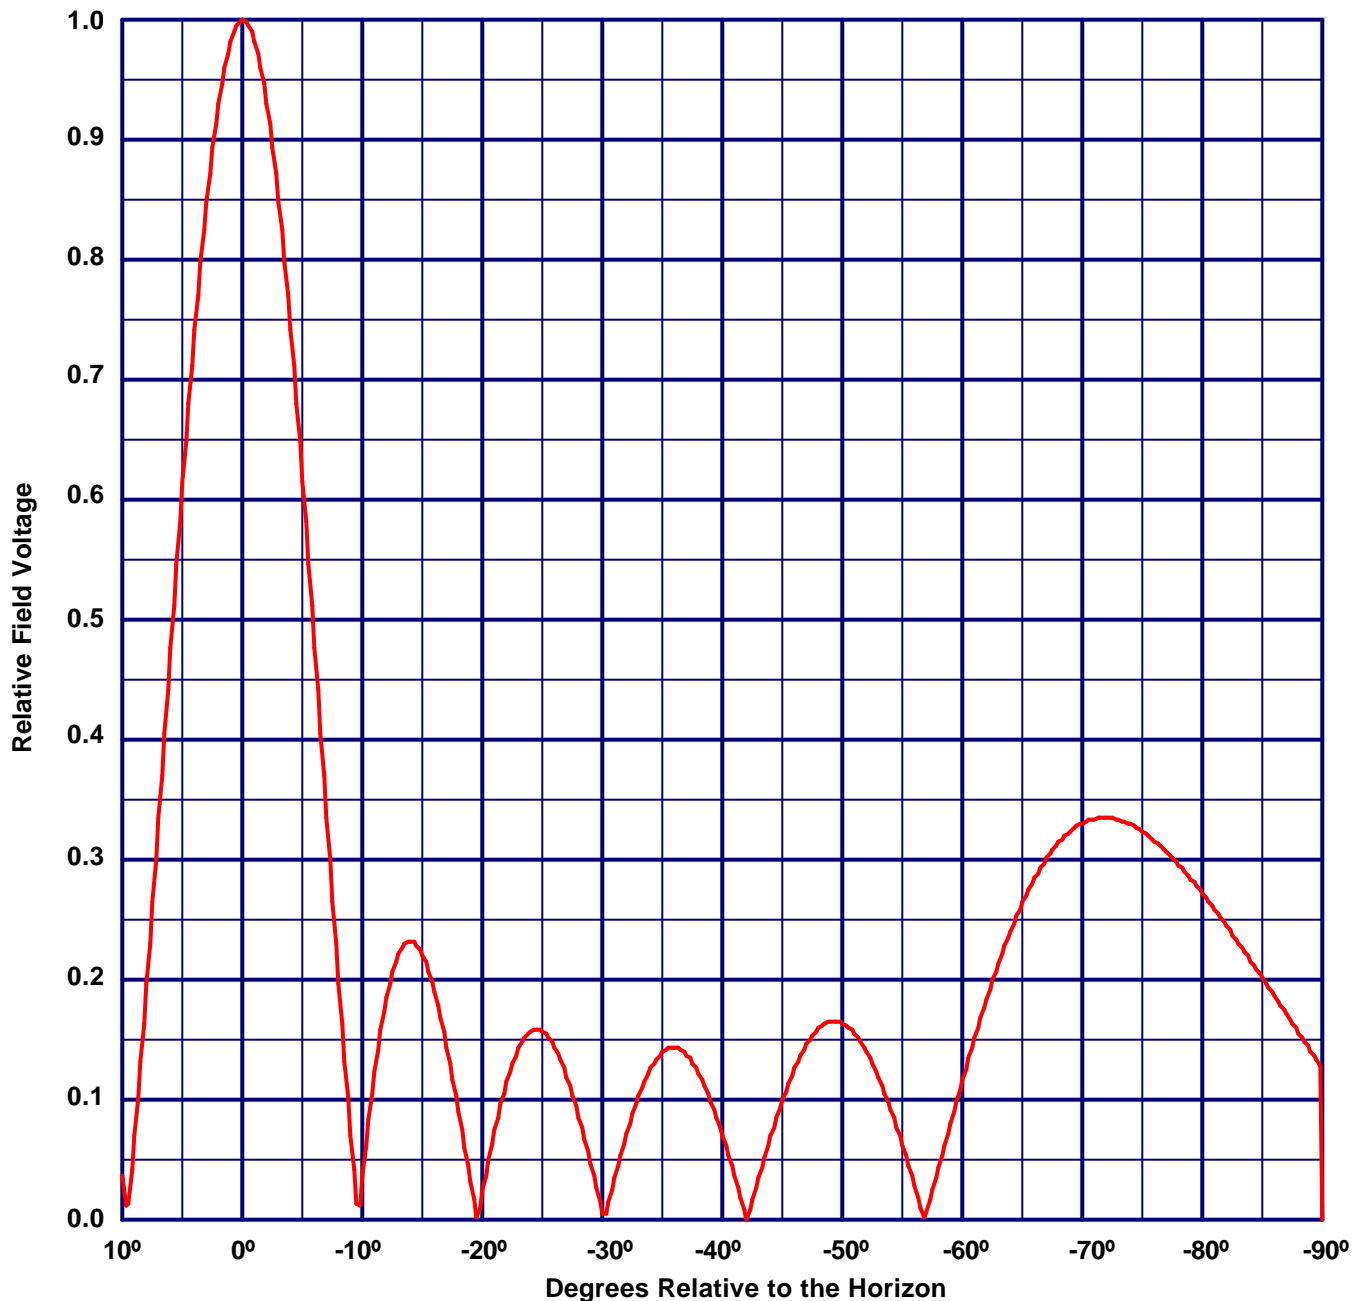

Vertical Polarization Gain:

Maximum: 6.162 (7.897 dB)

Horizontal Plane: 6.162 (7.897 dB)

Horizontal Polarization Gain:

Maximum: 6.162 (7.897 dB)

Horizontal Plane: 6.162 (7.897 dB)

Directional Antenna System for KWCB, Floresville, Texas

(Continued)

ANTENNA SPECIFICATIONS

Antenna Type:	MP-6C-DA
Frequency:	89.7 MHZ
Number of Bays:	Six

MECHANICAL SPECIFICATIONS

Mounting:	Standard
System length:	58 ft 7 in
Aperture length required:	74 ft 8 in
Orientation:	245° true
Input flange to the antenna 3 1/8" female.	

ELECTRICAL SPECIFICATIONS (For directional use)

Maximum horizontal ERP:	100 kW (20.000 dBk)
Horizontal maximum power gain:	6.162 (7.897 dB)
Maximum vertical ERP:	100 kW (20.000 dBk)
Vertical maximum power gain:	6.162 (7.897 dB)
Total input power:	16.230 kW (12.103 dBk)

